



(19) **United States**

(12) **Patent Application Publication**
Gottesfeld

(10) **Pub. No.: US 2004/0076859 A1**

(43) **Pub. Date: Apr. 22, 2004**

(54) **METHODS AND APPARATUSES FOR A PRESSURE DRIVEN FUEL CELL SYSTEM**

(52) **U.S. Cl. 429/13; 429/34; 220/567.2**

(76) **Inventor: Shimson Gottesfeld, Niskayuna, NY (US)**

(57) **ABSTRACT**

Correspondence Address:
**MINTZ, LEVIN, COHN, FERRIS
GLOVSKY AND POPEO, P.C.
The Chrysler Center
666 Third Avenue
New York, NY 10017 (US)**

(21) **Appl. No.: 10/684,168**

(22) **Filed: Oct. 10, 2003**


Related U.S. Application Data

(63) **Continuation of application No. 09/855,982, filed on May 15, 2001, now Pat. No. 6,686,081.**

Publication Classification

(51) **Int. Cl.⁷ H01M 8/04; B65D 88/00; H01M 8/00**

A fuel cell system including a housing defining an anode chamber and a cathode chamber and including a catalyst, a protonically conductive, but electronically non-conductive membrane positioned between the anode chamber and the cathode chamber and a first vent, a fuel chamber in gaseous communication with the anode chamber via a first valve, a liquid chamber in gaseous communication with the anode chamber via a second valve, and a mixing chamber having a second vent. The mixing chamber is in gaseous communication with the anode chamber via a third valve and receives fuel from the fuel chamber through a fuel valve, liquid from the liquid chamber via a liquid valve, and liquid effluent from the anode chamber via a liquid effluent valve. The mixing chamber also provides a fuel mixture to the anode chamber via a fuel mixture valve. Using effluent gases, the present invention drives fluids between elements of the fuel cell system.

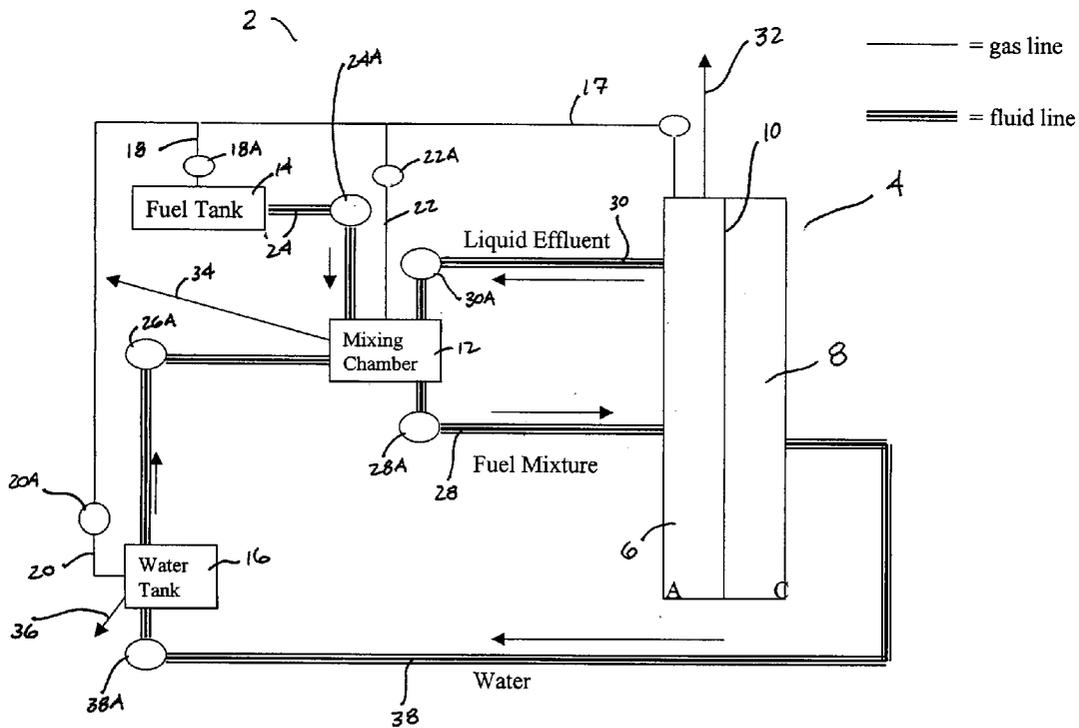

Prior Art

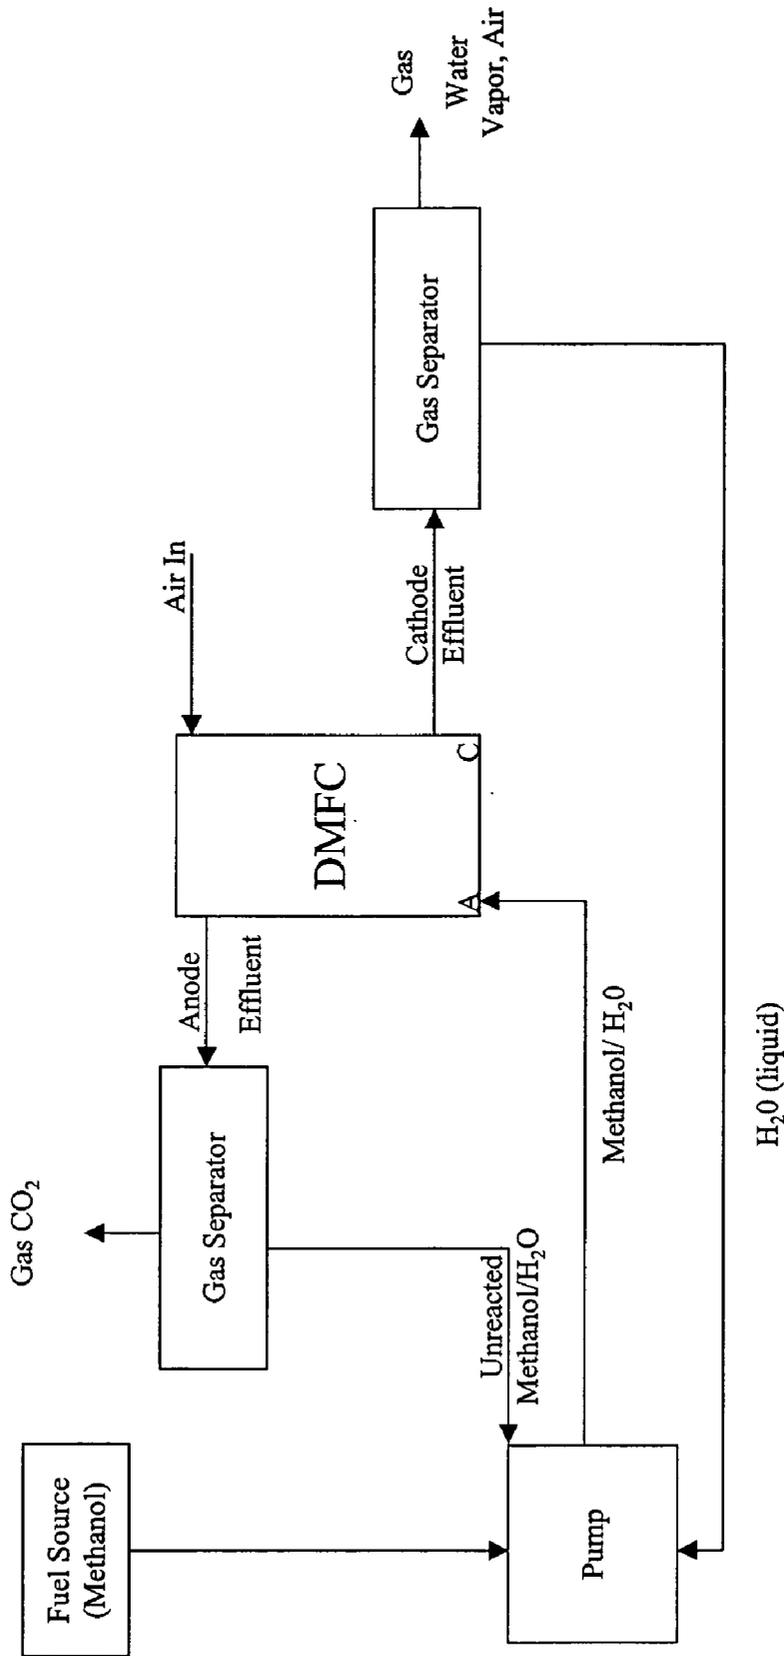


FIGURE 1

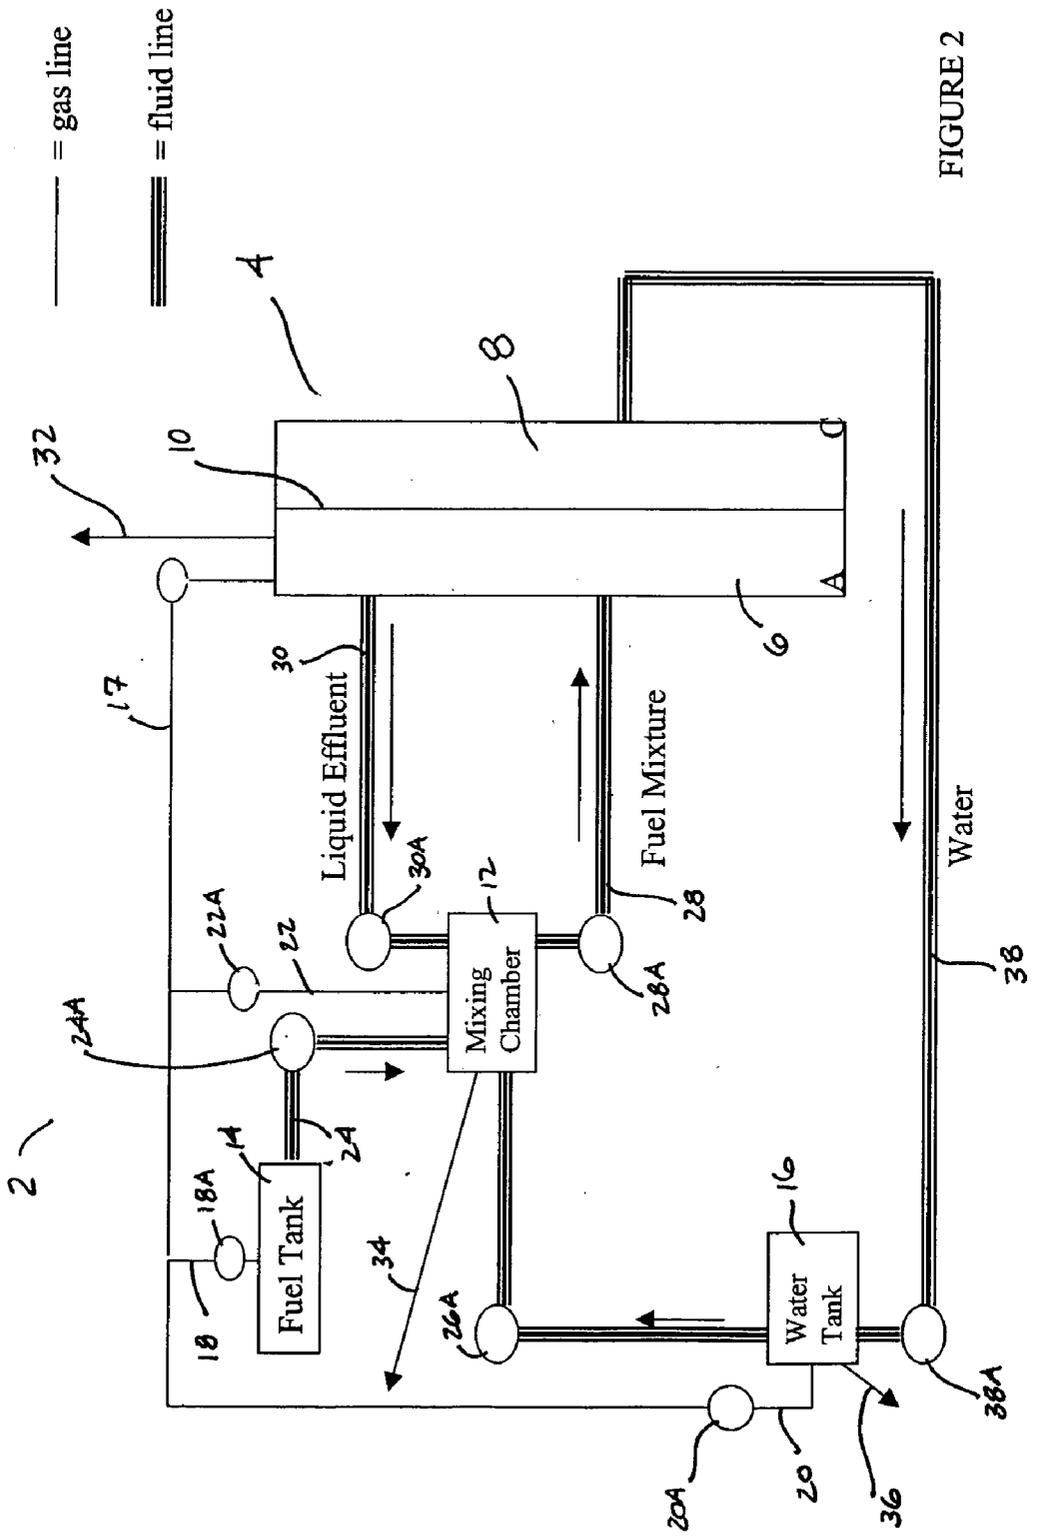


FIGURE 2

— = gas line
≡ = fluid line

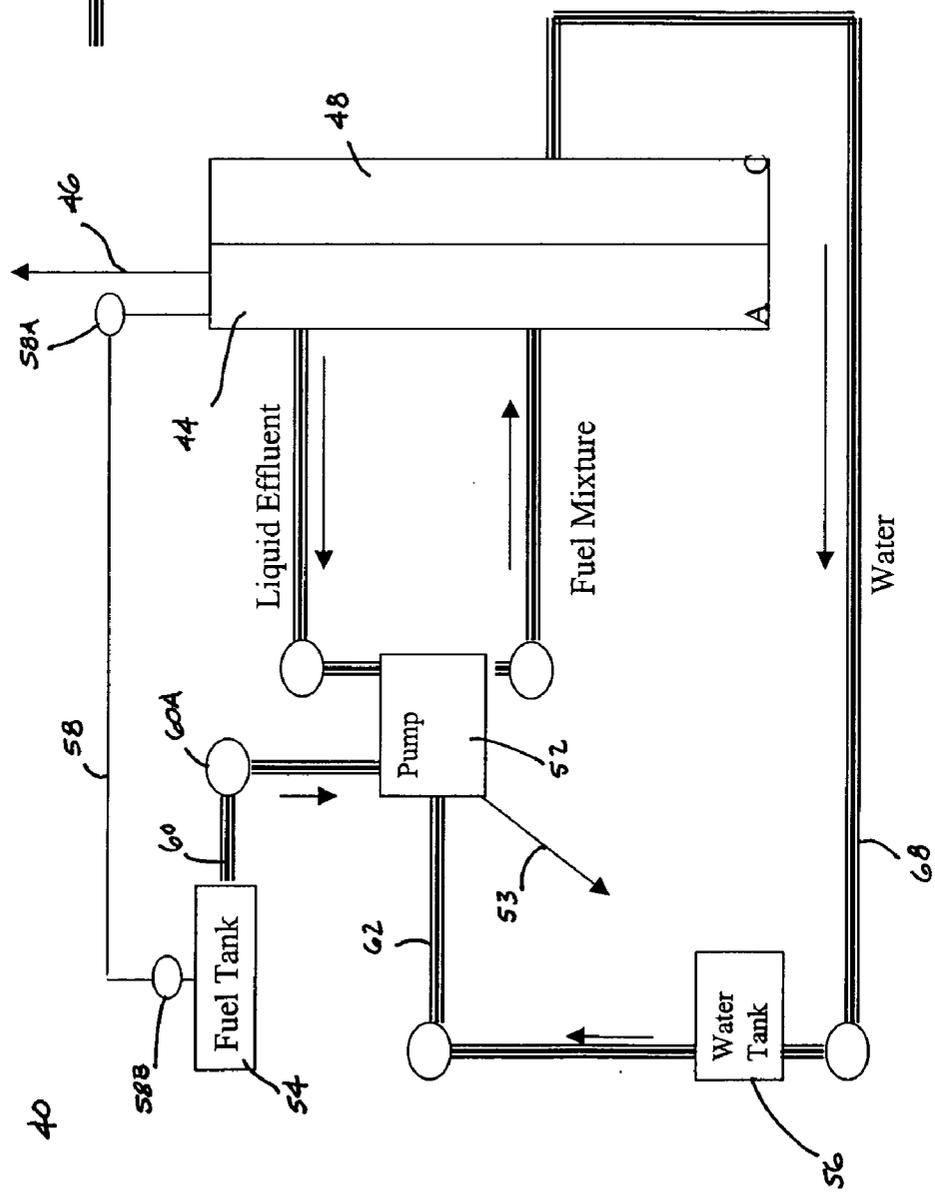


FIGURE 3

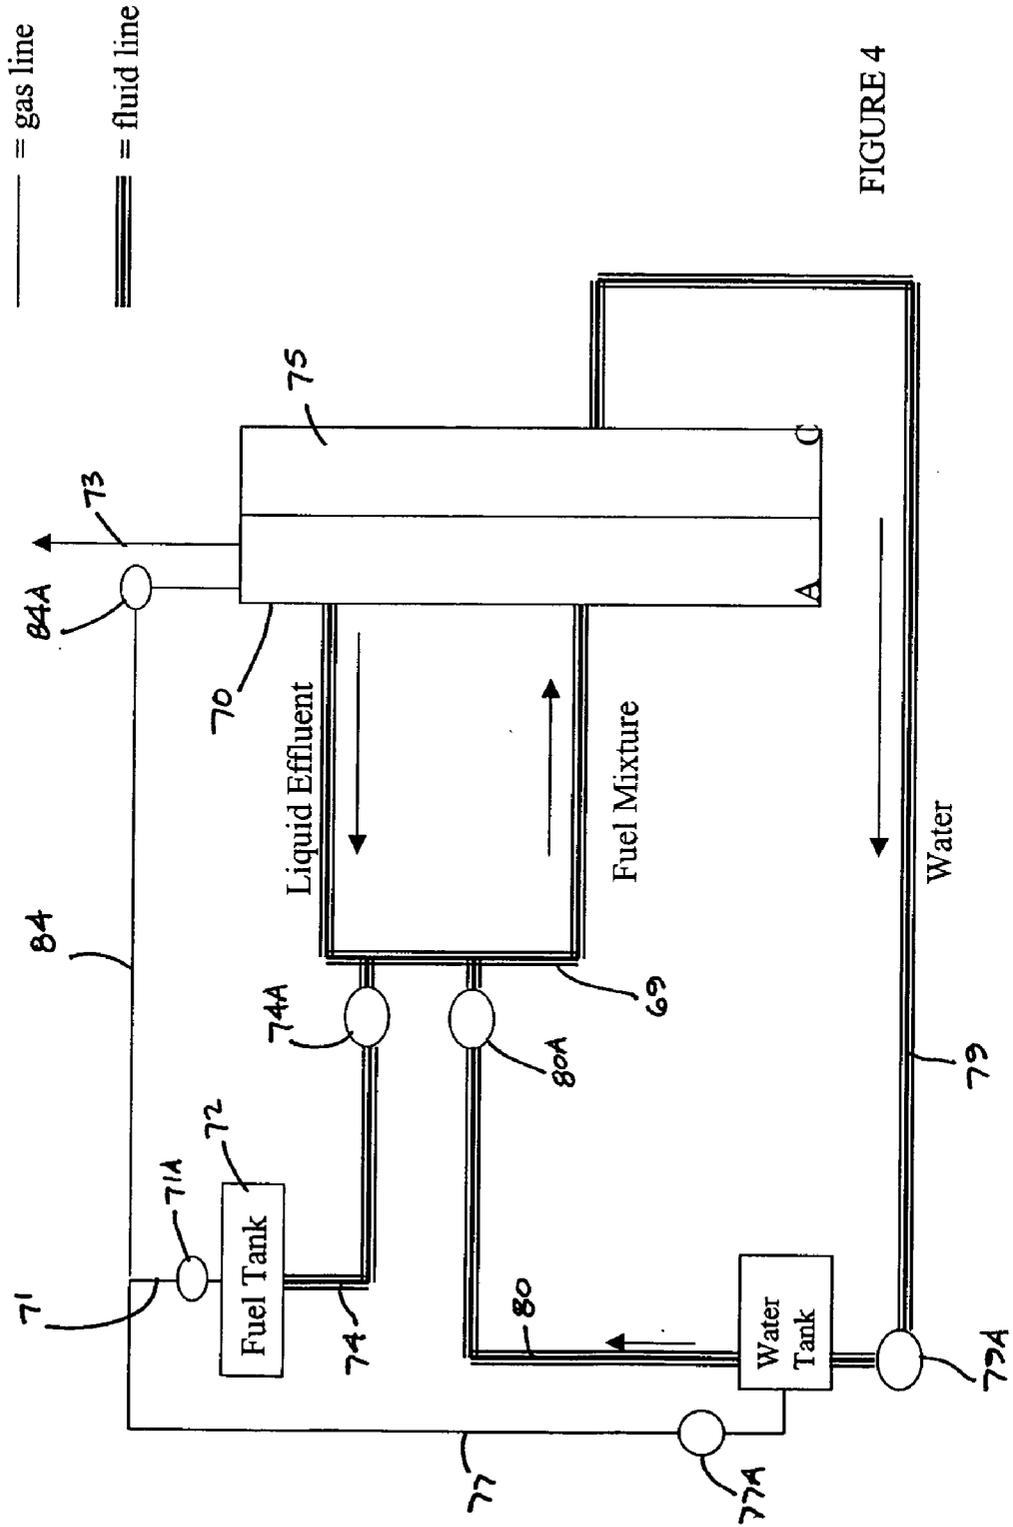


FIGURE 4

— = gas line
≡ = liquid line

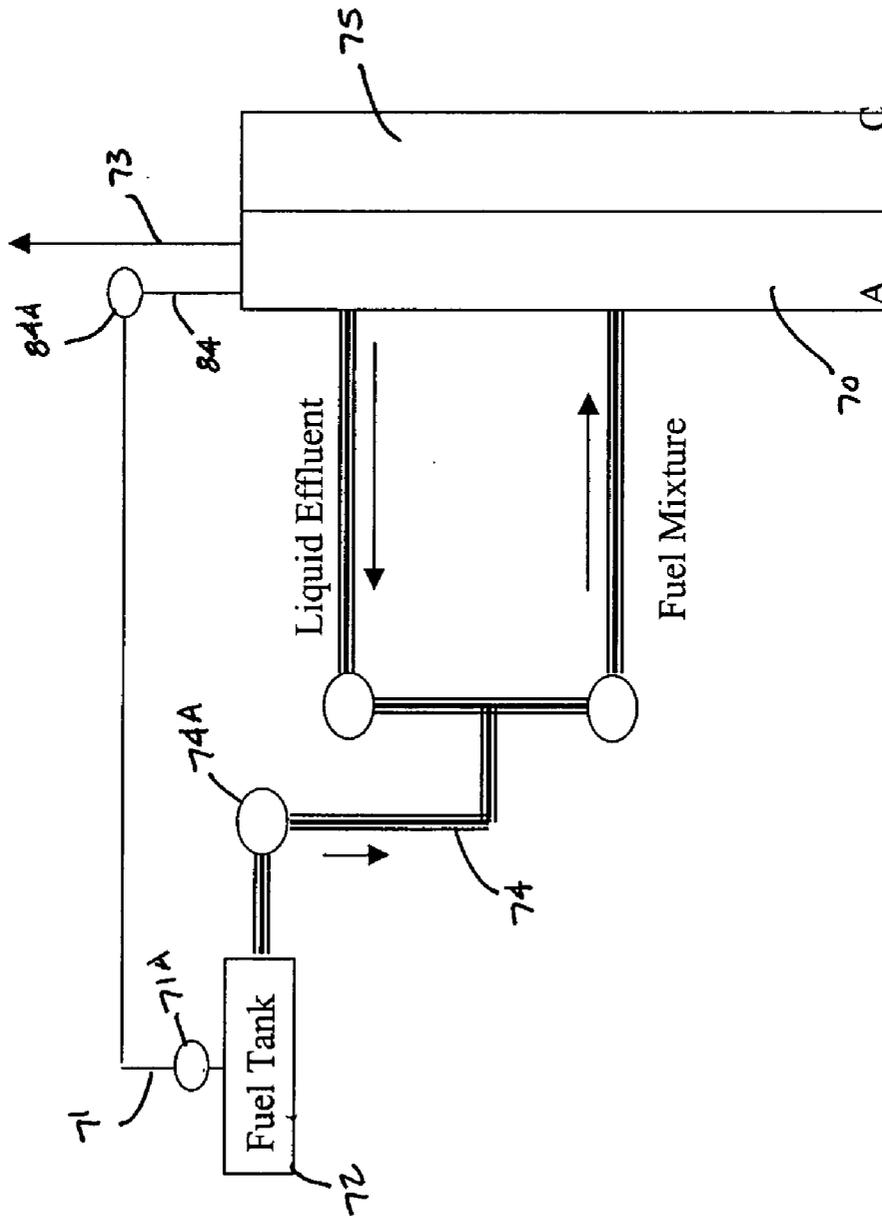


FIGURE 5

— = gas line
≡ = liquid line

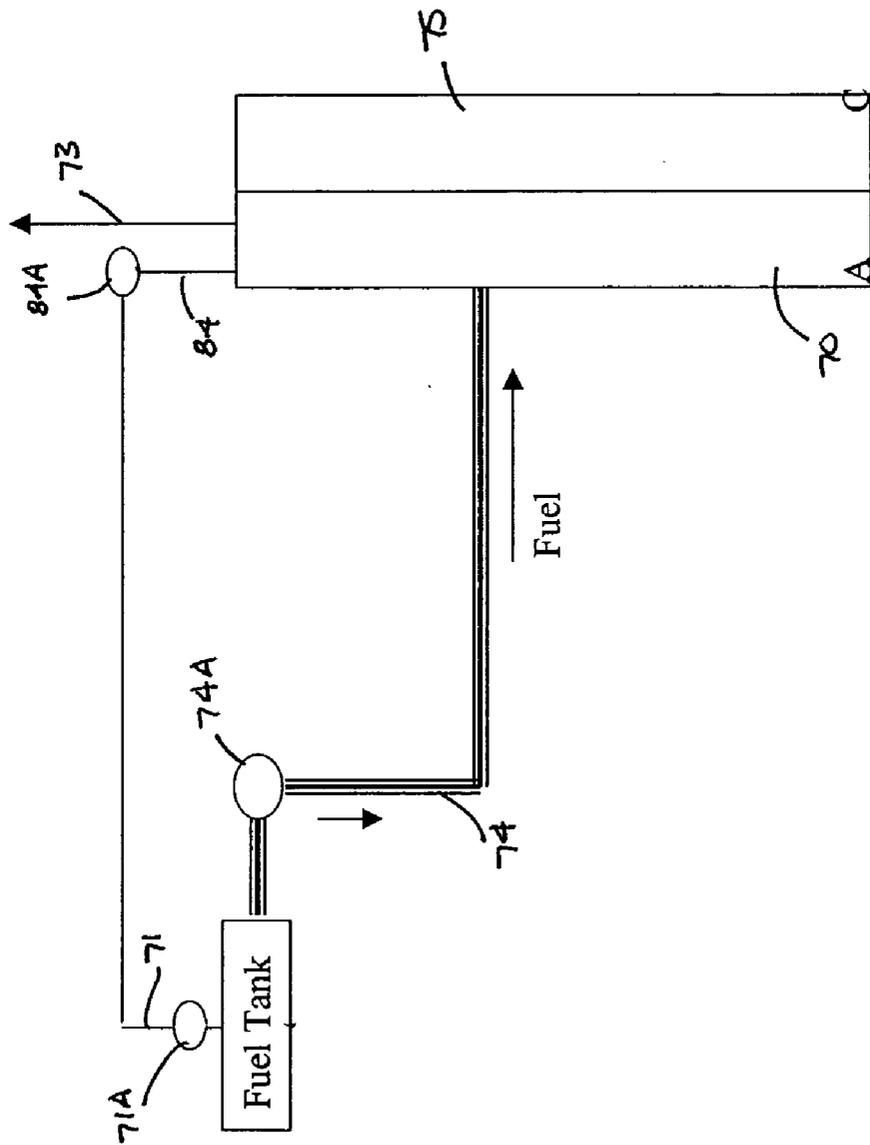


FIGURE 6

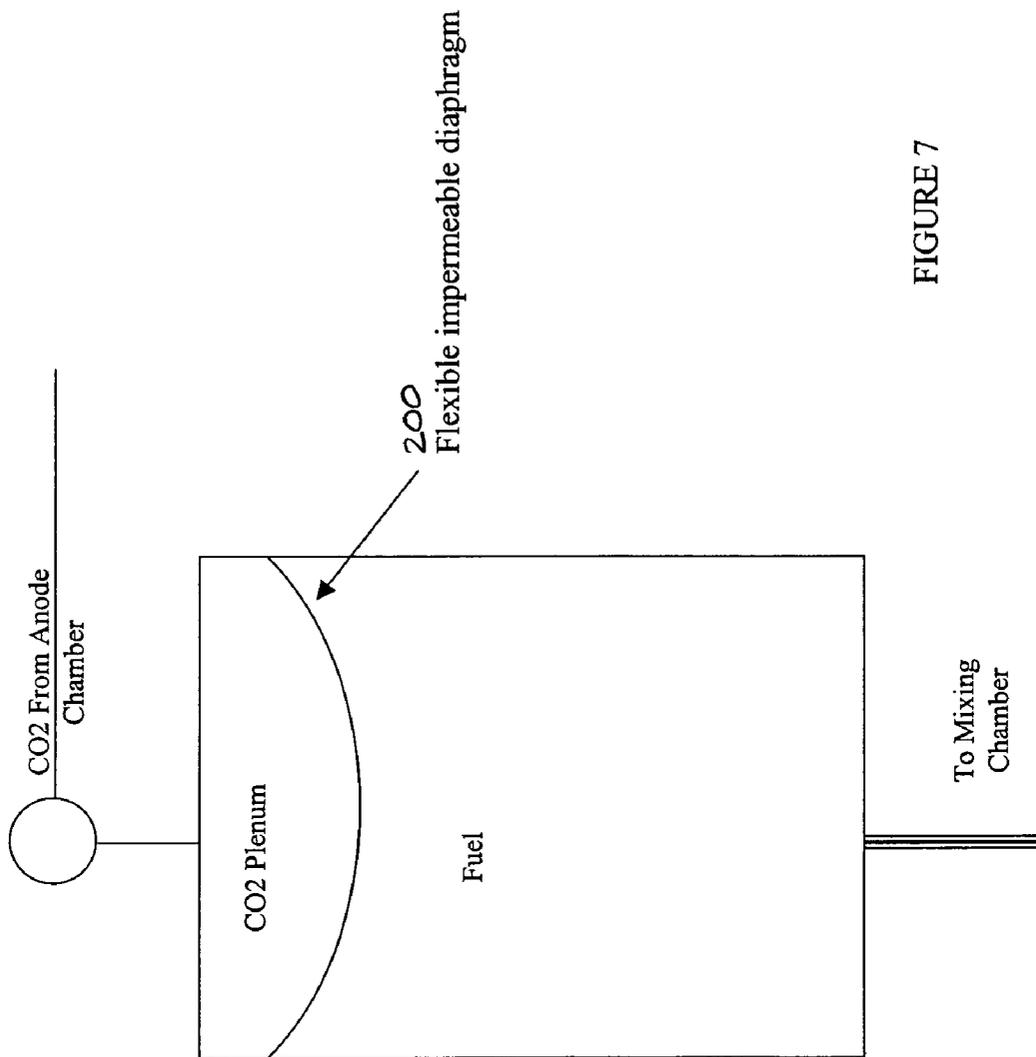


FIGURE 7

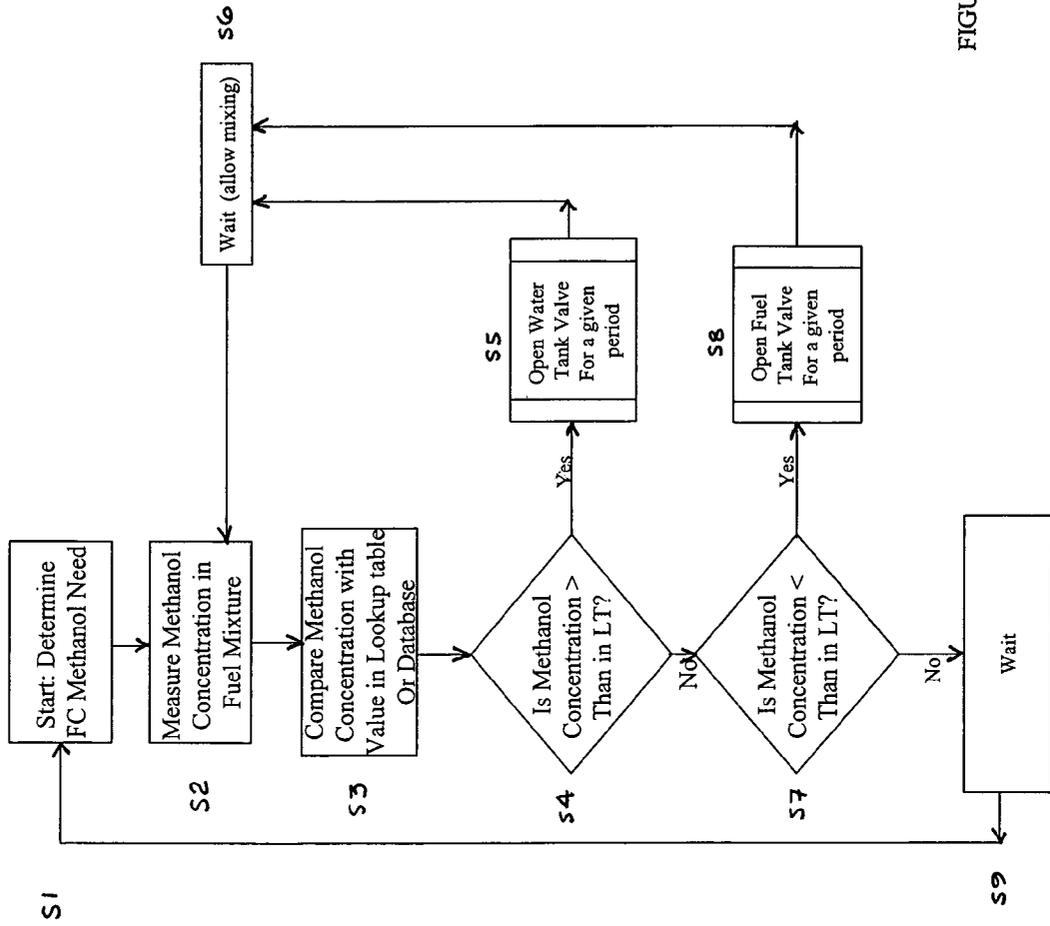


FIGURE 8

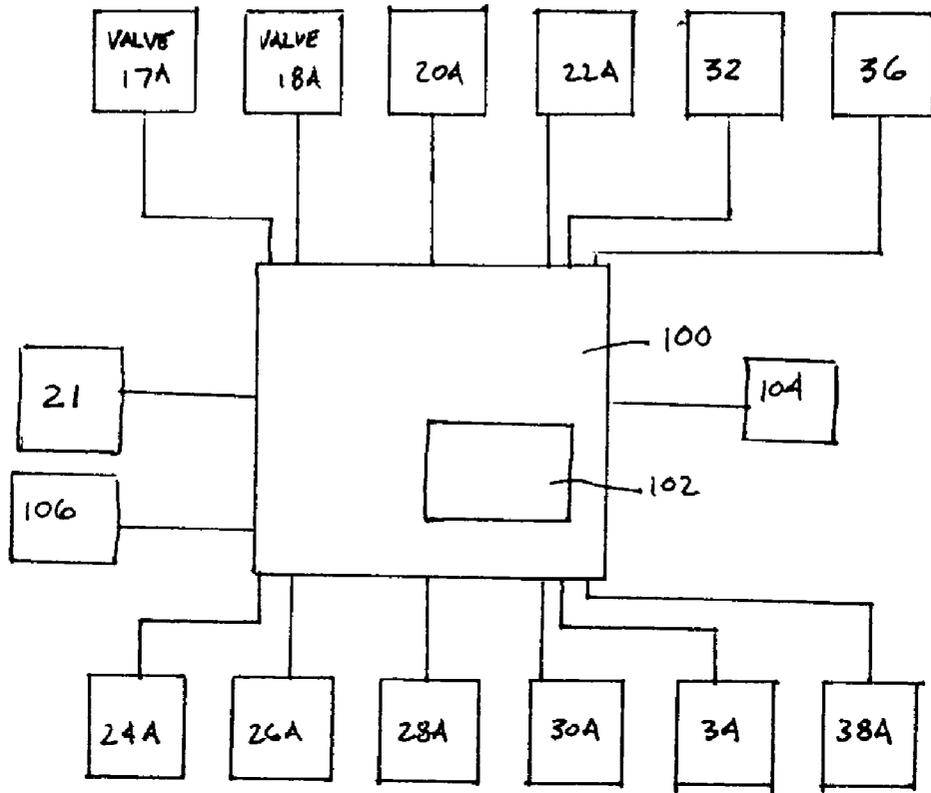


FIGURE 9

METHODS AND APPARATUSES FOR A PRESSURE DRIVEN FUEL CELL SYSTEM

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention is directed to methods and apparatuses for driving fluids in a fuel cell, and more particularly, to methods and apparatuses for moving fluids, specifically water, fuel, a fuel mixture and liquid effluent, in a direct methanol fuel cell system using self-generated pressure differentials.

[0003] 2. Background of the Prior Art

[0004] Substantial research has been dedicated to development of direct oxidation fuel cell systems, including but not limited to direct methanol fuel cell systems for use in portable electronics in recent years. Those skilled in the art will recognize a direct oxidation fuel cell is one that does not require fuel to be processed following its introduction into the fuel cell system. For a direct methanol fuel cell system to operate properly, it is imperative that the fluids in the system are available to the fuel cell for the generation of electricity.

[0005] Currently, direct oxidation fuel cell systems, including direct methanol fuel cell systems (DMFC Systems) are typically operated in a particular physical orientation in order for the system to properly operate (e.g., fuel supply, water supply). However, because many potential applications for DMFC Systems are operated in a variety of orientations, it is imperative that the DMFC System be able to operate regardless of its orientation.

[0006] Previous methods of supplying fuel to a fuel cell have focused on directing the fuel with a pump or series of pumps, as shown in FIG. 1. Alternatively, pressurized fuel tanks or cartridges may be used to drive fuel into the system. However, pumps result in parasitic power loss, and fabrication of pressurized fuel tanks that will effectively deliver fuel to a direct methanol fuel cell (DMFC) is cost prohibitive and difficult. In addition, in a DMFC System that recirculates the unreacted methanol/water fuel mixture and adds neat methanol to provide adequate fuel to the system, it is necessary to ensure that the new methanol is evenly mixed in the mixture prior to introduction into the anode.

[0007] It is therefore desirable to have a fuel delivery and mixture maintaining system that does not require that a pump or other power consuming device be used to manage fluid flow and composition within the fuel cell system.

SUMMARY OF THE INVENTION

[0008] The present invention provides unique methods and apparatuses for driving fluids throughout a fuel cell system, and for mixing fuel and water into a fuel mixture using pressure differentials produced by an effluent gas. Thus, the present invention allows for the movement and mixing of fluids in a direct oxidation fuel cell system without the use of electrically driven pumps or other electrically driven apparatuses.

[0009] The present invention presents novel apparatuses and methods to utilize anodically generated CO₂ to maintain and provide a sufficient flow of methanol and water ultimately to the anode chamber of a fuel cell. It will be

understood by those skilled in the art that the invention can be used with a variety of fuel cell configurations, including but not limited to configurations utilizing a bipolar stack, as well as those that use multiple Protonically Conductive Membranes assembled in a single plane, or single-cell Direct Methanol Fuel Cell System designs.

[0010] Accordingly, it is an object of the present invention to provide a means to ensure that a consistent supply of the fuel mixture is provided to an anode chamber of a fuel cell to enable electricity generating reactions to continue

[0011] It is also an object of the present invention to provide orientation independence for a fuel cell system. That is, the present invention allows a fuel cell system to operate in any variety of orientations. In prior art direct oxidation fuel cell systems, the fuel cell is typically required to remain in a single position, so that gravity is used to aid in movement of liquids/gases in the system. Accordingly, the present invention allows for direct oxidation fuel cell systems to be used in portable electronics.

[0012] It is yet a further object of the present invention to provide a fuel cell system to ensure that proper amounts of the constituents that comprise the fuel mixture are supplied to a mixing chamber.

[0013] It is another object of the present invention to ensure that proper flow of the fuel mixture, liquid anode effluent comprised of unreacted fuel and water, added fuel and/or added water, occurs. Moreover, the present invention allows for the accelerated and enhanced mixing of "neat" methanol with the liquid anode effluent and cathodically generated water.

[0014] In each of the embodiments of the invention, it is important to note that the fuel may be delivered to the system via a cartridge (similar to that used in a fountain pen) or through a tank that may be refilled. It should be further understood that the valves described in the present invention are preferably electrically actuated and allow the flow of fluid only when open, and preferably only in one direction.

[0015] Accordingly, in a first aspect of the present invention, a fuel cell system includes a housing defining an anode chamber and a cathode chamber and includes a catalyst, a protonically conductive (but electronically non-conductive) membrane positioned between the anode chamber and the cathode chamber and a first vent connecting said anode chamber with the ambient environment. The catalyst is preferably applied to the anode and cathode faces of the protonically conductive membrane. The system also includes a fuel chamber in gaseous communication with the anode chamber via a first valve, a water chamber in gaseous communication with the anode chamber via a second valve, and a mixing chamber having a second vent. The mixing chamber is in gaseous communication with the anode chamber via a third valve and receives fuel from the fuel chamber through a fuel valve, water from said water chamber via a water valve, and liquid effluent from the anode chamber via a liquid effluent valve. The mixing chamber also provides a fuel mixture to the anode chamber via a fuel mixture valve.

[0016] In yet another aspect of the present invention, a method for moving a liquid between chambers of a fuel cell system includes sealing off an anode chamber and a first chamber having a liquid stored therein of a fuel cell system from external pressure creating a closed sub-system, while

allowing an effluent gas produced in the anode chamber to freely flow between the anode chamber and the first chamber, and storing a portion of said effluent gas in the first chamber. A first pressure of the sub-system increases due to an increasing volume of effluent gas being produced in the anode chamber. The method also includes sealing off the first chamber from the anode chamber, substantially ceasing the flow of the effluent gas between the anode chamber and the first chamber, creating a pressure differential between a second chamber and the first chamber by lowering a second pressure in the second chamber to a point below the first pressure, opening a conduit between the first chamber and the second chamber, where, as a result of the pressure differential, the liquid stored in the first chamber flows into the second chamber via the second conduit.

[0017] In the above aspect, the first and second chambers may be the following:

First Chamber	Liquid	Second Chamber
mixing chamber	fuel mixture	anode chamber
water chamber	water	mixing chamber
fuel chamber	fuel	mixing chamber
anode chamber	liquid effluent	mixing chamber

[0018] In yet another aspect of the present invention, a method for agitating a liquid stored in a first chamber of a fuel cell system includes sealing off the anode chamber from external pressure, storing an effluent gas produced in the anode chamber within the anode chamber, where pressure within the anode chamber increases over a period of time due to an increasing volume of effluent gas being produced. The method also includes creating a pressure differential between the first chamber and the anode chamber by lowering a first pressure of a first chamber to a point below the anode pressure, and opening a conduit between the anode chamber and the first chamber. As a result of the pressure differential, effluent gas stored in the anode chamber flows into the first chamber agitating the liquid stored there and is then vented to the ambient environment.

[0019] The following additional aspects of the present invention, working in conjunction with the fuel cell system described in the first aspect, are directed to methods for moving particular fluids between chambers of the fuel cell system, and are each set out below:

[0020] A method for moving a fuel and water mixture stored within the mixing chamber to the anode chamber. This method includes closing the first vent, the second vent, the first valve, the second valve, the fuel valve, the fuel mixture valve, the water valve, and the liquid effluent valve, establishing a closed sub-system between the anode chamber and the mixing chamber. The method also includes the steps of opening the third valve allowing an effluent gas produced in the anode chamber to freely flow between the anode chamber and the mixing chamber, and storing a portion of the effluent gas produced in the anode chamber in the mixing chamber. A volume of the effluent gas establishes a first pressure within the closed sub-system and the first pressure becomes increasingly higher as the effluent gas is produced. The method further includes the steps of closing the third valve to isolate the mixing chamber from the anode

chamber, opening the first vent to release the first pressure in the anode chamber such that a second pressure is established within the anode chamber lower than the first pressure creating a pressure differential between the mixing chamber and the anode chamber, closing the first vent, and opening the fuel mixture valve and allowing the fuel mixture to flow from the mixing chamber into the anode chamber as a result of the pressure differential.

[0021] A method for moving water stored within the water chamber to the mixing chamber. The method includes closing the first vent, the second vent, the first valve, the third valve, the fuel valve, the fuel mixture valve, the water valve, and the liquid effluent valve, wherein a closed sub-system is established between the anode chamber and the water chamber. The method also includes the steps of opening the second valve allowing an effluent gas produced in the anode chamber to freely flow between the anode chamber and the water chamber, and storing a portion of the effluent gas produced in the anode chamber in the water chamber. A volume of the effluent gas establishes a first pressure within the closed sub-system, and the first pressure becomes increasingly higher as the effluent gas is produced. The second valve is then closed to isolate the water chamber from the anode chamber, and then the second vent is opened to lower a second pressure in the mixing chamber below the first pressure creating a pressure differential between the water chamber and the mixing chamber. The method further includes the steps of closing the second vent, opening the water valve and allowing water to flow from the water chamber into the mixing chamber as a result of the pressure differential.

[0022] A method for moving fuel stored within the fuel chamber to the mixing chamber includes closing the first vent, the second vent, the second valve, the third valve, the fuel valve, the fuel mixture valve, the water valve, and the liquid effluent valve, establishing a closed sub-system between the anode chamber and the water chamber, opening the first valve allowing an effluent gas produced in the anode chamber to freely flow between the anode chamber and the fuel chamber and storing a portion of the effluent gas produced in the anode chamber in the fuel chamber. A volume of the effluent gas establishes a first pressure within the closed sub-system which becomes increasingly higher as the effluent gas is produced. The method further includes the steps of closing the first valve to isolate the fuel chamber from the anode chamber, opening the second vent to lower a second pressure below the first pressure, creating a pressure differential between the fuel chamber and the mixing chamber, closing the second vent, opening the fuel valve and allowing fuel to flow from the fuel chamber into the mixing chamber as a result of the pressure differential.

[0023] A method for moving liquid effluent from the anode chamber to the mixing chamber includes closing the first vent, the second vent, the first valve, the second valve, the third valve, the fuel valve, the fuel mixture valve, the water valve, and the liquid effluent valve establishing a closed sub-system between the anode chamber and the liquid chamber, and storing an effluent gas produced in the anode chamber in the anode chamber. A volume of the effluent gas establishes a first pressure within the anode chamber that becomes increasingly higher as the effluent gas is produced. The method further includes opening the second vent and the effluent valve allowing an effluent liquid

stored in the anode chamber to flow from the anode chamber into the mixing chamber as a result of the pressure differential.

[0024] A method for agitating a fuel mixture stored within the mixing chamber includes closing the first vent, the second vent, the first valve, the second valve, the third valve, the fuel valve, the fuel mixture valve, the water valve, and the liquid effluent valve, wherein a closed sub-system is established between the anode chamber and the water chamber, and storing an effluent gas produced in the anode chamber in the anode chamber. A volume of the effluent gas establishes a first pressure within the anode chamber that becomes increasingly higher as the effluent gas is produced. The method further includes the steps of opening the second vent and the third valve allowing the stored effluent gas to flow from the anode chamber into the mixing chamber and out the second vent, where the fuel mixture stored in the mixing chamber is agitated as a result of the effluent gas flowing into the mixing chamber and out of the second vent as a result of the pressure differential.

[0025] In the preceding aspects, pressure may be lowered in a particular chamber by venting the respective chamber to an environment having a lower pressure. Thus, such an environment may include ambient air pressure.

[0026] In yet another aspect of the present invention, a fuel cell system similar to the first aspect includes a pump in place of the mixing chamber. Effluent gas is used to move fuel from the fuel chamber to the pump. Thus, this aspect includes a housing defining an anode chamber and a cathode chamber and including a catalyst and a protonically conductive, but electronically non-conductive, membrane positioned between the anode chamber and the cathode chamber where the anode chamber includes a first vent, a fuel chamber in gaseous communication with the anode chamber via a first valve, a water chamber, and a pump. The pump receives fuel from the fuel chamber via a fuel valve, water from the water chamber, and liquid effluent from the anode chamber. The pump provides a fuel mixture to the anode chamber.

[0027] In yet a further aspect of the present invention, the above fuel cell system is used with a method for supplying fuel to the pump and includes closing the fuel valve, opening the first valve allowing an effluent gas produced in the anode chamber to freely flow between the anode chamber and the fuel chamber, establishing a closed sub-system between the anode chamber and the fuel chamber, and storing a portion of said effluent gas produced in the anode chamber in the fuel chamber. A volume of the effluent gas establishes a first pressure within the closed sub-system, with the first pressure becoming increasingly higher as the effluent gas is produced and the first pressure is higher than a second pressure of the pump establishing a pressure differential there between. The method also includes closing the first valve to isolate the fuel chamber from the anode chamber, opening the fuel valve and allowing fuel to flow from the fuel chamber into the pump as a result of the pressure differential.

[0028] In yet a further aspect of the present invention, a fuel cell system includes a housing defining an anode chamber and a cathode chamber and including a catalyst, a protonically conductive but electronically non-conductive membrane positioned between the anode chamber and the cathode chamber and a first vent, a first conduit having a first

end for receiving liquid effluent from the anode chamber and a second end for supplying a fuel mixture comprised of fuel and/or water, and the liquid effluent to the anode chamber, and a fuel chamber in gaseous communication with the anode chamber via a first valve and in communication with the first conduit via a fuel valve. The water chamber may also be in communication with the cathode chamber to receive cathodically generated water within the cathode chamber.

[0029] In yet another aspect of the present invention, a method for controlling a concentration of fuel in a fuel-water mixture for a direct oxidation fuel cell system includes determining a first concentration level of fuel in a fuel-water mixture of an anode chamber of a direct oxidation fuel cell system and comparing the first concentration level to a second required concentration level required for a particular operating condition. Fuel is added to the fuel-water mixture when the first concentration level is less than the second required concentration level, under given operating conditions and water is added to the fuel-water mixture when the first concentration level is higher than the second required concentration level under given operating conditions.

[0030] In a related aspect, a system for performing this method includes a housing defining an anode chamber and a cathode chamber, with the housing also including a catalyst and a protonically conductive but electronically non-conductive membrane and the anode chamber including a fuel-water mixture. The system also includes a fuel concentration sensor for determining a first concentration level of fuel in said fuel-water mixture, a fuel chamber for storage of fuel, where the fuel chamber is in communication with the liquid-fuel mixture, a water chamber for storage of water, where the water chamber is in communication with the fuel-water mixture, and a controller for controlling a first flow of fuel to the fuel-water mixture, for controlling a second flow of water to the fuel-water mixture, and including a memory having a look-up table stored therein. The look-up table includes operating condition data and associated fuel concentration levels.

[0031] For a better understanding of the above aspects of the invention, reference is made to the below referenced drawings and written description following immediately thereafter

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] FIG. 1 illustrates a schematic of a prior art fuel cell system using a pump to supply a fuel mixture to an anode chamber of a fuel cell system.

[0033] FIG. 2 illustrates a schematic of a fuel cell system where an effluent gas is used to fully drive liquids throughout the system according to an embodiment of the present invention.

[0034] FIG. 3 illustrates a schematic of a fuel cell system where an effluent gas produced in the anode chamber is used to partially drive liquids in the fuel cell according to an embodiment of the present invention.

[0035] FIG. 4 illustrates a schematic of a fuel cell system according to another embodiment of the present invention.

[0036] FIG. 5 illustrates a schematic of a fuel cell according to another embodiment of the present invention.

[0037] FIG. 6 illustrates a schematic of a fuel cell according to another embodiment of the present invention.

[0038] FIG. 7 illustrates a schematic of a fuel cell according to another embodiment of the present invention.

[0039] FIG. 8 illustrates a flexible impermeable diaphragm used with the embodiments of the presents a schematic of a fuel cell according to another embodiment of the present invention.

[0040] FIG. 9 illustrates a schematic view of a controller for controlling the opening and closing of the valves of the fuel cell system according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0041] First Embodiment

[0042] As shown in FIG. 2, a direct methanol fuel cell system 2 includes a housing 4 defining an anode chamber 6 and a cathode chamber 8, a protonically conductive 10 but electronically non-conductive membrane (Protonically Conductive Membrane) and a catalyst, a mixing chamber 12, a fuel tank 14, and a water tank 16. The catalyst may be positioned anywhere within the anode and cathode chambers, but preferably is applied to one or both faces of the Protonically Conductive Membrane.

[0043] Gas carrying conduits connect the anode chamber (via conduit 17) to each of the fuel tank (via conduit 18), the water tank (via conduit 20), and the mixing chamber (via conduit 22). The gas carrying conduits ferry anodically generated gaseous effluent, CO₂ in a DMFC System, from the anode chamber to one or more of the other elements of the fuel cell. Each conduit also includes a valve to control the flow within a particular conduit. Thus, gas conduit 17 includes valve 17A, gas conduit 18 includes valve 18A, gas conduit 20 includes valve 20A, and gas conduit 22 includes valve 22A. In each embodiment of the invention, a gas separator (not shown) may be incorporated using methods well known in the art. Liquid-carrying conduits carry fuel and water from the fuel tank (via conduit 24) and the water tank (via conduit 26), respectively, to the mixing chamber. Additional liquid conduits ferry fuel mixture from the mixing chamber (via conduit 28) to the anode chamber, and liquid effluent (un-reacted methanol and water) from the anode chamber to the mixing chamber.

[0044] Each of the liquid carrying conduits also includes a valve to control the flow therein. Accordingly, conduit 24 includes valve 24A, conduit 26 includes valve 26A, conduit 28 includes valve 28A, and conduit 30 includes valve 30A.

[0045] The anode chamber, the mixing chamber and the water tank are each equipped with a vent to the external environment, which can be opened to allow the pressure within each to be equalized with the ambient environment.

[0046] In the first embodiment, fluids contained in respective chambers can be driven to another chamber or stirred, via a pressure differential developed between the chamber providing the fluid and the chamber receiving the fluid. Specifically, using CO₂ gas produced as a result of the anodic oxidation of the methanol fuel mixture in the anode chamber, pressure can be increased in the providing chamber above the pressure in the receiving chamber. The fluid carrying conduit between the two chambers includes a valve which is opened at an appropriate time to drive liquid from

the providing chamber to the receiving chamber, once the pressure has reached a predetermined level.

[0047] Accordingly, through the select opening and closing of respective valves among the elements and chambers of the fuel cell system according to the first embodiment of the present invention, in a predetermined sequence, controlled flow of the fluid between elements is established.

[0048] For example, fluid may be moved to the anode chamber either directly (from the mixing chamber) or from the fuel and water tanks through the mixing chamber. In addition, unreacted methanol and water effluent from the anode chamber may be moved from the anode chamber to the mixing chamber through the coordinated opening and closing of the valves. A variety of functions may thus be performed using this system.

[0049] The following are examples of different functions that may be performed using the fuel cell system according to the present invention. Each example specifies the function, actions, and valve positions to carry out the particular function.

[0050] Each of the following functions occurs during operation of the fuel cell. Specifically, an electrical load (not shown) is placed electrically between the anode chamber and cathode chamber of the fuel cell, thereby establishing a path for electrons produced in the anode chamber to be transported to the cathode chamber. Accordingly, in an initial state of the fuel cell, prior to closing the circuit and connecting the load to the fuel cell, the anode chamber includes an initial supply of an appropriate amount of fuel mixture and effluents have not yet been produced.

[0051] One skilled in the art will appreciate that although the description for this embodiment includes a first valve 17A (and associated valve positions) located along the gas carrying conduit 17 adjacent the anode chamber, it is not necessary. The operation of gas valves located adjacent the other elements render this first valve redundant, but conceptually allows for more efficient pressure capture and venting within the system.

[0052] Function 1: Add fuel mixture to anode chamber

[0053] A pressure differential between the mixing chamber and the anode chamber is established by creating a closed sub-system comprising the anode chamber, the mixing chamber, and the gas carrying conduit connecting them. CO₂ generated in the anode chamber increases and produces a corresponding increase in pressure in the sub-system. Accordingly, the sub-system is established using the following valve positions:

Valve Positions:	
Valve	Status
17A	Open
18A	Closed
20A	Closed
22A	Open
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0054] Since the anode chamber and the mixing chamber are at the same pressure, above an initial pressure (which is generally ambient, atmospheric pressure), the two chambers must be isolated from one another and the pressure in the anode chamber lowered to produce the required pressure differential between the two chambers. Accordingly, valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed
18A	Closed
20A	Closed
22A	Closed
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0055] The anode vent is then opened to equalize the pressure therein with ambient pressure. Thus, since the mixing chamber remains at the higher pressure, a pressure differential between the two chambers is established.

[0056] Thus, to move the fluid in the mixing chamber to the anode chamber, the valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed*
18A	Closed
20A	Closed
22A	Closed*
24A	Closed
26A	Closed
28A	Open
30A	Closed
38A	Closed

*Valves may remain open, but are preferably closed

[0057] The anode vent may be thereafter closed, or may remain open during the fluid transfer. However, for a next pressure driven function to occur, the anode vent must be closed so that the CO₂ gas may be efficiently used to create a required pressure differential between the chambers where the fluid transfer will take place.

[0058] Function 2: Add water to mixing chamber

[0059] A pressure differential between the water chamber and the mixing chamber is established by creating a closed sub-system comprising the anode chamber, the water chamber, and the gas carrying conduit connecting them. CO₂ generated in the anode chamber increases and produces a corresponding increase in pressure in the sub-system. Accordingly, the sub-system is established using the following valve positions:

<u>Valve Positions:</u>	
Valve	Status
17A	Open
18A	Closed
20A	Open
22A	Closed
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0060] In order to insure that there is a pressure differential between the water chamber and the mixing chamber, the vent in the mixing chamber is opened to equalize the mixing chamber pressure with ambient pressure. Thereafter, the valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed
18A	Closed
20A	Closed
22A	Closed
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0061] Since the water chamber is at a pressure higher than ambient, it is also therefore higher than the pressure in the mixing chamber thereby establishing the pressure differential between the two chambers.

[0062] Thus, to move water from the water chamber to the mixing chamber, the mixing chamber vent is closed and the valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed*
18A	Closed
20A	Closed*
22A	Closed
24A	Closed
26A	Open
28A	Closed
30A	Closed
38A	Closed

*Valves may remain open, but are preferably closed.

[0063] The anode vent may be open after valve 20A has been closed, or may remain closed. For a next pressure driven function to occur, however, the anode vent must be closed so that the CO₂ gas may be efficiently used to create a required pressure differential between the chambers where the fluid transfer will take place.

[0064] Function 3: Add fuel to mixing chamber.

[0065] A pressure differential between the fuel chamber and the mixing chamber is established by creating a closed sub-system comprising the anode chamber, the fuel chamber, and the gas carrying conduit connecting them. CO₂ generated in the anode chamber increases and produces a corresponding increase in pressure in the sub-system. Accordingly, the sub-system is established using the following valve positions

<u>Valve Positions:</u>	
Valve	Status
17A	Open
18A	Open
20A	Closed
22A	Closed
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0066] In order to insure that there is a pressure differential between the water chamber and the mixing chamber, the vent in the mixing chamber is opened to equalize the mixing chamber pressure with ambient pressure. Thereafter, the valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed
18A	Closed
20A	Closed
22A	Closed
24A	Closed
26A	Closed
28A	Closed
30A	Closed
38A	Closed

[0067] Since the fuel chamber is at a pressure higher than ambient, it is also therefore higher than the pressure in the mixing chamber thereby establishing the pressure differential between the two chambers.

[0068] Thus, to move fuel from the fuel chamber to the mixing chamber, the mixing chamber vent is closed and the valves are positioned in the following manner:

<u>Valve Positions:</u>	
Valve	Status
17A	Closed*
18A	Closed*
20A	Closed
22A	Closed
30A	Closed
24A	Open

-continued

<u>Valve Positions:</u>	
Valve	Status
26A	Closed
28A	Open
38A	Closed

*Valves may remain open, but are preferably closed.

[0069] The anode vent may be open after valve 18A has been closed, or may remain closed. For a next pressure driven function to occur, however, the anode vent must be closed so that the CO₂ gas may be efficiently used to create a required pressure differential between the chambers where the fluid transfer will take place.

[0070] Function 4: Move liquid effluent from anode chamber to mixing chamber.

[0071] A pressure differential between the anode chamber and the mixing chamber is established by isolating the anode chamber from the remainder of the system. CO₂ generated in the anode chamber increases and produces a corresponding increase in pressure. Accordingly, the anode vent is closed and the valves are placed in the following positions:

<u>Valve Positions:</u>		Valve	Status
		17A	Closed
		18A	Closed
		20A	Closed
		22A	Closed
		30A	Closed
		24A	Closed
		26A	Closed
		28A	Closed
		38A	Closed

[0072] In order to insure that there is a pressure differential between the anode chamber and the mixing chamber, the vent in the mixing chamber is opened to equalize the mixing chamber pressure with ambient pressure. Thereafter, the valves are positioned in the following manner to send liquid effluent to the mixing chamber from the anode chamber:

<u>Valve Positions:</u>		Valve	Status
		17A	Closed
		18A	Closed
		20A	Closed
		22A	Closed
		24A	Closed
		26A	Closed
		28A	Closed
		30A	Open
		38A	Closed

[0073] Thereafter, the CO₂ generated in the anode chamber may be vented to the ambient environment, or used to create pressure differentials within the fuel cell system.

[0074] Function 5: Stir fuel mixture in the mixing chamber.

[0075] A pressure differential between the anode chamber and the mixing chamber is established by isolating the anode chamber from the remainder of the system. CO₂ generated in the anode chamber increases and produces a corresponding increase in pressure. Accordingly, the anode vent is closed and the valves are placed in the following positions:

Valve Positions:	Valve	Status
	17A	Closed
	18A	Closed
	20A	Closed
	22A	Closed
	24A	Closed
	26A	Closed
	28A	Closed
	30A	Closed
	38A	Closed

[0076] In order to insure that there is a pressure differential between the anode chamber and the mixing chamber, the vent in the mixing chamber is opened to equalize the mixing chamber pressure with ambient pressure. Thereafter, the valves are positioned in the following manner to send CO₂ flowing through the mixing chamber from the anode chamber to the mixing chamber in order to agitate the fuel-water mixture:

Valve Positions:	Valve	Status
	17A	Open
	18A	Closed
	20A	Closed
	22A	Open
	24A	Closed
	26A	Closed
	28A	Closed
	30A	Closed
	38A	Closed

[0077] It will be understood to those skilled in the art that it may require more than one actuation to properly mix the fuel-water mixture.

[0078] Water generated on the cathode may be moved from the cathode to the water tank via a wicking agent, and/or by other systems including use of the system described in associated U.S. application Ser. No. 09/818,290, filed Mar. 27, 2001, entitled, METHODS AND APPARATUS FOR MANAGING EFFLUENT PRODUCTS IN A DIRECT CONVERSION FUEL CELL SYSTEM (which is commonly owned by the assignee of the present invention) the entire application of which is incorporated by reference. Water generated on the cathode may also be removed to the water tank by other means known to those skilled in the art, including but not limited to gravity based systems.

[0079] While it is preferable to implement this embodiment of the present invention using only valves to control the flow of CO₂, a flexible impermeable membrane **200** (FIG. 7) may also be used to prevent the CO₂ from mixing

with the various liquids and bubbling out before creating the necessary pressure differential.

[0080] The valves of the present invention may be electrically or mechanically actuated and may be fabricated using a variety of designs well known to those skilled in the art. Moreover, the fluid valves are preferably metering valves that may be used to control the amount of fluid that is released when actuated.

[0081] To coordinate the opening and closing of the valves, a computer processor and associated supporting and peripheral systems may be used and programmed to actuate the valves according to the above functions.

[0082] Second Embodiment

[0083] FIG. 3 illustrates a second embodiment according to the present invention. Here, a direct methanol fuel cell system includes a housing **42** defining an anode chamber **44** having a vent **46** and a cathode chamber **48**. The system includes a protonically conductive but electronically non-conductive membrane **50** (Protonically Conductive Membrane), a catalyst, a pump **52**, a fuel tank **54**, and a water tank **56**. As in the previous embodiment, the catalyst may be positioned anywhere within the anode and cathode chambers, but preferably is applied to one or both sides of the Protonically Conductive Membrane **50**.

[0084] It should be understood that the pump includes, but is not limited to, a passively driven pump as disclosed in U.S. patent application Ser. No. 09/717,754, filed Dec. 8, 2000, entitled PASSIVELY PUMPED LIQUID FEED FUEL CELL SYSTEM, which is commonly owned by the assignee of the present invention, and which is incorporated by reference herein in its entirety. A gas carrying conduit **58** connect the anode chamber to the fuel tank. Liquid-carrying conduits carry fuel and water from the fuel tank and the water tank via conduits **60** and **62**, respectively, to the pump, fuel mixture from the pump to anode chamber via conduit **64**, and liquid effluent from the anode chamber to the pump via conduit **66**. An additional liquid conduit **68** may be included which transports liquid effluent from the cathode chamber to the water tank. A valve **60A** controls the flow from the fuel tank to the pump.

[0085] Similar to functions performed by the valves according to the first invention, this embodiment utilizes CO₂ produced in the anode chamber to create a pressure differential between the fuel tank and a pump, so that when the fuel mixture is too lean (i.e., not enough fuel in the water/fuel mixture), fuel may be driven to the pump.

[0086] The pump operates to force a fuel mixture into the anode chamber and for drawing liquid effluent from the anode chamber. A vent positioned on the pump allows for pressure within the pump to be equalized with ambient pressure, to insure that an adequate pressure differential between the fuel tank and the pump is created.

[0087] Accordingly, pressure is increased in the fuel tank by closing the anode vent **46**, opening valves **58A** and **58B**, and closing valve **60A**. A pump vent **53** is opened to insure that the pressure therein is at a lower pressure, i.e., ambient pressure, than that of the fuel tank.

[0088] When the pressure of the fuel tank reaches an appropriate level to drive fuel into the pump, and the pump requires the addition of fuel, valves **58A** and **58B** are closed

(although either one or both may remain open), the anode vent **46** is opened, the pump vent **53** is closed, and valve **60A** is opened. Fuel is then driven by the pressure differential to the pump.

[0089] Third Embodiment

[0090] The fuel cell according to the fourth embodiment of the present invention is substantially similar to the DMFCs described in the first and second embodiments, except in place of the mixing chamber, a recirculation conduit **69** is included. Specifically, liquid effluent from the anode chamber **70** is circulated through the conduit from one end of the anode chamber to the other end. The fuel tank **72** provides fuel to the recirculation conduit through a conduit **74** and **74A** fuel valve. Similarly, the water tank supplies water to the recirculation conduit through a conduit **80** and **80A** water valve.

[0091] Accordingly, fuel and water are provided into the recirculation conduit as they are needed, so that the fuel concentration in the fuel mixture remains at a predetermined amount, or may be adjusted as necessary. Thus a gas conduit **84** delivers effluent gas from the anode chamber **70** to each of the fuel tank **72** and water tank **78** via conduit **71** and associated valve **71A** and conduit **77** and associated valve **77A**, respectively. Effluent from the cathode chamber **75** may be delivered to the water tank **78** via liquid conduit **79** and valve **79A**.

[0092] To move fuel to the recirculation conduit, an anode vent **73** is closed, valves **84A** and **71A** are opened, and valves **77A**, **74A**, **80A** and **79A** are closed. The increasing volume of CO₂ produced in the anode chamber increases the pressure of the anode chamber/fuel tank. When a this pressure reaches a predetermined level, and the fuel mixture requires more fuel, valves **84A** and/or **71A** are then closed and the anode vent is opened to equalize the pressure therein to ambient pressure, thereby establishing a pressure differential between the fuel tank and the recirculation conduit/anode chamber. Thereafter, the anode vent is closed and valve **74A** is opened. The pressure differential drives the fuel from the fuel tank and into the recirculation conduit.

[0093] The same process is used to deliver water to the fuel mixture. The anode vent **73** is closed, valves **84A** and **77A** are opened, and valves **71A**, **74A**, **80A** and **79A** are closed. After the pressure in the anode chamber/water chamber reaches a predetermined amount, and the fuel mixture requires more water, valves **84A** and/or **77A** are closed and the anode vent is opened. Opening the anode vent, of course, equalizes the pressure therein to ambient, creating the necessary pressure differential between the water tank and the anode chamber. The anode vent is then closed, and valve **80A** is opened, driving water into the fuel mixture.

[0094] Fourth Embodiment

[0095] **FIG. 5** illustrates a similar design to that of **FIG. 4**, except in this case, the system does not include a water tank and associated conduits and valves. To drive fuel into the recirculation conduit, the procedure described in association with **FIG. 4** is followed. Additional water, if necessary, may be provided from the cathode chamber to maintain the proper fuel-water mixture.

[0096] Fifth Embodiment

[0097] **FIG. 6** illustrates yet another alternative design to that of **FIGS. 4 and 5**. Specifically, in this embodiment, fuel is supplied directly into the anode chamber without being diluted, being driven in the same procedure as that described in association with the third and fourth embodiments.

[0098] Sixth Embodiment

[0099] **FIG. 8** illustrates the sixth embodiment according to the present invention relating to a method and system for determining an appropriate level of fuel in a fuel mixture for a DMFC. This system will be described with reference to the system illustrated in **FIG. 2**.

[0100] A fuel concentration sensor **21** (**FIG. 9**) located within the system is used to determine a first concentration level of fuel in the fuel mixture. The fuel tank and the water tank supplies fuel and water, respectively, to the fuel mixture using the methods according to the previous embodiments. The fuel cell system, and specifically the gaseous and liquid valves, and vents are operated and controlled via a controller **100** as shown in **FIG. 9**. **FIG. 9** illustrates the controller in communication with each one of the valves and vents of the fuel cell system. The controller also includes a memory **102** containing a look-up table having data associated with fuel levels in the fuel mixture for specific operating parameters. A clock/timer **106** is used to measure time between obtaining fuel concentration levels. Alternatively, an electrical meter or other device which measures the electrical output of the fuel cell system may be used to determine when to re-measure the fuel concentration level. As shown in **FIG. 8**, the system monitors the fuel level in the fuel mixture as well as the electricity that is being required of the system using a metering device **104**. Accordingly, the system obtains the current fuel concentration compares (step **S1**) and it with a fuel level required for a particular condition using the look-up table (step **S2**). If the fuel mixture is too lean, requiring more fuel from the fuel tank, the system opens/closes the appropriate vents and valves to drive fuel into the fuel mixture (steps **S7, S8**). If the fuel mixture is too rich, requiring more water from the water tank, the system responds appropriately (steps **S4, S5**).

[0101] Each time fuel or water is added, a period of time is pre-programmed to elapse so that the component can adequately mix with the pre-existing mixture (step **S6**). Otherwise, the fuel level sensor might obtain a false reading and supply fuel or water to the system at an inappropriate time. This would eventually lead to inefficient operation of the DMFC, potentially resulting in failure of the fuel cell system.

[0102] One skilled in the art will appreciate that the controller of **FIG. 9** and the method outlined in **FIG. 8** may be used with any of the above-described embodiments of the invention. For simplicity, the controller was illustrated in communication with the valves and vents as shown in **FIG. 2**.

[0103] Having thus presented the present invention in view of the above described embodiments, various alterations, modifications and improvements will readily occur to those skilled in the art. Such alterations, modifications and improvements are intended to be within the scope and spirit of the invention. Accordingly, the foregoing description is

by way of example only and is not intended as limiting. The invention's limit is defined only in the following claims and the equivalents thereto.

1. (Amended) A detachable fuel chamber for a fuel cell system, comprising an area for holding an amount of fuel, a first port for gaseous connection with a fuel cell system and a second port for liquid connection with the fuel cell system. [A fuel cell system comprising:

- a housing defining an anode chamber and a cathode chamber and including a catalyst, a protonically conductive but electronically non-conductive membrane positioned between said anode chamber and said cathode chamber and a first vent in said anode chamber;
- a fuel chamber in gaseous communication with said anode chamber via a first valve;
- a water chamber in gaseous communication with said anode chamber via a second valve; and
- a mixing chamber having a second vent, wherein said mixing chamber is in gaseous communication with said anode chamber via a third valve, wherein

said mixing chamber receives fuel from said fuel chamber through a fuel valve, water from said water chamber via a water valve, and liquid effluent from said anode chamber via a liquid effluent valve, and

said mixing chamber provides a fuel mixture to said anode chamber via a fuel mixture valve.]

2. (new) A detachable fuel chamber for a fuel cell system, comprising fuel storage means; gaseous communication means and liquid communication means.

3. (new) The detachable fuel chamber according to claim 1, wherein the first port and second port are in communication with the fuel cell.

4. (new) A method for delivering fuel from a fuel chamber to a fuel cell comprising:

allowing gaseous product from an anode chamber of a fuel cell system to be introduced to the fuel chamber; creating a pressure differential between the fuel chamber and a destination for the fuel; and

releasing the pressure in the fuel chamber to the destination area; and

driving fuel contained in the fuel chamber to the destination area as a result of the release of pressure.

5. (new) The method according to claim 4, wherein the destination area is an anode chamber of the fuel cell.

6. (new) The method according to claim 4, wherein the destination area is a mixing chamber of the fuel cell system.

7. (new) A method for driving a fluid in a fuel cell system comprising:

pressurizing a first chamber with gaseous product produced by an anode chamber of a fuel cell system;

creating a pressure differential between the first chamber and a second chamber containing a liquid;

releasing the pressure contained in the first chamber into the second chamber; and either

driving the liquid from the second chamber to a destination area; or

agitating the liquid in the second chamber.

8. (new) The method according to claim 7, wherein the released pressure flows from the first chamber to the second chamber via a third chamber.

9. (new) A fuel cell system comprising:

- a housing defining an anode chamber and a cathode chamber and including a catalyst, a protonically conductive but electronically non-conductive membrane positioned between said anode chamber and said cathode chamber and a vent;

* * * * *