

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 May 2011 (26.05.2011)


(10) International Publication Number
WO 2011/062001 A1

- (51) **International Patent Classification:**
B60K 35/00 (2006.01) *G01D 7/00* (2006.01)
- (21) **International Application Number:**
PCT/JP2010/067296
- (22) **International Filing Date:**
27 September 2010 (27.09.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2009-264860 20 November 2009 (20.11.2009) JP
- (71) **Applicant (for all designated States except US):** **YAZAKI CORPORATION** [JP/JP]; 4-28, Mita 1-chome, Minato-ku, Tokyo, 1088333 (JP).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** **OISHI Yukio** [JP/JP]; Yazaki Meter Co., Ltd., 1-7-1, Yokoi, Shimada-shi, Shizuoka 427-8555 Japan (JP).
- (74) **Agents:** **TAKINO Hideo** et al.; 4th Floor, Hiroo SK bldg., 36-13, Ebisu 2-chome, Shibuya-ku, Tokyo, 1500013 (JP).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: DISPLAY DEVICE

FIG. 2

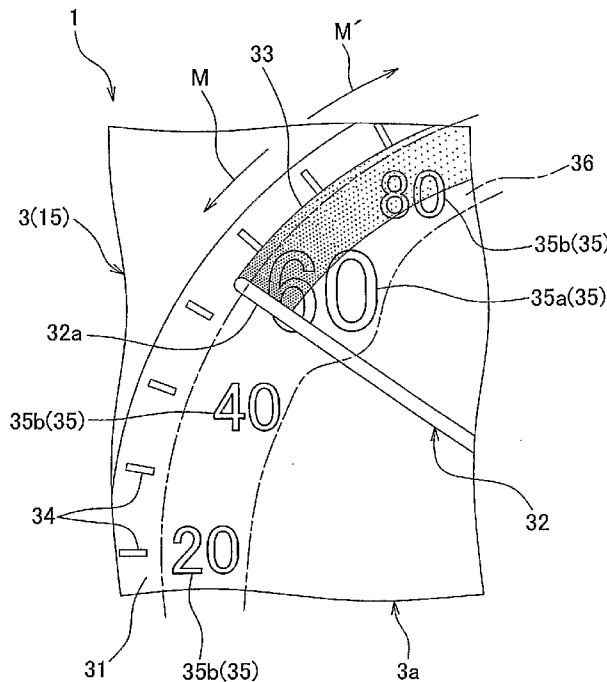

(57) **Abstract:** [Problem] To provide a display device able to visibly and clearly display a relationship between a moving condition of an indicating member and an indexes. [Means for solving problem] A display device (1) includes: a design pattern (31) on which a plurality of numerical markers (35) are arranged; a pointer (32) configured to move along the numerical markers (35), and display a position corresponding to a measured amount of a moving object; a display member (15) configured to display an afterimage (33) extending in a direction M' opposite to a moving direction M of the pointer (32); and a CPU(IO) configured to control the display member (15) to display the afterimage (33). A tip (32a) of the pointer (32) is overlapped with an area (36) on which the numerical markers (35) are arranged. The CPU(IO) makes the afterimage (33) extend from the tip part (32a) of the pointer (32) to be overlapped with the area (36) on which the numerical markers (35) are arranged, and makes the numerical markers (35) visible through the afterimage (33).

WO 2011/062001 A1

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— with international search report (Art. 21(3))

DESCRIPTION

Display device

Technical field

This invention relates to a display device mounted on a moving object
5 such as a vehicle, and configured to display a measured amount of the moving
object by a collaboration of a plurality of indexes forming a design pattern and
an indicating member for indicating a position corresponding to the measured
amount of the moving object, in particular, to a display device configured to
display an afterimage of the indicating member.

10 Back ground art

A display device is mounted on a moving object such as a vehicle or a
ship for displaying data measured by various measuring members to a crew
member of the moving object (for example, see Patent Document 1). The display
device described in the Patent Document 1 includes: a dial plate on which a
15 plurality of scale marks are arranged; and a pointer moving along the scale
marks and indicating a position corresponding to a measured amount of the
moving object, and displays the measured amount of the moving object by a
collaboration of the scale marks and the pointer.

The display device described in the Patent Document 1 further includes:
20 a display member configured to display an afterimage of the pointer extending
in a direction opposite to a moving direction of the pointer; and a display control
member configured to control the display member to display the afterimage of
the pointer. The display member includes: a plurality of prisms arranged at the
center of the dial plate; and a plurality of LEDs each of which is arranged at a
25 rear wall side of the prism. Each prism is formed in a sector shape in a plan

view, and the prisms are arranged in the moving direction of the pointer to form a larger sector.

The display control member controls on/off of each LED corresponding to the moving direction of the pointer to illuminate each prism corresponding to the moving direction of the pointer to display an afterimage of the pointer. Thus, 5 by displaying the afterimage of the pointer, the moving direction of the pointer can be displayed on the display device.

Prior art document

Patent document

10 Patent Document 1: JP, A, H11-20507

Disclosure of the invention

Problem to be solved by the invention

However, in the above-described display device, because the prisms are arranged at the center of the dial plate, and a plurality of scale marks are arranged at an outer edge of the dial plate, the afterimage of the pointer and 15 the scale marks are separated from each other. Therefore, the afterimage and the scale marks are arranged in a relatively wide range, thereby visibility is not good. Further, it is hard to clearly recognize a relationship between the moving direction of the pointer and the scale marks.

20 Accordingly, an object of the present invention is to solve such a problem. Namely, the object of the present invention is to provide a display device able to display visibly and clearly a relationship between a moving condition of an indicating member and indexes.

Means for solving the problem

25 For attaining the object, according to the invention described in claim 1,

there is provided a display device comprising:

a design pattern on which a plurality of indexes are arranged;

an indicating member configured to move along the indexes, and indicate a position corresponding to a measured amount of a moving object to display the measured amount by a collaboration of the indexes and the indicating member;

a display member configured to display an afterimage of the indicating member extending in a direction opposite to a moving direction of the indicating member; and

a display control member configured to control the display member to display the afterimage,

wherein a part of the indicating member is overlapped with an area on which the indexes are arranged, and

wherein the display control member makes the afterimage extend from the part of the indicating member to be overlapped with the area on which the indexes are arranged, and makes the indexes visible through the afterimage.

According to the invention described in claim 2, there is provided the display device as claimed in claim 1,

wherein the display control member makes the afterimage gradually displayed darker as the afterimage is away from the indicating member.

According to the invention described in claim 3, there is provided the display device as claimed in claim 1 or 2,

further comprising a moving amount calculating member configured to calculate a moving amount of the indicating member per a specific time period,

wherein the display control member makes the afterimage displayed in a size proportional to the moving amount of the indicating member calculated by

the moving amount calculating member.

According to the invention described in claim 4, there is provided the display device as claimed in any one of claims 1 to 3,

wherein the display member displays the design pattern, and includes an
5 index identifying member configured to identify the closest index to the
indicating member among the indexes, and

wherein the display control member makes the index identified by the
index identifying member more emphatically displayed than other indexes.

Effects of the Invention

10 According to the invention claimed in claim 1, because the afterimage of
the indicating member is overlapped with the area on which the indexes are
arranged, the afterimage and the indexes are displayed on a narrower range,
thereby the visibility is good. Further, the relationship between the moving
direction of the indicating member and the indexes are displayed more clearly.

15 According to the invention claimed in claim 2, because the afterimage is
gradually displayed darker as the afterimage is away from the indicating
member, the moving direction of the indicating member is more intuitively
visible, and clearly displayed.

20 According to the invention claimed in claim 3, because the afterimage is
displayed in a size proportional to the moving amount of the indicating member
per a specific time interval, the moving amount of the indicating member per a
specific time interval, namely, the measured amount of the moving object per a
specific time interval can be displayed by the size of the afterimage.

25 According to the invention claimed in claim 4, because the closest index
to the indicating member is more emphatically displayed than other indexes,

the closest index to the indicating member can be clearly displayed. Further, when a plurality of indexes is enlargedly displayed, the index at the moving direction of the indicating member side can be clearly displayed by a combination with the afterimage.

5 Brief description of drawings

[Fig. 1] A system block diagram showing a display device according to an embodiment of the present invention.

[Fig. 2] A front view showing a speed meter displayed on the display device shown in Fig. 1.

10 [Fig. 3] A front view showing the speed meter in a case that a speed change is smaller than that shown in Fig. 2.

[Fig. 4] A flowchart showing a speed control process executed by a CPU shown in Fig. 1.

Description of embodiments

15 Hereinafter, a display device 1 according to an embodiment of the present invention will be explained with reference to Figs. 1 to 4. The display device 1 according to the embodiment of the present invention is mounted on a moving object such as a vehicle, and displays graphically a condition of the moving object to a crew member of the moving object.

20 As shown in Fig. 1 the display device 1 includes: a CPU 10 (Central Processing Unit, corresponding to a display control member) for executing various operations and controls according to a predetermined program; a CPU power source 11 for supplying electric power to the CPU; an EEPROM (Electrically Erasable Programmable Read Only Memory) for storing such as a
25 program for the CPU; a RAM (not shown) for storing various data and having

an area needed for an operation of the CPU; a graphic controller 14; a display part 15 (corresponding to a display member); an LCD power source for supplying electric power to the display part 15; an ignition I/O circuit 17; and a data I/O circuit 18.

5 The ignition I/O circuit 17 and the data I/O circuit 18 are connected to the CPU 10 in a manner that various data can be inputted and outputted to each other. Further, the EEPROM 12, the RAM, and the graphic controller 14 are connected to the CPU 10 in a manner that various data can be inputted and outputted to each other.

10 The CPU 10 executes an arithmetic processing based on a running condition or the like of the moving object, generates multi-layered image data 2 including a pointer image layer 2a, a scare mark image layer 2b, a warning image layer 2d, and the like coincident with a vertical synchronizing signal from the graphic controller 14, and stores them temporarily in the RAM. Then,
15 when the next vertical synchronizing signal is detected, the CPU 10 outputs the multi-layered image data 2 stored in the RAM to the graphic controller 14.

 The EEPROM 12 stores a program for controlling the whole operation of the display device 1. By executing the program, the CPU 10 outputs a display command of a desired display screen 3 to the graphic controller 14, and controls
20 the display part 15. Namely, the EEPROM 12 stores various programs such as a program for display control process to make the CPU 10 work as a display control member claimed in claims.

 The graphic controller 14 includes a frame memory 14a for taking composite image data combining the multi-layered image data 2 inputted from
25 the CPU 10. The graphic controller 14 arranging the pointer image layer 2a, the

score mark image layer 2b, and a background image layer 2c sequentially at a back side to generate the composite image data of one frame, and stores it in the frame memory 14a.

Further, the display part 15 is connected to the graphic controller 14 in a manner that various data can be inputted and outputted to each other. When receiving the display command from the CPU 10, the graphic controller 14 outputs RGB image data based on the composite image data of the frame memory 14a, the vertical synchronizing signal, and a horizontal synchronizing signal to the display part 15 to display the display screen 3 on the display part 15. Further, the graphic controller 14 simultaneously outputs the vertical synchronizing signal to the CPU 10. Incidentally, instead of the CPU 10, the graphic controller 14 may work as the display control member.

The display member 15 is made of TFT-LCD (Thin Film Transistor-Liquid Crystal Display). The 15 is arranged on a position where a crew member can see, and a visible surface of the display member 15 works as the display screen 3. The display member 15 can display a dot-matrix display pattern and includes an X driver 15a and a Y driver 15b. The display part 15 turns on/off each unit pixel arranged in a matrix to display numbers, figures, or the like on the display screen 3 via the X driver 15a and Y driver 15b. The display part 15 displays the display screen 3 by turning on/off each unit pixel with the X driver 15a and Y driver 15b under the control of the graphic controller 14.

As shown in Fig. 1, the display screen 3 graphically displays a speed meter 3a indicating a vehicle speed, a tachometer 3b indicating the number of rotations of an engine, a fuel gauge 3c indicating residual amount of fuel, a

temperature meter 3d indicating temperature of coolant, a digital indicator for travel distance 3e, and a warning indicator 3f.

The speed meter 3a is displayed in a circular shape as a whole. As shown in partially enlarged views of Figs. 2 and 3, the speed meter 3a includes: a design pattern 31; a pointer 32 (corresponding to the indicating member); and an afterimage 33 of the pointer 32. Namely, the display part 15 displays the design pattern 31, the pointer 32, and the afterimage 33.

The design pattern 31 includes: a plurality of outer-edge marks 34; and a plurality of numerical marks 35 (corresponding to the indexes) arranged at an inside of the outer-edge marks 34. Both the outer-edge marks 34 and the numerical marks 35 are respectively arranged in arc shapes at an inner edge of the speed meter 3a. Incidentally, an area sandwiched between two chain lines in Figs. 2 and 3 indicates an area 36 on which the numerical marks 35 are arranged.

Further, the closest numerical mark 35a to the rotary moving pointer 32 among the numerical marks 35 is more enlargedly displayed than other numerical marks 35b, and more emphatically displayed than other numerical marks 35. In Figs. 2 and 3, "60" as the closest numerical mark 35a to the pointer 32 is more enlargedly displayed than "20", "40", and "80" as the other numerical marks 35 b

The pointer 32 is displayed in a bar shape. A one end of the pointer 32 is arranged at the center of the speed meter 3a, and the pointer 32 is rotated around the one end. The other end, namely, a tip 32a (corresponding to a part claimed in claims) of the pointer is overlapped with the area 36 on which the numerical marks 35 are arranged, and moved along the numerical marks 35 to

indicate a position corresponding to a measured amount of the moving object.

The afterimage 33 is extended in a direction M' opposite to the moving direction M of the pointer from the tip 32a of the pointer 32, and overlapped with the area 36 on which the numerical marks 35 are arranged. As shown by dot in Figs. 2 and 3, the afterimage 33 is formed in a translucent shape, and gradually displayed darker as the afterimage 33 is away from the pointer 32. Further, a length of the afterimage 33 is proportional to amount of speed change per a specific time period, namely, to the moving amount per a specific time period of the pointer 32. As the moving amount is large, the afterimage 33 becomes long.

Fig. 2 shows the speed meter 3a in a case that the moving object slows down. The pointer 32 is moved in the moving direction M, and the afterimage 33 is extended in a direction M' opposite to the moving direction M. On the other hand, Fig. 3 shows the speed meter 3a in a case that the moving object speeds up. The pointer 32 is moved in the moving direction M, and the afterimage 33 is extended in a direction M' opposite to the moving direction M, namely, the afterimage 33 is extended in a direction opposite to a direction shown in Fig. 2. Further, amount of speed change in a specific time period in Fig. 2 is larger than that in Fig. 3. Therefore, the afterimage 33 in Fig. 2 is displayed longer than the afterimage 33 in Fig. 3.

In the speed meter 3a, the pointer 32 and the afterimage 33 are formed on the pointer image layer 2a of the multi-layered image data 2. The design pattern 31 is formed on the scale mark image layer 2b disposed at a back side of the pointer image layer 2a. Accordingly, the afterimage 33 is disposed at a front side of the numerical marks 35. However, because the afterimage 33 is

translucent, even when the afterimage 33 is overlapped with the numerical marks 35, the numerical marks 35 are visible. Incidentally, a translucent afterimage 33 may be formed on a separately provided translucent layer, or a non-translucent afterimage 33 may be formed on a layer disposed at a back side
5 of the scare mark image layer 2b.

Because the tachometer 3b, the fuel gauge 3c, and the temperature meter 3d have substantially the same configuration as the speed meter 3a, a detailed explanation is omitted. Incidentally, in this embodiment, the afterimage 33 of the pointer 32 and an enlarged display of the numerical marks
10 35 are displayed on the speed meter 3a. However, of course, those may be displayed on the tachometer 3b or the like.

The ignition I/O circuit 17 is connected to an ignition switch. When the ignition switch is turned on and the engine is started, the ignition I/O circuit 17 outputs a specific signal to the CPU 10. The data I/O circuit 18 is connected to a
15 not-shown speed measuring sensor, a not-shown engine rotation number measuring sensor, a not-shown fuel residual amount measuring sensor, a not-shown coolant temperature measuring sensor, and the like mounted on the moving object. The data I/O circuit 18 outputs signals corresponding to measured amount measured by these measuring sensors to the CPU 10. The
20 CPU 10 receives the inputted signals at a CAN (Controller Area Network), and calculates various measured amount from the signals.

Next, an example of a display control process executed by the CPU 10 of the display device 1 will be explained with reference to a flowchart shown in Fig. 4. Incidentally, for simplifying the explanation, only a summary of the display
25 control process regarding the speed meter 3a of the display part 15 will be

explained.

First, in step S11, a current speed of the moving object is calculated based on a signal of the speed measuring sensor inputted from the data I/O circuit 18, and a current rotation angle data for the pointer 32 indicating a present value is calculated and stored in the RAM. The rotation angle data means, for example, an angle between "0" of the numerical marks 35 and the present value indicated by the pointer 32.

In step S12, a previous rotation angle data stored in the RAM is subtracted from the current rotational data calculated in step S11, and a moving amount (moving angle) data per a specific time interval of the pointer 32 is calculated, and stored in the RAM.

In step S13, length data of the afterimage 33 indicating the length of the afterimage 33 to be displayed is calculated based on the moving amount data of the pointer 32 calculated in the step S12, and stored in the RAM. The length data of the afterimage 33 is determined by using a formula of computation for calculating the length of the afterimage 33 from the moving amount data of the pointer 32, or by using a table on which the moving amount data of the pointer 32 is associated with the length data of the afterimage 33. The length data of the afterimage 33 is proportional to the absolute value of the moving amount data of the pointer 32.

Further, in step S14, one numerical mark 35a which is the closest to the pointer 32 among the numerical marks 35 is identified by comparing the current rotation angle data calculated in the step S11 and the data of the design pattern 31 of the speed meter 3a, and stored in the RAM. Incidentally, when the pointer 32 is in the middle of the numerical marks 35, for example, in the 3a

shown in Fig. 2, when the pointer 32 indicates "50", two numerical marks "40", "60" at both sides of the pointer 32 are identified as the numerical marks 35a. Then, in step S15, the numerical marks 35 are displayed on the scare mark image layer 2b, and one or two numerical marks 35a identified in the step S14
5 is displayed larger than other numerical marks 35 b.

Further, in step S16, the pointer 32 is displayed on the pointer image layer 2a based on the current rotation angle data calculated in the step S11, and the afterimage 33 is displayed based on the current rotation angle data and the length data of the afterimage 33 calculated in the step S13. The afterimage
10 33 is extended in the direction M' opposite to the moving direction M of the pointer 32 from the tip 32a of the pointer 32, and overlapped with the area 36 on which the numerical marks 35 of the scare mark image layer 2b are arranged. Further, the afterimage 33 is displayed darker as the afterimage 33 is away from the pointer 32.

15 Incidentally, the extending direction of the afterimage 33 is determined by the polarity (positive or negative) of the moving amount data of the pointer 32. When the moving amount data of the pointer 32 is positive, the afterimage 33 is displayed from the current rotation angle data to a smaller rotation angle. When the moving amount data of the pointer 32 is negative, the afterimage 33
20 is displayed from the current rotation angle data to a larger rotation angle.

Then, in step S17, the other background image layer 2c and the warning image layer 2d are displayed, and the multi-layered image data 2 is generated in the RAM, and outputted to the graphic controller 14. Then, composite image data is generated from the multi-layered image data 2, and displayed on the
25 display screen 3 of the display part 15.

In step S18, whether a termination request is generated or not is judged. When judged that the termination request is not generated, the process goes back to the step S11, and a bunch of operations are repeated in every specific time interval. When judged that the termination request is generated, the process is ended.

As is clear from the above explanation, the CPU 10 works as the display control member, the moving amount calculating member, and the index identifying member claimed in claims.

Next, an example of an operation of the display device 1 will be explained with reference to Figs. 2 and 3. When the display device 1 is started up corresponding to turning on of the ignition switch of the moving object, the display device 1 takes a sample of a signal from the speed measuring sensor in every specific time interval, and displays the speed of the moving object on the speed meter 3a of the display screen 3.

As shown in Fig. 3, when the moving object speeds up and the speed reaches 55 km/h, the afterimage 33 is extended from the tip 32a of the pointer 32 in the direction M' opposite to the moving direction M of the pointer 32, and overlapped with the area 36 on which the numerical marks 35 are arranged. The length of the afterimage 33 is proportional to the moving amount per specific time interval of the pointer 32. Further, the afterimage 33 is displayed gradually darker as the afterimage 33 is away from the pointer 32. Further, because the speed is 55 km/h, "60" as the closest numerical mark 35a to the pointer 32 is more enlargedly displayed than the other numerical marks 35 b.

Further, as shown in Fig. 2, when the moving object speeds down and the speed reaches 55 km/h, the afterimage 33 is extended in the direction M'

opposite to the moving direction M of the pointer 32, and opposite to the direction shown in Fig. 3. Further, because the amount of speed change per a specific time period, namely, to the moving amount per a specific time period of the pointer 32 of Fig. 2 is larger than that of Fig. 3, the longer afterimage 33
5 than that of Fig. 3 is displayed. Further, similar to Fig. 3, "60" as the closest numerical mark 35a to the pointer 32 is more enlargedly displayed than the other numerical marks 35 b.

According to this embodiment, because the afterimage 33 of the pointer 32 is overlapped with the area 36 on which the numerical marks 35 are
10 arranged, the afterimage 33 and the numerical marks 35 are displayed on a narrower range, and thereby the visibility is good. Further, the relationship between the moving direction M of the pointer 32 and the numerical marks 35 are displayed more clearly. Further, because the afterimage 33 is extended from the tip 32a of the pointer 32, the longer afterimage 33 than the afterimage 33
15 extended from the center or a base of the pointer 32 can be displayed, and the moving direction M of the pointer 32 can be more clearly displayed.

Further, because the afterimage 33 is gradually displayed darker as the afterimage 33 is away from the pointer 32, the moving direction M of the pointer 32 is more intuitively visible, and clearly displayed.

20 Further, because the afterimage 33 is displayed in a size proportional to the moving amount of the pointer 32 per a specific time interval, the moving amount of the pointer 32 per a specific time interval, namely, the measured amount of the moving object per a specific time interval can be displayed by the size of the afterimage 33.

25 Further, because the closest numerical mark 35a to the pointer 32 is

more enlargedly displayed than other numerical marks 35b, the closest numerical mark 35a to the pointer 32 can be clearly displayed. Further, when a plurality of numerical marks 35a is enlargedly displayed, the numerical mark 35a at the moving direction M of the pointer 32 side can be clearly displayed by
5 a combination with the afterimage 33.

In this embodiment, the display device 1 graphically displays the condition of the moving body. However, the display device 1 may be a mechanical display device having a pointer rotated by a movement, and a dial plate on which the markers are formed. Further, in this embodiment, the display part 15 of the
10 display device 1 is TFT-LCD. However, the display part 15 may be Organic EL (Electro Luminescence), plasma display, or the like

Further, in this embodiment, the tip 32a of the pointer 32 is overlapped with the area 36 on which the numerical marks 35 are arranged. However, other than the tip 32a of the pointer 32 may be overlapped with the area 36.
15 Further, the afterimage 33 is overlapped with the area 36 on which the numerical marks 35 are arranged. However, the afterimage 33 may be overlapped with an area on which outer-edge marks 34 are arranged. Further, in this embodiment, the numerical mark 35a is emphatically displayed by enlarging the numerical mark 35 a. However, the numerical mark 35a may be
20 emphatically displayed by the other ways, for example, changing the color of the numerical mark 35a.

Although the present invention has been fully described by way of example with reference to the accompanying drawings, it is to be understood that various changes and modifications will be apparent to those skilled in the
25 art. Therefore, unless otherwise such changes and modifications depart from

the scope of the present invention hereinafter defined, they should be construed as being included therein.

Reference Signs List

	1	display device
5	10	CPU (display control member, displacement calculating member, index identifying member)
	15	display part (display member)
	31	design pattern
	32	pointer (indicating member)
10	32a	tip (one part)
	33	afterimage
	35, 35a, 35b	numerical marker (index)
	36	area
	M	moving direction of the pointer
15	M'	direction opposite to the moving direction of the pointer

CLAIMS

1. A display device comprising:
 - a design pattern on which a plurality of indexes are arranged;
 - an indicating member configured to move along the indexes, and indicate
 - 5 a position corresponding to a measured amount of a moving object to display the measured amount by a collaboration of the indexes and the indicating member;
 - a display member configured to display an afterimage of the indicating member extending in a direction opposite to a moving direction of the indicating member; and
 - 10 a display control member configured to control the display member to display the afterimage,
 - wherein a part of the indicating member is overlapped with an area on which the indexes are arranged, and
 - wherein the display control member makes the afterimage extend from
 - 15 the part of the indicating member to be overlapped with the area on which the indexes are arranged, and makes the indexes visible through the afterimage.
2. The display device as claimed in claim 1,
 - wherein the display control member makes the afterimage gradually displayed darker as the afterimage is away from the indicating member.
- 20 3. The display device as claimed in claim 1 or 2,
 - further comprising a moving amount calculating member configured to calculate a moving amount of the indicating member per a specific time period,
 - wherein the display control member makes the afterimage displayed in a size proportional to the moving amount of the indicating member calculated by
 - 25 the moving amount calculating member.

4. The display device as claimed in any one of claims 1 to 3,
wherein the display member displays the design pattern, and includes an
index identifying member configured to identify the closest index to the
indicating member among the indexes, and

5 wherein the display control member makes the index identified by the
index identifying member more emphatically displayed than other indexes.

FIG. 1

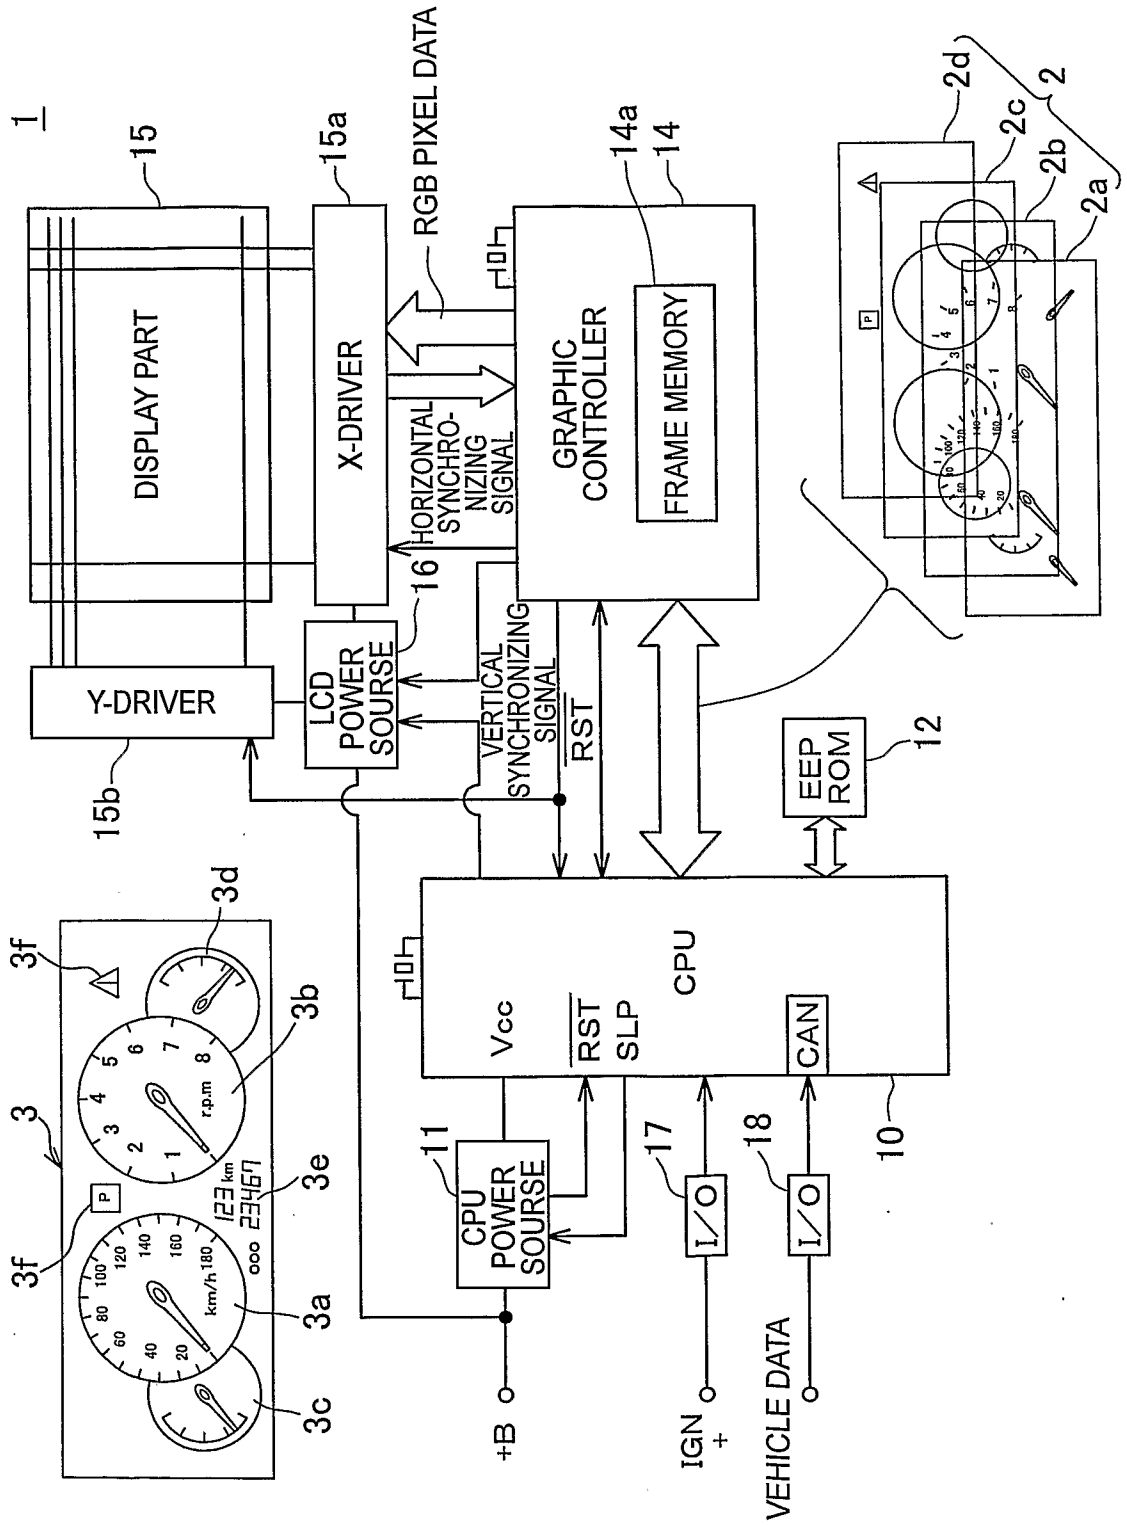


FIG. 2

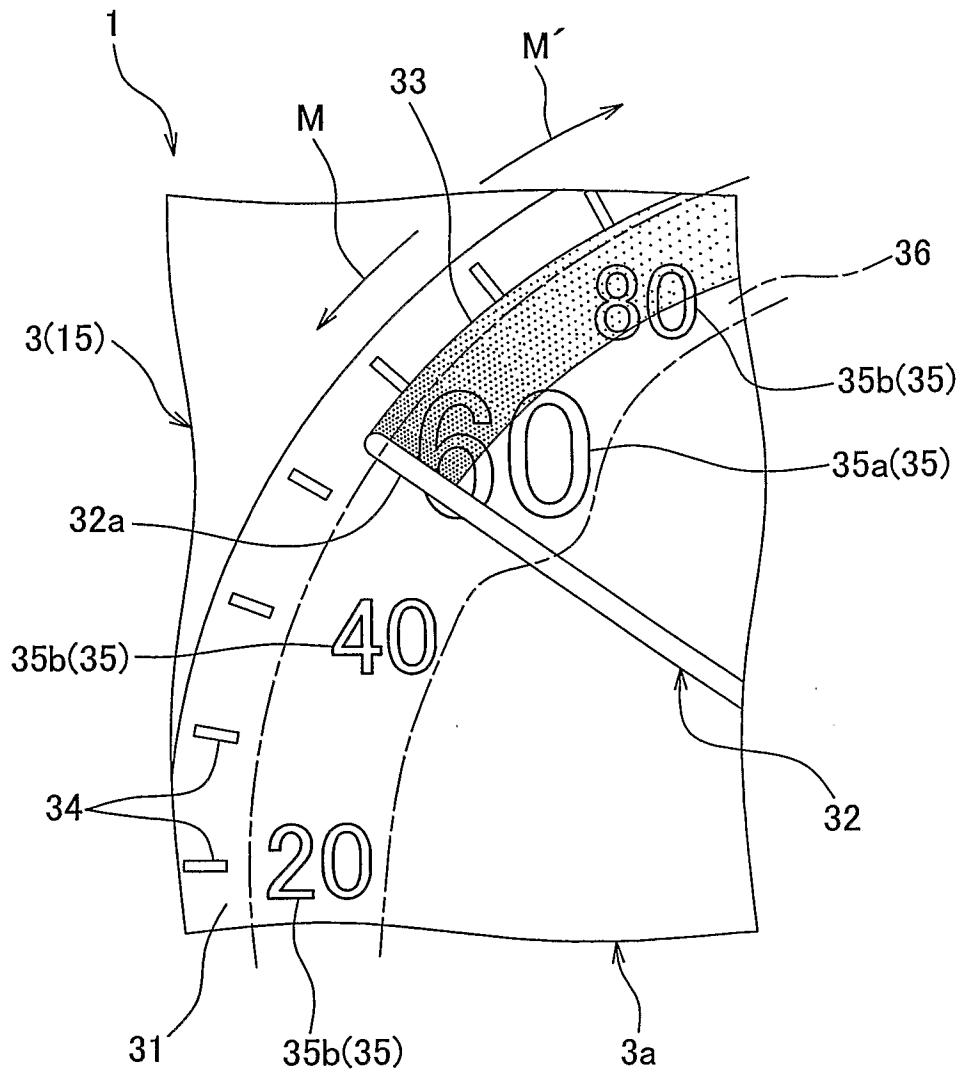


FIG. 3


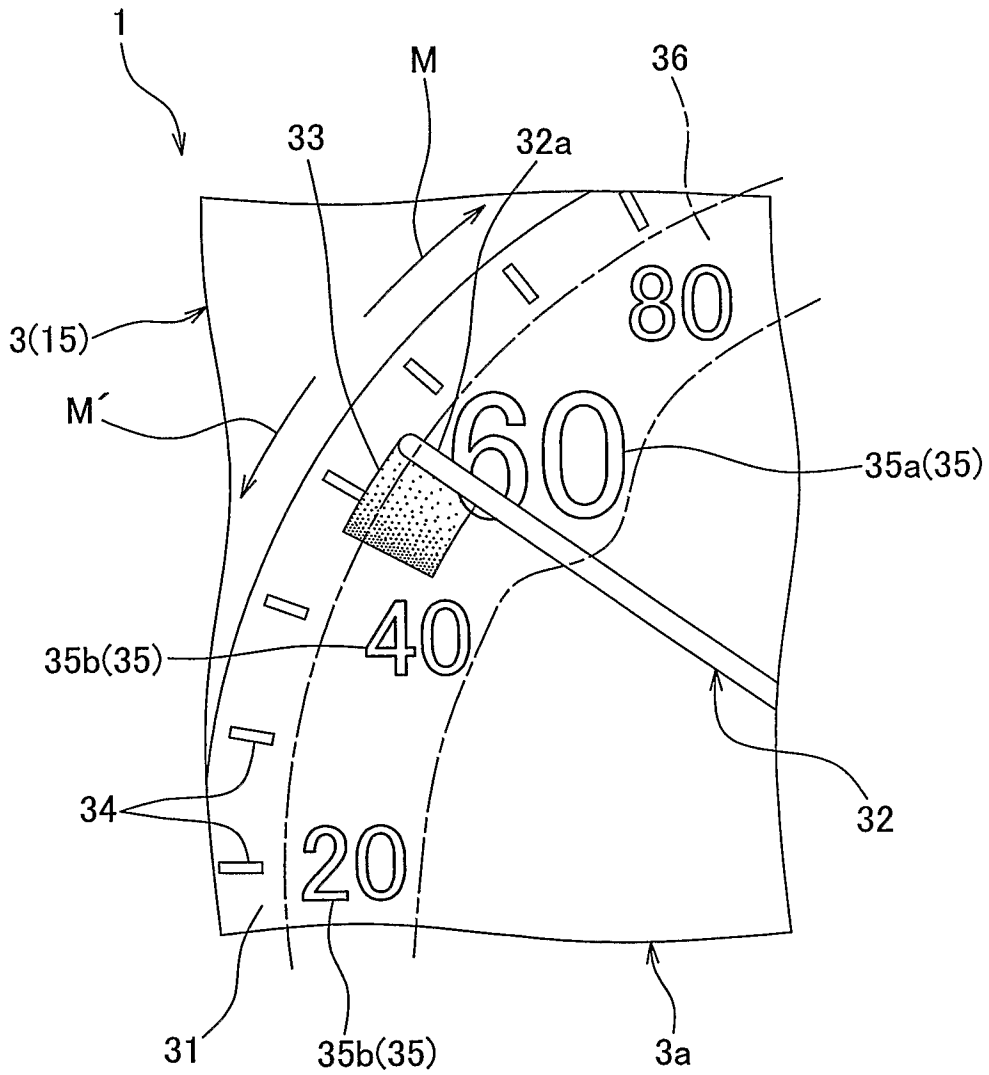


FIG. 4

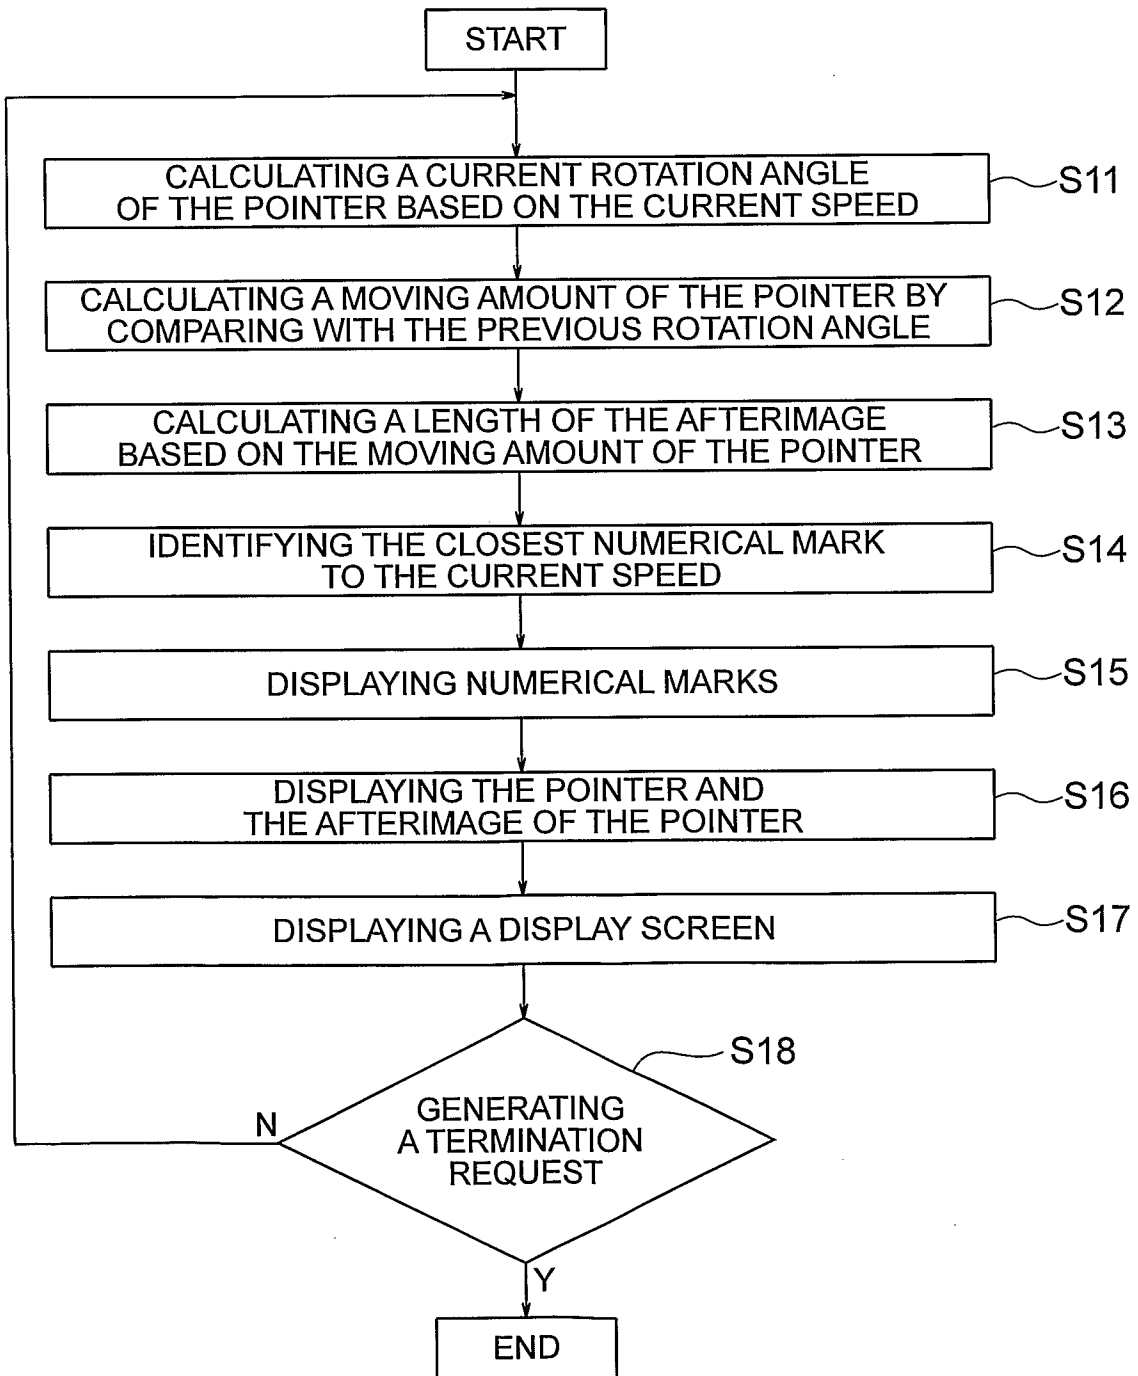

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2010/067296

A. CLASSIFICATION OF SUBJECT MATTER		
Int.Cl. B60K35/00 (2006.01) i, G01D7/00 (2006.01) i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Int.Cl. B60K35/00, G01D7/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Published examined utility model applications of Japan 1922-1996 Published unexamined utility model applications of Japan 1971-2010 Registered utility model specifications of Japan 1996-2010 Published registered utility model applications of Japan 1994-2010		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 5-248896 A (YAZAKI CORPORATION) 1993.09.28,	1
Y	【0010】 , 【0012】 - 【0019】 , Fig.1-7 , (No Family)	2-4
Y	JP 2002-257598 A (NIPPON SEIKI) 2002.09.11,	2-4
A	【0033】 , (No Family)	1
Y	JP 2003-262542 A (DENSO CORPORATION) 2003.09.19,	3-4
A	【0039】 , Fig.2 , (No Family)	1-2
Y	JP 2004-325156 A (CALSONIC KANSEI CORPORATION)	4
A	2004.11.18, 【0014】 , Fig.4 , Fig.5 , (No Family)	1-3
A	JP 2004-45131 A (HONDA MOTOR) 2004.02.12, 【0022】 , Fig.2 , Fig.5 , Fig.6 , (No Family)	1-4
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: “A” document defining the general state of the art which is not considered to be of particular relevance “E” earlier application or patent but published on or after the international filing date “L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) “O” document referring to an oral disclosure, use, exhibition or other means “P” document published prior to the international filing date but later than the priority date claimed “T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention “X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone “Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art “&” document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
20.10.2010		02.11.2010
Name and mailing address of the ISA/JP		Authorized officer
Japan Patent Office		3Z 4648
3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan		Telephone No. +81-3-3581-1101 Ext. 3355