



(86) **Date de dépôt PCT/PCT Filing Date:** 2006/12/06
 (87) **Date publication PCT/PCT Publication Date:** 2007/07/12
 (45) **Date de délivrance/Issue Date:** 2014/04/01
 (85) **Entrée phase nationale/National Entry:** 2008/06/04
 (86) **N° demande PCT/PCT Application No.:** SE 2006/001384
 (87) **N° publication PCT/PCT Publication No.:** 2007/078228
 (30) **Priorités/Priorities:** 2005/12/30 (US60/754,672);
 2005/12/30 (SE0502934-3)

(51) **Cl.Int./Int.Cl. B22C 1/00** (2006.01),
C10M 171/06 (2006.01), **C10M 177/00** (2006.01),
C22C 33/02 (2006.01)

(72) **Inventeurs/Inventors:**
 AHLIN, ASA, SE;
 AHLQUIST, ANNA, SE;
 LARSSON, PER-OLOF, SE;
 SOLIMNJAD, NAGHI, SE


(73) **Propriétaire/Owner:**
 HOGANAS AB (PUBL), SE

(74) **Agent:** SMART & BIGGAR

(54) **Titre : LUBRIFIANT POUR PREPARATIONS METALLURGIQUES EN POUDRE**
 (54) **Title: LUBRICANT FOR POWDER METALLURGICAL COMPOSITIONS**

(57) **Abrégé/Abstract:**

The present invention concerns an iron-based powder metallurgical composition comprising an iron or iron-based powder and a particulate composite lubricant, said composite lubricant comprising particles having a core comprising a solid organic lubricant having fine carbon particles adhered thereon. The invention further relates to the particulate composite lubricant and a method for producing the same.

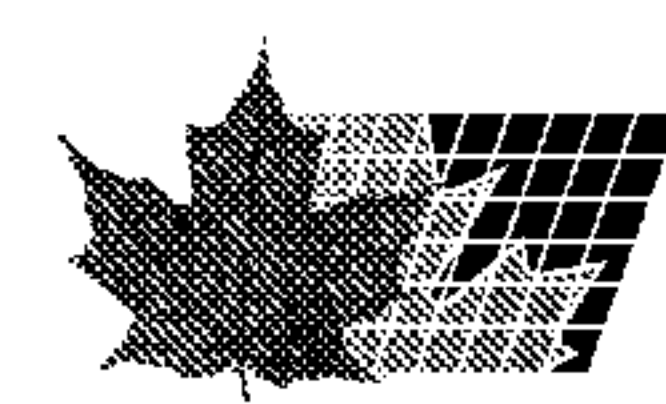

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 July 2007 (12.07.2007)

PCT

(10) International Publication Number
WO 2007/078228 A1

(51) International Patent Classification:

B22C 1/00 (2006.01) *C10M 177/00* (2006.01)
C10M 171/06 (2006.01) *C22C 33/02* (2006.01)

(21) International Application Number:

PCT/SE2006/001384

(22) International Filing Date:

6 December 2006 (06.12.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0502934-3 30 December 2005 (30.12.2005) SE
60/754,672 30 December 2005 (30.12.2005) US

(71) Applicant (for all designated States except US): **HÖGANÄS AB** [SE/SE]; S-263 83 Höganäs (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AHLIN, Åsa** [SE/SE]; Plöningegatan 1A, S-263 37 Höganäs (SE). **AHLQUIST, Anna** [SE/SE]; Farhultsvägen 137, S-263 93 Höganäs (SE). **LARSSON, Per-Olof** [SE/SE]; Rosenfinksgatan 42, S-254 50 Helsingborg (SE). **SOLIMNJAD, Naghi** [SE/SE]; Betesvägen 13, S-263 54 Lerberget (SE).

(74) Agent: **AWAPATENT AB**; Box 1066, 251 10 Helsingborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LUBRICANT FOR POWDER METALLURGICAL COMPOSITIONS

(57) Abstract: The present invention concerns an iron-based powder metallurgical composition comprising an iron or iron-based powder and a particulate composite lubricant, said composite lubricant comprising particles having a core comprising a solid organic lubricant having fine carbon particles adhered thereon. The invention further relates to the particulate composite lubricant and a method for producing the same.

WO 2007/078228 A1

LUBRICANT FOR POWDER METALLURGICAL COMPOSITIONS

The present invention relates to a powder metallurgical composition. Specifically, the invention relates to a powder metal composition comprising a new particulate composite lubricant. The invention further relates to the new particulate composite lubricant as well as a method of preparing this lubricant.

In the Powder Metallurgy industry (PM industry) powdered metals, most often iron-based, are used for production of components. The production process involves compaction of a powder metal blend in a die to form a green compact, ejecting the compact from the die and sintering the green compact at temperatures and under such conditions that a sintered compact having sufficient strength is produced. By using the PM production route costly machining and material losses can be avoided compared to conventional machining of components from solid metals as net shape or nearly net shape components can be produced. The PM production route is most suitable for the production of small and fairly intricate parts such as gears.

In order to facilitate the production of PM parts lubricants may be added to the iron-based powder before compaction. By using lubricants the internal frictions between the individual metal particles during the compaction step are reduced. Another reason for adding lubricant is that the ejection force and the total energy needed in order to eject the green part from the die after compaction are reduced. Insufficient lubrication will result in wear and scuffing at the die during the ejection of the green compact.

The problem with insufficient lubrication can be solved mainly in two ways, either by increasing the amount of lubricant or by selecting more efficient lubricants. By increasing the amount of lubricant, an undesired side effect is however encountered in that the gain

in density through better lubrication is reversed by the increased amount of the lubricants.

A better choice would then be to select more efficient lubricants. This is however a problem as
5 compounds having good lubricity in PM context tends to agglomerate during storage or contributes to agglomerate formation in the powder metallurgical composition, a consequence of which is that the subsequently compacted and sintered component may include comparatively large
10 pores which have a detrimental effect of the static and dynamic mechanical properties of the component. Another problem is that lubricants having good lubrication properties often have negative effects on the so-called powder properties, such as flow rate and apparent density
15 (AD). The flow rate is important because of its impact on the die filling which in turn is important for the production rate of the PM parts. A high AD is important in order to enable shorter filling depths and even AD is important in order to avoid variations in dimensions and
20 weight of the finished components. It is thus desirable to obtain a new lubricant for powder metal compositions that overcomes or reduces the above mentioned problems.

Objects of the invention

25 An object of the present invention is therefore to provide a lubricant having good lubrication properties but no or reduced tendency to agglomerate.

Another object of the present invention is to provide a lubricant having good lubrication properties
30 and yet imparting flow or improved flow properties when it is used in an iron or iron-based powder composition.

Another object is to provide a new iron or iron-based powder composition which includes the new lubricant and which has good flow properties and a high and even
35 apparent density.

Still another object is to provide a process for producing a lubricant.

Summary of the invention

According to the invention it has now unexpectedly been found that the above objects can be met by an iron-based powder metallurgical composition comprising an iron-
5 based powder metallurgical composition comprising an iron or iron-based powder and a new particulate composite lubricant, said composite lubricant comprising particles having a core comprising a solid organic lubricant having fine carbon particles adhered thereon.

10 The invention also concerns the particulate composite lubricant per se as well as the preparation thereof.

Detailed description of the invention

15 The type of solid organic lubricant of the composite lubricant according to the invention is not critical, but due to the disadvantages with metal-organic lubricants, the organic lubricant should preferably not include metal constituents. Thus the organic lubricant may be selected
20 from a wide variety of organic substances having good lubricating properties. Examples of such substances are fatty acids, waxes, polymers, or derivatives and mixtures thereof.

Preferred solid organic lubricants are fatty acids
25 selected from the group consisting of palmitic acid stearic acid, behenic acid and; fatty acid monoamides selected from the group consisting of palmitamide, stearamide, behenamide, oleamide and erucamide, fatty acid bis-amides, such as ethylene bisstearamide (EBS), ethylene
30 bisoleamide (EBO), polyethylene, polyethylene wax; secondary fatty acid amides selected from the group consisting of erucyl stearamide, oleyl palmitamide, stearyl erucamide, stearyl oleamide, stearyl stearamide, oleyl stearamide.

35 Especially preferred solid organic lubricants are stearamide, erucamide, stearyl oleamide, erucyl stearamide, stearyl erucamide, EBO, EBS, and EBS in

combination with oleamide, erucamide, stearyl oleamide ,
stearyl erucamide or erucyl stearamide. Presently
available results indicate that powder metal compositions
comprising these composite lubricants according to the
5 invention are distinguished by especially high apparent
densities and/or flow rates. Additionally these
lubricants are known for their excellent lubricating
properties.

The average particle size of the organic core parti-
10 cles may be 0.5-100 μm , preferably 1-50 μm and most pref-
erably 5-40 μm . Furthermore it is preferred that the par-
ticle size of the core is at least five times the
particle size of the carbon particles and it is preferred
that the fine carbon particles form a coating on the core
15 surface.

In this context the term "fine carbon particles" is
intended to mean crystalline, semi-crystalline or
amorphous carbon particles. The fine carbon particles may
originate from natural or synthetic graphite, carbon
20 black, activated carbon, coal and anthracite etc and may
also be a mixture of two or more of these. The fine
carbon particles adhered onto the surface of the solid
organic lubricant core may preferably be selected from
the group consisting of carbon black and natural or
25 synthetic graphite, having an average particle size of
less than 10 μm and larger than 5 nm.

The primary particle size of the carbon black may be
less than 200 nm, preferably less than 100 nm, and most
preferably less than 50 nm and larger than 5 nm. The spe-
30 cific surface area may be between 20 and 1000 m^2/g as
measured by the BET-method. Carbon black may be obtained
from a supplier such as Degussa AG, Germany. The content
of carbon black in the composite lubricant may be 0.1-25
% by weight, preferably 0.2-6 % by weight and most pre-
35 ferably 0.5-4 % by weight.

The average particle size of the graphite may be
less than 10 μm and larger than 500 nm. The content of

graphite in the composite lubricant may be 0.1-25 % by weight, preferably 0.5-10 % by weight and most preferably 1-7 % by weight. Graphite may be obtained from a supplier such as Graphit Kropfmühl AG, Germany or a synthetic
5 graphite with an ultra-high surface area from Asbury Carbons, USA.

The content of the composite lubricant in the powder metal composition may be 0.05-2 % by weight.

The particulate composite lubricant according to the
10 invention may be prepared by ordinary particle coating technique involving mixing an organic particulate lubricating material and fine carbon particles. The method may further comprise a heating step. The temperature for the heat-treatment may be below the melting point of the
15 solid particulate organic lubricant.

The particulate solid organic lubricant may be thoroughly mixed with the fine carbon particles in a mixer. The mixer may be a high-speed mixer. The mixture may be heated during mixing at a temperature and during a time
20 period sufficient to let the fine carbon particles adhere to the surface of the particulate organic lubricating material during a subsequently followed optional cooling step.

The iron-based powder may be a pre-alloyed iron-
25 based powder or an iron-based powder having the alloying elements diffusion-bonded to the iron-particles. The iron-based powder may also be a mixture of essentially pure iron powder or pre-alloyed iron-based powder and alloying elements selected from the group consisting of Ni,
30 Cu, Cr, Mo, Mn, P, Si, V, Nb, Ti, W and graphite. Carbon in the form of graphite is an alloying element used to a large extent in order to give sufficient mechanical properties to the finished sintered components. By adding carbon as an individual constituent to the iron-based
35 powder composition the dissolved carbon content of the iron-based powder may be kept low enhancing improved compressibility. The iron-based powder may be an atomized

powder, such as a water atomized powder, or a sponge iron powder. The particle size of the iron-based powder is selected depending on the final use of the material. The particles of the iron or iron-based powder may have a weight average particle size of up to about 500 μm , more preferably the particles may have a weight average particle size in the range of 25-150 μm , and most preferably 40-100 μm .

The powder metal composition may further comprise one or more additives selected from the group consisting of binders, processing aids, hard phases, machinability enhancing agents if there is a need of machining of the sintered component, and solid lubricants conventionally used in PM-industry such as EBS, zinc-stearate and Kenolube[®] available from Höganäs AB. The concentration of the powdered composite lubricant according to the invention plus optional solid lubricants may be in the range of 0.05 to 2 % of a powder metal composition.

The new iron or iron-based powder composition may be compacted and optionally sintered by conventional PM techniques.

The following examples serve to illustrate the invention but the scope of the invention should not be limited thereto.

25

Examples
Materials

The following materials were used.

30 (1) As iron-based water atomized powder (ASC100.29, available from Höganäs AB, Sweden) was used.

(2) As lubricating core materials the following substances were used; ethylene bis-stearamide (EBS) available as Licowax[™] from Clariant (Germany), stearamide, erucamide, oleyl palmitamide, stearyl oleylamide, erucyl stearamide, stearyl erucamide,

35

ethylene bis-oleamide (EBO) and polyethylene waxes. The average particle sizes of the lubricants can be seen in Table 2.

5

(3) Graphite UF-4 (from Graphit Kropfmühl AG, Germany) was used as added graphite in the iron-based powder composition.

10

(4) Coating particles were Graphite UF-1 (UF1) (from Graphit Kropfmühl AG, Germany) and Graphite 4827 (4827) (from Asbury Carbons, USA) having an average particle size of 2 μm and 1.7 μm respectively, and Carbon black (CB) (from Degussa AG, Germany) having a primary particle size of 30 nm.

15

The iron-based powder compositions consisted of ASC100.29 mixed with 0.5 % by weight of graphite and 0.8 % by weight of composite lubricant.

20

Different composite lubricants were prepared by mixing core material according to Table 1 and 2 with fine carbon particles at different concentrations in a high-speed mixer from Hosokawa. Carbon black was added at the concentrations of 0.75, 1.5, 3 and 4 % by weight, respectively. Graphite was added at the concentrations of 1.5, 3, 5 and 6% by weight, respectively to the composite lubricants. The process parameters for the mixing process, such as temperature of the powder in the mixer and the mixing times for each composite can be seen in Table 2. The rotor speed in the mixer was 1000 rpm and the amount of lubricant core material was 500 g.

30

Table 1. Lubricating substances used as core materials.

Mark	Common name
ES	Erucyl stearamide
OP	Oleyl palmitamide
S	Stearamide
O	Oleamide
E	Erucamide
EBS	Ethylene bis-stearamide
PW655	Polyethylene wax
PW1000	Polyethylene wax
SE	Stearyl erucamide
EBO	Ethylene bis-oleamide
SO	Stearyl oleamide

Table 2. Process parameters

Mark	Average particle size X50 (μm)	Temp. of powder in the mixer ($^{\circ}\text{C}$)	Mixing time (min)
S-1	5.2	50 $^{\circ}\text{C}$	25
S-2	5.8	50 $^{\circ}\text{C}$	25
S-3	15.4	50 $^{\circ}\text{C}$	25
S-4	16.5	50 $^{\circ}\text{C}$	45
S-5	17.8	50 $^{\circ}\text{C}$	25
S-6	21.5	50 $^{\circ}\text{C}$	25
S-7	4.0	83 $^{\circ}\text{C}$	60
ES-1	24.0	25 $^{\circ}\text{C}$	25
ES-2	29.5	25 $^{\circ}\text{C}$	25
E	20.3	25 $^{\circ}\text{C}$	45
OP	16.0	25 $^{\circ}\text{C}$	45
EBS	8.5	75 $^{\circ}\text{C}$	55
EBS/O	25.6	40 $^{\circ}\text{C}$	20
PW655	10.0	25 $^{\circ}\text{C}$	45
PW1000	10.0	40 $^{\circ}\text{C}$	45
SE	27.4	25 $^{\circ}\text{C}$	45
SO	35.4	25 $^{\circ}\text{C}$	45
EBS/SE	29.0	25 $^{\circ}\text{C}$	45

Table 2 continued

EBS/SO	29.2	25°C	45
EBS/ES	20.4	25°C	45
EBS/E	26.0	25°C	15
S/E	24.3	25°C	45
EBO	16.0	50°C	10

Different iron-based powder compositions (mix no 1-63) of 25 kg each were prepared by mixing the obtained composite lubricant or a conventional particulate lubricant (used as reference) with graphite and ASC100.29 in a 50 kg Nauta mixer. The solid organic lubricant particles in mixes no 36-38 and 50-61 were melted, subsequently solidified and micronised before used as a core material for preparing the composite lubricants or before added to the reference mixes. Apparent density (AD) and Hall flow (flow), were measured, according to ISO 4490 and ISO3923-1, respectively, on the obtained iron-based powder compositions 24 hours after the mixing. Table 3 shows the results of the measurements.

As can be seen from table 3, the flow rate of the iron-based powder compositions is improved and higher apparent densities may be obtained when using the different composite lubricants according to the invention as lubricants compared with the use of a conventional lubricant. In fact, when a PM composition containing a conventional lubricant has no flow the PM composition containing the inventive composite lubricant provides flow. Especially high apparent densities and/or flow rates were obtained for powder metal compositions containing composite lubricants according to the invention containing stearamide, erucamide, erucyl stearamide, stearyl erucamide, EBO, EBS and EBS in combination with oleamide or stearyl erucamide.

In order to measure the tendency of the composite lubricants and the conventional lubricants to form agglomerates the lubricants were sieved on a standard 315

μm sieve after storage of at least one week. The amount of the retained material was measured.

Table 4 shows that the tendency of forming agglomerates decreases when the organic lubricating core material is covered by fine carbon particles resulting in a composite lubricant according to the invention.

The same type of measurements as shown in table 4 was repeated with certain iron-based powder compositions in order to evaluate the tendency of forming agglomerates in an iron-based powder composition containing conventional lubricants and composite lubricants according to the invention, respectively.

Table 5 shows that the tendency of forming agglomerates is less pronounced in iron-based powder compositions containing the composite lubricant according to the invention compared with compositions comprising a conventional lubricant.

Table 3 , Flow rate and apparent density (AD) of compositions 1-63

Mix no	Conventional lubricant used as reference	Core of lubricating composite	Type of Carbon particles adhered onto lubricating core	Percentage of carbon particles in relation to total amount of lubricating composite (%)	Flow (seconds/ 50g)	AD (g/cm ³)
1	S-1				No flow	2.97
2		S-1	UF1	3.0	No flow	2.99
3		S-1	CB	1.5	34.5	2.85
4		S-1	CB	3.0	30.4	2.92
5	S-2				No flow	2.98
6		S-2	UF1	3.0	No flow	2.99
7		S-2	CB	3.0	32.9	2.91
8	S-3				No flow	3.05
9		S-3	UF1	3.0	29.5	3.17
10	S-4				No flow	3.12
11		S-4	UF1	3.0	28.3	3.18
12		S-4	CB	0.75	27.1	3.21
13		S-4	CB	1.5	27.2	3.17
14	S-5				30.6	3.05
15		S-5	CB	0.75	28.5	3.13
16		S-5	CB	1.5	27.3	3.13
17		S-5	4827	5.0	29.3	3.17
18	S-6				31.5	3.06
19		S-6	UF1	3.0	27.7	3.20
20		S-6	CB	0.75	26.9	3.21
21	S-7				28.2	3.17
22		S-7	UF1	3.0	26.1	3.19
23		S-7	CB	3.0	26.0	3.11
24	ES-1				No flow	3.10
25		ES-1	CB	1.5	33.1	3.19

Table 3 Continued

Mix no	Conventional lubricant used as reference	Core of lubricating composite	Type of Carbon particles adhered onto lubricating core	Percentage of carbon particles in relation to total amount of lubricating composite (%)	Flow (seconds/50g)	AD (g/cm ³)
26	ES-2				No flow	3.13
27		ES-2	CB	1.5	31.3	3.15
28		ES-2	4827	1.5	29.7	3.18
29	E				No flow	3.03
30		E	CB	1.5	30.3	2.97
31		E	CB	3.0	28.8	3.01
32	OP				No flow	2.92
33		OP	CB	1.5	34.3	2.94
34	EBS				33.5	3.01
35		EBS	CB	1.5	30.8	3.00
36	EBS/O				31.0	3.03
37		EBS/O	UF1	3.0	30.4	3.10
38		EBS/O	CB	3.0	28.4	3.09
39	PW655				No flow	2.76
40		PW655	CB	1.5	32.1	2.82
41	PW1000				No flow	2.78
42		PW1000	CB	1.5	32.5	2.85
43	Zn-stearat				35.4	3.18
44	SE				No flow	2.96
45		SE	CB	3.0	29.9	3.11
46		SE	UF1	6.0	31.2	3.08
47		SE	4827	5.0	30.4	3.10
48	SO				No flow	2.95
49		SO	CB	1.5	30.9	2.98
50	EBS/SE				No flow	2.98
51		EBS/SE	CB	1.5	29.6	3.17

Table 3 continued

52	EBS/SO				No flow	2.95
53		EBS/SO	CB	1.5	30.9	3.03
54	EBS/ES				No flow	3.00
55		EBS/ES	CB	1.5	33.4	2.99
56	EBS/E				No flow	2.96
57		EBS/E	CB	1.5	30.0	3.03
58	S/E				No flow	3.00
59		S/E	CB	4.0	29.1	3.16
60		S/E	UF1	6.0	28.4	3.17
61		S/E	4827	5.0	28.2	3.18
62	EBO				No flow	2.95
63		EBO	CB	3.0	34.0	3.04

Table 4 Tendency of forming agglomerates for conventional lubricants and lubricating composites according to the invention

Conventional lubricant	Core material of lubricating composite	Type of Carbon particles adhered onto lubricating core material	Percentage of carbon particles in relation to total amount of lubric composite (%)	Tendency of forming agglomerates
S-1				Aggl
	S-1	CB	1.5	Less aggl
	S-1	CB	3.0	Less aggl
S-2				Aggl
	S-2	CB	3.0	Less aggl
S-4				Aggl
	S-4	UF1	3.0	No aggl
	S-4	CB	0.75	No aggl
	S-4	CB	1.5	No aggl
S-5				Aggl

Table 4 continued

	S-5	CB	0.75	No aggl
	S-5	CB	1.5	No aggl
	S-5	4827	5,0	No aggl
S-7				Aggl
	S-7	UF1	3.0	No aggl
	S-7	CB	0.75	No aggl
ES-2				Aggl
	ES-2	CB	1.5	No aggl
	ES-2	4827	1.5	No aggl
E				Aggl
	E	CB	1.5	Less aggl
OP				Aggl
	OP	CB	1.5	No aggl
EBS				No aggl
	EBS	CB	1.5	No aggl
EBS/O				No aggl
	EBS/O	UF1	3.0	No aggl
SE				Aggl
	SE	CB	1.5	No aggl
	SE	UF1	6.0	No aggl
	SE	4827	5.0	No aggl
SO				Aggl
	SO	CB	1.5	No aggl
EBS/SE				Aggl
	EBS/SE	CB	1.5	No aggl
EBS/SO				Aggl
	EBS/SO	CB	1.5	No aggl
EBS/ES				Aggl
	EBS/ES	CB	1.5	No aggl
EBS/E				Aggl
	EBS/E	CB	1.5	No aggl
S/E				Aggl
	S/E	CB	4.0	No aggl
	S/E	UF1	6.0	No aggl
	S/E	4827	5.0	No aggl

Table 4 continued

EBO				Aggl
	EBO	CB	3.0	No aggl

5 Table 5 Tendency of forming agglomerates in iron-based powder compositions containing conventional lubricants and the composite lubricant according to the invention

Mix no	Conventional lubricant	Core material of composite lubricant	Type of carbon particles adhered onto lubricating core material	Percentage of carbon particles in relation to total amount of lubricating composite (%)	Tendency of forming agglomerates
1	S-1				Aggl
3		S-1	CB	1.5	No aggl
4		S-1	CB	3.0	No aggl
5	S-2				Aggl
7		S-2	CB	3.0	No aggl
24	ES-1				Aggl
25		ES-1	CB	1.5	No aggl
29	E				Aggl
30		E	CB	1.5	Less aggl
31		E	CB	3	No aggl
32	OP				Aggl
33		OP	CB	1.5	No aggl
34	EBS				No aggl
35		EBS	CB	1.5	No aggl
39	PW655				Aggl
40		PW655	CB	1.5	No aggl
41	PW1000				Aggl
42		PW1000	CB	1.5	No aggl
43	Zn-stearate				No aggl

Table 5 continued

44	SE				Aggl
45		SE	CB	1.5	No aggl
46		SE	UF1	6.0	No aggl
47		SE	4827	5.0	No aggl
48	SO				Aggl
49		SO	CB	1.5	No aggl
50	EBS/SE				Aggl
51		EBS/SE	CB	1.5	No aggl
52	EBS/SO				Aggl
53		EBS/SO	CB	1.5	No aggl
54	EBS/ES				Aggl
55		EBS/ES	CB	1.5	No aggl
56	EBS/E				Aggl
57		EBS/E	CB	1.5	No aggl
58	S/E				Aggl
59		S/E	CB	4.0	No aggl
60		S/E	UF1	6.0	No aggl
61		S/E	4827	5.0	No aggl
62	EBO				Aggl
63		EBO	CB	3.0	No Aggl

CLAIMS

1. Iron-based powder metallurgical composition comprising an iron or iron-based powder and a particulate
5 composite lubricant, said composite lubricant comprising particles having a core comprising a solid organic lubricant having fine carbon particles adhered thereon.

2. Composition according to claim 1, wherein the carbon particles are selected from natural or synthetic
10 graphite, carbon black, activated carbon, coal and anthracite.

3. Composition according to claim 1, wherein the carbon particles are selected from natural or synthetic graphite and carbon black.

4. Composition according to claim 1, wherein the carbon particles form a coating on the core.
15

5. Composition according to claim 1, wherein the organic core particles are selected from the group consisting of fatty acids, waxes, polymers, or derivatives and
20 mixtures thereof.

6. Composition according to claim 1, wherein the average particle size of the organic core particles is 0.5-100 μm .

7. Composition according to claim 1, wherein the content of the composite lubricant in the powder metal
25 composition is 0.05-2 % by weight.

8. Composition according to claim 1, wherein the particle size of the core is at least five times the particle size of the carbon particles.

9. Composition according to claim 2, wherein the particle size of the carbon black is less than 200 nm.
30

10. Composition according to claim 2, wherein the content of carbon black in the composite lubricant is 0.1-25 % by weight.

11. Composition according to claim 2, wherein the average particle size of the graphite is less than 10 μm .
35

54911-3

18

12. Composition according to claim 2, wherein the content of graphite in the composite lubricant is 0.1-25 % by weight.