

(19)



(11)

EP 2 554 094 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
19.10.2016 Bulletin 2016/42

(51) Int Cl.:
A47L 15/50^(2006.01)

(21) Application number: **12179131.3**

(22) Date of filing: **03.08.2012**

(54) **A dishwasher rack with shelf for supporting objects**

Korb für Geschirrspülmaschine mit Gestell zur Halterung von Gegenständen

Panier pour lave-vaisselle avec tablette pour le support d'objets

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **05.08.2011 IT TO20110739**

(43) Date of publication of application:
06.02.2013 Bulletin 2013/06

(73) Proprietor: **Indesit Company S.p.A.
60044 Fabriano (AN) (IT)**

(72) Inventors:
• **Votadoro, Samuele
I-56012 Fornacette (PI) (IT)**

- **Lionetti, Alfredo
I-56003 Capannoli (PI) (IT)**
- **Mauri, Duccio Gualtiero Giovanni
I-20143 MILANO (IT)**
- **Rossi, Paola
I-20127 MILANO (IT)**
- **Di Bartolo, Carmelo
I-20124 Milano (IT)**

(74) Representative: **Dini, Roberto et al
Metroconsult S.r.l.
Via Sestriere 100
10060 None (TO) (IT)**

(56) References cited:
**EP-A1- 2 095 755 WO-A1-2005/037050
DE-A1-102009 002 270 US-A1- 2007 039 904**

EP 2 554 094 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a dishwasher rack, comprising tip-up shelves for supporting glasses, cups and other objects in general.

[0002] The invention further comprises a tip-up shelf, with the relevant support for being applied to the dishwasher rack, according to what will be better disclosed below.

[0003] As it is known, for supporting glasses, cups, cutlery and other objects that usually are arranged in the upper racks of dishwashing machines, there are provided tip-up shelves, commonly called also as tilting shelves or briefly as flaps; they are essentially composed of flat grid-like frames or however having a perforated configuration, such to allow washing water to freely run through them.

[0004] These tip-up shelves are mainly free to take two positions, that is a raised one where they lean against the rack wall, and a lowered one where they are substantially arranged at 90° with respect to said wall; in the second position objects can be put on the shelf for being washed.

[0005] A drawback occurring quite often is the space under the tip-up shelf with the latter in the lowered position; under the shelf it is necessary to introduce objects having small dimensions or anyway compatible with the distance between it and the rack bottom.

[0006] However, this is not always possible and therefore it would be suitable to have the possibility of height-adjusting the position of the shelf, such to increase the available space under it.

[0007] A first example of height-adjustable tip-up shelf is described in the Italian patent application RN2008A000010, the owner being the same applicant of the present application.

[0008] This document describes a dishwasher rack wherein tip-up shelves have the usual hooks for the connection to the rack structure, allowing them to rotate with respect to the horizontal metal wires constituting it; according to this prior art, tip-up shelves can be positioned with different angles by suitable strikers, one at about 90° with respect to the rack wall and the other one with an angle of about 60° with respect to such wall.

[0009] This allows a greater space to be available under the tip-up shelf when it takes the position with the angle of 60°; in practice this latter is intermediate between the lowered condition of the tip-up shelf at 90° with respect to the rack wall, and the completely raised condition where it leans against the wall itself.

[0010] Although the solution known in the above mentioned Italian patent application is a first and interesting attempt for adjusting the position of the tip-up shelves in order to increase the space available under them, it is not completely satisfactory since anyway the shelf is mounted always at the same distance from the bottom of the rack.

[0011] In order to improve this condition, the already

mentioned Italian patent application teaches how to couple the shelf at different heights from the side wall of the rack, along which wires are provided which are horizontally arranged at different heights.

[0012] This solution has the drawback of requiring the complete removal of the tip-up shelves from the rack wall, such to position them with a different height at a different metal wire; this leads to the subsequent need of contemporaneously engaging all the hooks hinging the shelf in the metal wire, which does not always result to be easy particularly in case of quite long tip-up shelves. The same problem is faced in the solution described in European Patent Application EP 2 095 755 A1 to INDESIT COMPANY S.P.A.

[0013] A partial solution to the above-mentioned problem is provided by the U.S. Patent Application US 2007/039904 A1 to PURUSHOTHAMAN BALAJI. The drawback of this solution is that, in order to adjust the height of the shelf, it is required the separation of the shelf from a frame which is coupled with a dishwasher rack, and this separation requires free space in the rack.

[0014] The present invention therefore aims at overcoming such drawback; that is to say, the problem at the base of the present invention is to arrange a dishwasher rack equipped with tip-up shelves for supporting glasses, cups and other objects in general, with such structural and functional characteristics to allow them to be height-adjusted, without the need of removing the whole shelf in order to obtain a wider space between it and the bottom of the rack.

[0015] Such problem is solved by providing a dishwasher rack whose characteristics are set forth in the following claims; the invention further comprises a system for mounting the shelves on the rack, namely a shelf for a dishwasher rack and a shelf support for a dishwasher rack, whose characteristics are also set forth in the annexed claims.

[0016] The characteristics of the invention, the effects deriving therefrom and the advantages obtained, will be more clear from the description of a preferred and non-exclusive embodiment of the invention, shown in the annexed drawings wherein:

figure 1 shows a perspective view of a dishwasher rack according to the invention;

figures 2, 3, 4 and 5 show respective details of the rack of fig. 1;

figure 6 shows a plan view of a tip-up shelf of the rack of fig. 1;

figures 7 and 8 show a front and a side views respectively of a support for tip-up shelves of the rack of the previous figures;

figures 9 and 10 show both perspective views of a second embodiment;

figure 11 is a perspective view of a further embodiment having a size greater than that of figures 9 and 10;

figure 12 shows a perspective view of a fourth em-

bodiment with respect to that of figures 9 and 10.

[0017] With reference to the figures listed above, a dishwasher rack according to the invention is generally designated with 1 (with a shape suitable for being housed in the upper part of the washing tank of a dishwashing machine), which comprises the usual structure 2 made in a manner known per se of metal wires 3 that firstly are bent or shaped in different manners and then welded together to form the assembly, in order to support objects.

[0018] The rack 1 has a substantially parallelepiped shape with a bottom 4 with walls extending along the edges thereof, a pair of side walls 5 and 6, a front wall 7 and a rear wall 8 opposing each other respectively; then at the top the rack is opened such to allow it to be loaded from the top as usual.

[0019] Along the side walls 5 and 6 of the rack there are provided tip-up shelves 10, 11, 12, 13, and 14 according to the invention; such shelves have different dimensions one with respect to the other but they can be advantageously all mounted according to the same system and therefore reference will be made below only to one of them: however what is described applies also to the other ones.

[0020] Therefore, with reference to the shelf 10 some details of it being shown in figures 2-6, it is advantageously made of plastic material and it comprises a mainly opened structure such to facilitate the water flow, it having a base 15 for being mounted to the wall of the rack from which a wide-mesh reticular frame 16 extends. Such frame advantageously comprises a central mesh for supporting objects such as cups and a plurality of peripheral housings for supporting objects such as stem glasses.

[0021] On the base 15, at the part opposite than that of the frame 16, two pairs of appendices 18 and 19 extend symmetrically with respect to a central axis of the shelf, arranged vertically with reference to figure 6.

[0022] Moreover, centrally with respect to the appendices there is a "T" shaped engaging spigot 17, whose functions and those of appendices 18 and 19 as well will be better described below.

[0023] The shelves 10, 11, 12, 13 and 14 are mounted on the side walls 5 and 6 of the rack by means of respective supports 20.

[0024] The latter, also made preferably of plastic material, are all equal to one another, and are fastened to the rack walls by means of rear snap-on projections 21, 22, which are configured such to be engaged with the horizontal wires 51, 52 of the side wall 5 of the rack 1. The supports 20 are removable with respect to the rack 1, such that the user can remove them if he/she does not desire to use the shelves or if he/she desires to clean the supports 20; but once they are fastened to the rack 1 and in operation, they substantially remain still with respect to the rack 1, since the width of the projections 21, 22 is slightly lower than the distance between two vertical consecutive wires 53 in the side wall 5 or 6.

[0025] In the front the supports 20 have a central

groove 24 interposed between two walls 25 having an irregular saw-tooth profile.

[0026] The walls 25 act for supporting a pair of supporting pins 28 for the shelf 10, arranged at the sides of the spigot 17.

[0027] The shelf 10 comprises, preferably as one piece, a retaining pin 77 applied on the surface thereof faced towards the relevant support 20, and suitable for allowing the shelf 10 to be firmly vertically positioned.

[0028] Such retaining pin 77 co-operates to this end with the guiding groove 24 or with another suitable locking element integral with the support 20.

[0029] From the above, it is possible to understand the functional aspects of the rack 1 and of the tip-up shelves 10 it is equipped with.

[0030] The tip-up shelves 10 can be positioned with different angles with respect to the corresponding side wall 5, 6 of the rack 1 and, contemporaneously, even at different heights from the bottom thereof.

[0031] To this end, the spigot 17 of each shelf 10 is slidably guided in the guiding groove 24 of the relevant support 20, with respect thereto it can be positioned at different heights due to the saw-tooth profile of the walls 25.

[0032] By engaging the supporting pins 28 of a shelf 10 with the teeth of the walls 25 as shown in figure 3, the shelf can rotate with respect to these teeth that therefore act as a seat for the rotation of the pins.

[0033] Depending on the selected height, it is possible to change even the angle of the shelf positioned in this manner; this is possible by the engagement of the pairs of appendices 18, 19 of the shelf, which abut against the vertical and horizontal wires respectively of the same wall in a selective manner and depending on the angle given to the shelf 10. These appendices 18, 19 serve for making the support of the objects on the shelf 10 more firm at any heights and/or angle thereof, since the weight of these objects is thus mainly unloaded from the shelf 10 to the rack 1 by means of strikers just obtained by said appendices 18, 19.

[0034] With reference to the former, the ends 18a of the appendices 18 are shaped in a concave manner combined with the vertical metal wires of the side walls 5, 6 of the rack, as it is better shown in figures 3 and 5; the distance between the appendices 18 is preferably equal to or a multiple of the distance between vertical wires 53, such to guarantee appendices 18 to engage therewith, with the supports 20 in any positions.

[0035] In this condition the shelf 10 is angled at about 60° with respect to the corresponding wall 5, 6 of the rack.

[0036] By positioning the shelf at a different height with respect to the walls 25 having the saw-tooth profile, at a horizontal metal wire of the rack wall, the appendices 19 abut against this horizontal wire.

[0037] In this case, the shaped end 19a of the appendices acts as a surface for the abutment against the rack wire and since the appendices 19 are longer than those 18, the latter do not interfere with the positioning of the

shelf, which therefore takes an angle different than the previous case (about 45°).

[0038] In this context, it has to be noted that any other angles of the shelves can be obtained in racks such as that shown in the figures, wherein the side walls 5,6 have a step-like arrangement, that is with parallel flat portions, allowing the supports 20 to be positioned at different distances from the wires of the structure.

[0039] In practice, by moving the supports from a portion to another one of the wall of the rack 1, a higher amount of possibilities for adjusting the shelves is obtained.

[0040] Obviously, the shelves 10 can also be completely tilted such to lean against the side walls 5,6 of the rack. To this end, the shelf 10 comprises, at the central area of the frame 16, a hook (seen in Fig. 2) protruding from the upper face of the frame 16, such that, when the shelf is in the vertical position, this hook engages the central groove 24 of the support 20. To this end, the hook has an appropriate elasticity allowing it to be inserted in the groove 24 and to remain locked therein, thus forcing the shelf 10 to remain in the vertical position. For example the hook can comprise a head composed of two elastic tabs symmetric one another.

[0041] Therefore, it is possible to understand how the rack according to the invention overcomes the technical problems at the base of the invention.

[0042] The tip-up shelves 10 are adjustable not only with reference to the angle with respect to the corresponding side wall of the rack 1 upon which they are mounted, but also their position can be height-adjusted with respect to the bottom of the rack 1, without the need of removing them from the wall.

[0043] This allows the arrangement of the shelves to be easily modified when loading the dishwasher, by a simple gesture of the hand by a person which is asked only to pull the shelf and to slide it along the groove 24 of the support 20, in order to position it on the desired pair of teeth of the walls 25.

[0044] Thus it is not more necessary to remove the shelf from the wall and to hook it again subsequently as it occurs in the prior art mentioned hereinbefore, by operations that involve the use of both the hands and that are not always easy to be performed.

[0045] The combined adjustment of the angle of the shelves and of their height position from the bottom of the rack, synergistically increases the possibilities for loading the dishwasher rack.

[0046] Obviously several variants of the example of the tip-up shelf described up to now are possible.

[0047] A first variant is shown in figures 9 and 10; for the sake of brevity the following disclosure highlights only the parts of this variant different than the main embodiment described above; for the same reason, when possible, the same reference numerals will be used with one or more prime symbols for denoting structurally and functionally equivalent elements.

[0048] In short it is possible to say that in this variant

the appendices 19' abut against the support 20' instead of the horizontal wires 51,52 of the wall of the rack 1.

[0049] In this variant, a tip-up shelf 10' is connectable with the support 20' by means of the same means already described in the previous embodiment; this shelf 10' is provided with a base 15', which in turn comprises at least two snap-on projections 18' compatible with the vertical wires 53 of the rack 1. The distance between the snap-on projections 18' is equal to an integer multiple of the distance between the vertical wires 53. Moreover, said shelf 10' comprises one or more appendices 19' having a polygonal, preferably triangular, and more preferably isosceles triangle cross-section, with the height parallel to the axis of symmetry of the shelf 10'.

[0050] The appendices 19' are compatible with the saw-tooth profiles of the walls 25, and are advantageously strengthened for unloading on the support 20' a part of the weight resting on the shelf 10', thus avoiding a part of the weight to be unloaded from the inside to the outside of the rack 1 acting on the horizontal wire 51,52. Thus it is possible to increase the flexibility of use of the shelf 10', making it possible to arrange it with a higher number of positions inside the rack 1. The isosceles triangle cross-section of the appendices 19', by interfering with the saw-tooth profiles of the walls 25, allows the shelf 10' to reach stable angles equivalent to those of the main embodiment described above.

[0051] In order to make the coupling between the shelf 10' and the support 20' more stable, there are provided one or more cam constraint walls 19a', each of which penetrating into an appendix 19'; these walls 19a' interfere with the walls 25 when to the shelf 10' a rotary movement about its axis of symmetry is given, thus constraining the travel thereof and in addition avoiding the possibility of breaking the engagement spigot 17.

[0052] A second variant is the one shown in fig. 11, which is different than the first variant described above for the provision of a shelf 10" with dimensions about twice those of the variant described above; this shelf 10" comprises a base 15", that in turn comprises at least four snap-on projections 18" joined in pairs by a crossbar 18b". The base 15" has a length about twice that of the first variant.

[0053] This variant comprises appendices 19" structurally and functionally equivalent to the appendices 19' of the first variant; such appendices abut against a support 20". Moreover, this variant advantageously makes it possible to wash bigger dishes in a position raised with respect to the bottom 4 of the rack 1, such as conservation containers or the like.

[0054] A third variant is shown in fig.12. This variant is different than the first one described above, since it provides at least one retaining hook 23" positioned on the top of a support 20" and at the top end of a longitudinal groove 24". These two last elements are structurally and functionally equivalent with respect to the longitudinal groove 24 of the main embodiment and to one of the supports 20,20',20" described above respectively. The

retaining hook 23''' comprises a pair of elastic tabs 23a''', parallel each other and vertically oriented; these tabs 23a''' give the retaining hook 23 a double function, that is the retaining and the guiding one.

[0055] The retaining function is exerted by the hook 23''' when a frame 16'', structurally and functionally equivalent to the frame 16, is coupled to the support 20''' by the longitudinal groove 24'''; when a force from the bottom to the top with a modulus less than a certain threshold is exerted, the tabs 23a''' put up resistance to a spigot 17''' structurally and functionally equivalent to the spigot 17 of the main embodiment while, when the modulus of said force is higher than said threshold value, the tabs 23a''' open, letting the spigot 17''' to be separated from the longitudinal groove 24'''.

[0056] The guiding function is exerted by the hook 23''' when a frame 16'', structurally and functionally equivalent to the frame 16 of the main embodiment, is separated from the support 20'''; in this situation the tabs 23a''' guide the spigot 17''' into the groove 24'', and they open without a particular resistance.

[0057] The tabs 23a''' generate a striker facilitating the positioning of the tip-up shelf in the raised position.

[0058] In the third variant of figure 12, the locking of the frame 16''' in the vertical position, is guaranteed by the engagement between the retaining pin 77''' and the pair of elastic tabs 23a''', the head of said retaining pin occupying the housing therebetween once the elasticity of the tabs 23a''' is overcome.

[0059] A further variant (not shown in the figures) is given by a shelf similar to shelves 10, 10', 10'' just described, wherein said shelf is supported by more than one support 20, 20', 20'', 20''', such to allow a higher load to be positioned on said shelf with respect to the variants described above.

Claims

1. A shelf (10, 10', 10'') for a dishwasher rack (1), the dishwasher rack (1) comprising a structure (2) with a bottom (4) from which a plurality of walls (5, 6, 7, 8) extend, wherein at least said shelf (10, 10', 10'') can be associated with one of said walls for supporting objects in general, said rack comprising at least one support (20, 20', 20'', 20''') applied to the wall (5, 6, 7, 8), along which the shelf can be positioned at different heights from the bottom (4), wherein the support (20, 20', 20'', 20''') comprises a guiding groove (24, 24'') for guiding the shelf (10, 10', 10''), and two walls (25) having a saw-tooth profile on opposite sides of the groove,
characterized in that
the shelf (10, 10', 10'') comprises a spigot (17, 17'') and a pair of supporting pins (28) arranged at sides of the spigot (17, 17''), wherein the spigot (17, 17'') is arranged to be slidably guided in the guiding groove (24) and the walls (25) of the support (20,

20', 20'', 20''') are arranged to act for supporting said pair of supporting pins (28) at different heights from the bottom (4).

2. A shelf (10, 10', 10'') according to claim 1, **characterized in that** it comprises a mounting base (15) from which a plurality of appendices (18, 18', 18'', 19, 19', 19'') extend transversally and a substantially reticular frame (16, 16'') on the opposite side.
3. A shelf (10, 10', 10'') according to claim 2, wherein the appendices (18, 18', 18'', 19, 19', 19'') are arranged symmetrically in pairs with respect to a longitudinal axis of the shelf, where there is a mounting spigot (17, 17'').
4. A shelf (10, 10', 10'') according to claim 2 or 3, wherein the ends of the appendices (18, 19) are so shaped as to include concave, beveled or similar surfaces.
5. A shelf (10, 10', 10'') according to any one of claims 2 to 4, wherein the appendices (19', 19'') abut against the support (20, 20', 20'', 20''').
6. A shelf support (20, 20', 20'', 20''') for a dishwasher rack (1), the dishwasher rack (1) comprising a structure (2) with a bottom (4) from which a plurality of walls (5, 6, 7, 8) extend, wherein at least a shelf (10, 10', 10'') can be associated with one of said walls for supporting objects in general, said rack comprising at least said support (20, 20', 20'', 20''') applied to the wall (5, 6, 7, 8), along which said shelf can be positioned at different heights from the bottom (4),
characterised in that
the support (20, 20', 20'', 20''') comprises a guiding groove (24, 24'') for guiding the shelf (10, 10', 10''), and two walls (25) having a saw-tooth profile on opposite sides of the groove, wherein the shelf (10, 10', 10'') comprises a spigot (17, 17'') and a pair of supporting pins (28) arranged at sides of the spigot (17, 17''), and wherein the spigot (17, 17'') is arranged to be slidably guided in the guiding groove (24) and the walls (25) of the support (20, 20', 20'', 20''') are arranged to act for supporting said pair of supporting pins (28) at different heights from the bottom (4).
7. A support (20, 20', 20'', 20''') according to claim 6, comprising tabs (23a'') acting as strikers to facilitate the positioning of the shelf in an upper position.
8. A dishwasher rack (1) comprising a shelf (10, 10', 10'') according to any of claims 1-5 and a shelf support (20, 20', 20'', 20''') according to claim 6 or 7, wherein said dishwasher rack (1) comprises a structure (2) with a bottom (4) from which a plurality of walls (5, 6, 7, 8) extend, wherein said shelf (10, 10', 10'') can be associated with one of said walls for

supporting objects in general, said support (20, 20', 20'', 20''') can be applied to the wall (5, 6, 7, 8), along which the shelf can be positioned at different heights from the bottom (4).

9. A rack (1) according to claim 8, wherein the shelf (10, 10', 10'') can be mounted onto the support at different angles relative to the corresponding wall (5, 6, 7, 8).
10. A rack (1) according to claim 8 or 9, wherein the shelf (10) comprises appendices (18, 18', 18'', 19) abutting against the wall (5, 6, 7, 8) to hold the shelf at a predetermined angle relative to the wall.
11. A rack (1) according to claim 10, whose structure (2) is at least partly made out of metal wires (3) or the like, against which the appendices (18, 18', 18'', 19) of the shelf (10) abut to determine the different angles relative to the wall (5, 6, 7, 8) whereon it is mounted.
12. A rack (1) according to claim 11, wherein the ends (18a, 19a) of the appendices (18, 19) are so shaped as to include concave, beveled or similar surfaces, so as to improve the contact with the wires (3) of the rack structure.
13. A rack (1) according to any one of claims 8 to 12, wherein said at least one support (20, 20', 20'', 20''') is removably secured to one wall (5, 6, 7, 8).

Patentansprüche

1. Gestell (10, 10', 10'') für einen Geschirrspülerkorb (1), wobei der Geschirrspülerkorb (1) eine Struktur (2) mit einem Boden (4) aufweist, von dem aus sich eine Mehrzahl von Wänden (5, 6, 7, 8) erstrecken, wobei zumindest das Gestell (10, 10', 10'') mit einer der Wände verbunden werden kann, um allgemein Objekte zu halten, wobei der Korb zumindest eine Halterung (20, 20', 20'', 20''') umfasst, die an der Wand (5, 6, 7, 8) angeordnet ist, entlang derer das Gestell in unterschiedlichen Höhen vom Boden (4) positioniert werden kann, wobei die Halterung (20, 20', 20'', 20''') eine Führungsnut (24, 24''') zum Führen des Gestells (10, 10', 10'') umfasst, und wobei zwei Wände (25) ein Sägezahnprofil auf gegenüberliegenden Seiten der Nut aufweisen, **dadurch gekennzeichnet, dass** das Gestell (10, 10', 10'') einen Zapfen (17, 17''') und ein Paar von Halterungspins (28), die an Seiten des Zapfens (17, 17''') angeordnet sind, umfasst, wobei der Zapfen (17, 17''') ausgebildet ist, verschiebbar in der Führungsnut (24) geführt zu werden, und wobei die Wände (25) der Halterung (20, 20', 20'', 20''') angepasst sind, zum Halten des Paares von Halterungspins (28) in unterschiedlichen Höhen vom Bo-

den (4) zu wirken.

2. Gestell (10, 10', 10'') nach Anspruch 1, **dadurch gekennzeichnet, dass** sie eine Befestigungsbasis (15), von der aus sich eine Mehrzahl von Fortsätzen (18, 18', 18'', 19, 19', 19'') transversal erstrecken, und einen im Wesentlichen rechteckigen Rahmen (16, 16''') an der gegenüberliegenden Seite umfasst.
3. Gestell (10, 10', 10'') nach Anspruch 2, wobei die Fortsätze (18, 18', 18'', 19, 19', 19'') symmetrisch in Paaren ausgebildet sind in Bezug auf eine Längsachse des Gestells, wobei dort ein Befestigungszapfen (17, 17''') vorgesehen ist.
4. Gestell (10, 10', 10'') nach Anspruch 2 oder 3, wobei die Enden der Fortsätze (18, 19) so geformt sind, dass sie konkave, angeschrägte oder ähnliche Oberflächen beinhalten.
5. Gestell (10, 10', 10'') nach einem der Ansprüche 2 bis 4, wobei die Fortsätze (19', 19'') gegen die Halterung (20, 20', 20'', 20''') anliegen.
6. Gestellhalterung (20, 20', 20'', 20''') für einen Geschirrspülerkorb (1), wobei der Geschirrspülerkorb (1) eine Struktur (2) mit einem Boden (4) aufweist, von dem aus sich eine Mehrzahl von Wänden (5, 6, 7, 8) erstrecken, wobei zumindest ein Gestell (10, 10', 10'') mit einer der Wände verbunden werden kann, um allgemein Objekte zu halten, wobei der Korb zumindest eine Halterung (20, 20', 20'', 20''') umfasst, die an die Wand (5, 6, 7, 8) angeordnet ist, entlang derer das Gestell in unterschiedlichen Höhen vom Boden (4) positioniert werden kann, **dadurch gekennzeichnet, dass** die Halterung (20, 20', 20'', 20''') eine Führungsnut (24, 24''') zum Führen des Gestells (10, 10', 10'') umfasst, und wobei zwei Wände (25) ein Sägezahnprofil an gegenüberliegenden Seiten der Nut aufweisen, wobei das Gestell (10, 10', 10'') einen Zapfen (17, 17''') und ein Paar von Halterungspins (28), die an Seiten des Zapfens (17, 17''') angeordnet sind, umfasst, und wobei der Zapfen (17, 17''') ausgebildet ist, verschiebbar in der Führungsnut (24) geführt zu werden, und wobei die Wände (25) der Halterung (20, 20', 20'', 20''') ausgebildet sind, zum Halten des Paares von Halterungspins (28) in unterschiedlichen Höhen vom Boden (4) zu wirken.
7. Halterung (20, 20', 20'', 20''') nach Anspruch 6, umfassend Reiter (23a'''), die als Schließbügel wirken, um das Positionieren des Gestells in einer oberen Position zu erleichtern.
8. Geschirrspülerkorb (1), umfassend ein Gestell (10, 10', 10'') nach einem der Ansprüche 1 bis 5 und eine Gestellhalterung (20, 20', 20'', 20''') nach Anspruch

6 oder 7, wobei der Geschirrspülerkorb (1) eine Struktur (2) mit einem Boden (4) umfasst, von dem aus sich eine Mehrzahl von Wänden (5, 6, 7, 8) erstrecken, wobei das Gestell (10, 10', 10'') mit einer der Wände verbunden werden kann, um allgemein

9. Korb (1) nach Anspruch 8, wobei das Gestell (10, 10', 10'') an der Halterung in unterschiedlichen Winkeln relativ zu der entsprechenden Wand (5, 6, 7, 8) befestigt werden kann.

10. Korb (1) nach Anspruch 8 oder 9, wobei das Gestell (10) Fortsätze (18, 18', 18'', 19) umfasst, die gegen die Wand (5, 6, 7, 8) anliegen, um das Gestell in einem vorbestimmten Winkel relativ zu der Wand zu halten.

11. Korb (1) nach Anspruch 10, dessen Struktur (2) zumindest teilweise aus Metalldrähten (3) oder dergleichen gemacht ist, gegen welche die Fortsätze (18, 18', 18'', 19) des Gestells (10) anliegen, um die unterschiedlichen Winkel relativ zu der Wand (5, 6, 7, 8), an der es befestigt ist, zu bestimmen.

12. Korb (1) nach Anspruch 11, wobei die Enden (18a, 19a) der Fortsätze (18, 19) so geformt sind, dass sie konkave, angeschrägte oder ähnliche Oberflächen beinhalten, um so den Kontakt mit den Drähten (3) der Korbstruktur zu verbessern.

13. Korb (1) nach einem der Ansprüche 8 bis 12, wobei die zumindest eine Halterung (20, 20', 20'', 20''') lösbar an einer Wand (5, 6, 7, 8) gesichert ist.

Revendications

1. Tablette (10, 10', 10'') pour panier égouttoir de lave-vaisselle (1), le panier égouttoir de lave-vaisselle (1) comprenant une structure (2) pourvue d'un fond (4) duquel s'étendent une pluralité de parois (5, 6, 7, 8), au moins ladite tablette (10, 10', 10'') pouvant être associée à l'une desdites parois pour supporter des objets en général, ledit panier égouttoir comprenant au moins un support (20, 20', 20'', 20''') appliqué sur la paroi (5, 6, 7, 8) le long de laquelle la tablette peut être positionnée à différentes hauteurs à partir du fond (4), le support (20, 20', 20'', 20''') comprenant une rainure de guidage (24, 24'') destinée à guider la tablette (10, 10', 10''), et deux parois (25) ayant un profil en dents de scie sur des côtés opposés de la rainure,

caractérisée en ce que

la tablette (10, 10', 10'') comporte un ergot (17, 17'')

et une paire de tiges de support (28) disposées sur des côtés de l'ergot (17, 17''), l'ergot (17, 17'') étant adapté pour être guidé de manière coulissante dans la rainure de guidage (24) et les parois (25) du support (20, 20', 20'', 20''') étant adaptées pour supporter ladite paire de tiges de support (28) à différentes hauteurs à partir du fond (4).

2. Tablette (10, 10', 10'') selon la revendication 1, **caractérisée en ce qu'elle** comprend une base de montage (15) de laquelle une pluralité d'appendices (18, 18', 18'', 19, 19', 19'') s'étendent transversalement et un cadre sensiblement réticulaire (16, 16'') sur le côté opposé.

3. Tablette (10, 10', 10'') selon la revendication 2, dans laquelle les appendices (18, 18', 18'', 19, 19', 19'') sont disposés symétriquement par paires par rapport à un axe longitudinal de la tablette où il y a un ergot de montage (17, 17'').

4. Tablette (10, 10', 10'') selon la revendication 2 ou 3, dans laquelle les extrémités des appendices (18, 19) sont conformées de manière à inclure des surfaces concaves, biseautées ou similaires.

5. Tablette (10, 10', 10'') selon l'une quelconque des revendications 2 à 4, dans laquelle les appendices (19', 19'') viennent en butée contre le support (20, 20', 20'', 20''').

6. Support de tablette (20, 20', 20'', 20''') pour panier égouttoir de lave-vaisselle (1), le panier égouttoir de lave-vaisselle (1) comprenant une structure (2) pourvue d'un fond (4) duquel s'étendent une pluralité de parois (5, 6, 7, 8), l'au moins une tablette (10, 10', 10'') pouvant être associée à l'une desdites parois pour supporter des objets en général, ledit panier égouttoir comprenant au moins ledit support (20, 20', 20'', 20''') appliqué à la paroi (5, 6, 7, 8) le long de laquelle ledit tablette peut être positionnée à différentes hauteurs à partir du fond (4),

caractérisé en ce que

le support (20, 20', 20'', 20''') comprend une rainure de guidage (24, 24'') destinée à guider la tablette (10, 10', 10''), et deux parois (25) ayant un profil en dents de scie sur des côtés opposés de la rainure, la tablette (10, 10', 10'') comportant un ergot (17, 17'') et une paire de tiges de support (28) disposées sur des côtés de l'ergot (17, 17''), et l'ergot (17, 17'') étant adapté pour être guidé de manière coulissante dans la rainure de guidage (24) et les parois (25) du support (20, 20', 20'', 20''') étant adaptées pour supporter ladite paire de tiges de support (28) à différentes hauteurs à partir du fond (4).

7. Support (20, 20', 20'', 20''') selon la revendication 6, comprenant des pattes (23a'') servant de percuteur

pour faciliter le positionnement de la tablette dans une position supérieure.

8. Panier égouttoir de lave-vaisselle (1) comprenant une tablette (10, 10', 10") selon l'une quelconque des revendications 1 à 5 et un support de tablette (20, 20', 20", 20''') selon la revendication 6 ou 7, ledit panier égouttoir de lave-vaisselle (1) comprenant une structure (2) pourvue d'un fond (4) duquel s'étendent une pluralité de parois (5, 6, 7, 8), ladite tablette (10 10', 10") pouvant être associée à l'une desdites parois pour supporter des objets en général, ledit support (20, 20', 20", 20''') pouvant être appliqué à la paroi (5, 6, 7, 8) le long de laquelle la tablette peut être positionnée à différentes hauteurs à partir du fond (4). 5
9. Panier égouttoir (1) selon la revendication 8, dans lequel la tablette (10, 10', 10") peut être montée sur le support à des angles différents par rapport à la paroi correspondante (5, 6, 7, 8). 10
10. Panier égouttoir (1) selon la revendication 8 ou 9, dans lequel la tablette (10) comporte des appendices (18, 18', 18", 19) venant en butée contre la paroi (5, 6, 7, 8) pour maintenir la tablette selon un angle prédéterminé par rapport à la paroi. 15
11. Panier égouttoir (1) selon la revendication 10, dont la structure (2) est fabriquée au moins partiellement à partir de fils métalliques (3) ou analogues, contre lesquels les appendices (18, 18', 18", 19) de la tablette (10) viennent en butée pour déterminer les différents angles par rapport à la paroi (5, 6, 7, 8) sur laquelle elle est montée. 20
12. Panier égouttoir (1) selon la revendication 11, dans lequel les extrémités (18a, 19a) des appendices (18, 19) sont conformées de manière à inclure des surfaces concaves, biseautées ou similaires, de manière à améliorer le contact avec les fils (3) de la structure du panier égouttoir. 25
13. Panier égouttoir (1) selon l'une quelconque des revendications 8 à 12, dans lequel ledit au moins un support (20, 20', 20", 20''') est fixé de manière amovible à une paroi (5, 6, 7, 8). 30

50

55

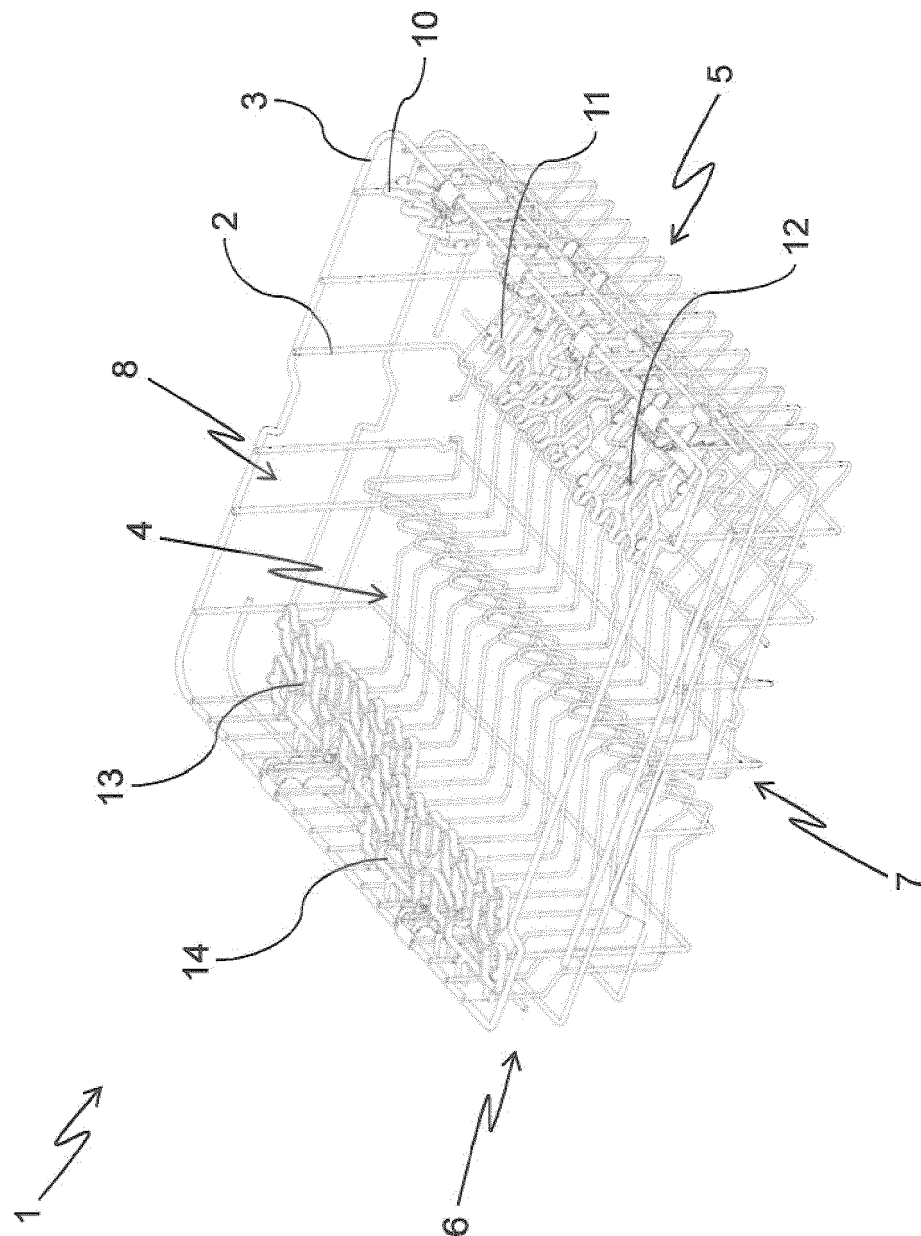


Fig. 1

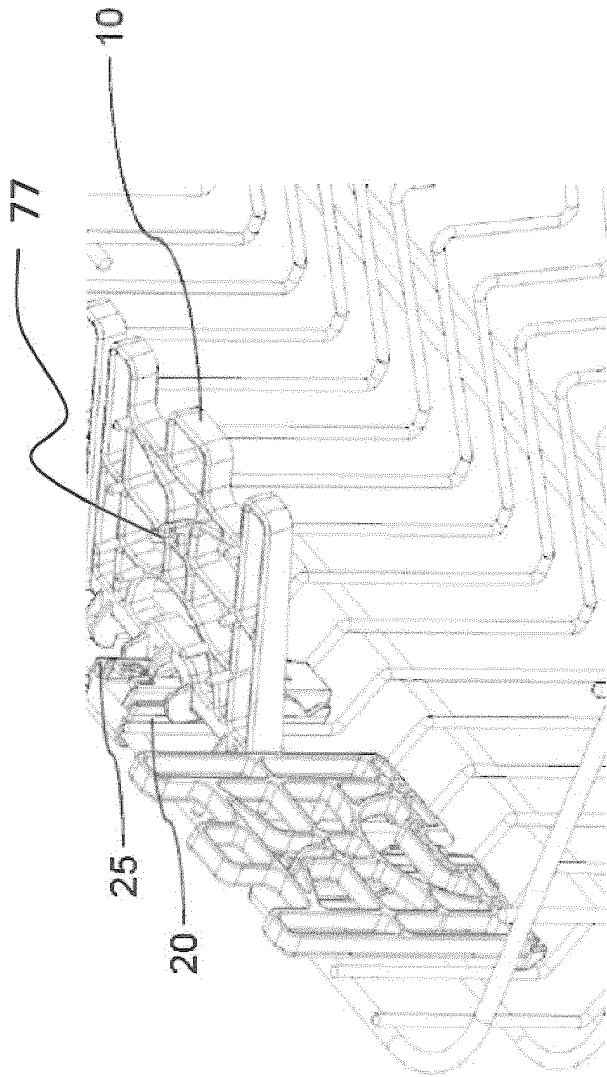


Fig. 2

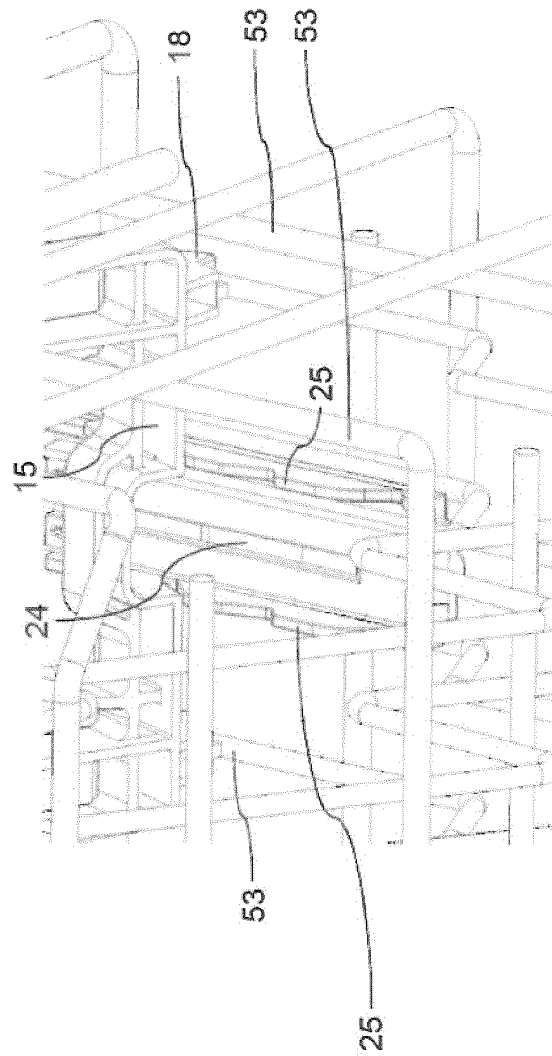


Fig. 3

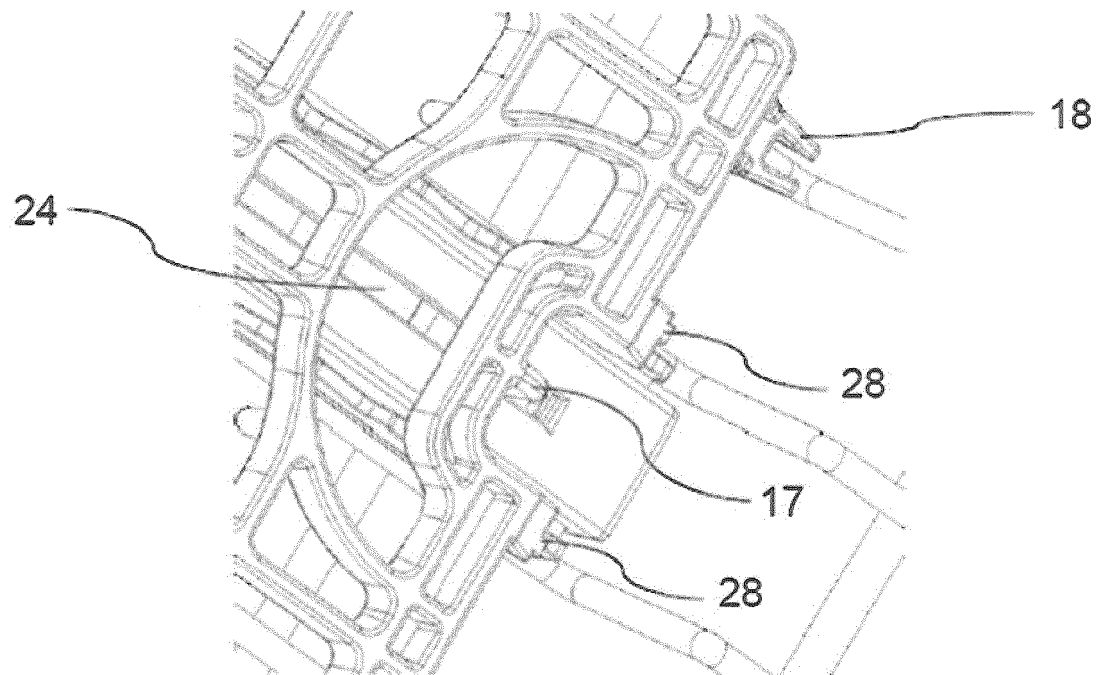


Fig. 4

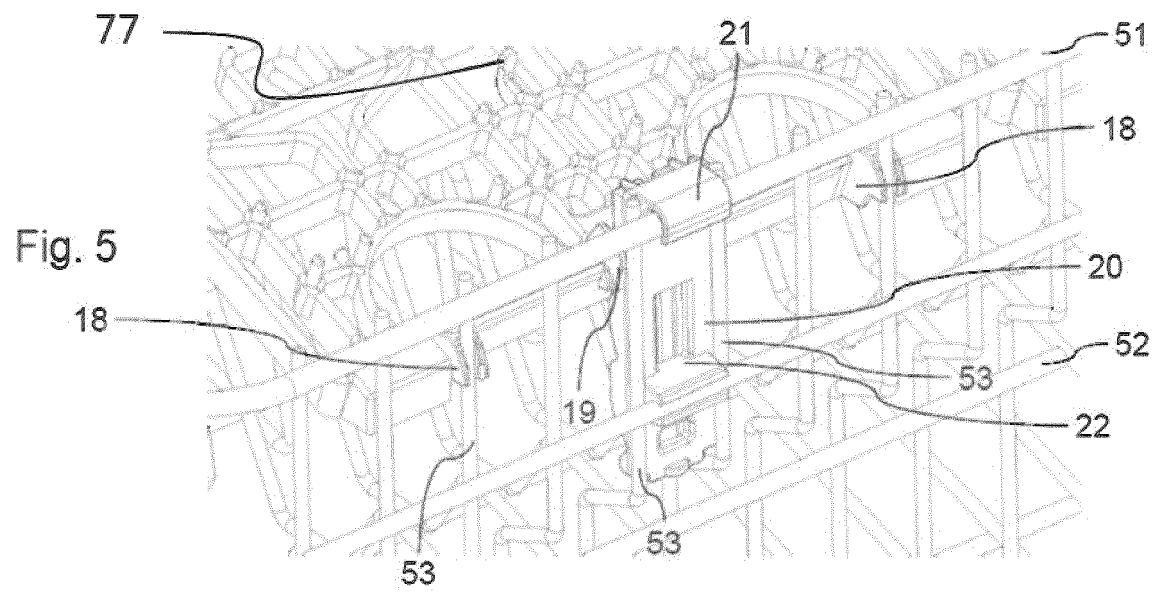
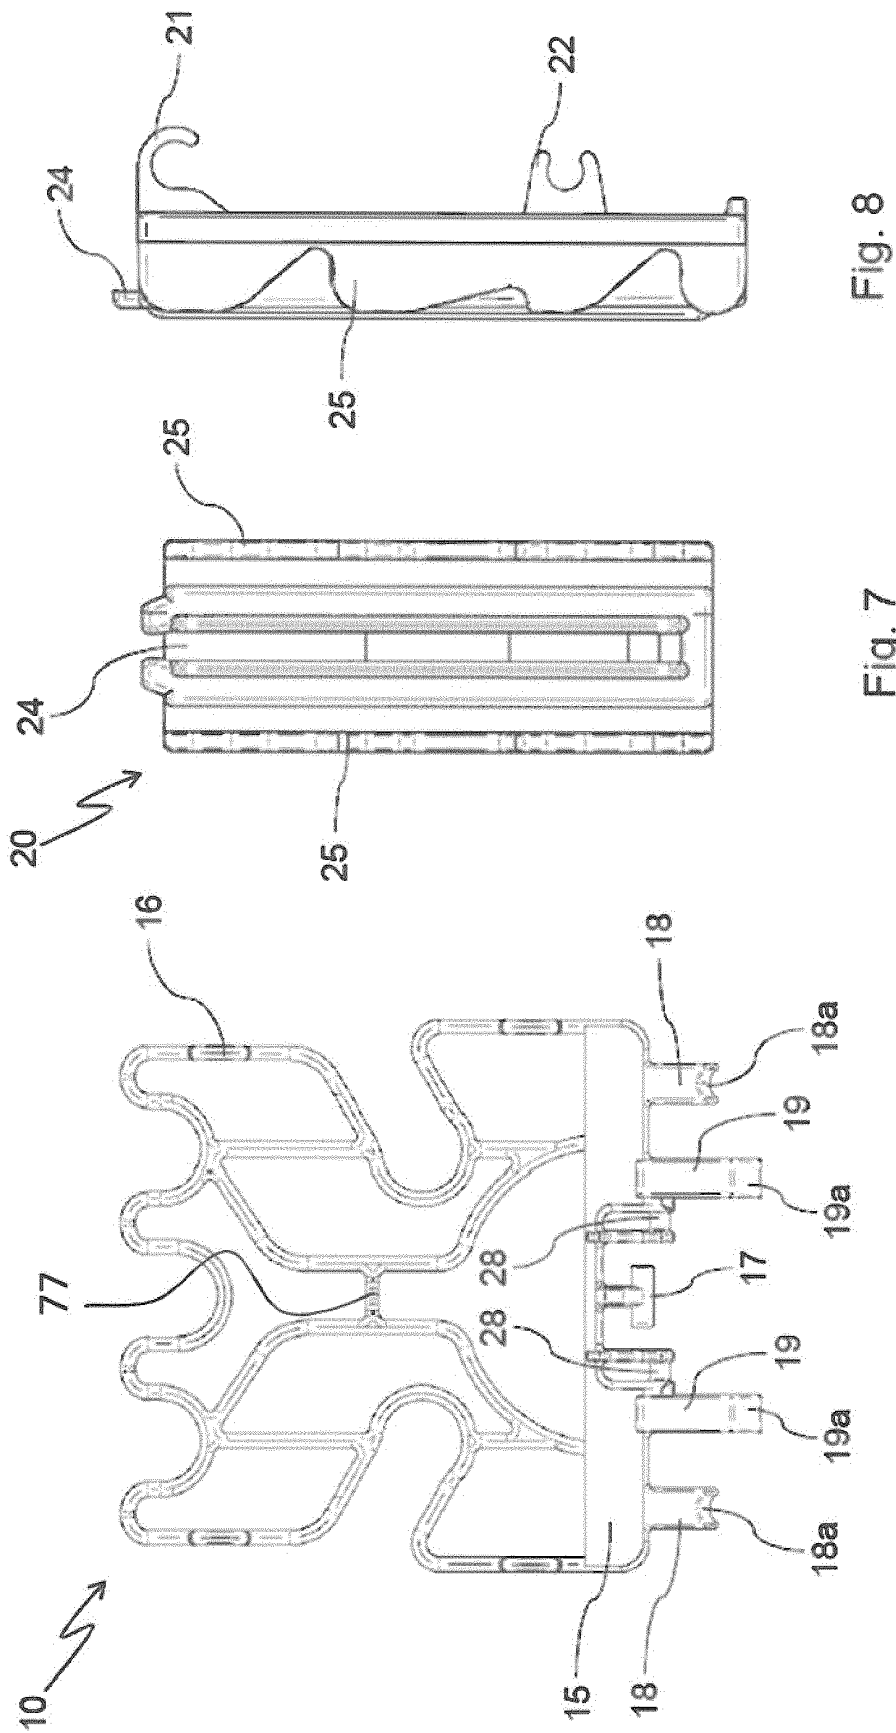


Fig. 5



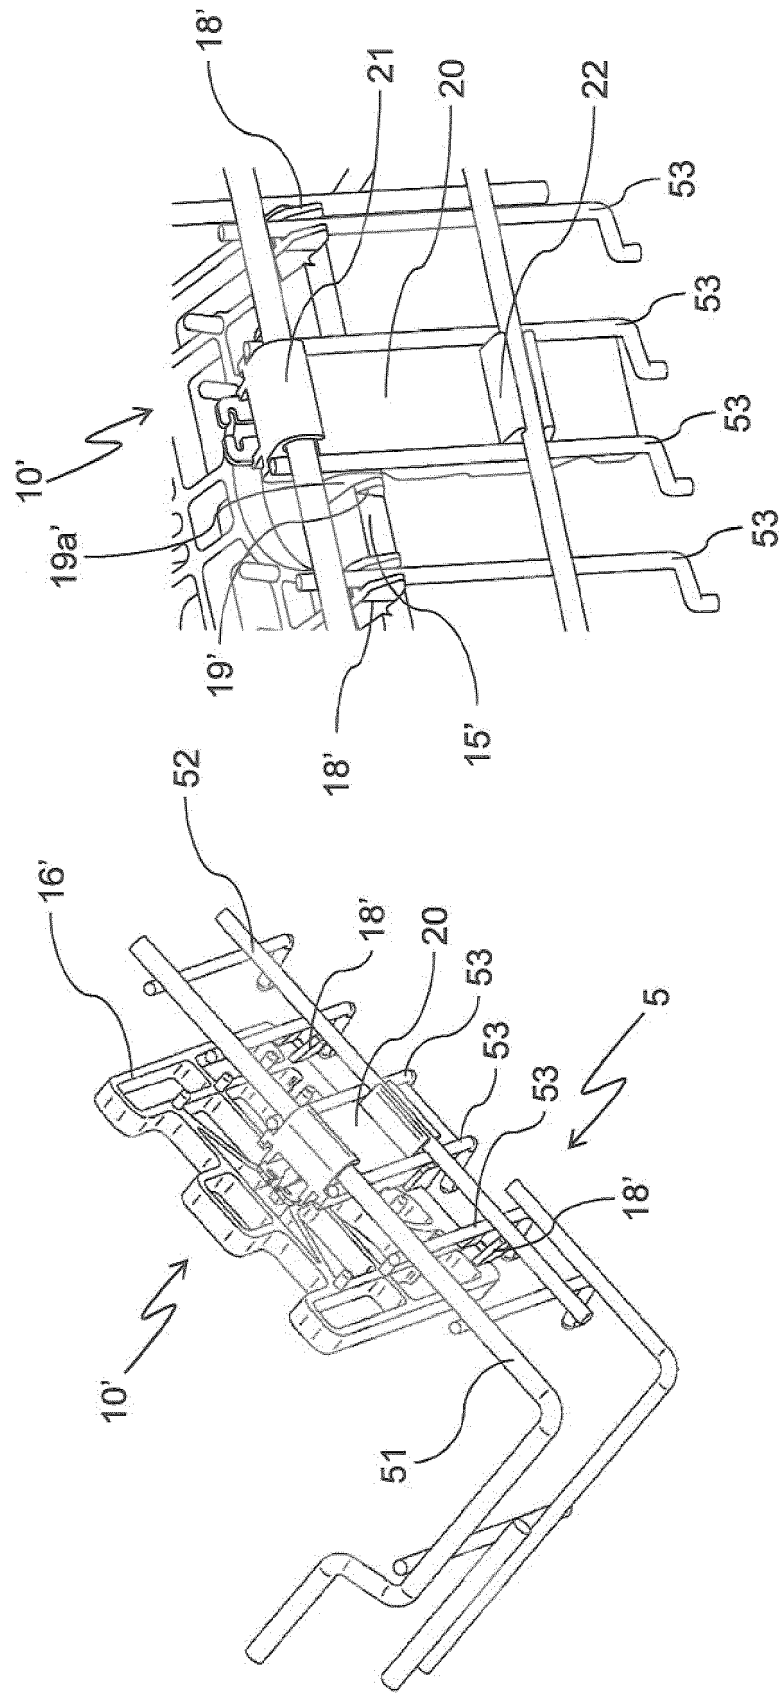


Fig. 10

Fig. 9

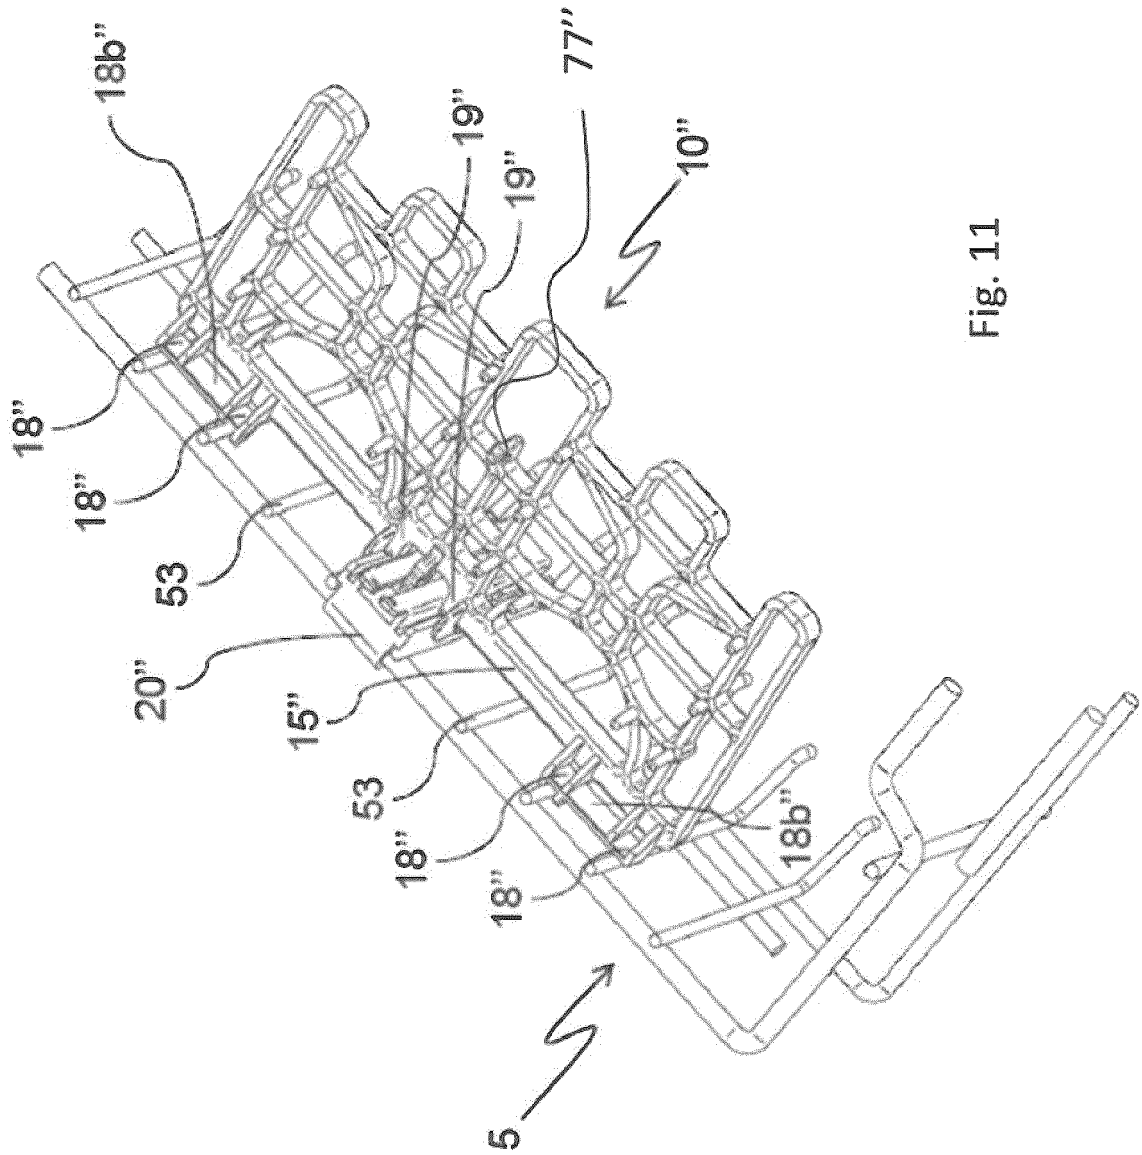


Fig. 11

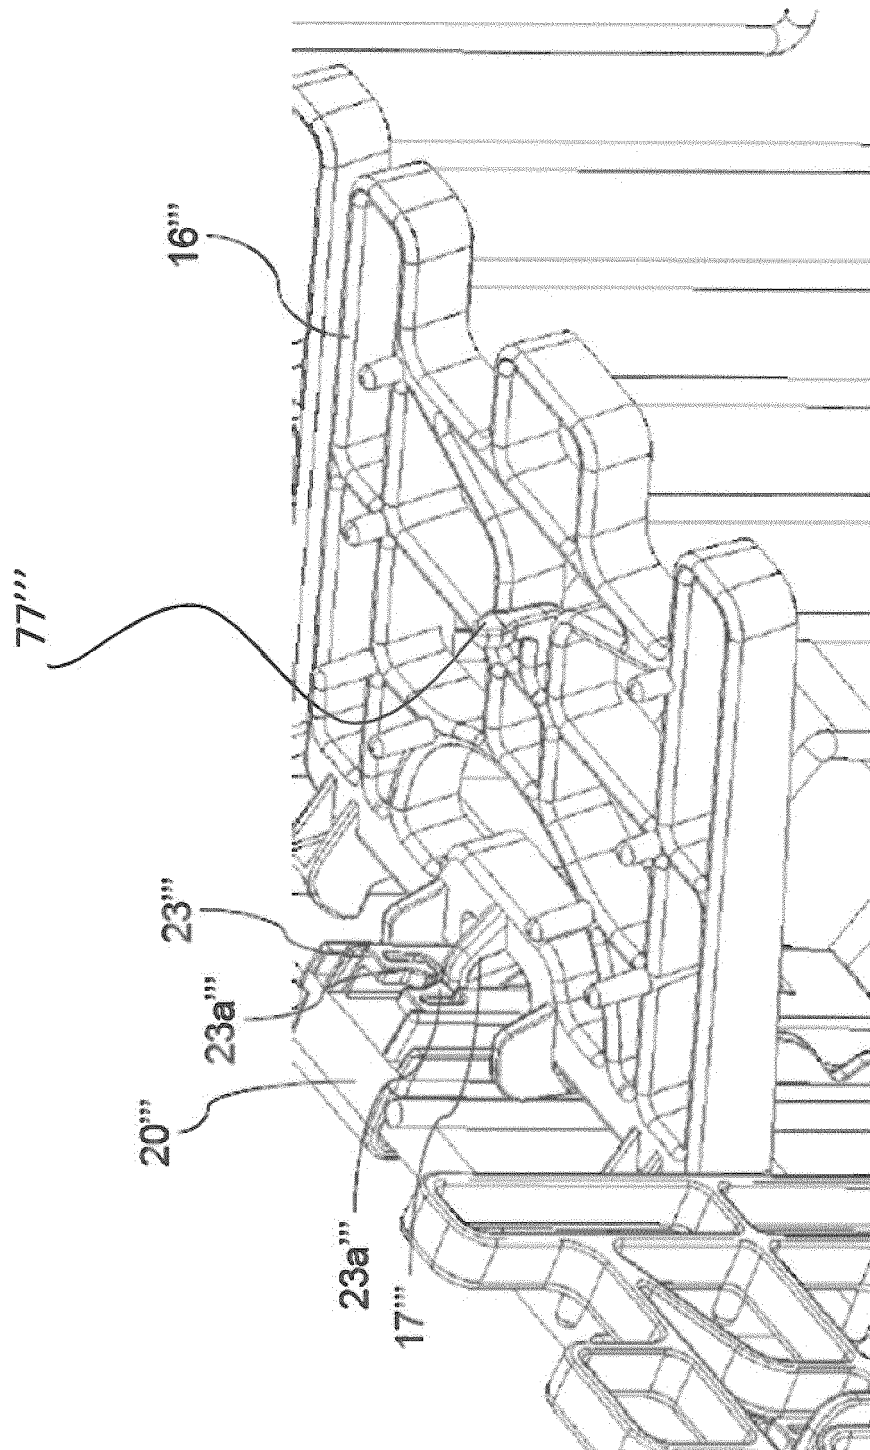


Fig. 12

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT RN20080010 A [0007]
- EP 2095755 A1 [0012]
- US 2007039904 A1, PURUSHOTHAMAN BALAJI [0013]