

(19)



(11)

EP 4 005 805 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.01.2025 Bulletin 2025/02

(51) International Patent Classification (IPC):
B41J 2/14 ^(2006.01) **B41J 2/21** ^(2006.01)
B41J 2/045 ^(2006.01)

(21) Application number: **20210408.9**

(52) Cooperative Patent Classification (CPC):
B41J 2/2142; B41J 2/0451; B41J 2/04581;
B41J 2002/14354

(22) Date of filing: **27.11.2020**

(54) **A METHOD OF DETECTING EJECTION ABNORMALITIES IN AN INKJET PRINT HEAD, A PRINTING SYSTEM AND A SOFTWARE PRODUCT**

VERFAHREN ZUR ERKENNUNG VON AUSSTOSSFEHLERN IN EINEM
TINTENSTRAHLDRUCKKOPF, DRUCKSYSTEM UND SOFTWAREPRODUKT

PROCÉDÉ DE DÉTECTION D'ERREURS D'ÉJECTION DANS UNE TÊTE D'IMPRESSION À JET
D'ENCRE, SYSTÈME D'IMPRESSION ET PRODUIT LOGICIEL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
01.06.2022 Bulletin 2022/22

(73) Proprietor: **Canon Production Printing Holding
B.V.**
5914 HH Venlo (NL)

(72) Inventor: **SIMONS, Johannes M.M.**
Venlo (NL)

(74) Representative: **Canon Production Printing IP
Department**
Canon Production Printing Netherlands B.V.
Van der Grintenstraat 10
5914 HH Venlo (NL)

(56) References cited:
EP-A1- 3 670 188 US-A1- 2013 141 484
US-A1- 2019 263 113

EP 4 005 805 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] The present invention generally pertains to detecting ejection abnormalities in an inkjet print head, in particular a piezo-actuated inkjet print head.

[0002] During the execution of print processes several faults can disturb the jetting of a nozzle, leading to ejection abnormalities. For example, blocking of an ink nozzle due to the presence of a dirt particle is one of the most common causes of malfunction in ink jetting. In order to identify whether a nozzle jetting abnormally, it is customary actuating the one or more electro-mechanical transducers in the print head to generate a pressure wave in the liquid in the plurality of ducts, in order to subsequently sense a residual pressure wave in the liquid in the plurality of ducts.

[0003] After the above mentioned process, the sensed residual pressure wave is compared with the residual pressure wave of a correctly functioning nozzle after manufacturing. From said comparison, a plurality of abnormalities along with their root cause can be detected, such as the presence of dirt particles, air bubbles, or dry ink.

[0004] However, the comparison with the residual pressure wave of a correctly functioning nozzle after manufacturing does not allow detecting the malfunctioning of nozzles that arises due to prolonged use of a print head. Said prolonged use may cause a drift in the behavior of one or more nozzles, which may cause ejection abnormalities such as side-shooting nozzles. These abnormalities are difficult to detect by means of a comparison of a residual pressure wave resulting from an actuation of an electro-mechanical transducer and the residual pressure wave of a correctly functioning ejection unit at the time of manufacturing. However, they may still lead to visible artifacts in the printed image.

[0005] As a consequence, it is desired to have a method for detecting ejection abnormalities in an inkjet print head that is capable of detecting the ejection abnormalities caused by prolonged use.

[0006] Documents EP3670188, US2019/263113 and US2013/141484 disclose methods of detecting malfunctioning of nozzles in printing devices.

SUMMARY OF THE INVENTION

[0007] In claim 1, a method of detecting a failing nozzle in an ejection device during the printing of a print job is provided. In claim 13, a droplet ejection device is provided comprising a plurality of ejection units. Said ejection unit is arranged to eject droplets of a liquid and comprises one or more of nozzles, one or more liquid ducts each connected to one of the one or more nozzles, and one or more electro-mechanical transducers each arranged to create an acoustic pressure wave in the liquid in one or more ducts, and further arranged to sense a

residual pressure wave in the liquid in each of the one or more ducts. In claim 15 a software product is disclosed.

[0008] The method of the present invention comprises actuating the electro-mechanical transducer to generate a pressure wave in the liquid in one or more ducts. Said actuation typically causes the ejection of a liquid through the one or more nozzles in the ejection unit. Subsequently, the method of the present invention comprises sensing a residual pressure wave in the liquid in each of the one or more ducts. The sensed residual pressure wave allows performing different analyses in order to ascertain the jetting quality of an ejection unit.

[0009] In another step, the method of the present invention comprises comparing the residual pressure wave previously sensed in the one of the one or more ducts with the residual pressure wave of the one of the one or more ducts sensed in one or more previous executions of the method by determining the difference of one or more parameters of the residual pressure wave previously sensed and one or more parameters of the residual pressure wave sensed in one or more previous executions of the method.

[0010] In another step, the method of the present invention comprises determining whether the one of the one or more of nozzles is in an operative state or in a malfunctioning state, wherein the one of the one or more of nozzles is determined to be in a malfunctioning state when the difference of one or more parameters of the residual pressure wave previously sensed in the liquid of the one of one or more ducts and one or more parameters of the residual pressure wave sensed in the one of the one or more ducts in one or more previous executions of the method exceeds a predetermined threshold.

[0011] In an embodiment, all of the steps of the present invention previously described are performed for more than one of the one or more liquid ducts such that a determination is made about whether each of the more than one of the one or more of nozzles is in an operative state or in a malfunctioning state by performing the comparing step for the more than one of the one or more liquid ducts with their residual pressure wave sensed in one or more previous executions of the method exceeds a predetermined threshold.

[0012] In an embodiment, the method of the present invention comprises actuating the electro-mechanical transducer (28) to generate a pressure wave in the liquid in the one or more liquid ducts (16) comprises actuating the electro-mechanical transducer (28) with a waveform that causes the ejection of a droplet.

[0013] In an embodiment, the method of the present invention comprises that actuating the electro-mechanical transducer to generate a pressure wave in the liquid in the one or more liquid ducts (16) comprises actuating the electro-mechanical transducer (28) with a plurality of waveforms.

[0014] In an embodiment, the method of the present invention comprises that actuating the electro-mechanical transducer with a plurality of waveforms comprises

actuating the electro-mechanical transducer with a plurality of waveforms with a waveform period between 0,1 milliseconds and 40 milliseconds.

[0015] In an embodiment, the method of the present invention comprises that actuating the electro-mechanical transducer with a plurality of waveforms comprises actuating the electro-mechanical transducer with a plurality of identical waveforms.

[0016] In an embodiment, the method of the present invention comprises that actuating the electro-mechanical transducer with a plurality of waveforms comprises actuating the electro-mechanical transducer with a plurality of different waveforms.

[0017] In an embodiment, the method of the present invention comprises that wherein the electro-mechanical transducer is actuated with one or more waveforms suitable for causing the ejection of liquid.

[0018] In an embodiment, the method of the present invention comprises that the one or more parameters of the residual pressure wave sensed in the liquid in each of the one or more liquid ducts comprise at least one or more of frequency, phase, amplitude, and damping factor of the residual pressure wave.

[0019] In an embodiment, the method of the present invention comprises that actuating the electro-mechanical transducer to generate a pressure wave in the liquid in the one or more liquid ducts comprises actuating the electro-mechanical transducer with a different waveform or plurality of waveforms in different executions of the method.

[0020] In an embodiment, the method of the present invention comprises that when it is determined in the step of determining whether the one of the one or more of nozzles is in an operative state or in a malfunctioning state that one or more of nozzles are in a malfunctioning state the method further comprises determining the root cause of the malfunctioning state based upon the difference of one or more parameters of the residual pressure wave sensed in the liquid in each of the one or more liquid ducts in the step of sensing a residual pressure wave in the liquid in the one of the one or more liquid ducts and one or more parameters of the residual pressure wave sensed in each of the one or more liquid ducts in one or more previous executions of the method exceeds a predetermined amount.

[0021] In an embodiment, the method of the present invention comprises that the root cause of the malfunctioning state is one of a side-shooting nozzle, the presence of dried ink in a nozzle, the presence of excess water in the ink, the presence of water in the nozzle face, or the presence of dirt in the nozzle.

[0022] Further, the present invention comprises a droplet ejection device comprising a number of ejection units arranged to eject droplets of a liquid and each comprising a nozzle, a liquid duct connected to the nozzle, and an electro-mechanical transducer arranged to create an acoustic pressure wave in the liquid in the duct, wherein each of the ejection units is associated with a processor

configured to perform the method according to any of the methods of the present invention.

[0023] Further, the present invention relates to a printing system comprising the droplet ejection device of the present invention as an ink jet print head and a control unit comprising a processor suitable for executing the method according to any of the methods of the present invention.

[0024] Also, the present invention relates to a software product comprising program code on a machine-readable non transitory medium, the program code, when loaded into a control unit of the printing system of the present invention, causes the control unit to execute any of the methods of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The present invention will become more fully understood from the detailed description given below, and the accompanying drawings which are given by way of illustration only, and are thus not limitative of the present invention, and wherein:

Fig. 1 is a cross-sectional view of mechanical parts of a droplet ejection device according to the invention, together with an electronic circuit for controlling and monitoring the device.

Fig. 2 is a graph showing the ratio between the amplitude measured in the residual pressure wave of a nozzle and the amplitude of a correctly jetting nozzle for a plurality of burst lengths

Fig. 3 is a graph showing the ratio between the phase measured in the residual pressure wave of a nozzle and the phase of a correctly jetting nozzle for a plurality of burst lengths

Fig. 4 is a graph showing the ratio between the frequency measured in the residual pressure wave of a nozzle and the frequency of a correctly jetting nozzle for a plurality of burst lengths

DETAILED DESCRIPTION OF EMBODIMENTS

[0026] The present invention will now be described with reference to the accompanying drawings, wherein the same or similar elements are identified with the same reference numeral.

[0027] A single ejection unit of an ink jet print head is shown in Fig. 1. The print head constitutes an example of a droplet ejection device according to the invention. The device comprises a wafer 10 and a support member 12 that are bonded to opposite sides of a thin flexible membrane 14.

[0028] A recess that forms an ink duct 16 is formed in the face of the wafer 10 that engages the membrane 14,

e.g. the bottom face in Fig. 1. The ink duct 16 has an essentially rectangular shape. An end portion on the left side in Fig. 1 is connected to an ink supply line 18 that passes through the wafer 10 in thickness direction of the wafer and serves for supplying liquid ink to the ink duct 16.

[0029] An opposite end of the ink duct 16, on the right side in Fig. 1, is connected, through an opening in the membrane 14, to a chamber 20 that is formed in the support member 12 and opens out into a nozzle 22 that is formed in a nozzle face 24 constituting the bottom face of the support member.

[0030] Adjacent to the membrane 14 and separated from the chamber 20, the support member 12 forms another cavity 26 accommodating a piezoelectric actuator 28 that is bonded to the membrane 14.

[0031] An ink supply system which has not been shown here keeps the pressure of the liquid ink in the ink duct 16 slightly below the atmospheric pressure, so as to prevent the ink from leaking out through the nozzle 22.

[0032] The nozzle face 24 is made of or coated with a material which is wetted by the ink, so that adhesion forces cause a pool 30 of ink to be formed on the nozzle face 24 around the nozzle 22. The pool 30 is delimited on the outward (bottom) side by a meniscus 32a.

[0033] The piezoelectric transducer 28 has electrodes 34 that are connected to an electronic circuit that has been shown in the lower part of Fig. 1. In the example shown, one electrode of the transducer is grounded via a line 36 and a resistor 38. Another electrode of the transducer is connected to an output of an amplifier 40 that is feedback-controlled via a feedback network 42, so that a voltage V applied to the transducer will be proportional to a signal on an input line 44 of the amplifier. The signal on the input line 44 is generated by a D/A-converter 46 that receives a digital input from a local digital controller 48. The controller 48 is connected to a processor 50.

[0034] When an ink droplet is to be expelled from the nozzle 22, the processor 50 sends a command to the controller 48 which outputs a digital signal that causes the D/A-converter 46 and the amplifier 40 to apply an actuation pulse to the transducer 28. This voltage pulse causes the transducer to deform in a bending mode. More specifically, the transducer 28 is caused to flex downward, so that the membrane 14 which is bonded to the transducer 28 will also flex downward, thereby to increase the volume of the ink duct 16. As a consequence, additional ink will be sucked-in via the supply line 18. Then, when the voltage pulse falls off again, the membrane 14 will flex back into the original state, so that a positive acoustic pressure wave is generated in the liquid ink in the duct 16. This pressure wave propagates to the nozzle 22 and causes an ink droplet to be expelled. The pressure wave will then be reflected at the meniscus 32a and will oscillate in the cavity formed between the meniscus and the left end of the duct 16 in Fig. 1. The oscillation will be damped due to the viscosity of the ink. Further, the transducer 28 is energized with a quench pulse which has a polarity opposite to that of the actuation pulse and is

timed such that the decaying oscillation will be suppressed further by destructive interference.

[0035] The electrodes 34 of the transducer 28 are also connected to an A/D converter 52 which measures a voltage drop across the transducer and also a voltage drop across the resistor 38 and thereby implicitly the current flowing through the transducer. Corresponding digital signals S are forwarded to the controller 48 which can derive the impedance of the transducer 28 from these signals. The measured electric response (current, voltage, impedance, etc.) is signaled to the processor 50 where the electric response is processed further.

[0036] A graph showing the ratio between the amplitude measured in the residual pressure wave of a nozzle and the amplitude of a correctly jetting nozzle for a plurality of burst lengths is shown in Fig. 2. The result obtained for measurements of the amplitude of nozzles for different burst lengths can be observed in Fig. 2. Further, the nozzles may be classified in different categories (e.g. side shooter, acceptable functioning behavior, correct functioning behavior, and non-jetting nozzle) depending upon their jetting behavior based upon the observed result while performing a printing operation. As explained below in relation with Figs. 3 and 4 it is possible to perform the same operation using different parameters amongst those observable in a residual pressure wave: phase, amplitude, etc. A person of skill in the art would readily understand that any other parameter, e.g. damping factor, etc., may be also used. This procedure is used to determine the proper functioning of the nozzles for different burst lengths, such that those leading to a more reliable jetting are decided. Once the most reliable bursts of pulses have been determined, the method of the present invention can compare the residual pressure wave sensed in a step of the method in the one of the one or more liquid ducts with the residual pressure wave of the one or more liquid ducts sensed in one or more previous executions of the method. This process may be performed by determining the difference of one or more parameters of the residual pressure wave sensed and one or more parameters of the residual pressure wave sensed in one or more previous executions of the method. This process allows the method of the present invention to detect subtle variations in the behavior of the print heads, commonly known as drift.

[0037] Further, a person skilled in the art would readily also understand that a step of comparing the residual pressure wave sensed in a step of the method in the one of the one or more liquid ducts with the residual pressure wave of the one or more liquid ducts sensed in one or more previous executions of the method can be performed for the different parameters shown in Figs. 2 to 4 or other additional factors such as damping factor. As a consequence, the step of determining whether the one of the one or more of nozzles is in an operative state or in a malfunctioning state can be performed using information about one or more of the mentioned parameters of the residual pressure wave.

[0038] A graph showing the ratio between the phase measured in the residual pressure wave of a nozzle and the phase of a correctly jetting nozzle for a plurality of burst lengths is shown in Fig. 3. Further, the nozzles have been classified in four different categories (side shooter, acceptable functioning behavior, correct functioning behavior, and non-jetting nozzle) depending upon their jetting behavior based upon the observed result while performing a printing operation.

[0039] Further, a person skilled in the art would readily also understand that the method of the present invention can be applied to each and all of the plurality of nozzles of a print head. Also, person skilled in the art would readily also understand that the method of the present invention may comprises actuating the electro-mechanical transducer to generate a pressure wave in the liquid in the one or more liquid ducts comprises actuating the electro-mechanical transducer with a plurality of waveforms, known in the art as bursts.

[0040] A graph showing the ratio between the frequency measured in the residual pressure wave of a nozzle and the frequency of a correctly jetting nozzle for a plurality of burst lengths is shown in Fig. 4. Further, the nozzles have been classified in four different categories (side shooter, acceptable functioning behavior, correct functioning behavior, and non-jetting nozzle) depending upon their jetting behavior based upon the observed result while performing a printing operation.

[0041] Based on the determinations above, the method of the present invention is able to determine whether each of the one or more of nozzles is determined to be in a malfunctioning state when the difference of one or more parameters of the residual pressure wave sensed in the liquid in each of the one or more ducts in a previous step and one or more parameters of the residual pressure wave sensed in each of the one or more ducts in one or more previous executions of the method exceeds a predetermined threshold. In one embodiment, the method of the present invention determines that one nozzle is in a malfunctioning state if the difference of one or more parameters of the residual pressure wave sensed in the liquid in each of the one or more ducts in a previous step and one or more parameters of the residual pressure wave sensed in each of the one or more ducts in one or more previous executions of the method exceed a first predetermined threshold. Further, in an embodiment the method of the present invention determines that one nozzle is in a malfunctioning state if two more parameters of the residual pressure wave sensed in each of the one or more ducts in one or more previous executions of the method exceed a second predetermined threshold, wherein said second predetermined threshold is smaller than the first predetermined threshold. Further, a person skilled in the art would readily also understand that the method of the present invention can make determination about the jetting state based on whether a combination of parameters differ from those measured in previous executions of the method for the same nozzle more than a

threshold, based on the information gathered in simulations.

[0042] The scope of the invention is defined by the appended claims.

Claims

1. A method of detecting a failing nozzle in an ejection device comprising a number of ejection units during the printing of a print job, each ejection unit being arranged to eject droplets of a liquid and comprising a nozzle (22), a liquid duct (16) connected to the nozzle (22), and an electro-mechanical transducer (28), arranged to create an acoustic pressure wave in a liquid in the liquid duct (16) and further arranged to sense a residual pressure wave in the liquid, the method comprising:
 - a) actuating an electro-mechanical transducer (28) to generate a pressure wave in the liquid in a corresponding liquid duct (16); and
 - b) sensing a residual pressure wave in the liquid in said liquid duct (16); and
 - c) comparing the residual pressure wave sensed in step b) with another residual pressure wave in the liquid of the same or another liquid duct (16), sensed in a previous execution of the method, by determining the difference of a parameter of the residual pressure wave sensed in step b) and a parameter of the other residual pressure wave; and
 - d) determining whether the nozzle (22) corresponding to said liquid duct is in an operative state or in a malfunctioning state, wherein said nozzle (22) is determined to be in a malfunctioning state when the difference of said parameter of the residual pressure wave sensed in step b) and said parameter of said other residual pressure wave sensed in a previous execution of the method exceeds a predetermined threshold.
2. The method of claim 1, wherein steps a), b), c) and d) are performed for more than one other liquid ducts (16) such that a determination is made about whether each of the nozzles (22) which is connected to those other liquid ducts is in an operative state or in a malfunctioning state by performing the comparing step for the residual pressure wave in the more than one liquid ducts (16) as sensed in one or more previous executions of the method.
3. The method of any preceding claim, wherein actuating the electro-mechanical transducer (28) to generate a pressure wave in the liquid in the liquid duct (16) comprises actuating the electro-mechanical transducer (28) with a waveform that causes the ejection of a droplet.

4. The method of any preceding claim, wherein actuating the electro-mechanical transducer (28) to generate a pressure wave in the liquid in the liquid ducts (16) comprises actuating the electro-mechanical transducer (28) with a plurality of waveforms. 5
5. The method of claim 4, wherein actuating the electro-mechanical transducer (28) with a plurality of waveforms comprises actuating the electro-mechanical transducer (28) with a plurality of waveforms with a waveform period between 0.1 milliseconds and 40 milliseconds; 10
6. The method of claims 4 or 5, wherein actuating the electro-mechanical transducer (28) with a plurality of waveforms comprises actuating the electro-mechanical transducer (28) with a plurality of identical waveforms. 15
7. The method of claims 4 or 5, wherein actuating the electro-mechanical transducer (28) with a plurality of waveforms comprises actuating the electro-mechanical transducer (28) with a plurality of different waveforms. 20
8. The method of any preceding claim, wherein the electro-mechanical transducer (28) is actuated with one or more waveforms suitable for causing the ejection of liquid. 25
9. The method of any preceding claim, wherein said parameter of the residual pressure wave sensed in the liquid in each of the liquid ducts (16) comprises at least one of frequency, phase, amplitude, and damping factor of the residual pressure wave. 30
10. The method of any preceding claim, wherein actuating the electro-mechanical transducer (28) to generate a pressure wave in the liquid in the liquid ducts (16) comprises actuating the electro-mechanical transducer (28) with a different waveform or plurality of waveforms in different executions of the method. 35
11. The method of any preceding claim, wherein, when it is determined in step d) that a nozzle (22) is in a malfunctioning state, the method further comprises a step of determining a root cause of the malfunctioning state based upon the difference of said parameter of the residual pressure wave sensed in the liquid in step b) and said parameter of the other residual pressure wave in a previous execution of the method exceeding a predetermined amount. 40
12. The method of claim 11, wherein the root cause of the malfunctioning state is one of a side-shooting nozzle, the presence of dried ink in a nozzle, the presence of excess water in the ink, the presence of water in the nozzle face, and the presence of dirt in the nozzle. 45
13. A droplet ejection device comprising a number of ejection units arranged to eject droplets of a liquid and each comprising a nozzle (22), a liquid duct (16) connected to the nozzle (22), and an electro-mechanical transducer (28) arranged to create an acoustic pressure wave in the liquid in the duct (16), wherein each of the ejection units is associated with a processor (50) configured to perform the method according to any of the claims 1 to 12. 50
14. A printing system comprising the droplet ejection device according to claim 13 as an ink jet print head and a control unit comprising a processor (50) suitable for executing the method according to any of the claims 1 to 12. 55
15. A software product comprising program code on a machine-readable non transitory medium, the program code, when loaded into a control unit of a printing system according to claim 14, causes the control unit to execute any of the methods of claims 1 to 12.

25 Patentansprüche

1. Ein Verfahren zum Erfassen einer versagenden Düse in einer Ausstoßvorrichtung, die eine Anzahl von Ausstoßeinheiten während des Druckens eines Druckauftrags umfasst, wobei jede Ausstoßeinheit angeordnet ist, um Tröpfchen einer Flüssigkeit auszustoßen, und eine Düse (22), eine Flüssigkeitsleitung (16), die mit der Düse (22) verbunden ist, und einen elektromechanischen Wandler (28) umfasst, der angeordnet ist, um eine akustische Druckwelle in einer Flüssigkeit in der Flüssigkeitsleitung (16) zu erzeugen, und ferner angeordnet ist, um eine Restdruckwelle in der Flüssigkeit zu erfassen, wobei das Verfahren folgende Schritte umfasst:
 - a) Betätigung eines elektromechanischen Wandlers (28) zur Erzeugung einer Druckwelle in der Flüssigkeit in einem entsprechenden Flüssigkeitskanal (16); und
 - b) Erfassen einer Restdruckwelle in der Flüssigkeit in dem Flüssigkeitskanal (16); und
 - c) Vergleichen der in Schritt b) erfassten Restdruckwelle mit einer anderen Restdruckwelle in der Flüssigkeit desselben oder eines anderen Flüssigkeitskanals (16), die in einer vorherigen Ausführung des Verfahrens erfasst wurde, durch Bestimmen der Differenz eines Parameters der in Schritt b) erfassten Restdruckwelle und eines Parameters der anderen Restdruckwelle; und
 - d) Bestimmen, ob sich die Düse (22), die der Flüssigkeitsleitung entspricht, in einem Betriebszustand oder in einem Fehlfunktionszu-

- stand befindet, wobei bestimmt wird, dass sich die Düse (22) in einem Fehlfunktionszustand befindet, wenn die Differenz des Parameters der in Schritt b) erfassten Restdruckwelle und des Parameters der anderen Restdruckwelle, die in einer vorherigen Ausführung des Verfahrens erfasst wurde, einen vorbestimmten Schwellenwert überschreitet.
2. Verfahren nach Anspruch 1, wobei die Schritte a), b), c) und d) für mehr als eine andere Flüssigkeitsleitung (16) durchgeführt werden, so dass bestimmt wird, ob jede der Düsen (22), die mit diesen anderen Flüssigkeitsleitungen verbunden ist, sich in einem Betriebszustand oder in einem Fehlfunktionszustand befindet, indem der Vergleichsschritt für die Restdruckwelle in der mehr als einen Flüssigkeitsleitung (16) durchgeführt wird, wie sie in einer oder mehreren früheren Ausführungen des Verfahrens erfasst wurde.
 3. Verfahren nach einem der vorhergehenden Patentansprüche, wobei die Betätigung des elektromechanischen Wandlers (28) zur Erzeugung einer Druckwelle in der Flüssigkeit in der Flüssigkeitsleitung (16) die Betätigung des elektromechanischen Wandlers (28) mit einer Wellenform umfasst, die den Ausstoß eines Tröpfchens bewirkt.
 4. Verfahren nach einem der vorhergehenden Patentansprüche, wobei das Betätigen des elektromechanischen Wandlers (28) zum Erzeugen einer Druckwelle in der Flüssigkeit in den Flüssigkeitskanälen (16) das Betätigen des elektromechanischen Wandlers (28) mit einer Vielzahl von Wellenformen umfasst.
 5. Verfahren nach Anspruch 4, wobei das Ansteuern des elektromechanischen Wandlers (28) mit einer Vielzahl von Wellenformen das Ansteuern des elektromechanischen Wandlers (28) mit einer Vielzahl von Wellenformen mit einer Wellenformperiode zwischen 0,1 Millisekunden und 40 Millisekunden umfasst;
 6. Verfahren nach Patentansprüchen 4 oder 5, wobei die Ansteuerung des elektromechanischen Wandlers (28) mit einer Vielzahl von Wellenformen die Ansteuerung des elektromechanischen Wandlers (28) mit einer Vielzahl von identischen Wellenformen umfasst.
 7. Verfahren nach Patentansprüchen 4 oder 5, wobei das Betätigen des elektromechanischen Wandlers (28) mit einer Vielzahl von Wellenformen das Betätigen des elektromechanischen Wandlers (28) mit einer Vielzahl von unterschiedlichen Wellenformen umfasst.
 8. Verfahren nach einem der vorhergehenden Patentansprüche, bei dem der elektromechanische Wandler (28) mit einer oder mehreren Wellenformen betätigt wird, die geeignet sind, den Ausstoß von Flüssigkeit zu bewirken.
 9. Verfahren nach einem der vorhergehenden Patentansprüche, wobei der Parameter der Restdruckwelle, der in der Flüssigkeit in jeder der Flüssigkeitsleitungen (16) erfasst wird, mindestens einen der Parameter Frequenz, Phase, Amplitude und Dämpfungsfaktor der Restdruckwelle umfasst.
 10. Verfahren nach einem der vorhergehenden Patentansprüche, wobei das Betätigen des elektromechanischen Wandlers (28) zum Erzeugen einer Druckwelle in der Flüssigkeit in den Flüssigkeitskanälen (16) das Betätigen des elektromechanischen Wandlers (28) mit einer unterschiedlichen Wellenform oder einer Vielzahl von Wellenformen in verschiedenen Ausführungen des Verfahrens umfasst.
 11. Verfahren nach einem der vorhergehenden Patentansprüche, wobei, wenn in Schritt d) festgestellt wird, dass sich eine Düse (22) in einem Fehlfunktionszustand befindet, das Verfahren ferner einen Schritt der Bestimmung einer Grundursache des Fehlfunktionszustands auf der Grundlage der Differenz zwischen dem Parameter der Restdruckwelle, die in der Flüssigkeit in Schritt b) erfasst wird, und dem Parameter der anderen Restdruckwelle in einer früheren Ausführung des Verfahrens, die einen vorbestimmten Betrag überschreitet, umfasst.
 12. Verfahren nach Anspruch 11, wobei die Grundursache für die Fehlfunktion eine seitlich schießende Düse, das Vorhandensein von getrockneter Tinte in einer Düse, das Vorhandensein von überschüssigem Wasser in der Tinte, das Vorhandensein von Wasser in der Düsenfläche oder das Vorhandensein von Schmutz in der Düse ist.
 13. Eine Tröpfchenausstoßvorrichtung, die eine Anzahl von Ausstoßeinheiten umfasst, die so angeordnet sind, dass sie Tröpfchen einer Flüssigkeit ausstoßen, und die jeweils eine Düse (22), eine mit der Düse (22) verbundene Flüssigkeitsleitung (16) und einen elektromechanischen Wandler (28) umfassen, der so angeordnet ist, dass er eine akustische Druckwelle in der Flüssigkeit in der Leitung (16) erzeugt, wobei jede der Ausstoßeinheiten mit einem Prozessor (50) verbunden ist, der so konfiguriert ist, dass er das Verfahren nach einem der Patentansprüche 1 bis 12 durchführt.
 14. Ein Drucksystem mit der Tröpfchenausstoßvorrichtung nach Anspruch 13 als Tintenstrahl Druckkopf und einer Steuereinheit mit einem Prozessor (50),

der zur Ausführung des Verfahrens nach einem der Patentansprüche 1 bis 12 geeignet ist.

15. Softwareprodukt, das einen Programmcode auf einem maschinenlesbaren, nicht flüchtigen Medium umfasst, wobei der Programmcode, wenn er in eine Steuereinheit eines Drucksystems nach Anspruch 14 geladen wird, die Steuereinheit veranlasst, eines der Verfahren der Patentansprüche 1 bis 12 auszuführen.

Revendications

1. Méthode de détection d'une buse défailante dans un dispositif d'éjection comprenant un certain nombre d'unités d'éjection pendant l'impression d'un travail d'impression, chaque unité d'éjection étant conçue pour éjecter des gouttelettes d'un liquide et comprenant une buse (22), un conduit de liquide (16) relié à la buse (22), et un transducteur électromécanique (28), conçu pour créer une onde de pression acoustique dans un liquide dans le conduit de liquide (16) et conçu pour détecter une onde de pression résiduelle dans le liquide, la méthode comprenant :

- a) actionner un transducteur électromécanique (28) pour générer une onde de pression dans le liquide dans un conduit de liquide correspondant (16) ; et
- b) détection d'une onde de pression résiduelle dans le liquide dans ledit conduit de liquide (16) ; et
- c) comparer l'onde de pression résiduelle détectée à l'étape b) avec une autre onde de pression résiduelle dans le liquide du même ou d'un autre conduit de liquide (16), détectée lors d'une exécution précédente de la méthode, en déterminant la différence entre un paramètre de l'onde de pression résiduelle détectée à l'étape b) et un paramètre de l'autre onde de pression résiduelle ; et
- d) déterminer si la buse (22) correspondant audit conduit de liquide est en état de fonctionnement ou de dysfonctionnement, ladite buse (22) étant considérée comme étant en état de dysfonctionnement lorsque la différence entre ledit paramètre de l'onde de pression résiduelle détectée à l'étape b) et ledit paramètre de l'autre onde de pression résiduelle détectée lors d'une exécution précédente de la méthode dépasse un seuil prédéterminé.

2. La méthode de la revendication 1, dans laquelle les étapes a), b), c) et d) sont exécutées pour plus d'un autre conduit de liquide (16) de sorte qu'une détermination est faite pour savoir si chacune des buses (22) qui est connectée à ces autres conduits de

liquide est dans un état opérationnel ou dans un état de dysfonctionnement en exécutant l'étape de comparaison pour l'onde de pression résiduelle dans plus d'un conduit de liquide (16) comme détecté dans une ou plusieurs exécutions précédentes de la méthode.


3. Procédé de toute revendication précédente, dans lequel l'actionnement du transducteur électromécanique (28) pour générer une onde de pression dans le liquide dans le conduit de liquide (16) comprend l'actionnement du transducteur électromécanique (28) avec une forme d'onde qui provoque l'éjection d'une gouttelette.
4. Le procédé de toute revendication précédente, dans lequel l'actionnement du transducteur électromécanique (28) pour générer une onde de pression dans le liquide dans les conduits de liquide (16) comprend l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'onde.
5. La méthode de la revendication 4, dans laquelle l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'onde comprend l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'onde avec une période de forme d'onde comprise entre 0,1 millisecondes et 40 millisecondes;
6. Le procédé des revendications 4 ou 5, dans lequel l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'ondes comprend l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'ondes identiques.
7. Le procédé des revendications 4 ou 5, dans lequel l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'ondes comprend l'actionnement du transducteur électromécanique (28) avec une pluralité de formes d'ondes différentes.
8. Procédé de toute revendication précédente, dans lequel le transducteur électromécanique (28) est actionné avec une ou plusieurs formes d'ondes aptes à provoquer l'éjection du liquide.
9. La méthode de toute revendication précédente, dans laquelle ledit paramètre de l'onde de pression résiduelle détectée dans le liquide dans chacun des conduits de liquide (16) comprend au moins l'un parmi la fréquence, la phase, l'amplitude et le facteur d'amortissement de l'onde de pression résiduelle.
10. Le procédé de toute revendication précédente, dans lequel l'actionnement du transducteur électroméca-

nique (28) pour générer une onde de pression dans le liquide dans les conduits de liquide (16) comprend l'actionnement du transducteur électromécanique (28) avec une forme d'onde différente ou une pluralité de formes d'onde dans différentes exécutions du procédé. 5

11. La méthode de toute revendication précédente, dans laquelle, lorsqu'il est déterminé à l'étape d) qu'une buse (22) est dans un état de dysfonctionnement, la méthode comprend en outre une étape de détermination d'une cause fondamentale de l'état de dysfonctionnement sur la base de la différence entre ledit paramètre de l'onde de pression résiduelle détectée dans le liquide à l'étape b) et ledit paramètre de l'autre onde de pression résiduelle dans une exécution précédente de la méthode dépassant une quantité prédéterminée. 10 15
12. La méthode de la revendication 11, dans laquelle la cause fondamentale de l'état de dysfonctionnement est l'une des suivantes : une buse à tir latéral, la présence d'encre séchée dans une buse, la présence d'un excès d'eau dans l'encre, la présence d'eau dans la face de la buse, et la présence de saletés dans la buse. 20 25
13. Dispositif d'éjection de gouttelettes comprenant un certain nombre d'unités d'éjection agencées pour éjecter des gouttelettes d'un liquide et comprenant chacune une buse (22), un conduit de liquide (16) relié à la buse (22), et un transducteur électromécanique (28) agencé pour créer une onde de pression acoustique dans le liquide dans le conduit (16), dans lequel chacune des unités d'éjection est associée à un processeur (50) configuré pour mettre en oeuvre le procédé selon l'une quelconque des revendications 1 à 12. 30 35
14. Système d'impression comprenant le dispositif d'éjection de gouttelettes selon la revendication 13 en tant que tête d'impression à jet d'encre et une unité de commande comprenant un processeur (50) apte à exécuter le procédé selon l'une quelconque des revendications 1 à 12. 40 45
15. Produit logiciel comprenant un code de programme sur un support non transitoire lisible par une machine, le code de programme, lorsqu'il est chargé dans une unité de commande d'un système d'impression selon la revendication 14, amène l'unité de commande à exécuter l'un quelconque des procédés des revendications 1 à 12. 50

55

Fig. 1

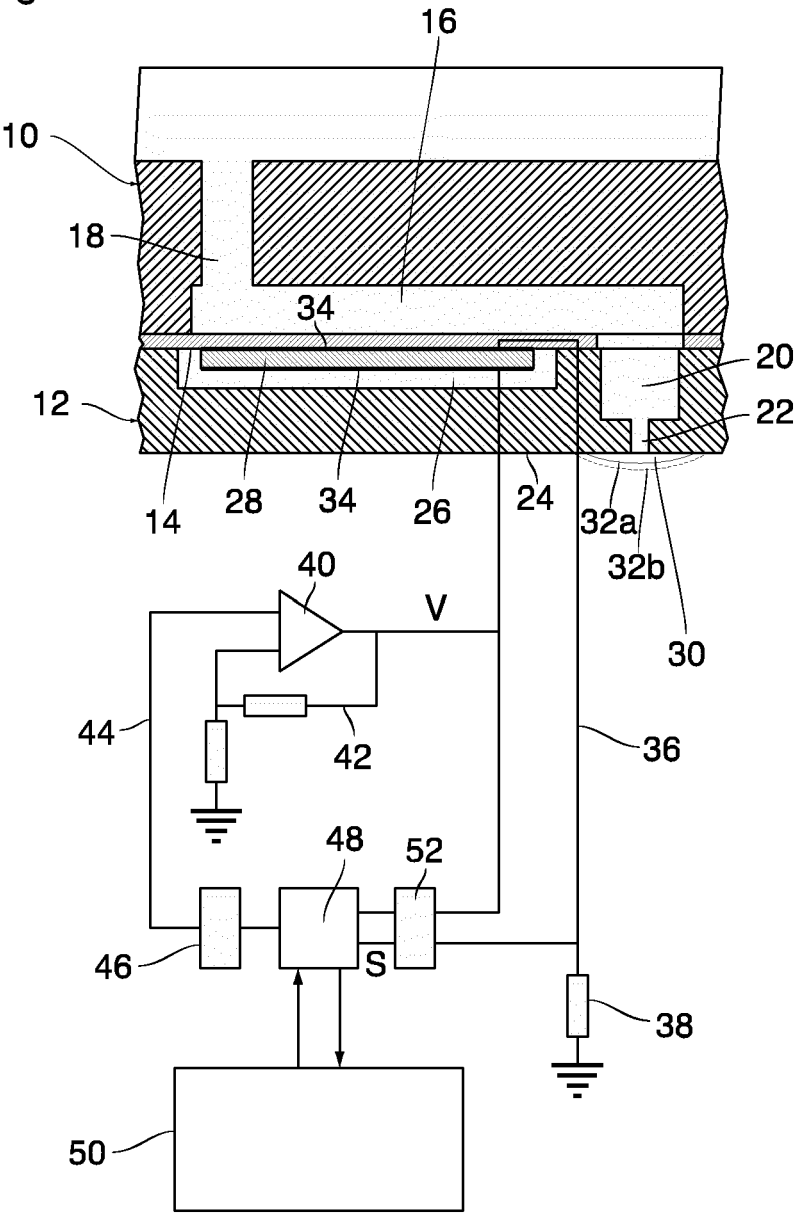

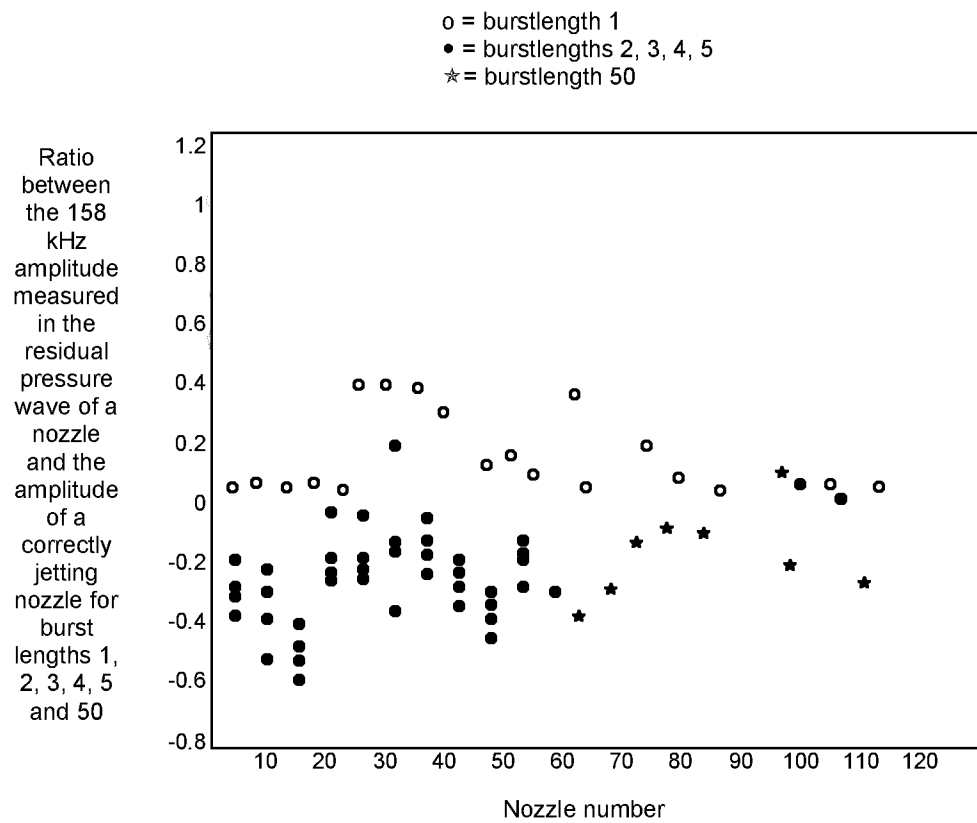


Figure 2

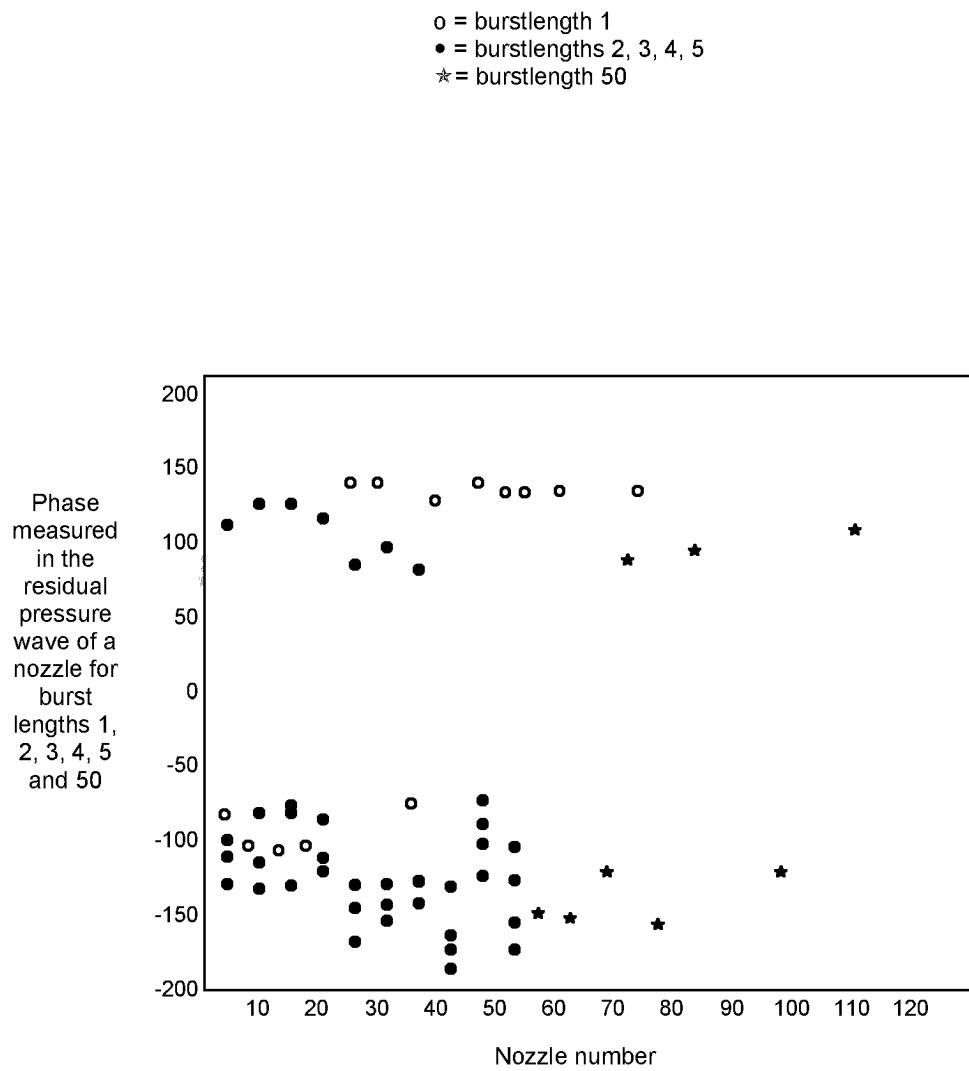


Figure 3

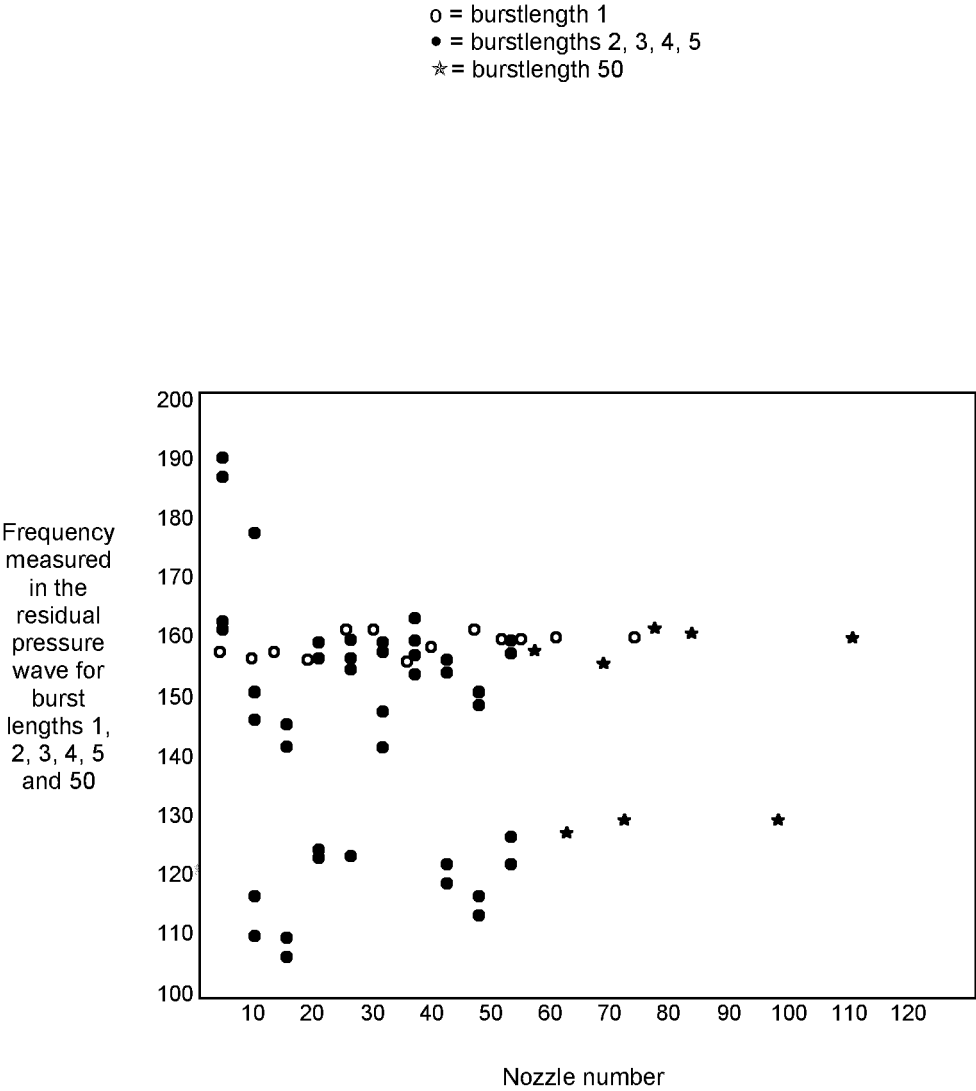


Figure 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 3670188 A [0006]
- US 2019263113 A [0006]
- US 2013141484 A [0006]