



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A42B 3/22, A62B 18/08		A1	(11) International Publication Number: WO 99/45809 (43) International Publication Date: 16 September 1999 (16.09.99)
(21) International Application Number:	PCT/US98/14148	(81) Designated States:	AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date:	9 July 1998 (09.07.98)	(21) Priority Data:	09/037,628 10 March 1998 (10.03.98) US
(71) Applicant:	MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).	(72) Inventors:	BARIBEAU, Gary, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). BURNS, James, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MITTELSTADT, William, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). SWANSON, William, J.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).
(74) Agents:	ROGERS, James, A. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).	Published	<i>With international search report.</i>
(54) Title: ATTACHMENT SYSTEM FOR REPLACEABLE HELMET RESPIRATOR LENS			
(57) Abstract			
<p>A replaceable lens attachment system (10) for respiratory devices and methods of use. The replaceable lens attachment system (10) includes a face shield frame (14) having rotatable attachment members (32) and a replaceable lens (16). The rotatable attachment members (32) include cams (34) and flanges (36). The attachment system (10) may further comprise a helmet respirator with support elements (15) disposed thereon. The method includes bowing the lens (16) and inserting it into the frame (14). The rotatable attachment members are rotated to urge the lens into the frame (14) and cover the frame. The flanges (36) and support elements (15) provide impact resistance to the lens.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ATTACHMENT SYSTEM FOR REPLACEABLE HELMET RESPIRATOR LENS

10 This invention relates to replaceable lens assemblies for helmet respirators.

Respirators are frequently worn by people working in areas where the air may be contaminated with toxic or noxious substances such as particulates, gases and vapors. For example, the air in a sanding or grinding area may contain airborne particulates, the air in a painting area may contain droplets of paint or solvent vapors, and the air in a welding area may contain harmful particles or fumes. The respirator may filter the air or it may provide a supply of uncontaminated air.

15 A respirator may include a helmet or similar device for impact protection. Respirators that include helmets are frequently worn by people working in areas where there is a potential for impact from a foreign object. Typically, this type of 20 respirator comprises a helmet with an air inlet, face shield, and an independent air supply.

The face shield has a lens that may be a permanent part of the face shield or it may be removable and replaceable in a frame. In many instances, a replaceable lens may be more economical to replace than having to replace the entire face 25 shield. However, because the lens is used in a respirator function, the attachment system should provide an adequate seal. In addition, the lens as installed should provide for some level of impact protection.

Various government agencies and industry organizations define certain requirements and standards for protective gear, including helmets and respirators. 30 For example, the National Institute of Occupational Safety and Health (NIOSH) certifies certain safety equipment, such as respirators, for the workplace and the American National Standards Institute (ANSI) recommends voluntary consensus industry standards, such as high mass and high velocity impact, in the United States. Other agencies and organizations around the world establish standards for helmets 35 and respirators. Attempts to meet these types of standards and requirements have resulted in fairly complex attachment systems for replaceable lenses for respirators.

5 For example, U.S. Patent 4,097,929 describes a protective visor that has an
arcuately curved frame that receives a flexed sheet of resilient transparent material.
The sheet is attached to the outside of the frame using mutually offset lugs. The
sheet is inserted through a fairly complex process of pressing on the rear surface of
the visor panel in the region of one of the outer lugs and simultaneously pressing
10 from the front at the vertical edge of the visor panel. The lugs are on the outside
frame of the face shield.

There is a need in the art for a replaceable lens attachment system for
respirators. The lens should be easy to insert and remove, yet provide a relatively
tight seal and some level of impact resistance. The system should be suitable for use
15 with respirators that include helmets and similar devices.

The present invention includes a lens attachment system and method of use
for exchanging replaceable face shield lenses in a respirator system. The respirator
includes a helmet with an attached face shield and replaceable lens. This system is
capable of meeting ANSI Z87.1-1989 for high mass impact yet is also capable of
20 meeting minimum NIOSH respiratory standards.

In one embodiment of the present invention, a lens replacement system
including a face shield frame for a respirator and a lens is described. The face shield
frame includes rotatable attachment members. The lens attachment system may
further include a helmet. The helmet includes support elements. Preferably, the
25 support elements protrude from the leading edge of viewing area of the helmet.

The lens is a flat, preferably transparent lens. In a preferred embodiment,
the lens is made from polycarbonate. Other suitable materials may include cellulose
acetate, triacetate, polyester, and acrylic. The lens may further include materials or
coatings to aid in scratch resistance, chemical resistance, anti-fogging resistance and
30 the like. The lens may include alignment guides. Preferably, the alignment guides
are notches.

The face shield frame is attached to the helmet respirator and generally has
an arcuate shape. The rotatable attachment members are disposed along the inside
of the frame. The attachment members include a cam and a flange. The lens frame

- 5 may further include alignment members that correspond to alignment guides on the lens. In a preferred embodiment, the alignment members are pins.

As assembled, the lens fits within the face shield frame. Alignment guides on the lens and alignment members on the face shield frame may hold the lens in proper orientation within the frame. The cams of the rotatable attachment member 10 urge the lens against the frame of the face shield. The flanges and support elements cover the lens to provide impact resistance thereto. Protruding locks may be provided to lock the attachment members in place on the frame with respect to the lens. Stops may be provided to prevent over-rotation of the attachment members.

In another embodiment of the present invention, a method of inserting a 15 replaceable lens into a face shield for a respirator having a helmet is described. The method includes providing a helmet respirator, face shield including rotatable attachment members and a replaceable lens. The helmet respirator includes support elements. The attachment members include a cam and flange.

The lens is bowed and inserted into the frame. The lens may be aligned using 20 the alignment members. The attachment members are rotated such that the cams urge the lens against the frame while the flanges, together with the support elements of the helmet, provide a degree of impact resistance to the lens. Protruding locks may be provided on the frame. The attachment members engage the protrusions to lock the attachment members in place.

25 This method provides a simplified approach to lens replacement when compared to prior art processes of attaching a lens to a frame with a fairly complex system, such as retaining lugs. The system of the present invention does not require reverse bending to install the lens in the frame, which may be difficult and which may cause crazing of lens coatings.

30 The lens attachment system of the present invention permits the use of extremely wide view lenses in respirator applications. The replaceable lenses are easy to install within the frame, yet provide a level of impact resistance and respiratory protection.

35 Other advantages of the invention will be apparent from the following detailed description and the figures.

5 Figure 1a is a side plan view of a helmet respiratory device with attached face shield.

Figure 1b is a perspective view of the helmet respiratory device of Figure 1.

Figure 2 is a plan view of a replaceable lens of the present invention.

10 Figure 3 is a rear plan view of the attachment system of the present invention.

Figure 4 is a perspective view of an attachment member of the present invention.

Figure 5 is an exploded perspective view of an embodiment of the attachment system of the present invention.

15 In describing preferred embodiments of the invention, specific terminology is used for the sake of clarity. The invention, however, is not intended to be limited to the specific terms so selected, and it is to be understood that each term so selected includes all technical equivalents that operate similarly.

20 Referring to the drawings and specifically to Figure 1a, the attachment system 10 is for use with a respirator having a helmet 12. The helmet respirator 12 has a moveable face shield frame 14 with a replaceable lens 16. Many types of respirator helmets, that meet varying types of regulations, may be used. Examples of suitable helmets include the Whitecap I™, Whitecap II™ and Airhat™ helmets available from 3M of St. Paul, Minnesota. Typically, the respirator 12 has an air supply inlet 18 for piping fresh air into the respirator 12. Helmet respirator 12 may further include a jaw piece. Helmet 12 may further include support elements 15, as discussed below and depicted in Figure 1b.

25 Lens 16 is generally transparent. The material of the lens 16 is dictated to a large degree by the application of use for the respirator 12. For most applications, it is desirable to have a transparent lens. Further, the lens 16 may provide a degree of penetration resistance. Accordingly, the preferred material for the lens of the present invention is polycarbonate. Other potentially suitable materials may include cellulose acetate, triacetate, polyester, and acrylic. The lens may be tinted or treated to impart scratch resistance, chemical resistance, anti-fogging capabilities and the like.

5 In the present invention, lens 16 is capable of being bowed. A flat lens is preferred because of manufacturing cost and due to the characteristics of a flat lens that assist in sealing the lens to the face shield frame, as more fully explained below. For purposes of this invention, the term "flat lens" includes lenses that have a degree of curvature but are still capable of being bowed and will substantially return 10 to their original orientation after being bowed.

Referring to Figure 2, lens 16 may have alignment guides 22 disposed along its periphery. These alignment guides 22 correspond to alignment members 24 on the frame 14, as more fully discussed below. The shape and number of guides 22 may vary according to the number of corresponding alignment members 24.

15 Preferably, the alignment guides 22 are notches because of cost considerations with respect to manufacturing lenses.

Referring to Figure 3, lens 16 fits within face shield frame 14. For purposes of this invention, lenses that are held on the inside of the frame 14 are considered to be oriented within the frame. The lens 16 is bowed prior to placing it within the 20 frame 14. Bowing the flat lens 16 places a stress load on the lens 16 such that if left unsupported, the lens 16 will substantially revert to its original, flat orientation. Accordingly, when the lens 16 is placed within the frame, the stress load acts to seal the lens 16 against the side edges 17, 19 of the frame 14.

With reference to Figure 1a and continuing reference to Figure 3, face shield 25 frame 14 is attached to respirator 12. The face shield frame 14 may be attached to the respirator 12 in any number of ways that are known in the art. Preferably, the face shield frame 14 is attached by a hinge assembly 9 that permits the face shield to be positioned either in a down position, thereby protecting the wearer's face, or in an up position, thereby permitting the wearer access to his or her face.

30 With reference to Figure 4, the frame 14 is designed to provide a wide-view lens with good peripheral and upward and downward vision. Face shield frame 14 is generally arcuate and may be constructed of any of a number of materials known in the art.

With reference to Figures 3, 4 and 5, the face shield frame 14 has 35 attachment members 32 disposed along the inside periphery. Attachment members

- 5 32 preferably include a cam 34 and a flange 36. Attachment members 32 may further include a positioning lever 38 and a snap connector 39 including an axle 44 and cap 46.

Axle 44, positioning lever 38 and flange 36 are connected to cam 34. Axe 44 extends from cam 34, generally perpendicular to the positioning lever 38 and 10 flange 36. In other embodiments, positioning lever 38 may be oriented in a different manner with respect to the axle 44, flange 36 and cam 34.

15 The axle 44 extends through a receptacle (not depicted) in the face shield frame 14. Cap 46 is snapped into or over the axle 44, thereby rotatably connecting attachment member 32 to frame 14. The attachment member 32 freely rotates about the axle 44. Those skilled in the art will recognize that the members may be rotatably connected to the frame using many different structures known in the art, 20 all of which are considered to be within the scope of this invention.

Cam 34 is sized to engage the edge of lens 16 upon rotation of the attachment member 32, thereby urging the lens 16 into the frame 14. The engagement of the cam 34 places a load on the lens 16 that results in the lens 16 generally sealing against the top 48 and bottom 52 of the face shield frame 14.

25 Flange 36 extends from cam 34. The flange 36 may engage the lens 16 within the frame 14 or may cover a portion of the lens 16. The flange 36, in combination with the support elements 15 on the helmet 12, provides impact resistance to the lens 16. For purposes of this invention, impact resistance in this context means that the lens does not detach from the frame such that after an impact from an object, the lens remains substantially retained within the frame. For purposes of this invention, the term "cover" means to overlay a portion of the lens, typically an edge portion, to provide support against an impact. Preferably, the 30 flange 36 covers the lens within 0 to 4 millimeters of the lens surface. Most preferably, the flange 36 covers the lens 16 by touching the lens surface.

Accordingly, the flange 36 may take any number of shapes adequate to cover the lens 16 and therefore provide impact resistance. The size of the flange 36 may be subject to visibility considerations.

5 The attachment members 32 are made of materials that exhibit stiffness and toughness in a broad range of temperatures and environments. The materials are preferably solvent resistant. In a preferred embodiment, the attachment members are made from acetals, such as Delrin™ homopolymer from DuPont and Celcon™ copolymer from Heochst-Celanese Corporation. Other suitable materials may 10 include, without limitation, polyesters, polyurethanes, and the like.

10 Preferably, the positioning lever 38 extends from cam 34 as depicted in Figure 4. The purpose of the lever 38 is to provide a means for the installer to easily rotate the attachment member 32. Accordingly, the lever 38 may be positioned on the attachment member 32 in any manner consistent with this 15 purpose.

15 A locking bar 54 may be included with the attachment member 32. Preferably, the locking bar 54 is part of or attached to the positioning lever 38. The locking bar 54 engages a lock 56 protruding from the frame 14 as depicted in Figure 3. When locked, the cam 34 of the attachment member 32 is in contact with 20 the edge of lens 16 and the flange 36 covers a portion of the lens 16.

20 Stops 58 may be provided to prevent over-rotation of the attachment members 32. In a preferred embodiment, stops 58 are located on the frame 14. The flange 36 and/or the positioning lever 38, if present, are prevented from rotating past the position of the stop 58.

25 A seal may be provided along the face shield frame 14 to seal the face shield frame 14 to the helmet 12.

30 Referring to Figure 3, the face shield frame 14 has alignment members 24 disposed along its inside surface. The frame alignment members 24 correspond to alignment guides 22 on the lens 16. The frame alignment members 24 may be of a variety of structures. The alignment members 24 align the lens 16 in position within the frame 14 by communicating with the lens alignment members 24. In a preferred embodiment, the frame alignment members 24 are pins and ridges. The pins and ridges interlock with corresponding guides 22 on the lens 16. Preferably, the lens guides 22 are slots that correspond with the ridges and holes that correspond with 35 the pins. The combination of pins, ridges, slots, and holes permits relatively easy

- 5 alignment of the lens 16 within the frame 14 yet provides sufficient structure to retain the lens 16 on the frame 14 while the attachment members 32 are rotated into place.

Returning to Figure 1b, as mentioned above, the helmet includes support elements 15. Support elements 15 may comprise the leading edge of the helmet viewing area 21. Preferably, support elements 15 extend from the leading edge of the viewing area 21. The support elements 15 cover the lens 16 in a manner similar to the flanges 36. Preferably, the support elements 15 cover the lens 16 within 0 to 4 millimeters of the lens surface. Most preferably, the support elements 15 touch the lens surface. The size of the support elements 15 may vary according to the amount of clearance desired for the face shield frame 14 as it is repositioned with respect to helmet 12.

In a preferred embodiment of the method of the present invention, a respirator 12 having support elements 15 and including a face shield frame 14 with a replaceable lens 16 as described above is provided. The face shield frame 14 has a plurality of attachment members 32 rotatably attached thereto. The attachment members 32 each include a cam 34 and flange 36 and may include a positioning lever 38. The face shield frame 14 preferably includes alignment members 24 and the lens 16 includes alignment guides 22.

With reference to Figure 3, the flat lens 16 is bowed and inserted in the frame 14. If alignment members 24 and guides 22 are provided, the lens 16 is aligned with the frame 14 by inserting the members 24 into the guides 22. The bowing of the lens results in the lens pushing against the frame. Referring to the attachment members designated as 32a for illustration purposes, the attachment members 32a are rotated such that cam 34a contacts the edge of the lens 16 and urges the lens 16 against the frame 14. The combination of the bowed lens and the force exerted by the cams acts to seal lens 16 against frame 14.

Preferably, the attachment members 32 are provided with a positioning lever 38. The positioning lever 38 may further include a locking bar 54 or a locking bar 54 may be provided as a separate element. The locking bar 54 and/or attachment member 32 may be rotated over a protruding lock 56. With continuing reference to

- 5 Figure 3, when in the locked position, cam 34 is in contact with the lens 16 and the flange 36 covers the lens 16. The flanges 36 and support elements 15 of the helmet respirator 12 provide a measure of impact resistance to the lens 16.

10 To remove the lens 16, the attachment members (designated 32b for illustration purposes) are rotated such that they substantially disengage the lens 16 and the flanges 36 no longer effectively cover the lens 16. The lens 16 is then capable of being removed from the frame 14.

The following examples illustrate aspects of the present invention but are not intended to be limiting thereof.

Examples

15 Face shields were prepared as described above and attached to helmet respirators. The helmet respirators included two support elements made of Xenoy™ resin, a polycarbonate/polyester blend available from the General Electric Company ("GE"). The support elements covered the lenses within 4 millimeters. The face shields included a polycarbonate lens made of Type CTG polycarbonate available from GE that was 0.10 cm. (0.040 inches) in thickness. The lens was secured in the frame in accordance with the description set forth above by four attachment members made from Celcon™ M90, an acetal copolymer available from the Celanese Corporation. The flanges of the attachment members covered the lenses within 4 millimeters. The face shields were tested for physical integrity 20 upon high mass impact and for leakage.

25

Example I

Impact Resistance

The face shields were tested for high mass impact according to ANSI standard Z87.1-1989. This test is intended to ensure a level of mechanical integrity 30 of a protective device and a level of protection from relatively heavy, pointed objects traveling at low speed. The face shield was rigidly mounted on a headform in the horizontal position, face up. A missile having a 30° conical tip with a 1 mm (0.039 in.) radius made of heat-treated steel weighing 500 grams (17.6 ounces) was dropped through a loose-fitting guide tube onto the lens from a height of 130 cm. 35 (51.2 in.). The alignment was such that when the missile was dropped, its point

- 5 was in line with one of the eyes of the headform. Four face shield samples were tested. None of the samples showed any fracture or dislodgment of the lens. All samples passed this test.

Example II

Respiratory Protection

- 10 The face shields were tested for gas or vapor leakage by assembling them into a respirator system and testing according to the NIOSH standard for respirators 42CFR Part 84, as published in the Federal Register, Vol. 60, No. 110, paragraph 84.162, page 30379, June 8, 1995. The completely assembled respirators were fitted to the wearer with an appropriate face seal and were then
15 worn in a chamber containing 0.10% (1000 ppm) isoamyl acetate vapor. Each subject performed light exercise for 10 minutes in the chamber. Any detection of the odor of isoamyl acetate by the subject is considered failure, while no detection of the odor of isoamyl acetate by the subject is passing. Ten face shields were tested in various respirator combinations by various subjects, and all passed the test.



20

5 What is claimed is:

1. A respiratory lens attachment system, comprising:
 - a. an arcuate face shield frame having an inside surface and a plurality of rotatable attachment members disposed thereon, said attachment members including cams and flanges; and
 - b. a replaceable transparent lens within said frame, wherein said attachment cams urge said lens against said face shield frame and said flanges cover a portion of said lens.
- 15 2. A helmet respirator comprising the lens attachment system of claim 1 attached to a helmet respirator with a support element.
3. The attachment system of claim 1 or the helmet respirator of claim 2 wherein said attachment members include a locking bar that corresponds to a lock on said frame wherein said locking bar engages said lock.
- 20 4. The attachment system of claim 1 or the helmet respirator of claim 2 wherein said lens has alignment guides and said frame has alignment members such that said guides and members interlock to align the lens on the frame.
- 25 5. The attachment system of claim 1 or the helmet respirator of claim 2 wherein the face shield is attached to a helmet respiratory device and includes an up position, such that the shield is substantially out of the plane of sight of a wearer and a down position, such that the shield is in a position in front of a wearer's face, and the helmet includes support elements such that the support elements cover to the lens when the face shield assembly is in the down position.
- 30 6. A method of replacing the face shield lens of the helmet respirator of claim 2, comprising:
 - 35 a. providing the helmet respirator without a lens;

- 5 b. bowing and inserting said lens into said frame; and
 c. rotating said attachment members such that said cams urge
 said lens against said face shield frame and said flanges cover a portion of the lens,
 said support members and said flanges providing impact resistance to the lens.
- 10 7. The method of claim 6 wherein the face shield frame has alignment members
 and said lens has alignment guides and the bowed lens is positioned on said frame
 by aligning the alignment members with the alignment guides.
- 15 8. The method of claim 6 wherein said frame has a plurality of lock protrusions
 and said attachment members are rotated over said lock protrusions.
9. The method of claim 7 wherein the alignment members comprise pins.
10. The method of claim 7 wherein the alignment guides comprise slots.

20

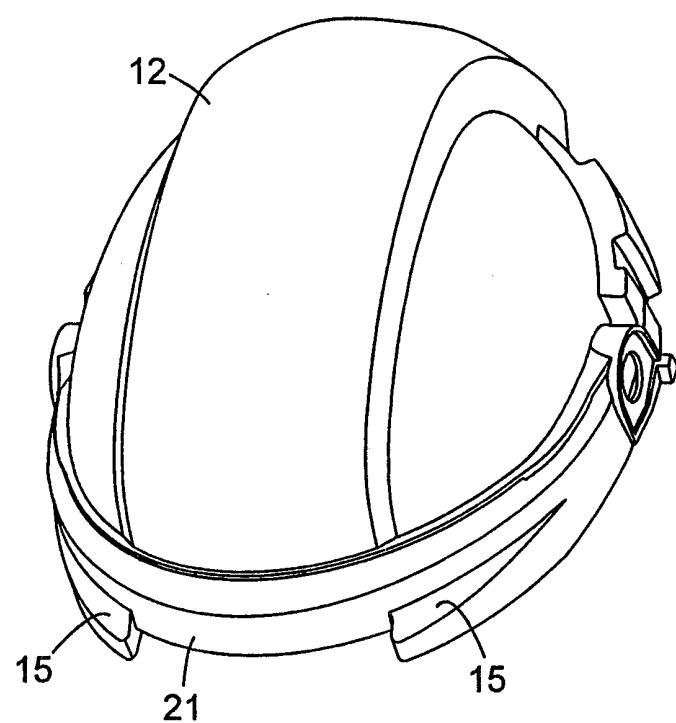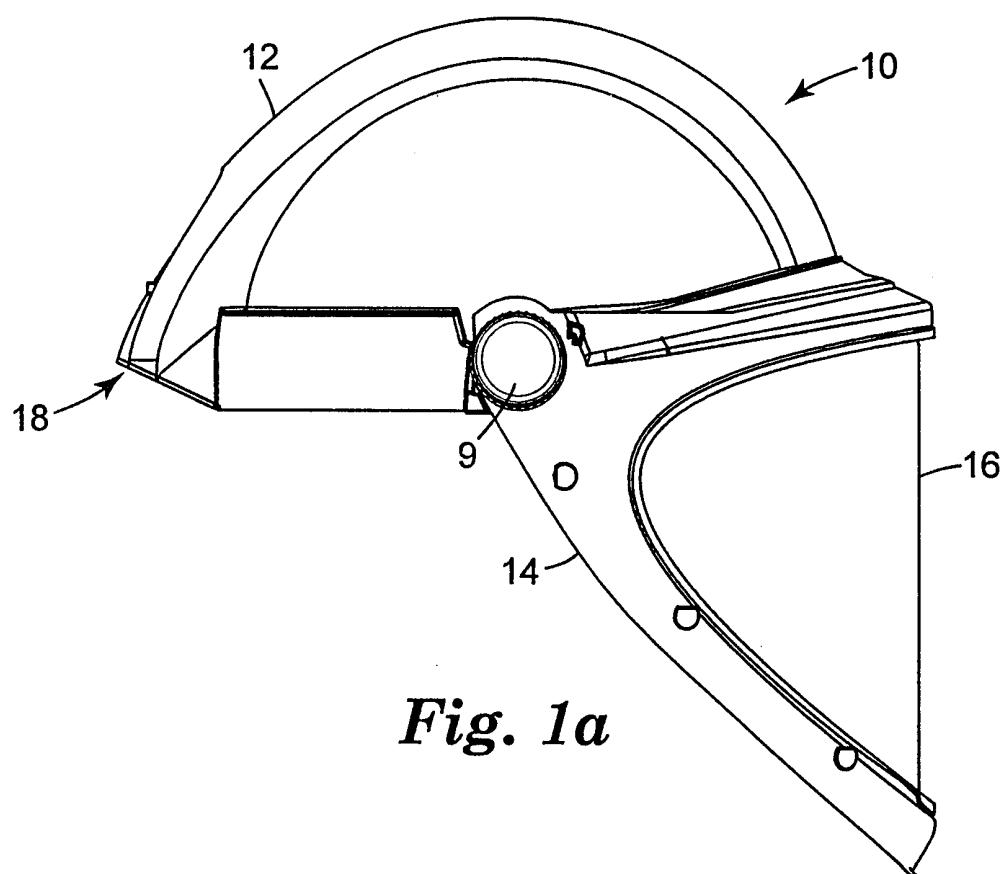

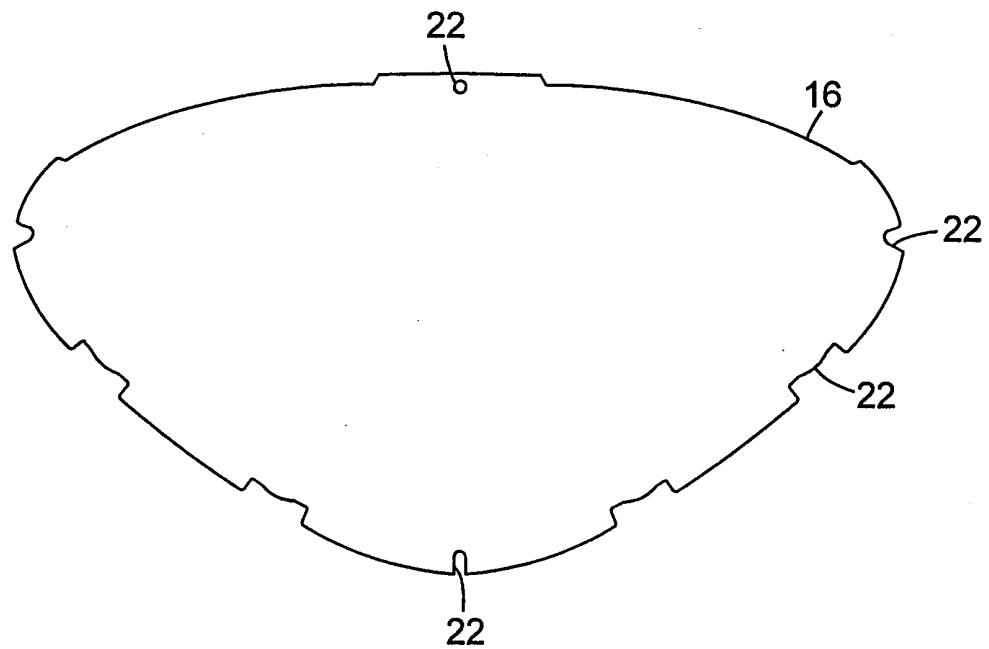


Fig. 2



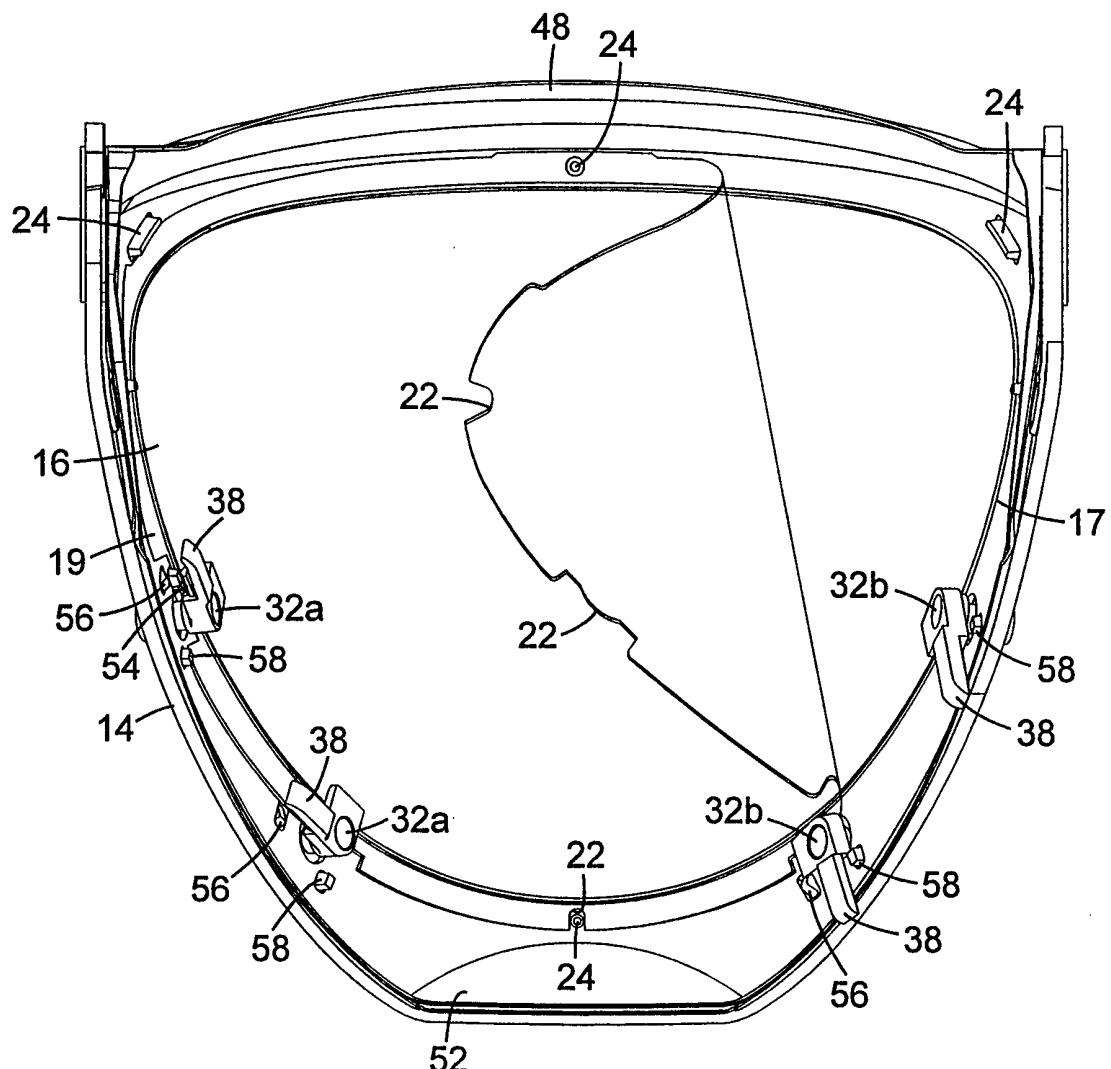


Fig. 3

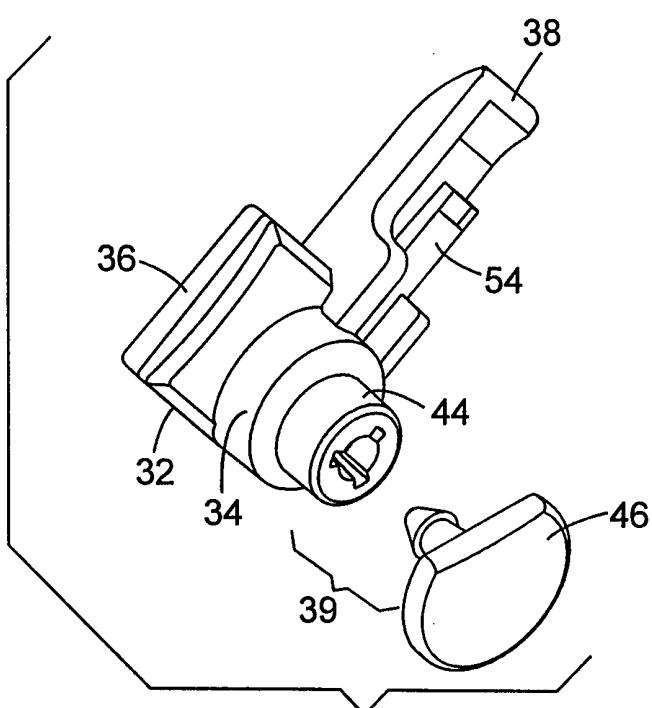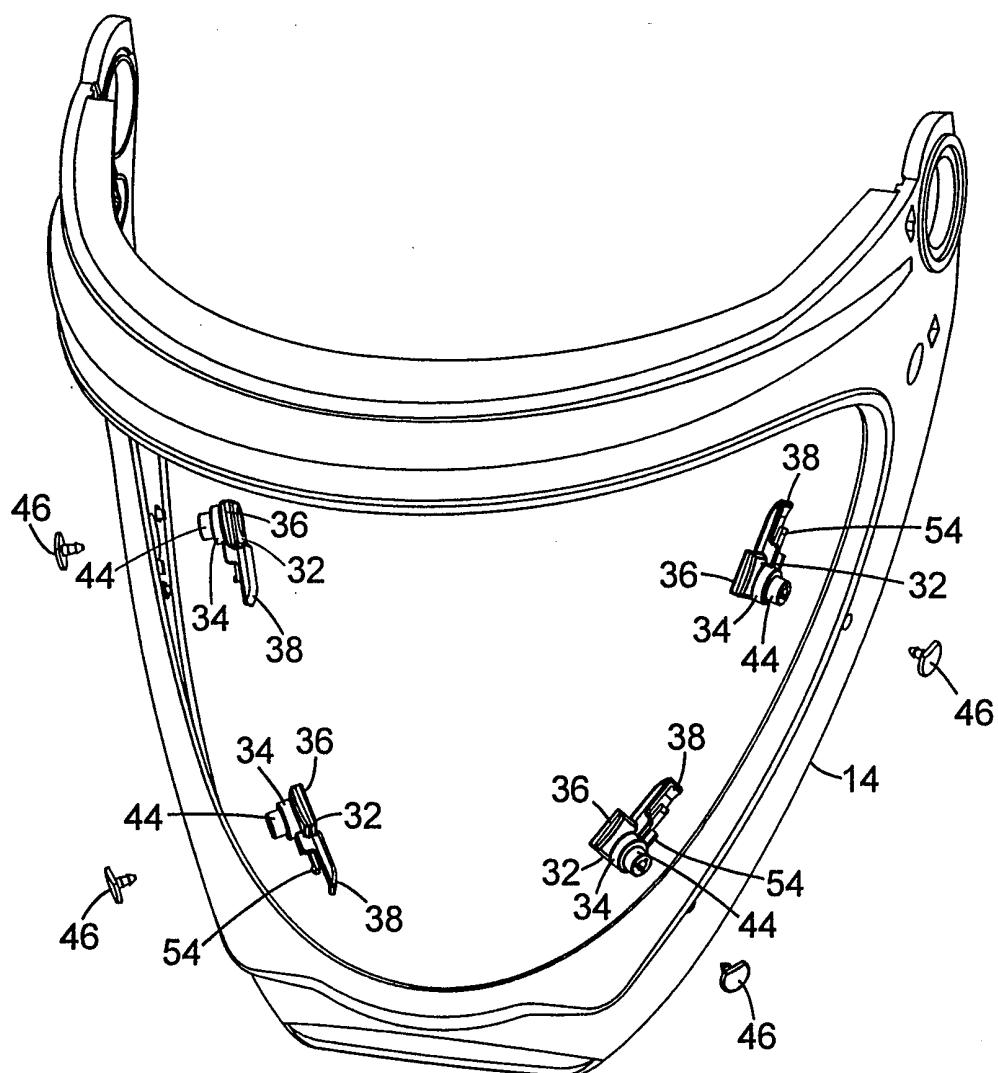

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/14148

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A42B3/22 A62B18/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 A42B A62B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 805 294 A (A. F. ROSE ET AL.) 23 April 1974 see column 1, line 12 - line 48 see column 2, line 9 - column 3, line 21 see claims; figures ---	1,2,5,6
X	DE 26 59 187 A (NORTON CO.) 14 July 1977 see page 3, paragraph 2 - page 4, paragraph 1 see page 4, last paragraph - page 6, last paragraph see claims; figures	1
A	---	3.8
A	BE 748 423 A (ETABLISSEMENTS VANDEPUTTE) 16 September 1970 see page 4, paragraph 2 - paragraph 4 see figures 1-3 ---	1,2,4-7, 9,10
		-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 November 1998	30/11/1998
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Authorized officer Bourseau, A-M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/14148

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 81 10 871 U (UVEX WINTER OPTIK GMBH) 18 March 1982 -----	
A	WO 86 04790 A (A. FÖHL) 28 August 1986 -----	
A	US 4 462 119 A (T. H. RUDD) 31 July 1984 -----	
A	DE 91 09 795 U (PROFIL JEAN-PAUL BURLET GMBH) 19 March 1992 -----	
A	US 4 097 929 A (B. A. LOWE ET AL.) 4 July 1978 cited in the application -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/14148

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 3805294	A	23-04-1974	CA	989551 A		25-05-1976
DE 2659187	A	14-07-1977	BR	7608725 A		25-10-1977
			CA	1083752 A		19-08-1980
			DE	7640817 U		15-03-1979
			FR	2373979 A		13-07-1978
			GB	1523990 A		06-09-1978
			JP	1296446 C		26-12-1985
			JP	52092643 A		04-08-1977
			JP	60022081 B		31-05-1985
BE 748423	A	16-09-1970		NONE		
DE 8110871	U	18-03-1982		NONE		
WO 8604790	A	28-08-1986	DE	3506495 A		04-09-1986
			AU	584406 B		25-05-1989
			AU	5545286 A		10-09-1986
			EP	0214195 A		18-03-1987
			US	4884302 A		05-12-1989
US 4462119	A	31-07-1984		NONE		
DE 9109795	U	19-03-1992	EP	0526919 A		10-02-1993
US 4097929	A	04-07-1900	GB	1518766 A		26-07-1978
			DE	2711588 A		24-11-1977
			DK	133477 A		15-11-1977
			FR	2350802 A		09-12-1977
			JP	1328418 C		30-07-1986
			JP	52139300 A		21-11-1977
			JP	60050881 B		11-11-1985
			SE	417572 B		30-03-1981
			SE	7705434 A		15-11-1977
			ZA	7701171 A		25-01-1978