

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) **Date de dépôt PCT/PCT Filing Date:** 2014/10/20
(87) **Date publication PCT/PCT Publication Date:** 2015/04/30
(85) **Entrée phase nationale/National Entry:** 2016/03/23
(86) **N° demande PCT/PCT Application No.:** EP 2014/072435
(87) **N° publication PCT/PCT Publication No.:** 2015/059089
(30) **Priorité/Priority:** 2013/10/21 (DE10 2013 111 586.1)

(51) **Cl.Int./Int.Cl. B04B 1/14** (2006.01),
B04B 11/04 (2006.01)

(71) **Demandeur/Applicant:**
GEA MECHANICAL EQUIPMENT GMBH, DE

(72) **Inventeurs/Inventors:**
HARTMANN, TORE, DE;
BAUMANN, OLIVER, DE

(74) **Agent:** FETHERSTONHAUGH & CO.

(54) **Titre : PROCEDE D'EPURATION EN CONTINU D'UNE SUSPENSION FLUIDE A L'AIDE D'UNE CENTRIFUGEUSE**
(54) **Title: METHOD FOR CONTINUOUSLY CLARIFYING A FLOWABLE SUSPENSION WITH A CENTRIFUGE**

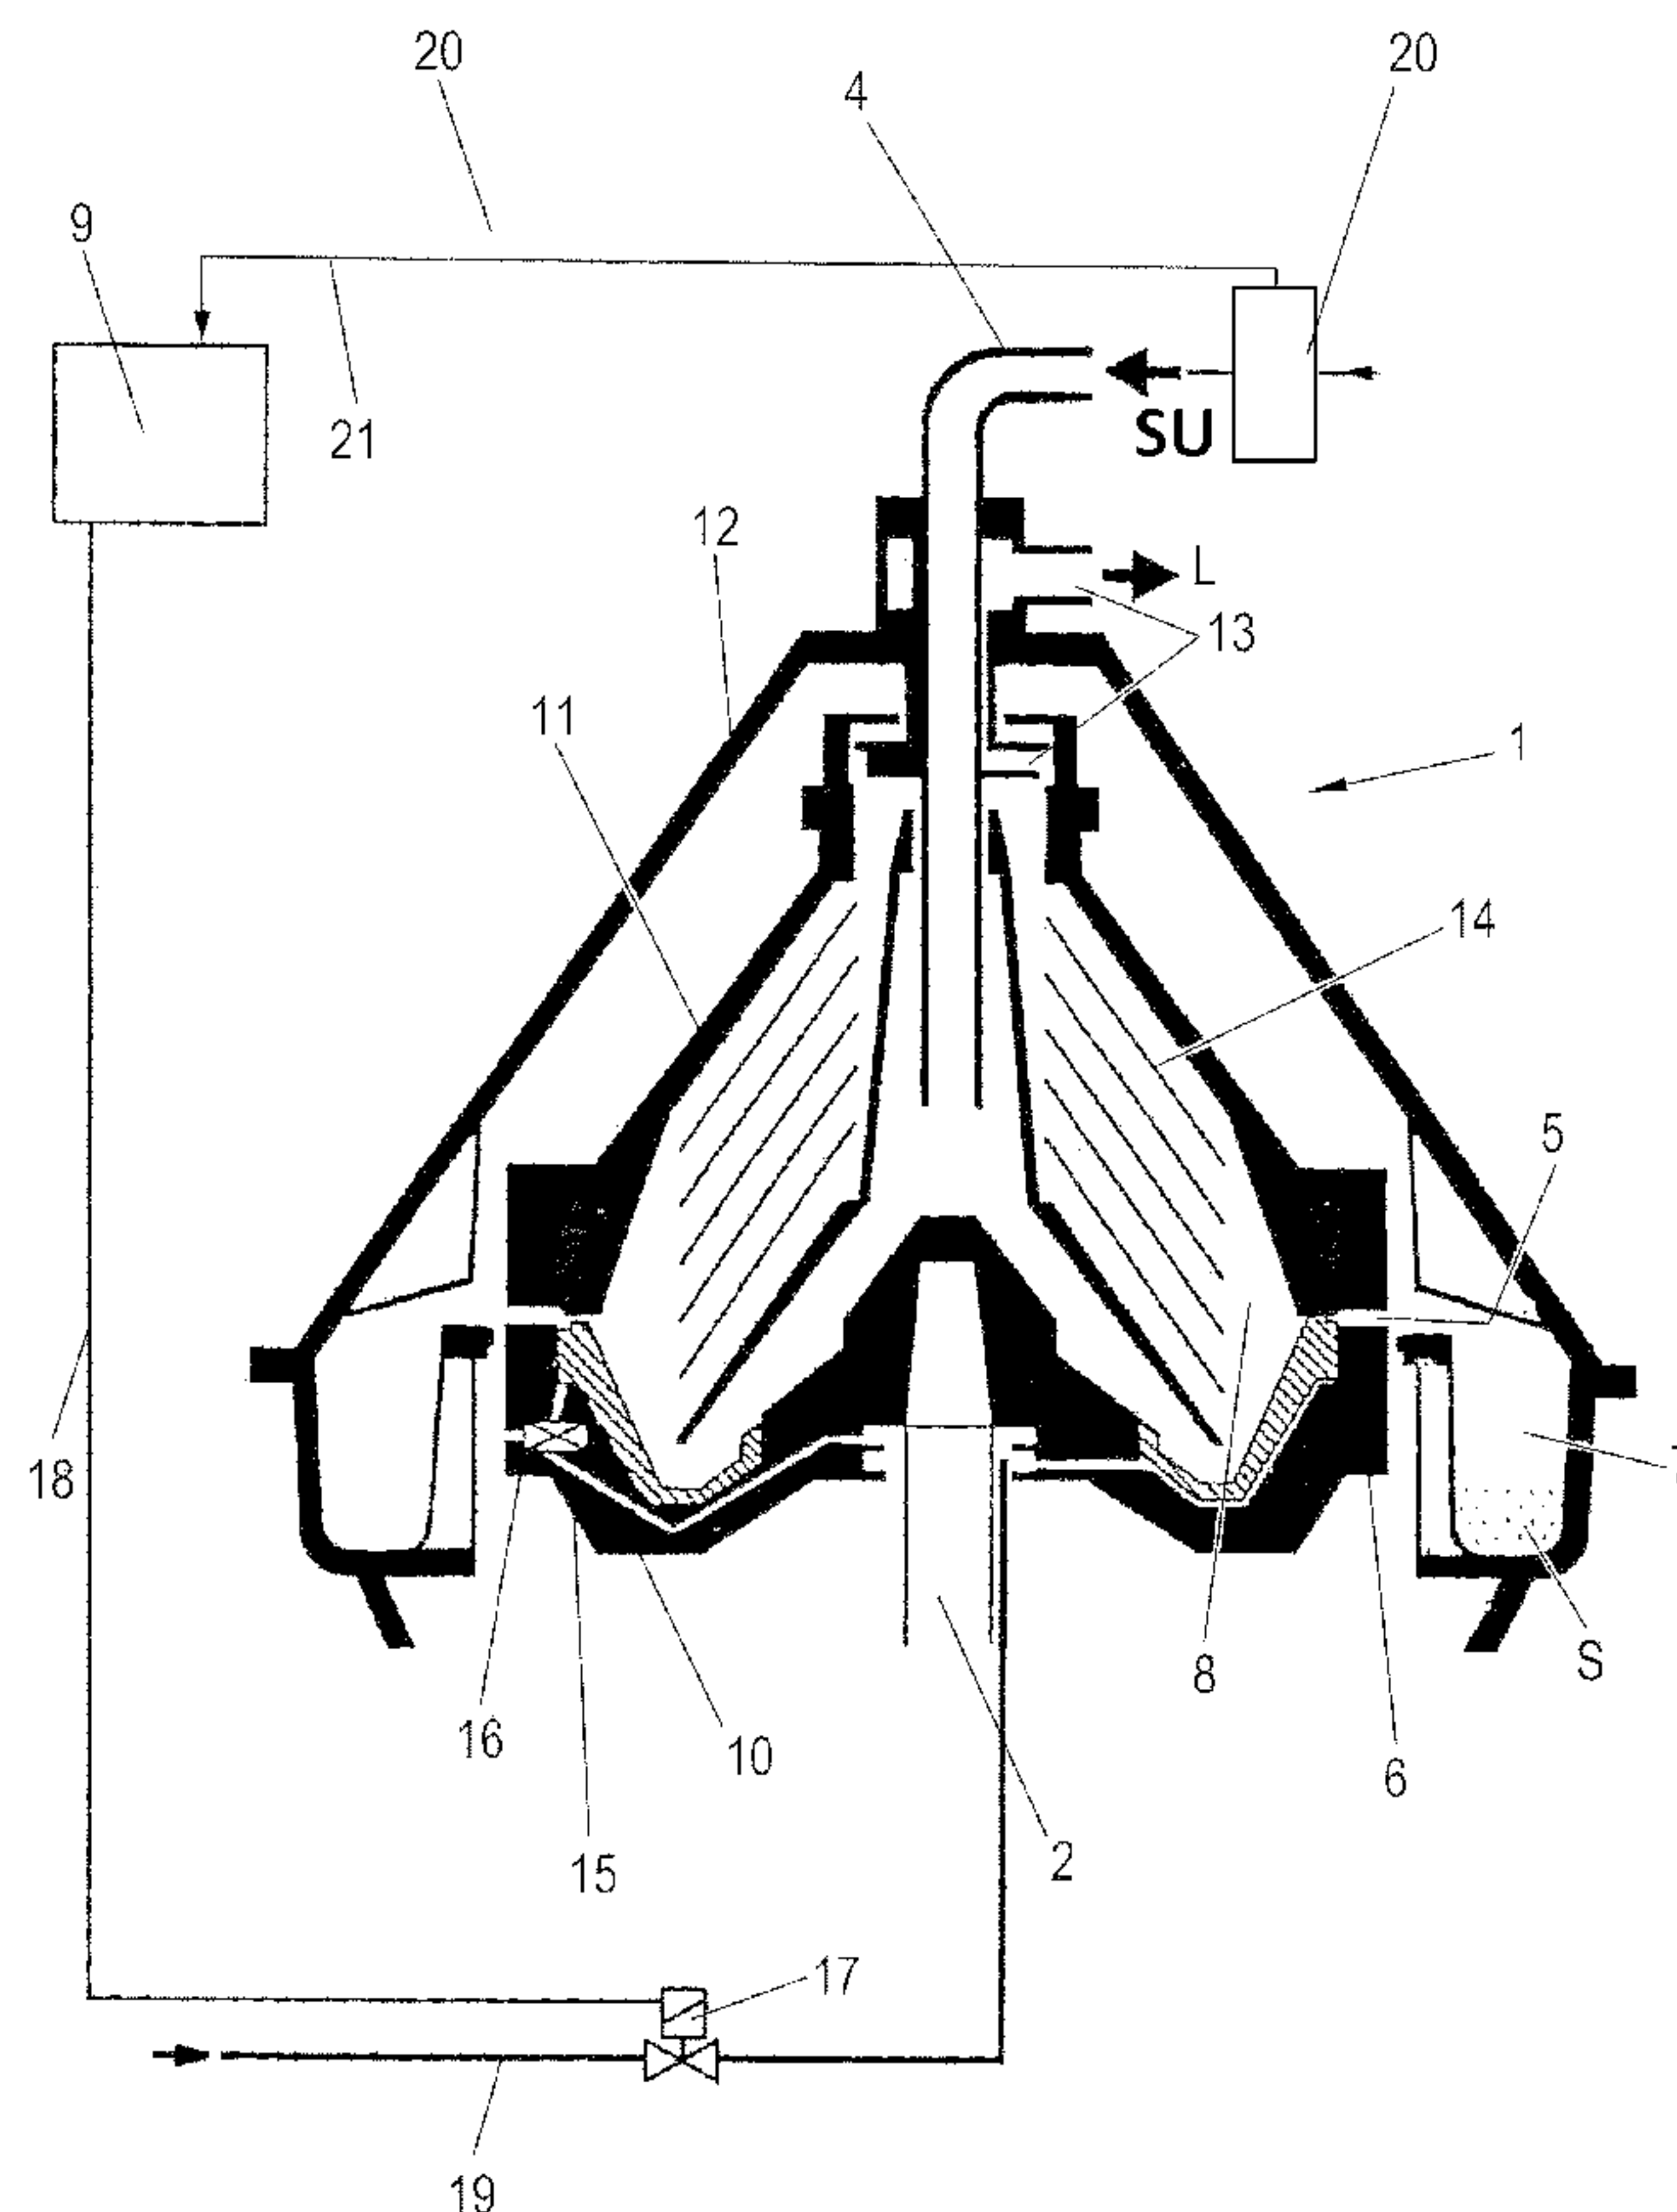


Fig. 1

(57) Abrégé/Abstract:

A method for continuously clarifying a flowable suspension (P) with a centrifuge, in particular a discontinuously solid-discharging - self-discharging - separator, which has a rotatable drum with a vertical axis of rotation, a feed for the suspension (P) to be clarified

(57) **Abrégé(suite)/Abstract(continued):**

and at least one liquid discharge for continuously discharging at least one clarified liquid phase (L), and discontinuously openable solid-discharge openings for discontinuously discharging the solid phase (S), comprises the following steps: a) measuring one or more of the suspension parameters mass, mass of solid substance in the suspension, mass flow, temperature, density, cumulative density; and b) initiating a time-limited discharge of solid substance as a result of a repeated determination on the basis of step a) in the event of or after the exceeding of a limit value.

ABSTRACT

A method for continuously clarifying a flowable suspension (P) with a centrifuge, in particular a discontinuously solid-discharging - self-discharging - separator, which
5 has a rotatable drum with a vertical axis of rotation, a feed for the suspension (P) to be clarified and at least one liquid discharge for continuously discharging at least one clarified liquid phase (L), and discontinuously openable solid-discharge openings for discontinuously discharging the solid phase (S), comprises the following steps: a) measuring one or more of the suspension parameters mass, mass of solid substance
10 in the suspension, mass flow, temperature, density, cumulative density; and b) initiating a time-limited discharge of solid substance as a result of a repeated determination on the basis of step a) in the event of or after the exceeding of a limit value.

METHOD FOR CONTINUOUSLY CLARIFYING A FLOWABLE SUSPENSION WITH A CENTRIFUGE

The invention relates to a method according to the preamble of claim 1.

5

DE 32 28 074 A1 discloses a method which advantageously permits control of a continuously emptying clarifying separator having a drum. Here, a suspension parameter – here the level of turbidity of a clear phase running out of the drum – is determined and used to monitor the emptying of the solid-matter chamber of the drum. The solid-matter phase is emptied continuously. If the turbidity in the clear phase becomes too high, the clear phase is led back into the drum.

10

Besides this, it is also known to use a clarifying separator for the clarification of liquids, in particular beverages, in which the solid matter is emptied discontinuously with the aid of a piston valve for opening and closing discharge openings if the level of turbidity, measured with the photocell, exceeds a certain limiting value.

15

This method has also proven worthwhile in specific applications. Unfortunately, there is solid matter which causes the photocell to become blind over time, so that in these cases satisfactory control of the separator is no longer ensured. There is therefore a need for simple and nevertheless most precise methods with which a moment which is highly suitable for the emptying of solid matter during the clarification of suspensions of solid matter by using discontinuously automatically emptying separators is determined.

20

25

The object of the invention is to solve this problem.

30

The invention achieves this object by means of a method having the features of claim 1.

A method is devised for continuously clarifying a free-flowing suspension or a free-flowing product with a centrifuge, in particular a separator – an automatically emptying separator – that discontinuously automatically empties solid matter and comprises a rotatable drum having a vertical axis of rotation, having an inlet for the suspension to be clarified and at least one liquid discharge for the continuous discharge of at least one clarified liquid phase and solid-matter discharge openings that are to be opened discontinuously for the discontinuous discharge of the solid phase, characterized by the following steps: a) measuring one or more of the suspension parameters comprising mass, mass of solid matter in suspension, mass flow, temperature, density, cumulative density; and b) initiating a time-limited solid-matter discharge as a result of a repeated determination according to step b) upon reaching or after exceeding a limiting value dependent on one or more of the measured suspension parameters.

The limiting value can be one which can be (preferably) determined directly from the behavior over time of the one or more suspension parameters. However, it can also be a limiting value which can be determined from the first (or second or nth) derivative of the behavior over time of the one or more suspension parameters, for example in the form of a differential ratio of the measured values of the suspension parameter and the time intervals between the measurements of the suspension parameter.

The direct or indirect determination of one or two or more of the aforementioned parameters makes it possible to determine the mass of solid matter (or value proportional thereto) in each case which has been separated from the suspension since the last emptying, in order to draw conclusions about the level of filling of the solid-matter chamber with solid matter separated out from the suspension, which has collected in the solid-matter collecting chamber. In particular, the solid matter must not reach the edge of the disk stack. If, therefore, the mass of solid

matter value determined exceeds a predefined limiting value – for example determined during trial operation – emptying is initiated in order to empty the solid-matter collecting chamber entirely of solid matter or in any case to the greatest possible extent.

5

To determine the suspension and/or mass of solid matter, a Coriolis flowmeter is in particular suitable, with which a sufficiently accurate determination of this value or these values is possible in a straightforward manner. The Coriolis flowmeter is preferably designed to measure the mass flow, the density and the cumulative density in parallel. It preferably also measures the temperature. Cumulative density means that the density is measured again and again at time intervals, that the sum of these values is formed (directly or suitably processed further, e.g. multiplied by the time interval between the measurements) and thus a value which corresponds directly to the mass of solid matter is determined.

10

15

If the suspension to be processed has a relatively uniform, constant proportion of solid matter, it may be sufficient for the mass determination to determine the mass flow per unit time of incoming suspension and to integrate the same over time, in particular by means of addition, in order therefrom to determine by computation the proportion of solid matter which has collected in the solid-matter collecting chamber. However, if said proportion fluctuates, it may be necessary, with the aid of a previously stored table – e.g. determined in trials – or with the aid of a previously determined functional relationship and the measurement of a further suspension parameter such as the density, to determine in each case how high the proportion of solid matter in the incoming suspension is at present, which is possible with modern Coriolis flowmeters. With an additional temperature determination, which the Coriolis flowmeter can preferably likewise also carry out in an integrated manner, and with a supplementary accumulation of the measured values – which is preferably likewise carried out directly by the Coriolis

20

25

flowmeter/sensor, the level of filling of the solid-matter collecting chamber of the drum can be determined.

At the same time, the Coriolis flowmeter (Coriolis meter) can be used to protect the automatically emptying separator or the drum thereof against excessively high densities in the inlet, by the inlet being prevented (e.g. by controlling a valve) when the maximum permissible density for the respective automatically emptying separator is exceeded. This value is previously known and identified for each separator.

The individual method steps do not necessarily have to be carried out in a structural unit of the separator but can also be carried out by external devices (in particular measuring devices, sensors, control unit, individually or in combination therewith and possibly further devices).

Advantageous refinements of the invention are the subject matter of the sub-claims.

The invention will be explained in more detail below by using a preferred exemplary embodiment with reference to the appended drawings, in which:

Fig. 1: shows a schematic sectional view of a separator which is operated with the method according to the invention; and

Fig. 2: shows a flowchart to illustrate a method according to the invention.

Fig. 1 shows a separator 1 for clarifying free-flowing starting suspensions SU containing turbid matter, having a rotatable drum with a vertical axis of rotation. The processing of the suspension is carried out in continuous operation. This means that the input of suspension is carried out continuously, as is the discharge of at least one clarified liquid phase, called the clear phase.

The automatically emptying separator has a discontinuous solid-matter discharge for this purpose, wherein the solid matter F separated from a suspension by clarification is emptied at intervals by opening and re-closing discharge nozzles or discharge openings 5.

The drum has a lower drum part 10 and a drum cover 11. It is also preferably surrounded by a hood 12. The drum is additionally placed on a drive spindle 2, which is rotatably mounted and can be motor-driven.

The drum has a suspension inlet 4, through which a suspension SU to be clarified is led into the drum. It also has at least one outlet 13 with a gripper, which is used to lead a clear phase L out of the drum. The gripper is a type of centripetal pump. However, the liquid discharge could also be managed with other means. In addition, it would also be conceivable, in addition to the clarification, to perform separation of the suspension into two liquid phases of different density. A further liquid outlet would be required for this purpose.

The drum preferably has a disk pack 14 made of axially spaced separating disks. Between the outer circumference of the disk pack 14 and the inner circumference of the drum, in the area of the greatest internal diameter of the latter, there is formed a solid-matter collecting chamber 8. Solid matter which is separated from the clear phase in the area of the disk pack 14 collects in the solid-matter collecting chamber 8, from which the solid matter can be discharged from the drum via the discharge openings 5. The discharge openings 5 can be opened and closed by means of a piston valve 6, which is arranged in the lower drum part 11. When the discharge openings are opened, the solid matter F is thrown out of the drum into a solid-matter collector 7.

To move the piston valve 6, the drum has an actuating mechanism. Here, this comprises at least one feed line 15 for a control fluid such as water and a valve arrangement 16 in the drum and further elements outside the drum. Thus, the input of the control fluid such as water is made possible by a control valve 17
5 arranged outside the drum, which is arranged in a feed line 19 for the control fluid that is arranged outside the drum, so that for an emptying action by opening the control valve, the control fluid can be sprayed into the drum or, vice versa, the inflow of control fluid can be interrupted in order to move the piston valve appropriately in order to open the discharge openings. The actuating mechanism
10 – here the control valve 17 – is connected via a data line 18 to a control unit 9 for controlling and/or regulating the solid-matter discharge.

A Coriolis sensor 20 is arranged in the inlet 4. The Coriolis sensor 20 is designed as a Coriolis mass flowmeter. The function of a Coriolis sensor designed as a
15 Coriolis mass flowmeter is known per se. If a homogenous mixture of the solid-matter phase S and the liquid phase is present in the incoming suspension SU, via a density measurement, which can likewise be carried out by using the sensor 20, and intrinsically known fluid properties of the suspension, the two phases S and L can be determined proportionally. If necessary, these fluid properties can
20 be determined in trials or in test operation.

The Coriolis sensor 20 is connected via a wired or wire-free data line 21 to the evaluation and control unit 9 (preferably a control computer of the separator), which evaluates the measured values determined and, on the basis of this evaluation, controls the emptying and therefore the opening of the discharge
25 openings 5.

During the clarification of the suspension SU, forming the clear phase L, turbid matter contained in the suspension to be clarified and other solid matter is collected in the solid-matter collecting chamber 6 of the separator, which is filled.
30 If too much of the solid matter is collected in the collecting chamber 6, the

discharge thereof with the clear phase begins (fig. 2), which should be avoided if possible.

In the following text, with reference to fig. 2, an exemplary embodiment of a method according to the invention, which is carried out by means of the above-described separator, will be explained in more detail.

The suspension SU is preferably led continuously into the separator, in which said suspension is clarified. A continuing clear phase discharge of the clear phase L is carried out.

Arranged in the inlet 4 is the Coriolis sensor 20, with which, in a step 100, a measurement of one or more of the suspension parameters comprising mass, mass of solid matter in suspension, mass flow, temperature, density and/or cumulative density is carried out. The signal from the Coriolis sensor 20 is added up in a step 200 by the control unit 9 of the separator or by electronics integrated into the Coriolis sensor. This cumulative value is stored temporarily in an accumulator in the sensor itself or preferably in the control unit.

Then, the cumulative value – preferably a mass value or a value proportional to the mass value – is compared in a step 300 with a predefined and previously stored limiting value. This predefined limiting value can, for example, have been determined previously during measurements in trial operation in such a way that it corresponds to an 80% filling of the solid matter collecting chamber with solid matter.

As long as a limiting value has not been reached, steps 100 and 200 are repeatedly run through again (indicated by the downward arrow by the "300").

On the other hand, when the limiting value is reached or exceeded, in a step 400 emptying of the solid matter collecting chamber is carried out by means of an actuation of the piston valve. In a step 500, the accumulator is set back to zero and a measurement according to step 100 and an accumulation of the measured values in the accumulator according to step 200 are repeatedly started again until a renewed emptying action.

List of designations:

	1	Separator
	2	Spindle
5	3	Sensor
	4	Inlet
	5	Discharge openings
	6	Piston valve
	7	Solid-matter collector
10	8	Solid-matter collecting chamber
	9	Evaluation unit
	10	Lower drum part
	11	Drum cover
	12	Hood
15	13	Outlet
	14	Disk pack
	15	Line for hydraulic fluid
	16	Valve
	17	Control valve
20	18	Data line
	19	Hydraulic line
	20	Sensor
	21	Data line
25	SU	Suspension
	L	Liquid phase/clear phase
	F	Solid matter

Claims

1. A method for continuously clarifying a free-flowing suspension (P) with a centrifuge, in particular a separator – an automatically emptying separator – that discontinuously empties solid matter and comprises a rotatable drum having a vertical axis of rotation, having an inlet for the suspension to be clarified and at least one liquid discharge for the continuous discharge of at least one clarified liquid phase (L) and solid-matter discharge openings that are to be opened and closed again discontinuously for the discontinuous discharge of the solid phase (S), characterized by the following steps:
- 5 a) measuring one or more of the suspension parameters comprising mass, mass of solid matter in suspension, mass flow, temperature, density, cumulative density; and
b) initiating a time-limited solid-matter discharge as a result of a repeated determination according to step b) upon reaching or after exceeding a limiting value dependent on one or more of the measured suspension parameters.
- 15 2. The method as claimed in claim 1, characterized in that the solid-matter mass value or a value proportional thereto which has been separated from the suspension since the last emptying is determined in order to draw conclusions about the level of filling of the solid matter chamber with solid matter separated from the suspension.
- 20 3. The method as claimed in claim 1 or 2, characterized in that in order to determine one or more of the parameters of the step a), use is made of at least one Coriolis flowmeter, with which a mass flow is determined.
- 25 4. The method as claimed in claim 1, 2 or 3, characterized in that the initiation of the solid-matter discharge is carried out as a result of integration of the output signal from the Coriolis flowmeter over time after a limiting value has been exceeded.

5. The method as claimed in claim 3 or 4, characterized in that the integration over time is carried out by means of accumulating measured values, and in that the limiting value is a cumulative limiting value.

5 6. The method as claimed in one of the preceding claims, characterized in that a suspension (P) having a fluctuating solid-matter content is processed.

7. The method as claimed in one of the preceding claims, characterized in that the measured results from the Coriolis flowmeter (Coriolis meter) are further used to
10 protect the automatically emptying separator or the drum thereof against excessively high densities in the inlet, by the inlet being prevented when the maximum permissible density of the separator is exceeded.

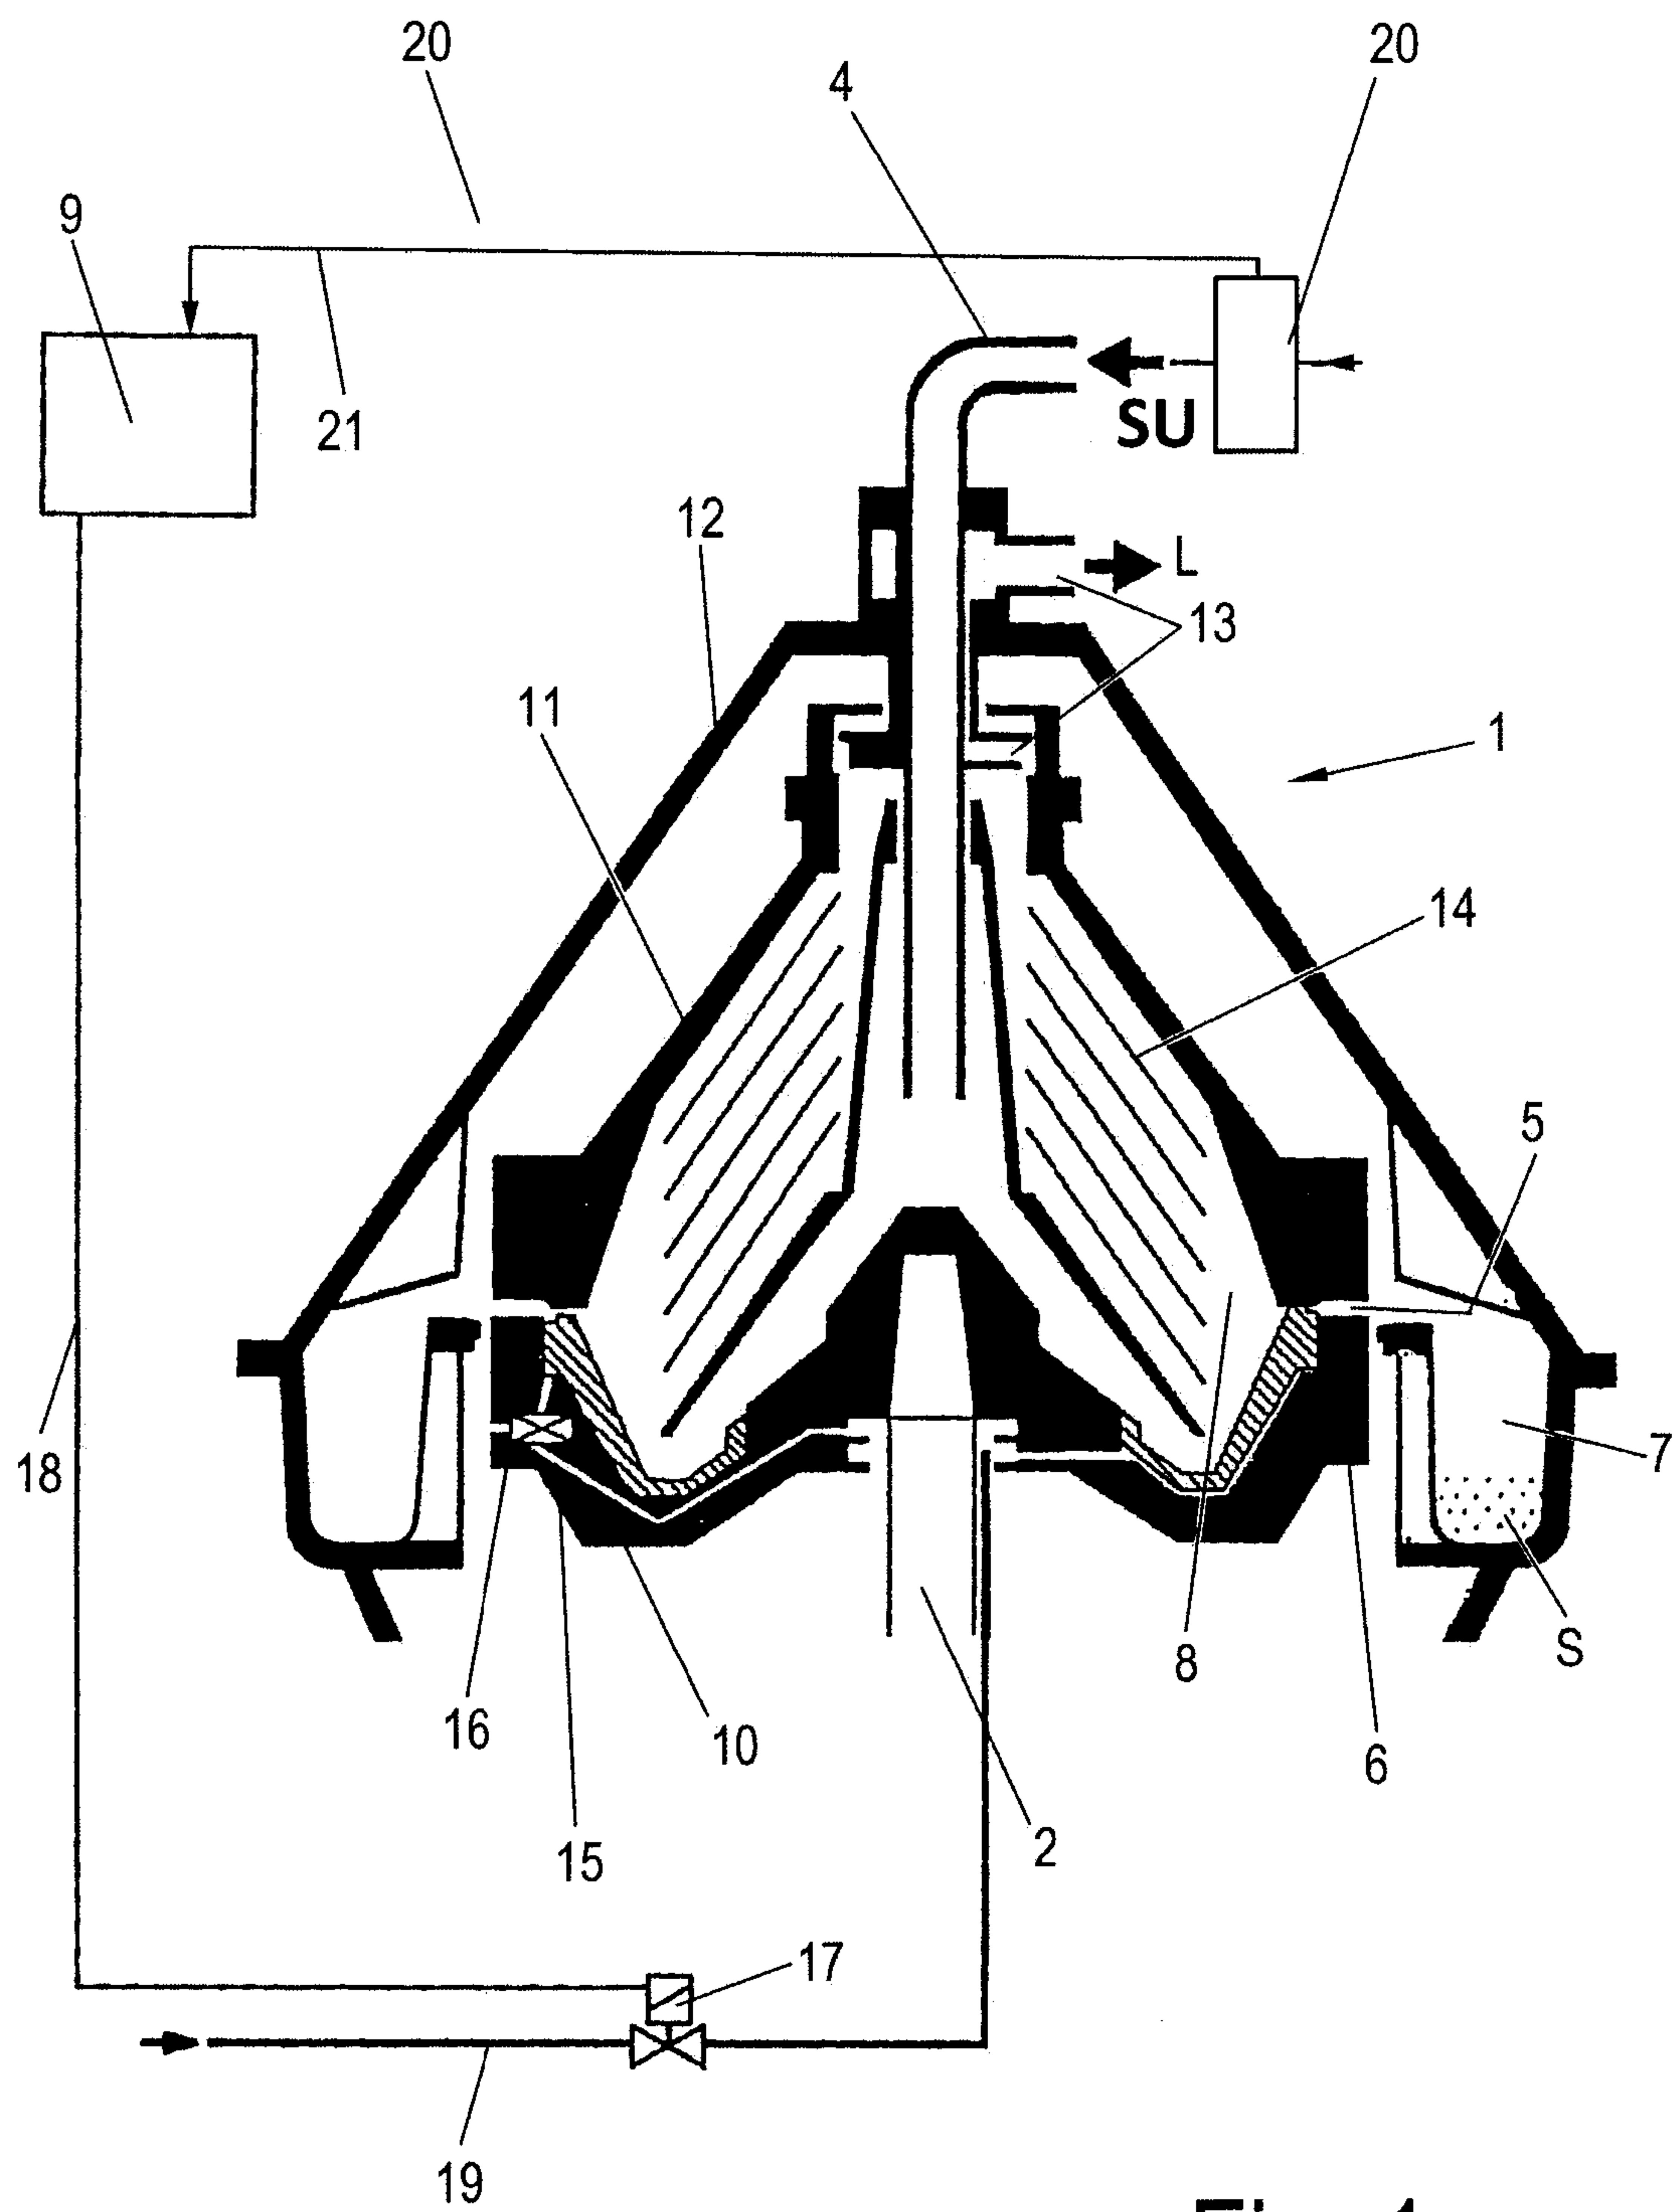


Fig. 1

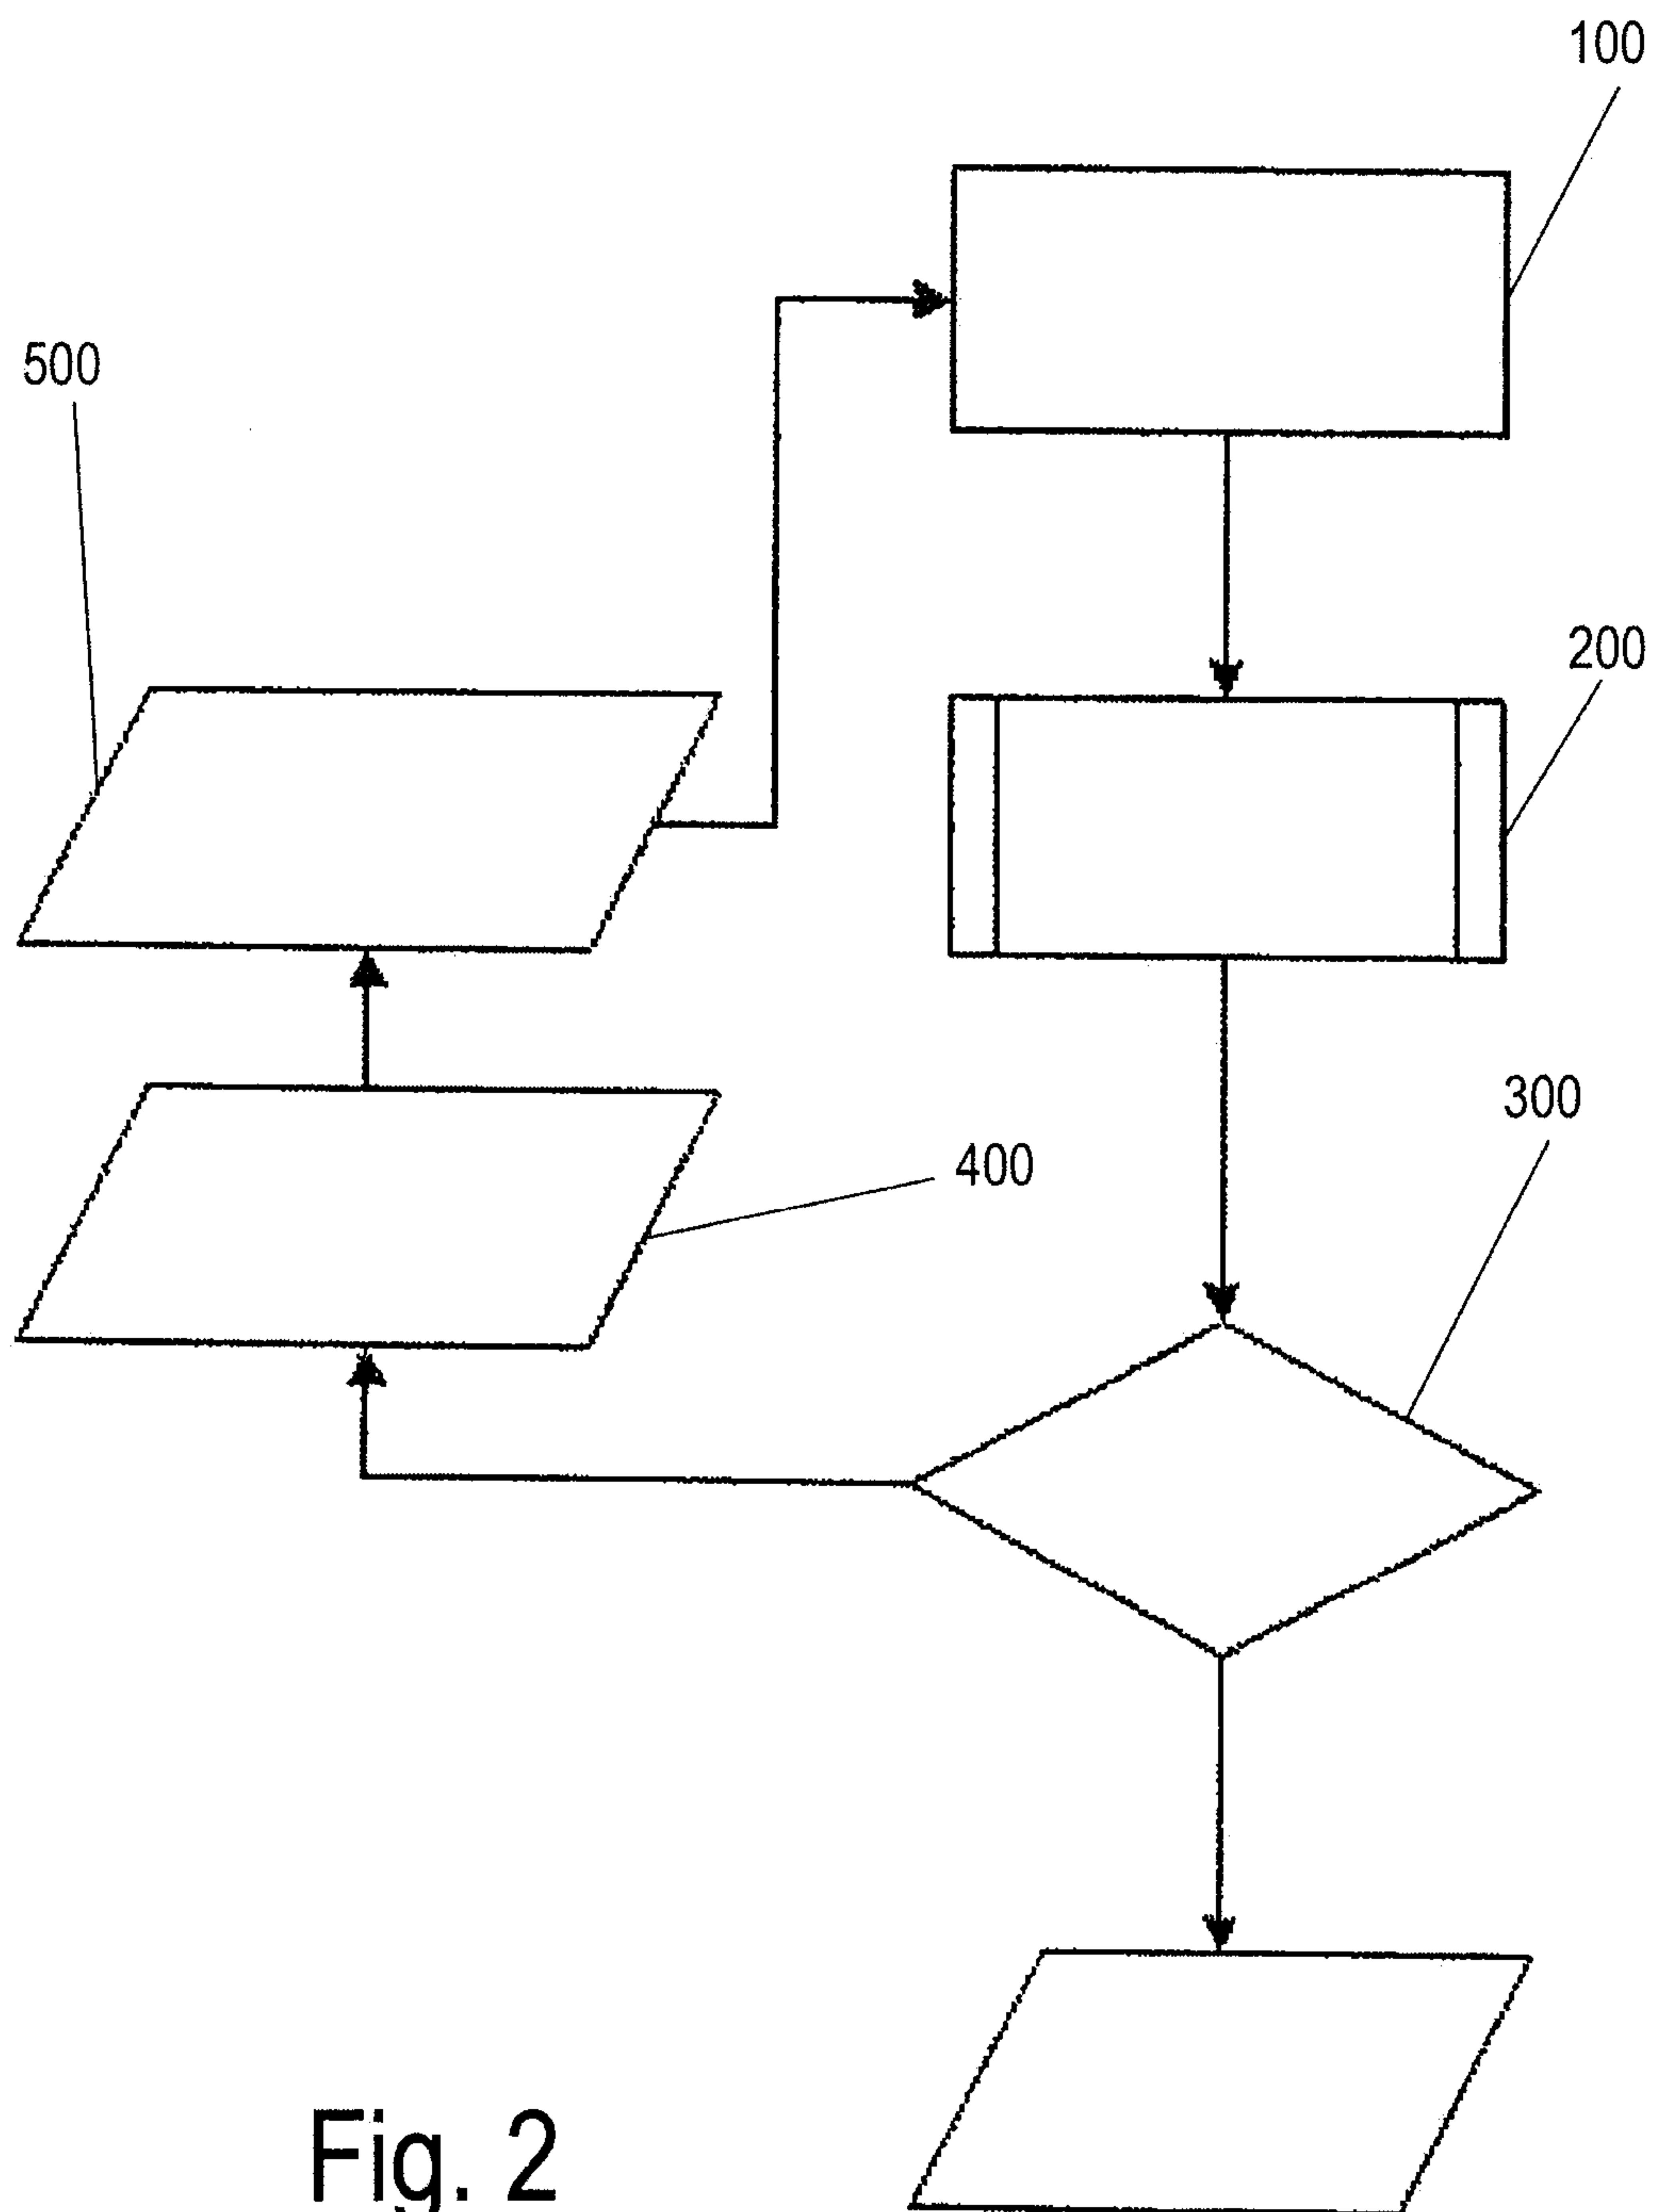


Fig. 2

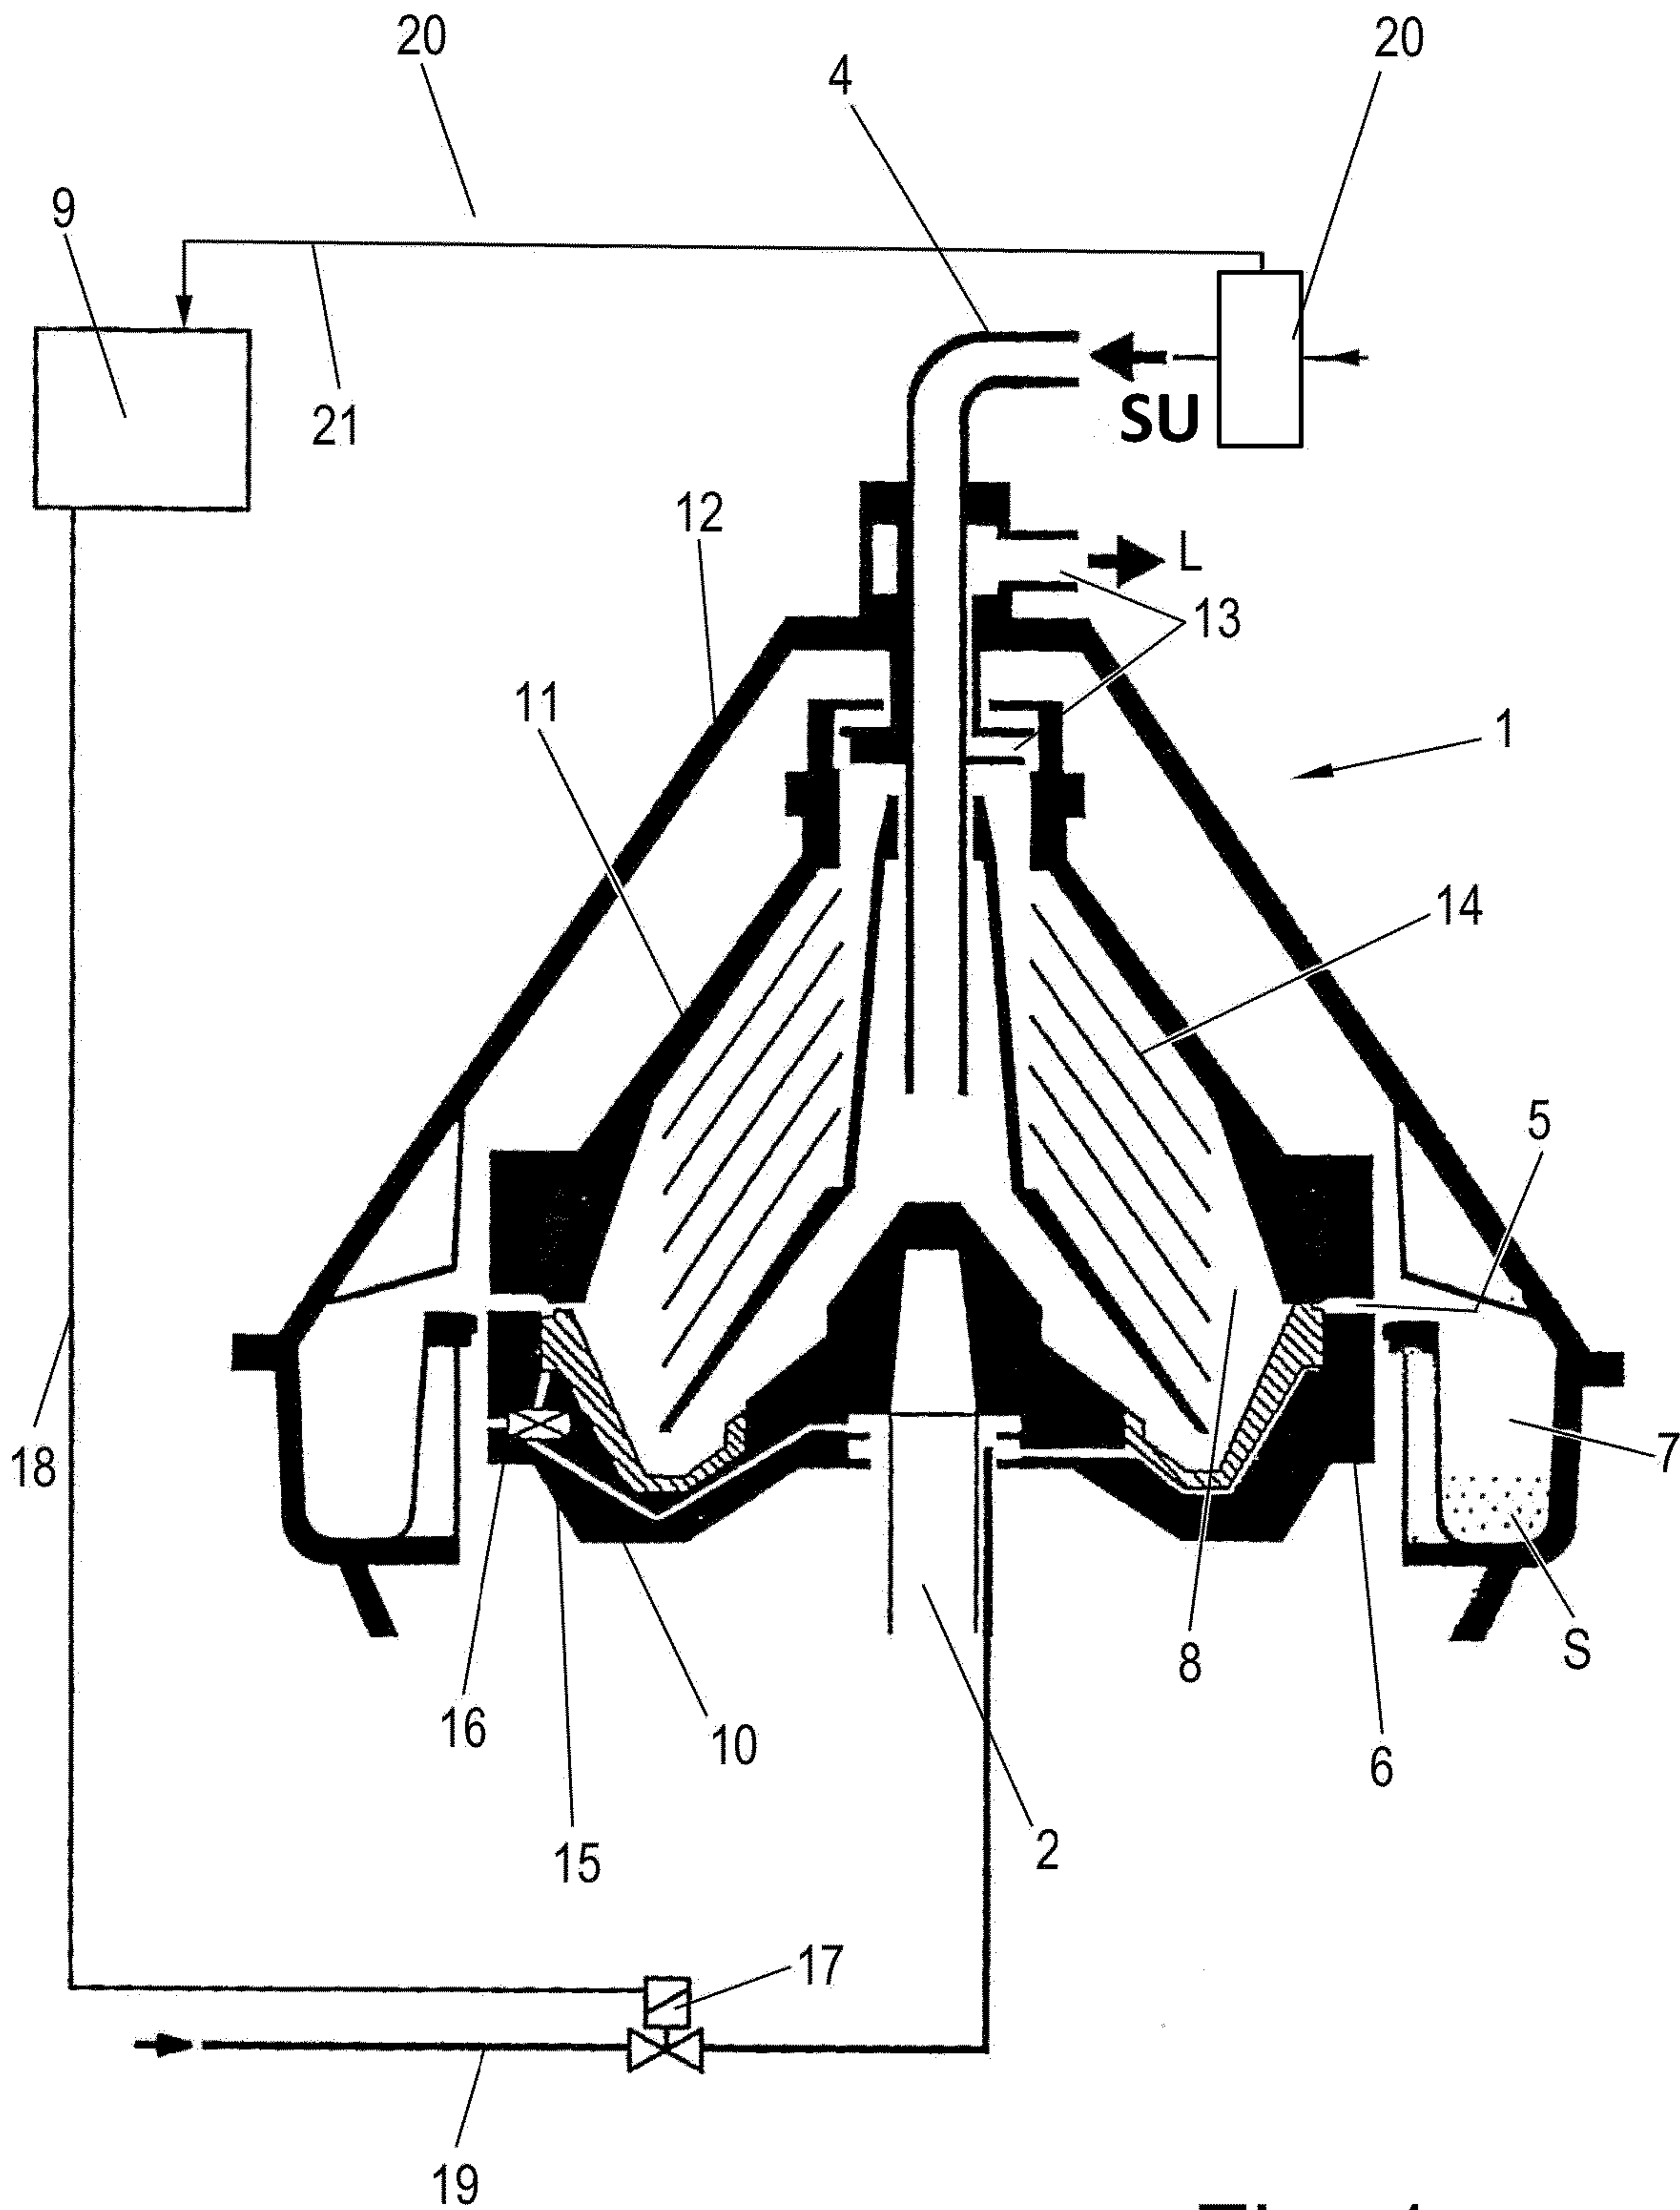


Fig. 1