


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ :	A1	(11) International Publication Number: WO 87/ 02797
G05D 1/12, B64G 1/64		(43) International Publication Date: 7 May 1987 (07.05.87)
(21) International Application Number: PCT/US86/02249		(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).
(22) International Filing Date: 28 October 1986 (28.10.86)		
(31) Priority Application Number: 793,292		
(32) Priority Date: 31 October 1985 (31.10.85)		Published
(33) Priority Country: US		<i>With international search report.</i>
(71) Applicant: ENERGY OPTICS, INC. [US/US]; 224 North Campo, P.O. Box 15052, Las Cruces, NM 88004 (US).		<i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(72) Inventor: WARD, Steven, M. ; 3000 Abbottswell Drive, Alpharetta, GA 30201 (US).		
(74) Agents: CHIN, Gay; Martin Marietta Corporation, 6801 Rockledge Drive, Bethesda, MD 20817 (US) et al.		

(54) Title: DEAD RECKONING OPTOELECTRONIC INTELLIGENT DOCKING SYSTEM

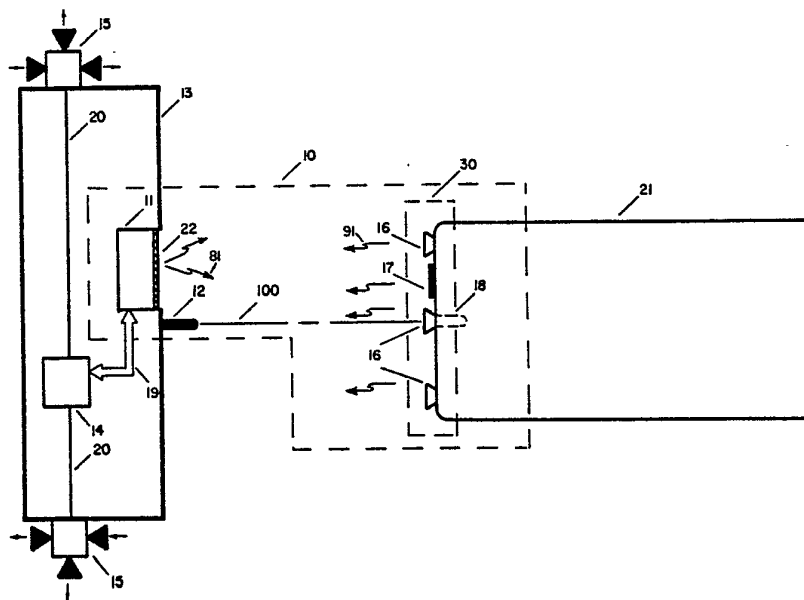

(57) Abstract

An intelligent, optoelectronic docking system for use in manned or unmanned spacecraft for automatically docking with a target spacecraft. The system is a multifaceted, active sensor using a controlling microprocessor to integrate the operation of independently triggerable laser sources for target illumination and optical receiver arrays for target detection. Returning signal waveforms are processed to sense the direction, range, and attitude of a target docking surface which may be equipped with passive optical aids to enhance the reflective signature. The docking system reconfigures its active sensor elements as the target range closes by sequentially employing three laser transceiver arrangements. As a result, the system effectively tracks a target from a range of several hundred meters down to a range of only a few centimeters. The system microprocessor operates on data received from each sensor arrangement to generate the information necessary to guide a host spacecraft safely through hard docking maneuvers. Wide field coverage is achieved without moving parts by electronic selection of independently directed laser beams.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

DEAD RECKONING OPTOELECTRONIC
INTELLIGENT DOCKING SYSTEM

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

5 The present invention relates generally to a modular docking system for use in host space vehicles which must perform satellite capture maneuvers and the like, where automated docking is required. In particular, the present invention is a microprocessor based, optoelectronic sensor system interacting with target
10 mounted, passive optical aids for the purpose of providing target range, position and attitude information necessary for the host guidance system to execute a hard docking.

DESCRIPTION OF THE PRIOR ART

15 The docking of two spacecraft has in the past been a primarily manual operation. Such maneuvers are executed by a highly trained astronaut, visually acquiring and tracking a target, while manipulating control mechanisms to fly the host vehicle to a desired docking point. Recent events in the U.S. space program have fostered new impetus toward the development of effective procedures
20 and systems for automating rendezvous, station keeping, tethering, berthing and docking of spacecraft. Three particular space vehicles which are currently under some phase of development, (1) Space Station, (2) Orbital Maneuvering Vehicle and (3) Mars Probe, require new technology for automatic docking. In some cases, unmanned
25 docking can be accomplished by teleoperations or remote control. Such techniques rely on downlink telemetry of TV images which are monitored by a controller on the ground, transmitting guidance commands back to the vehicle on the telemetry uplink. However, the large number of future docking missions and the vastness of space
30 eliminate the use of teleoperations in many scenarios.

- 2 -

Although Radio Frequency (RF) technology has long been developed for acquiring and tracking targets for various purposes, the magnitude of RF wavelengths preclude operation at very close ranges and cannot be adapted for the precision measurement capability required for automated docking. It is well understood in the art that effective docking technology must operate in the optical, IR or millimeter wave spectra.

A large number of commercial and military optoelectronic systems such as stereoscopic robot vision, optical contrast video trackers, laser guided seekers, forward looking infrared imaging devices, laser radar and laser interferometers are currently available and appear applicable to automated docking. However, all known systems are burdened with practical disadvantages such as large size, fragile components, large power dissipation and a general requirement for moving mechanisms for beam steering, field scanning, focusing, cooling and aperture control which preclude application in an autonomous, space environment.

Recent developments in automated docking technology have taken two distinct directions. One approach represents an extension of TV teleoperations, relying on automated computer processing of video signals generated by TV cameras to sense position, range and attitude of a target. The second approach lies in the use of laser radar, scanning a narrow laser beam over a wide field and processing target reflected returns for position, range and attitude. With the necessary target data base, a guidance/navigation/control computer generates guidance commands to maneuver the host vehicle to the target docking port.

Although both such methods provide a target sensing and measurement capability, specific limitations preclude practical implementation in space. TV systems, which must rely on solar target illumination, are fraught with difficulties in dealing with high contrast shadows, low contrast target geometries and/or operation in the earth's shadow. In addition, TV systems must process millions of bytes of video pixel data to deduce the necessary target information, resulting in a significant burden in computer size, memory capacity and processing time. Further,

- 3 -

conventional TV optics must be adjusted for exposure and focus, requiring moving mechanical devices which limit long term operational reliability. On the other hand, laser scanning systems generally involve large, high power laser sources and require moving mechanisms (galvanometer mirrors and the like) to steer the narrow laser beams over the sensor field. Such systems are generally fragile, have substantial mass, consume large amounts of power and place a severe limitation on the overall system reliability and operating lifetime.

10

SUMMARY OF PRESENT INVENTION

The present invention, generally described as a Dead Reckoning Optoelectronic, Intelligent Docking, hereinafter referred to as "DROID", system, is a microcomputer based system for use on spacecraft which must automatically maneuver to hard docking with targets equipped with passive, optical aids with a reduced range capability for docking non-cooperative targets. The DROID system performs target acquisition, tracking, homing, relative attitude adjustment, relative roll correction, hard docking and self diagnostics. The system operates over target distances from about 1000 meters to about 20 centimeters, generating guidance control commands required to steer the host vehicle through the maneuver. Key salient features of the invention include autonomous operation, small size, low mass, all solid state components, target illumination at a single laser line and most importantly, no moving parts.

The DROID system combines three, highly integrated sensor subsystems with a Master Central Processing Unit (CPU) to generate a target database and compute host vehicle guidance commands. Each sensor is a distinct form of laser radar (or more commonly termed LIDAR) configured to provide range dependent measurement resolution required for conducting a safe hard docking maneuver. The Pulsed Array LIDAR (PAL) subsystem is configured for long range operation from about 1000 meters to about 30 meters. The Continuous Array LIDAR (CAL) subsystem provides more precise target sensing at ranges from about 50 meters to about 3 meters. The Charge Coupled Device

- 4 -

(CCD) Television LIDAR (CTL) subsystem is configured for extremely precise target sensing at ranges from 5 meters to about 20 centimeters. The Master CPU sequences the operation of each sensor subsystem, accepting target data and computing the guidance commands necessary to maneuver the host vehicle.

Passive, retroreflective optical aids strategically located near the docking port of the target represent an integral factor in long range sensing. The retroreflective nature of each device allows the use of very low power, wide beam semiconductor lasers for target illumination, minimizing the power burden of the system and enhancing system reliability.

In a typical rendezvous and docking mission, initial target rendezvous is accomplished by various other navigation techniques including the Global Positioning System and conventional Radar. Therefore, the primary purpose of the present invention is to sense the target at relatively close ranges (under a few thousand meters) and to precisely control the terminal phase of the hard docking maneuver. For example, when the DROID system is enabled by the host guidance computer, the Master CPU executes a spiral search maneuver and activates the PAL subsystem in an attempt to acquire the target at typical closing velocities of about 50 meters per second. When the target is acquired, PAL passes target position and range data to the CPU, which generates pitch, yaw and +Z commands to center the target on the host Z axis (an imaginary line emanating from the docking probe) and to close the target. As the target range closes, -Z commands gradually slow the closing velocity to about 1.0 meter per second. At a range of 50 meters, the CAL subsystem is activated and tested for proper operation. At 30 meters range, operation is handed over to CAL which senses target position, range and attitude by precisely ranging each of three individual retroreflectors mounted in a triangular pattern on the target surface. The CPU processes target data and maneuvers the host onto the target Z axis (an imaginary line emanating from the center of the docking port), orients the host at the appropriate attitude and spins the host to match the roll rate of the target. Again -Z commands serve to reduce closing velocity to about 10 centimeters per second. At a

- 5 -

range of 5 meters, the CTL subsystem is activated and tested for proper operation. Target sensing is handed over to the CTL sensor at a range of 3 meters to control the final, hard docking operation. The CTL acquires a retroreflective, docking image plate
5 located near the docking port and generates a data indicating target range, position and attitude. The Master CPU processes CTL data to precisely maneuver the docking probe into the docking port, sense the contact, lock the probe into place and terminate the operation. At any time in the mission that an active DROID system sensor fails
10 to track the target, the CPU outputs a "bailout" command to abort the mission and to maneuver in a manner to avoid collision.

It is, therefore, the primary object of the present invention to provide a fully automatic space docking system which senses a target equipped with passive optical aids and guides a host vehicle to a
15 desired docking port which overcomes the disadvantages, shortcomings, and difficulties of prior art systems

It is a more specific object of the present invention to provide a hard docking system operating independently of solar illumination and providing wide field coverage with no moving parts for beam
20 steering, camera focusing or any other function.

It is a further object of the present invention to provide a fully automatic space docking system which senses a non-cooperative target and guides a host vehicle to the target for docking.

It is a still further object of the present invention to provide
25 a fully integrated optoelectronic sensor system operating properly in any ambient lighting conditions at a single wavelength (laser line).

It is a still further object of the present invention to provide a small, low mass docking sensor which comprises all solid state,
30 electronic and optoelectronic components with an operating lifetime of at least 10 years.

It is a still further object of the present invention to provide an intelligent sensor which reconfigures itself through the mission, resulting in improved target measurement resolution as the range
35 closes.

- 6 -

5 It is a still further object of the present invention to provide a docking system capable of sensing target position, range and attitude at very short distances under one meter.

It is a still further object of the present invention to provide a docking system operating at a very low power burden under 30
10 watts.

It should be noted that although the invention is described as an Orbital Maneuvering Vehicle subsystem, guiding the vehicle through an automated satellite capture mission, the DROID system is applicable to any other space vehicle such as the space shuttle, the
15 orbital transfer vehicle, Mars probe and the space station, supporting all kinds of proximity operations.

For a better understanding of the present invention, together with other and further objects thereof, reference is had to the following description taken in connection with the accompanying
20 drawings, and its scope will be pointed out in the appending claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of the DROID System;

Fig. 2 is a schematic illustration of the retroreflective target aids;

25 Fig. 3 is block diagram of the DROID System;

Fig. 4 is block diagram of the PAL subsystem;

Fig. 5 is an illustration of the PAL and CAL emitted beam patterns and detector fields;

Fig. 6 is a block diagram of the CAL subsystem;

30 Fig. 7 is a block diagram of the CTL subsystem;

Fig. 8 is a perspective frontal view of the docking plate; and

Fig. 9 is a perspective view of docking plate perimeter image shapes.

DETAILED DESCRIPTION OF THE INVENTION

35 An illustration of the DROID system 10 is shown in Fig. 1. The system includes an intelligent sensor package 11 strategically positioned relative to a docking probe 12, both of which are mounted on the host or chaser space vehicle 13. The intelligent sensor 11

- 7 -

passes guidance commands by means of a data bus 19 to a host GNC computer 14. The computer 14 directly controls thruster mechanisms 15 by means of control cables 20 to maneuver the spacecraft 13. The DROID system 10 also includes retroreflectors 16, a retroreflective docking plate 17 and a docking port 18 located on the target vehicle 21. The DROID system 10 illuminates the target vehicle 21 by coherent laser light 81 in the near IR spectrum, senses retroreflected source radiation 91 and processes the returns 91 in a manner to determine the relative angular direction, range and attitude of the target vehicle 21. The target vehicle 21 orientation parameters are processed to generate host vehicle 13 guidance commands necessary to insert the docking probe 12 into the docking port 18 for a safe, hard docking. The intelligent sensor 11 operates through a window 22 which is effective to pass only a narrow band of radiation 91 about the operating wavelength of the system 10.

The retroreflective optical aids 30 are more clearly illustrated in Fig. 2. The term retroreflector as used herein defines an optical reflector which returns incident light to its source, regardless of the angle of incidence. Of course, a perfect retroreflector would return the diverging laser beams directly back into the laser optics. However, typical retroreflectors have a finite divergence depending on manufacturing tolerances and the source angle subtended. Retroreflectors 16 of the type described herein exhibit full angle divergence on the order of 0.09 milliradians at long ranges, increasing to about 1.0 milliradian at a range of 50 meters (due to source angle subtense). Retroreflectors 16 are arranged in the pattern of an isosceles triangle with two 1.0 meter sides and one 0.8 meter side. This arrangement allows the target vehicle 21 roll angle (not shown) to be determined without ambiguity by imaging the reflector pattern. The retroreflectors 16 are used by the longer range DROID sensor subsystems 40, 50 to enhance the target signature.

A second optical aid 17, the docking image plate, which is used by the short range DROID sensor subsystem 60 is located near the docking port 18. The docking port 18 is positioned at the target

- 8 -

centroid, the geometrical center of the docking surface. The image plate 17 comprises a square, retroreflective, white surface 33 subtending a non-retroreflective, black crosshair pattern 34. The retroreflective bead surface 33 is similar to common bicycle
5 reflective tape with a relatively wide, 10 degree, full angle divergence. Interactions between the DROID sensors 40, 50, 60 and the optical aids 30 are described in following paragraphs.

It should be pointed out that optical aids 30 of the type described herein, serve only to enhance the target vehicle 21
10 signature, providing significant increases in operational range. At reduced ranges, the DROID system 10 can automatically dock a target vehicle 21 without the help of optical aids 30.

A block diagram of the intelligent DROID sensor 11 is shown in Fig. 3. The sensor 11 comprises a Pulsed Array LIDAR (PAL)
15 subsystem 40, a CW Array LIDAR (CAL) subsystem 50, a CCD TV LIDAR (CTL) subsystem 60, a Master CPU 70 and a power supply 80. The DC power supply 80 provides for a maximum power requirement of thirty watts. The optical systems of all three sensors are co-aligned, operating over a field of 20° azimuth by 20° elevation. The design
20 of each LIDAR subsystem is optimized over specific operating range brackets with improving target vehicle 21 sensing resolution and decreasing sensitivity as the range closes. The CPU 70 first activates the PAL subsystem 40 which employs a pulsed laser diode array 41 to illuminate the retroreflectors 16, a PIN diode detector
25 array 42 for sensing target returns 91 and a time-of-flight pulse processor 44 for target ranging. PAL provides for long range target vehicle 21 acquisition, tracking and ranging (resolution < +/- 3.0 meters) over a range bracket from 1000 meters to 30 meters. As the target range closes, the CAL subsystem 50 is activated, employing a
30 CW laser diode array 51 to illuminate retroreflectors 16 and a PIN diode detector array 42 to sense target returns 91 and a tone range processor 54 for target ranging. CAL provides for target vehicle 21 tracking, ranging (resolution < +/- 3.0 centimeters) and attitude sensing (resolution < +/- 3.0 degrees) over a range bracket of 50
35 meters to 3 meters. In the final phase of the docking maneuver, the CTL subsystem 60 is activated, employing both previously mentioned

- 9 -

laser arrays 41, 51 to illuminate the docking plate 17 and a CCD solid state TV camera 61 and a video processor 64 for target tracking, ranging (resolution $< \pm 1.0$ centimeter) and attitude sensing (resolution $< \pm 2.0$ degrees) over a range bracket from 5 meters to 20 centimeters. In addition, the CTL sensor 60 employs four narrow beam diode lasers 62, strategically oriented to designate bright spots (not shown) on the docking plate 17 to be processed for range and attitude sensing in close proximity. The three sensor subsystems 40, 50 and 60 are controlled by a Master CPU microprocessor 70 which communicates with each sensor by means of a two way data bus 71. The three sensors 40, 50 and 60 (only one of which is active at a time) sense the target aids 30 and pass target data (not shown) to the Master CPU 70. The CPU 70 processes target data and performs the necessary computations to generate host vehicle 13 guidance commands 5. Guidance commands 5 are transferred to the host GNC computer 14 by means of a two way data bus 19.

PULSED ARRAY LIDAR

The PAL sensor subsystem 40, which operates over target ranges from 1000 meters down to 30 meters, is described in greater detail with reference to Fig. 4 and Fig. 5. PAL 40 comprises a twenty element GaAs diode laser array 41, a twenty element silicon PIN diode detector array 42, a single element wide field-of-view (FOV) receiver 45, a time-of-flight (TOF) pulse processor 44 and a single-chip microcomputer controller 43. The transmitter array 41 is configured so that each laser element 46 is independently triggerable by the microcontroller 43. The microcontroller 43 fires a laser diode 46 by writing a control word on output port 47. The control word comprises a digital "one" bit corresponding to the laser selected and digital "zeros" on all nineteen other lines. The digital "one" activates a pulse forming network 48 which drives a twenty ampere current pulse (100 nanoseconds in duration) via line 82 through the selected diode 46, resulting in a 905 nanometer laser pulse 81 with peak power on the order of five watts. The diode array 46 is arranged with a cylindrical lens system 49 in a manner that generates vertically oriented, elongated beam 81 cross-sections

- 10 -

which are 1° wide and 20° high. The optical system 49 directs the twenty juxtaposed and non-overlapping beams 81 of each laser diode 46 in a manner providing a contiguous field coverage of 20° by 20° .

Transmitting each selected beam 81 (one at a time) and looking for
5 target returns 91 after each such transmission, allows the microcontroller 43 to locate the azimuth angle of the target vehicle 21 in the DROID system 10 optical field 90 with a resolution of $\pm 1^\circ$.

The PAL detector array 42 is a group of twenty PIN photodiodes
10 83, each with an aspect ratio of 1×20 (including interdiode gaps), with the minor axes stacked on a single substrate (not shown). The resulting total aspect ratio is then 20×20 representing a square active area. Orienting the diodes 83 with the major axes horizontal and adding a double convex objective lens 84 provides twenty
15 juxtaposed and non-overlapping fields-of-view which are individually 20° wide and 1° high. Combined, the fields provide a $20^\circ \times 20^\circ$ contiguous field-of-view. Co-aligning the optical systems 49, 84 of the transmitter array 41 and the detector array 42 provides a 20° horizontal by 20° vertical sensor coverage and an orthogonal
20 relation between the major axes of transmitter beam 81 cross-sections and receiver 5 FOVs 85. Now referring again to Fig. 5, identifying the specific transmitter beam 81 and the receiver FOV 85 corresponding to a target return 91 allows the PAL
25 microcontroller 43 to locate the azimuth and elevation angles of the target in the sensor field 90 to a resolution of $\pm 1^\circ$.

Once the PAL microcomputer 43 is activated by the Master CPU 70, it initially attempts to acquire a target by sequentially firing each laser beam 81 and testing the single element receiver latch 87 for a target return 91. The wide field receiver 45 is a single
30 element, large area photodiode 88 arranged with an objective lens 89 and an IR filter 22 in a manner providing a conical FOV (not shown) of roughly 30° full angle, co-aligned with the optical systems 49, 84 previously described. Pulsed IR radiation (905 nanometers wavelength) 91 passing the filter 22 generates a signal pulse (not
35 shown) at the photodiode 88 which is amplified by a wideband video amplifier 93 to a level triggering a latch circuit 87. The latch 87

- 11 -

holds a digital "one" on an input line 94 to the PAL microcomputer 43 until the microcomputer 43 acknowledges the input by toggling output line 95, thereby clearing the latch. PAL microcomputer firmware fires the first laser diode 46 and tests the latch 87
5 output state. If no return 91 is sensed, the next diode in the array 41 is triggered and so on. Assuming a maximum target closure rate of 50 meters per second, the entire field 90 is scanned at a rate of 500 Hz or ten field 90 scans per meter of closure.

Referring again to Fig. 4, the PAL subsystem 40 continues to
10 scan the field 90 until a target return 91 is sensed on the latch 87 input line 94. The PAL microcomputer 43 stores a return count of one and clears the latch 87 by toggling line 95. In order to avoid the possibility of a false alarm, the PAL microcomputer 43 continues the target acquisition scan until "n" consecutive returns 91 are
15 detected, verifying that the target vehicle 21 has actually been acquired and terminating the acquisition routine.

Once target acquisition is confirmed, the PAL microcomputer 43 sequences to the target tracking mode by activating the PIN receiver array 42. Each element of the detector array 42 includes a signal
20 amplifier 96 and a latch circuit 97 identical to that previously described for the wide field receiver 45. The latch array 97 is tied to the PAL microcomputer 43 by means of a twenty line input port 98, which can be read (in parallel) by a single instruction. All latch states are cleared simultaneously, when the PAL
25 microcomputer toggles line 95. In the tracking mode, PAL microcomputer 43 alternates between firing a laser beam 81 and reading the receiver port 98 for target returns 91. Any 905 nanometer target return 91 passes through the IR filter 22 and is focused by lens 84 onto the PIN diode array 42. Pulsed energy
30 levels exceeding receiver sensitivity result in latched digital levels at the PAL microcomputer 43 input port 98. If all input lines of the port 98 are zeros, the microprocessor 43 assumes that no target vehicle 21 is present in the transmitted beam 81 and sequences the operation to the next beam. When a transmitted beam
35 81 intercepts the target vehicle 21, one or more of the receiver latches 97 will go high to a digital "one" state. By monitoring the

- 12 -

beam output line 47 number transmitted and identifying the active receiver line 98 number, the PAL microcomputer 43 locates the target vehicle 21 in one of the 400, 1° by 1° field elements illustrated in Fig. 5.

5 With the target vehicle 21 located in the sensor field 90, the PAL microcomputer 43 outputs relative target azimuth and elevation angles to the Master CPU 70 by means of data bus 71. The Master CPU subsequently computes and outputs the pitch, yaw and +Z commands to the host computer 14 (via data bus 19) required to point the host Z
10 axis 100 directly at the target vehicle 21 and to close the target on a direct line.

While the PAL microcomputer 43 tracks the target 21, it also measures target range by pulse processing which is well known in prior art. The TOF range processor 44 comprises a 50 megahertz
15 oscillator 99 and high speed counter 101 effective to resolve 20 nanosecond time elements. The TOF processor 44 is configured to measure the propagation time of each laser pulse 81 to the target vehicle 21 and back. The round trip propagation time is related to target range by the speed of light. When the PAL microcomputer 43
20 outputs a control word on port 47 to fire a laser diode 46, it simultaneously outputs a "one" on line 102 which clears the counter 101 and enables the 50 mhz clock 99 input 104. The counter continues to register clock strobes 104 until the leading edge of the target return 91 sets latch 87, thereby disabling the clock
25 input 104 to the counter 101. After a target return 91 is detected, the PAL microcomputer 43 reads the counter 101 by means of a parallel input port 103. The range count is then transferred to the Master CPU 70 by means of data bus 71. The Master CPU 70 determines target range by dividing the count of 20 nanosecond time elements by
30 two and multiplying the result by six ($20 \times 10^{-9} \text{ sec} \times 3 \times 10^8 \text{ m/sec} = 6$). Further, the CPU stores the range on each subsequent scan, in order to compute the range closure rate by dividing the change in range by the time between samples (dR/dt). This technique provides a range measurement resolution of about +/- 3.0 meters,
35 which is sufficient for the long range maneuver.

- 13 -

The PAL microcomputer 43 continues to operate in this mode while the CPU 70 slows the rate of closure (outputting -Z commands) to about 1.0 meter per second at a range of 50 meters. At this range, the CAL subsystem 50 is activated by the CPU 70 for diagnostic testing. If the CAL subsystem 50 fails to operate properly, the CPU 70 outputs a "bailout" command to the host GNC computer 14 and terminates the mission. If, however, the CAL subsystem 50 passes such diagnostic testing, it takes over the target sensing operation at a range of 30 meters, and the PAL subsystem 40 is deactivated.

Since the PAL subsystem 40 is controlled by a microcomputer 43, a key component lies in the microcomputer firmware that executes the above described operation. The operational firmware is described in the following "pseudo code" listing, where each line represents a machine language program designed to execute the indicated function:

```
TARGET ACQUISITION
      INITIALIZE SCAN
      SET B = 1
      SET COUNT = 0
20      40  FIRE BEAM #B
          CLEAR WIDE FIELD (WF)RECEIVER LATCH
          DELAY LOOP
          READ WF RECEIVER LATCH
          TEST FOR TARGET RETURN
25      IF TARGET GOTO 130
          ELSE B = B + 1
          IF B = 21 THEN B = 1
          GOTO 40
      130  COUNT = COUNT + 1
30      IF COUNT = N GOTO 200
          ELSE B = B + 1
          IF B = 21 THEN B=1
          GOTO 40
```

- 14 -

TARGET TRACK AND RANGE

```

200 INITIALIZE SCAN
    SET B = 1
220 FIRE BEAM #B
5.   OUTPUT ENABLE RANGE COUNT
    CLEAR ARRAY (AR) RECEIVER LATCHES
    DELAY LOOP
    READ AR RECEIVER BUS (R)
    READ RANGE COUNT (C)
10.  TEST R > 0
    IF S0 - TARGET: X=#B, Y=#R, R=C
    GOTO 320
    ELSE X=#B, Y=0, R=0
320  STORE (X,Y,R)
15.  B = B+1
    IF B < 21 THEN 220
    ELSE INDICATE DATA READY
    OUTPUT DATA TO CPU (X,Y,R)
    GOTO 200.

```

20 CW ARRAY LIDAR

The CAL sensor subsystem 50 is described with reference to Fig. 5 and Fig. 6. CAL 50 includes a CW diode laser array 51, the same PIN diode detector array 42 previously described, a tone range processor 54, the same wide field receiver 45 previously described and a CAL microcomputer 53. In order to minimize size and weight of the total DROID system 10, subsystem hardware is shared where practical. The CW laser diode array 51 is optically equivalent to the transmitter array 41 of the PAL system 40, in that twenty vertically oriented beams 81 are propagated over the 20° by 20° field 90 as seen in Fig. 5. The difference lies in the fact that the laser diodes 112 employed in CAL 50 are of the continuously emitting type rather than the pulsed type described for the PAL sensor 40. Continuous emission is required for the high precision tone range measurement technique employed in the CAL sensor 50. CW diodes 112 are characterized by relatively low output power and,

- 15 -

therefore, short operating range. CAL diodes 112, when active, are driven with a CW current of about 0.1 ampere resulting in an output power of about 0.010 watt. The diodes 112 are amplitude modulated by varying the drive current in any desired waveform. A 3.0
5 megahertz oscillator 113 provides a modulation tone (not shown) which is imposed on the drive current of each diode 112 by modulation circuitry 114. As in the PAL sensor 40, the CW diodes 112 are selected (one at a time) for transmission by the CAL microcomputer 53 by writing a digital word to output port 115. Each
10 diode 112 radiates continuously for the entire period that it is selected. A 50 Hz field scan rate results in a minimum 1.0 millisecond ON time for each diode 112 when selected.

The receiver 42 operates exactly as described for the PAL sensor 40, with the exception that the lower signal strength of the CW
15 diodes 112 reduces the maximum operating range to about 64 meters. The orthogonal relation between the vertically elongated transmit beams 81 and the horizontally elongated detector FOVs 85 again allows the CAL microcomputer 53 to resolve the target relative angular direction $\pm 1^\circ$ in both azimuth and elevation. However, at
20 ranges under about 15 meters, the CAL sensor 50 must resolve multiple targets, because the subtense of the three retroreflector 16 pattern exceeds the 1° sensor field elements (see Fig. 5). This is accomplished in a straight forward manner by the procedure previously described. Each time a beam 81 is transmitted, the CAL
25 microcomputer 53 tests the receiver bus 98 for target returns 91. If no returns 91 are detected, operation is sequenced to the next beam. If one or more receiver latches 97 are high, then the active beam number and the active receiver line numbers are stored for later transfer to the Master CPU 70, the receive latches 97 are
30 cleared by toggling line 95 and operation is sequenced to the next beam. Scanning the field 90 in this manner, provides the CPU 70 with continuously updated azimuth and elevation coordinates for each of the target retroreflectors 16. The coordinates on sequential scans are processed to compute the angular direction of the docking
35 port 18, the target roll angle and the roll rate.

- 16 -

While the CAL sensor 50 tracks the target vehicle 21, it must also precisely range each of the three retroreflectors 16 in order to determine the target attitude (or the orientation of the target Z axis). The goal of the CAL sensor 50 is to provide the information necessary to maneuver the host vehicle 13 to a position and orientation aligning the docking probe 12 axis 100 with that of the target docking port 18 for the final approach. Tone ranging techniques which are known in prior art are employed to measure the range from the sensor 50 to each reflector 16 to a resolution of about ± 3.0 centimeters. The tone range processor 54 compares the phase of the 3.0 Mhz modulation transmit tone 113 to the 3.0 Mhz tone received from each reflector 16 to a resolution of one part in 3,333 to determine the propagation delay and, thereby, the range. When the CAL microcomputer 50 detects an active latch return line 98, it allows the output beam to remain on the target vehicle 21 for sufficient time for the tone range processor 54 to accurately measure the phase relation (not shown). Heterodyne techniques are employed to beat the 3.0 Mhz signals against a 2.999 Mhz reference 117, so that lower frequency (1.0 KHz) signals 119, 140 can be processed in a phase comparator circuit 118. The delay period between the zero crossing of the transmit signal 119 and that of the receive signal 140 corresponds to the reflector 16 range. A digital value representing the phase delay is read by the CAL microcomputer 50 from the comparator 118 by means of a data bus 116. At the end of each field 90 scan, three sets of target coordinates and phase delay values (one set for each retroreflector 16) are transferred to the CPU 70 via data bus 71. The CPU 70 processes the data to determine the attitude of the target and transfers guidance commands 5 via bus 19 to the host GNC computer 14 required to maneuver the host 13 onto the target Z axis 100 and to point the docking probe 12 directly at the docking port 18.

At a range of about 5 meters, the CPU 70 processes sequential scans to accurately measure closure rate and the roll rate of the target. Periodic -Z commands are generated to slow the rate of closure to about 0.1 meter per second. In addition, roll commands are generated to spin the host 13 in a manner to zero the relative

- 17 -

roll rate between the target vehicles 21 and the chaser 13, so that the final hard docking maneuver can be performed.

Once the host 13 is properly oriented and the range is under 5 meters, the Master CPU 70 activates the CTL subsystem 60 for
5 diagnostic testing. If the CTL 60 fails to operate properly, a "bailout" command is transferred via data bus 19 to the GNC computer 14, and the mission is terminated. If the CTL 60 passes diagnostic testing, it takes over the target sensing operation at a range of 3 meters, and the CAL subsystem 50 is deactivated.

10 Since the CAL subsystem 50 is controlled by a microcomputer 53, a key component is the microcomputer firmware that executes the operation described above. The operational firmware is given below in a "pseudo code" listing, where each line represents a machine language program to execute the indicated function:

```
15  MULTIPLE RETRO TRACK AND RANGE
      10  INITIALIZE SCAN
          SET B = 1
      30  ENABLE BEAM #B
          CLEAR ARRAY (AR) RECEIVER LATCHES
20      READ RECEIVER BUS (R)
          TEST #R > 0
          IF #R = 0 THEN X = #B, Y = 0
          IF MULTIPLE RETURNS THEN X = #B, Y = 255
          IF ONE RETURN THEN X = #B, Y = #R
25      IF Y = 0 OR Y = 255 THEN R = 0 GOTO 120
          GOTO 200
      120 DISABLE BEAM #B
          STORE (X,Y,R)
          B = B +1
30      IF B < 21 THEN 30
          ELSE INDICATE DATA READY
          OUTPUT DATA TO CPU (X,Y,R)
          GOTO 10
      TONE RANGE PROCESSING
35      200 ENABLE PHASE PROCESSOR
```

- 18 -

DELAY LOOP
READ PHASE COUNT (R)
GOTO 120.

CCD TV LIDAR

5 The CTL sensor subsystem 60, which operates over target ranges from 3 meters to 20 centimeters is described in greater detail with reference to Fig. 7, Fig. 8 and Fig. 9. CTL 60 comprises a CCD solid state TV camera 61, both the pulsed 41 and CW 51 laser arrays previously described, four narrow beam diode lasers 62, a video
10 processor 64 and a microcomputer controller 63. The two laser arrays 41, 51 are enabled with all elements 46, 112 active simultaneously to illuminate the target vehicle 21. The narrow beam lasers 62, which designate bright spots 135 on the docking plate 17, are used in the last meter of closure to indicate target range and
15 attitude.

A key element of the CTL sensor 60 is the CCD camera 61 which comprises a 491 X 491 array of active elements 120 which are highly sensitive to the 905 nanometer source radiation 91. The camera 61 is a high resolution sensor capable of imaging the docking plate 17
20 and generating a stream of digital data on data bus 121, one byte for each of the 241,081 pixels in the array 120, thirty times per second. The data is continuously fed to a video processor 64, which analyzes selected data to determine target angular direction, range and attitude. Target data is periodically read by the CTL
25 microcomputer 63 and transferred to the CPU 70, so that guidance commands 5 can be generated to accurately maneuver the host probe 12 into the target port 18 for hard docking.

The CTL subsystem 60 operates in two range dependent modes. From a range of 3 meters to a range of one meter, the system 60
30 processes the shape of the docking plate 17 in the CCD image (see Fig. 9). When the CTL 60 is initially activated, the CTL microcomputer 63 enables both laser diode arrays 41, 51 with all elements active and each diode in the pulsed array 41 operating at 10,000 pulses per second. Therefore, the docking plate 17 is
35 illuminated with 300 milliwatts of continuous, laser light in a 20°

- 19 -

by 20° beam. The resulting image 130 (see Fig. 8) is that of a white square surface 122 on a black background subtending a black crosshair pattern 126.

The retroreflective bead material covering the majority of the docking plate 17 area 122 returns the source radiation 91 toward the CCD camera 61 in roughly a 10° diverging beam. As a result, the irradiance at the camera input 123, at the maximum range of 3 meters, is about 20 db above the camera's 61 minimum discernable signal with an 11 millimeter, F1.4 lens 123 and a 20° field-of-view. The fact that the irradiance is excessive allows the F-stop 124 of the camera 61 to be closed down to 1/32, while maintaining good image 130 contrast. The result is that of a pinhole camera with a very long depth of focus. The combination of intense laser illumination 81, the retroreflective docking plate surface 122 and the small camera aperture 124 represents a key feature of the present invention, since no moving mechanisms are required to maintain image 130 exposure or focus over the operating distances from 3 meters to 20 centimeters. The camera optics 123 look through the same infrared filter window 22 previously described. The filter 22 passes only a narrow band of wavelengths about the source line (905 nanometers), thereby significantly attenuating broadband sources of interference (not shown), such as the sun.

SHAPE MODE

In the first operating mode, the video processor 64 employs optical contrast video tracking techniques, known in prior art, to acquire the docking plate image 130 and to locate the plate centroid 125 (the junction of the two, black crosshair pointers 126, seen in Fig. 8). The camera 61 images a 20° by 20° scene on the 491 X 491 array of detector elements 120. Therefore, each picture element (pixel) 120 covers a 0.7 milliradian field. A pixel coordinate system, where $0 < X < 491$ and $0 < Y < 491$, is used to indicate the relative angular direction in azimuth and elevation, respectively, of any discrete pixel in the scene. The video processor 64 locates the crosshair centroid 125 and outputs the image pixel coordinates

- 20 -

(X,Y) to the CTL microcomputer 63. The CTL 60 then transfers the target coordinate data to the CPU 70, so that pitch and yaw commands can be generated to keep the CCD camera 61 pointed directly at the plate centroid 125. This process is periodically repeated, because
5 other video processing schemes utilized in the CTL subsystem rely on the plate image 130 remaining in the center of the picture.

With the docking plate 17 centered in the image 130, the video processor 64 analyzes each horizontal line (not shown) in the scene, locates the thicker crosshair sector 127 and computes the relative
10 target roll angle and roll rate. In a like manner, roll data is transferred to the CPU 70, so that it can output host 13 roll commands necessary to orient the image 130 as seen in Fig. 8 and to zero the roll rate.

With both the camera 61 pointing angle and the host 13 roll
15 angle properly oriented, the CTL microcomputer 63 next analyzes the shape (see Fig. 9) of the docking plate image 130 to determine the attitude of the target vehicle 21. If the target attitude is perfectly matched with that of the chaser 13, then the perimeter 128 of the plate image 130 is perfectly square. If, on the other hand,
20 the target is pitched up in the +Y direction, for example, then the image 130 is that of a trapezoid 129 with the parallel lines 141, 142 horizontal and the shorter side 141 on the top of the image 130. The relative length of the top 141 and bottom 142 lines, the ratio of the height to the average width and the angles of the sides
25 off the vertical all are mathematically related to the magnitude of the pitch angle. In addition, each of these parameters can be measured by the video processor 64 by locating the black to white transitions in the image 130 and counting image pixels to define the perimeter lines 128. The video processor 64 generates pixel count
30 data corresponding to each parameter, which are passed on to the CPU 70 via the CTL microcomputer 63 and data buses 131, 71. The CPU 70 performs the necessary computations to determine target attitude and to generate the guidance commands 5 required to move the host 13 directly onto the target Z axis, thereby aligning the probe 12 with
35 the port 18.

- 21 -

An alternate technique which is less math intensive is illustrated in Fig. 9. When the docking plate image 130 is initially acquired, it is likely that the target attitude is off both in pitch and yaw. The result is a complex four sided image 132, with opposite sides non-parallel but converging along the X and Y axes of the image. In this method, the video processor 64 simply determines the directions of convergence (either +X or -X and +Y or -Y) and passes this information through the CTL microcomputer 63 to the CPU 70. The CPU 70 then maneuvers the host 13 in the indicated +/-X and +/-Y directions until the CTL 60 indicates that the image shape 130 is square and the attitude is corrected.

With the relative attitude adjusted, target range is measured in the video processor 64 by counting the number of pixels across the plate image 130. The count, which is inversely related to target range, is periodically transferred to the CPU 70 which computes range and range rate.

Target vehicle 21 tracking resolution (the processor's 64 ability to locate the centroid pixel 125), is defined by the field coverage of each pixel, i.e. +/- 0.7 milliradians in azimuth and elevation. Roll measurement resolution is a function of the image 130 size. At a range of one meter, the roll angle can be measured with a resolution of +/-0.1 degree. Attitude measurement resolution depends on the method selected, the magnitude of the attitude offset angles and the target range. Assuming the method which processes the relative lengths of opposite sides to determine attitude, the resolution is about +/- 0.5 degrees at a range of one meter. Range measurement resolution improves as the range closes. At a range of one meter, the measurement resolution is about +/- 2.0 millimeters.

Since the CTL 60 is controlled by a microcomputer 63, the microcomputer firmware is a key component of the system. The CTL microcomputer 63 firmware is described by means of the following "pseudo code" listing, where each line represents a machine language program which executes the indicated function:

- 22 -

SHAPE PROCESSING

```
      ACTIVATE ILLUMINATOR
      INITIALIZE VIDEO PROCESSOR
5      30  GET CROSSHAIR COORDINATES (X,Y)
      OUTPUT (X,Y) TO CPU
      50  GET TOP LINE ROLL ANGLE (r)
      IF r = 0 then 90
      OUTPUT ROLL STEP TO CPU
      GOTO 50
10     90  GET X CONVERGENCE SIGN +/-
      IF 0 THEN 130
      OUTPUT +/- X STEP TO CPU
      GOTO 90
      130  GET Y CONVERGENCE SIGN +/-
15     IF 0 THEN 160
      OUTPUT +/- Y STEP TO CPU
      GOTO 130
      160  GET RANGE/SIZE PIXEL COUNT (R)
      OUTPUT R TO CPU
20     IF RANGE = 1 METER THEN 200
      ELSE 30.
```

LASER SPOT PROCESSING

At ranges below one meter, the docking plate image 130 size exceeds the FOV of the CCD camera 61. A laser spot image 135 processing method, employed in the final stage of hard docking, is described with reference to Fig. 7 and Fig. 8. Four narrow beam, GaAs diode lasers 62 are arranged about the CCD camera 61; one on the +Y axis, one on the -Y axis, one on the +X axis and one on the -X axis. Each laser 62 is physically offset by 10 centimeters (from the camera Z axis) and pointed toward the camera axis at a convergence angle of 16 degrees. Therefore, at a range of 35 centimeters, all four laser beams 136 intersect the camera Z axis (not shown). This geometry results in four bright spots 135 imaged on the axes of the docking plate cross-hairs 126 (see Fig. 8). The laser spot 135 intensity is roughly 30 times the intensity of the

- 23 -

broadbeam laser 81 illuminated image plate 17, whether the spot designates the retroreflective material 122 or the non-retroreflective surface 126. The resulting video signal contrast allows the video processor 64 to locate the bright spots 135 in the image 130 by simple threshold detection. Due to the 16 degree convergence angles, as the target range closes, each spot 135 moves through the image along its associated axis toward the pattern centroid 125. At a range of 35 centimeters, all four spots 135 overlap at the centroid 125. As the range continues to close, the spots 135 cross through the centroid 125 and move to the opposite sides of the image 130. At the minimum range of 20 centimeters, the hard docking range, the spots 135 fall on the outer perimeter 128 of the CCD camera 61 FOV 90.

The general technique employed by the video processor 64 in this mode is to count the number of pixels from the centroid 125 (along each axis) to each laser spot 135. The four sets of pixel counts are mathematically related to the range from the camera 61 to each spot 135 designated on the docking plate 17. Knowing the range to four points on the target surface, provides a measure of target range and attitude.

Image plate centroid 125 tracking and roll angle adjustments are executed as previously described. The geometry of the crosshair pattern 126, provides a centroid image 125 (the junction of the two crosshair pointers in Fig. 8) with zero size. Therefore, the centroid 125 pixel location can be sensed by the video processor 64 even at zero range.

As the target range closes through the final meter, the video processor periodically outputs the pixel coordinates (X,Y) of the centroid 125, the relative roll angle (r), and the four sets of laser spot pixel counts to the CTL microcomputer 63 via data bus 131. The CTL microcomputer 63 passes the target data to the MASTER CPU 70, so that guidance commands 5 can be generated to maintain alignment of the docking probe 12 with the docking port 18. In addition, the final target range and range rate are computed by averaging the four spot ranges. At a range of 35 centimeters, when the laser spots converge, the probe 12 enters the port 18. At a

- 24 -

range of 20 centimeters the probe end (not shown) makes contact with the target port 18, and a hard docking indicator switch 145 is closed. The switch 145 closure is sensed by the CTL microcomputer 63 via line 137. This information is passed to the CPU 70 which
5 deactivates all systems and terminates the mission.

Measurement resolution in the spot 135 processing method is a function of the magnitude of spot movement in the image as the range and attitude change. Both attitude and range measurement resolution are nonlinear functions of target range and attitude. However, at a
10 range of 50 centimeters attitude resolution is about +/- 1.2 degrees and range resolution is about +/- 3.0 millimeters. At a range of 25 centimeters, attitude resolution is +/- 0.2 degree and range resolution is about +/- 0.3 millimeter.

Laser spot 135 processing, CTL microcomputer 63 firmware, which
15 is an integral component in the subsystem 60, is described in the following pseudo code listing, wherein each line represents a machine language program which executes the indicated function:

LASER SPOT PROCESSING

```
200 GET CENTROID COORDINATES (X,Y)
20 OUTPUT (X,Y) TO CPU
220 GET ROLL ANGLE (r)
    IF r = 0 THEN 260
    OUTPUT ROLL STEP TO CPU
    GOTO 220
25 260 GET LASER SPOT COUNT (C)
    IF C < 4 THEN 200
    GET +X PIXEL COUNT (+PX)
    GET -X PIXEL COUNT (-PX)
    GET +Y PIXEL COUNT (+PY)
30 GET -Y PIXEL COUNT (-PY)
    OUTPUT (+PX,-PX,+PY,-PY) TO CPU
    IF RANGE > 25 CENTIMETERS 200
330 TEST DOCK INDICATOR
    IF HARD DOCK THEN 360
35 GOTO 330
```

- 25 -

360 OUTPUT DOCK INDICATOR TO CPU
END.

MASTER CPU

The DROID Master CPU 70 is a more powerful sixteen bit
5 microprocessor with sufficient mathematics capability to process the
target data supplied by the PAL microcomputer 43, the CAL
microcomputer 53 and the CTL microcomputer 63 to generate guidance
commands 5 required to maneuver a space vehicle 13 through the last
few hundred meters of a hard docking mission. Since the DROID
10 system 10 is intended for use in various types of vehicles 13, the
Master CPU 70 memory is that of a plug in programmable read only
memory (PROM) (not shown). Different space vehicles 13 can be
expected to have different guidance and response characteristics.
Therefore, the Master CPU 70 PROM can be customized for each vehicle
15 13 to adapt the guidance commands 5 generated as necessary. Space
vehicles 13 which must execute automated docking missions can be
expected to have groups of control thrusters 15 manipulated by a GNC
computer 14 effective to maneuver the craft in pitch, yaw, roll, X,
Y and Z. In addition, thruster 15 burn can be controlled in a
20 manner to effect the rate of the maneuver. Therefore, the Master
CPU 70 analyzes the target data and generates the following types of
commands:

- (1) +/- PITCH
- (2) $d(\text{PITCH})/dt$
- 25 (3) +/- YAW
- (4) $d(\text{YAW})/dt$
- (5) +/- ROLL
- (6) $d(\text{ROLL})/dt$
- (7) +/- X
- 30 (8) dX/dt
- (9) +/- Y
- (10) dY/dt
- (11) +/- Z
- (12) dZ/dt .

- 26 -

The Master CPU 70 establishes two-way communication with the GNC computer 14 by means of data bus 19. In addition to the guidance commands 5 which must be transferred, the Master CPU 70 receives an enable command 6 from the GNC 14 which activates the DROID system 10 and outputs a hard dock command 9 which terminates the mission. As previously described, the CPU also outputs a "bailout" command 7 any time a sensor subsystem fails and the docking mission is in jeopardy. The "bailout" command 7 initiates a preprogrammed -Z maneuver designed to avoid a catastrophic collision with the target vehicle 21.

The DROID system 10 can be labeled an intelligent sensor since the Master CPU 70 acts to reconfigure the system on the basis of the sensed environment and changing mission requirements. In this process, the CPU 70 performs two important tasks. One is to monitor the operating condition of each sensor and target data to determine when it may be unsafe to proceed. The other is to process target data to generate guidance commands 5. The Master CPU 70 firmware, which is an integral component of the system 10, is described in the following "pseudo code" listing, where each line represents a machine language or higher level program to execute the indicated function. Associated guidance commands 5 are also given:

INITIALIZATION

```
10  VERIFY ENABLE COMMAND
    INITIALIZE DATA BASE
25  EXECUTE SELF DIAGNOSTICS
    EXECUTE PAL DIAGNOSTICS
    EXECUTE CAL DIAGNOSTICS
    EXECUTE CTL DIAGNOSTICS
    ON FAILURE GOTO 2000
30  ELSE GOTO 80
```

TARGET ACQUISITION

```
80  ACTIVATE PAL SEARCH
    EXECUTE SPIRAL MANEUVER (P,Y)
    TEST TARGET DATA
```

- 27 -

```
        IF NO TARGET THEN 80
        ELSE GOTO 130
PAL TARGET TRACK
    130  ACTIVATE PAL TRACK
5      TEST TARGET DATA
        NULL TARGET ANGLES      (P,Y)
        CLOSE TARGET            (+Z)
        COMPUTE RANGE, RRATE
        SLOW CLOSURE TO 30 M/S  (-Z)
10     190  TEST TARGET DATA
        NULL TARGET ANGLES      (P,Y)
        COMPUTE RANGE, RRATE
        IF RANGE > 200M THEN 190
        SLOW CLOSURE TO 10 M/S  (-Z)
15     230  TEST TARGET DATA
        NULL TARGET ANGLES      (P,Y)
        COMPUTE RANGE, RRATE
        IF RANGE > 60M THEN 230
        SLOW CLOSURE TO 1 M/S   (-Z)
20     NULL TARGET ANGLES      (P,Y)
        ACTIVATE CAL
        EXECUTE CAL DIAGNOSTICS
        ON FAILURE GOTO 2000
        320  TEST TARGET DATA
25     COMPUTE RANGE, RRATE
        IF RANGE > 35 THEN 320
        ENTER PAL/CAL HANDOVER
CAL TARGET TRACE
        DEACTIVATE PAL
30     370  TEST TARGET DATA
        COMPUTE CENTROID POSITION
        NULL TARGET ANGLES      (P,Y)
        COMPUTE RANGE, RRATE
        IF RANGE > 20M THEN 370
35     420  TEST TARGET DATA
        COMPUTE RANGE, RRATE
```

- 28 -

```

      COMPUTE CENTROID POSITION
      COMPUTE ATTITUDE
      COMPUTE ROLL
      NULL Z AXIS OFFSET      (X,Y)
5      NULL TARGET ANGLES     (P,Y)
      NULL ROLL ANGLE         (r)
      IF RANGE > 5M THEN 420
      SLOW CLOSURE TO 0.1M     (-Z)
      TEST TARGET DATA
10     COMPUTE RANGE, RRATE
      COMPUTE CENTROID POSITION
      COMPUTE ATTITUDE
      COMPUTE ROLL
      NULL TARGET ANGLES      (P,Y)
15     NULL Z AXIS OFFSET     (X,Y)
      NULL ROLL ANGLE         (r)
      ACTIVATE CTL
      EXECUTE CTL DIAGNOSTICS
      ON FAILURE GOTO 2000
20     590 TEST TARGET DATA
      COMPUTE RANGE, RRATE
      IF RANGE > 3M THEN 590
      ENTER CAL/CTL HANDOVER
      CTL SHAPE TRACK
25     DEACTIVATE CAL
      640 GET CROSSHAIR COORDINATES
      NULL TARGET ANGLES      (P,Y)
      GET SHAPE DATA
      COMPUTE ROLL ANGLE
30     IF ROLL = 0 THEN 710
      NULL ROLL ANGLE         (r)
      GOTO 640
      710 GET CROSSHAIR COORDINATES
      NULL TARGET ANGLES      (P,Y)
35     GET SHAPE DATA
      TEST X CONVERGENCE (+,-,0)
```

- 29 -

```

        IF CONV = 0 THEN 780
        NULL X CONVERGENCE      (X)
        GOTO 710
5      780 GET CROSSHAIR COORDINATES
        NULL TARGET ANGLES      (P,Y)
        GET SHAPE DATA
        TEST Y CONVERGENCE (+,-,0)
        IF CONV = 0 THEN 850
        NULL Y CONVERGENCE      (Y)
10     GOTO 780
        850 GET SHAPE DATA
        COMPUTE RANGE, RRATE
        IF RANGE > 1M THEN 640
        CTL SPOT TRACK
15     880 GET TARGET DATA
        NULL TARGET ANGLES      (P,Y)
        NULL ROLL ANGLE         (r)
        GET SPOT DATA
        XCOUNT = (+XCOUNT)-(-XCOUNT)
20     IF XCOUNT > 0 STEP RIGHT (+X)
        IF XCOUNT < 0 STEP LEFT (-X)
        YCOUNT = (+YCOUNT)-(-YCOUNT)
        IF YCOUNT > 0 STEP UP (+Y)
        IF YCOUNT < 0 STEP DOWN (-Y)
25     GET SPOT DATA
        IF XCOUNT = YCOUNT = 0 THEN 1010
        1000 GOTO 880
        1010 GET SPOT DATA
        COMPUTE RANGE, RRATE
30     TEST SPOT CONVERGENCE
        IF RANGE > 35 CM THEN 1010
        ACTIVATE HARD DOCK MECHANISMS
        1060 TEST DOCK INDICATOR
        IF HARD DOCK THEN 3000
35     GOTO 1060
```

- 30 -

BAILOUT

2000 OUTPUT BAILOUT COMMAND
EXECUTE MANEUVER (P,Y,-Z)

HARD DOCK

5 3000 OUTPUT HARD DOCK COMMAND
TERMINATE SYSTEMS.

TRANSCIEVER CONFIGURATIONS

With regard to the orthogonal transceiver configuration described for the PAL and CAL sensors, it should be noted that
10 equivalent resolution can be obtained by various other configurations. Some of these (not shown) include two transmitter arrays of the type described oriented orthogonally to each other combined with a single element, wide field receiver; a two
15 dimensional transmitter array combined with a single element, wide field receiver; a single element, broad beam transmitter combined with a two dimensional receiver array; and various other configurations. The orthogonal transceiver of the preferred embodiment carries the advantages of a low component count and high speed of operation.

20 Although the present invention is particularly significant for the development of space, and it has been described primarily in the context of space applications, it is obvious to those skilled in the art that the ability to sense the direction, range and attitude of a target renders it useful in various military applications as well as
25 in the robotics and security industries. Operations such as the airborne refueling of aircraft are manual by nature, and nighttime operations can be significantly aided by the sensors of the present invention. Properly arranging the retroreflector pattern on the fuel receiving basket allows the entire operation to be automated.
30 In the security field, more powerful laser sources render the system suitable for covert operation as an area surveillance radar, solving the problem of undesired, omnidirectional emission associated with conventional radar. A key industrial application of the present invention resides in the field of robotics. Robot vision currently
35 requires dual television cameras, moving pedestals and a great deal

- 31 -

of video processing electronics to emulate depth perception. The ability of the present invention to indicate target direction, range and attitude without the need for moving parts, provides a reliable approach to depth perception for robots. Activating the sensors of
5 the present invention in alternating, sequential fashion allows a robot to locate a target at long range, to maneuver to the target while avoiding close range obstacles and to sense the relative attitude of the target at very close ranges. Such capabilities allow a robot to perform many kinds of proximity manipulations.

10 While there have been described what are at present considered to be the preferred embodiments of this invention, it will be obvious to those skilled in the art that various changes and modifications may be made therein without departing from the invention, and it is aimed, therefore, in the appended claims to
15 cover all such changes and modifications as fall within the true spirit and scope of the invention.

- 32 -

CLAIMS:

1. An optoelectronic system for docking a host spacecraft to a target spacecraft having a docking port comprising:

first optical light sensor and illuminating means secured on the
5 host spacecraft effective to establish a source of light radiation waveforms;

second optical light returning means secured on the target spacecraft and effective to return incident light radiation in the direction of said source of light radiation and configured in a
10 predetermined geometry with respect to the docking port of the target spacecraft;

said first optical means also being adapted to illuminate said second optical means within an optically effective field of view having a central axis and to detect and process returned light
15 illumination waveforms to indicate the direction, range and attitude of the target spacecraft; and

data processing means associated with said first optical means effective to analyze target information to produce guidance commands for maneuvering the host spacecraft to dock with the target
20 spacecraft.

2. A system according to Claim 1, wherein said first and second optical means are solely composed of essentially nonmoveable components.

3. A system according to Claim 1, wherein said first optical
25 means comprises first, second and third optoelectronic sensors and said second optical means comprises a pattern of three retroreflectors separated and arranged in an isosceles triangle about the docking port, and a retroreflective image plate on and juxtaposed to said port and having a preselected perimetric shape
30 subtending a contrasting crosshair pattern of nonretroreflective material effective to identify the image plate centroid.

4. A system according to Claim 3, wherein said first
optoelectronic sensor is adapted to operably scan the target over
range from approximately one thousand meters to approximately thirty
35 meters and is effective to illuminate said second optical means for

- 33 -

detecting the returned light and sensing the angular direction and range of the target spacecraft and to transfer the information to said data processing means.

5 5. A system according to claim 4, wherein said first sensor is composed of a first and a second set of elements arranged in an array, each element of the first set comprising a pulsed laser transmitter and each element of the second set comprising a light radiation receiver being sensitive solely to a predetermined narrow band of light radiation.

10 6. A system according to Claim 5, wherein said first sensor includes a single element light radiation receiver effective to view the entire optically effective field of view of the first optical means; a first range processing circuit effective to measure the round trip propagation time of the light emanating from said first
15 optical means and returned from said second optical means; and a first microcomputer effective to activate said transmitter elements, to monitor said receiver elements and to process data from the sensor elements to determine target direction and range.

20 7. A system according to Claim 6, wherein each said transmitter comprises a combination of a laser pulse forming network and a pulsed laser diode, and wherein each transmitter is responsive to be selectively triggered by said first microcomputer to establish laser beam emanation for the duration of said pulse.

25 8. A system according to Claim 5, wherein said first set of elements are effective to propagate independent beams of laser light through a system of lenses to effect a cooperative beam pattern, wherein substantially one degree horizontal by twenty degrees vertical beam cross-sections of each element are effective to
30 illuminate mutually exclusive but juxtaposed fields in space, and wherein the combination of all said beam cross-sections is arranged to cover the entire optically effective field of view of the first optical means.

35 9. A system according to Claim 6, wherein each said receiver is composed of a combination of light detector, signal amplifier and digital latching circuit with the binary state of each said latch effective to represent the presence or absence of a target return,

- 34 -

and wherein the state of each said latch being selectively readable and clearable by the first microcomputer.

10. A system according to Claim 5, wherein said second set of elements are arranged to view space through a system of lenses to effect a cooperative pattern of viewing fields, wherein
5 substantially twenty degree horizontal by one degree vertical field cross-sections of each element are effective to view mutually exclusive but juxtaposed fields in space, and wherein the combination of all fields is arranged to cover the entire optically
10 effective field of the first optical means.

11. A system according to Claim 6, wherein said single element receiver comprises a light detector and lense system arranged to sense the entire optically effective field of the first optical means, a signal amplifier and a digital latching circuit with the
15 binary state of said latch effective to represent the presence or absence of a target return, and wherein the latch output state is coupled both to the first microcomputer and the first range processing circuit.

12. A system according to Claim 6, wherein said first range
20 processing circuit comprises a high frequency clock and a digital counter circuit effective to count clock cycles occurring between laser pulse transmission and laser pulse reception and to transfer said count data to said first microcomputer.

13. A system according to Claim 12, wherein said first
25 microcomputer is effective to selectively and sequentially trigger each transmitter element, execute a delay, selectively read and clear the binary state of each said receiver element and store said count data and data identifying the transmitter and receiver elements associated with each target return.

30 14. A system according to Claim 13, wherein said first microcomputer is effective to transfer target data to said data processing means.

15. A system according to Claim 3, wherein said second optoelectronic sensor is adapted to operably scan the target over
35 ranges of approximately fifty meters to approximately three meters, to illuminate said retroreflectors of second optical means, to

- 35 -

detect the returned light radiation, to sense the direction and range of each of said retroreflectors and to transfer target information to said data processing means.

16. A system according to Claim 15, wherein said second sensor
5 is composed of a first and second set of elements arranged in an array, each element of the first set comprising a continuous laser transmitter having the amplitude of its output light modulated in the waveform of a sine function; and each element of the second set comprising a light radiation receiver being sensitive solely to a
10 narrow band of radiation of the wavelength of the transmitted light.

17. A system according to 16, wherein said second sensor includes a single element light radiation sensor; a second range processing circuit effective to measure the round trip propagation time of said light emanating from said first optical means and
15 returned by said second optical means; and a second microcomputer effective to activate said transmitter elements, monitor said receiver elements, and process data from the sensor elements to determine target direction, range and attitude.

18. A system according to Claim 17, wherein each said
20 transmitter comprises a combination of an intensity modulation circuit and a continuously emitting diode laser, and wherein each said transmitter being selectively enabled by said second microcomputer to establish continuously modulated laser beam emanation for the duration of the enabling period.

19. A system according to Claim 16, wherein said first set of
25 elements are effective to propagate independent beams of laser light through a system of lenses to effect a cooperative beam pattern, wherein substantially one degree horizontal by twenty degrees vertical beam cross-sections of each element are effective to
30 illuminate mutually exclusive but juxtaposed fields in space, and wherein the combination of all said beam cross-sections is arranged to cover the entire optically effective field of view of the first optical means.

20. A system according to Claim 17, wherein each said receiver
35 forms a combination of light detector, signal amplifier and digital latch circuit with the binary state of each said latch effective to

- 36 -

represent the presence or absence of a target return, and wherein the state of each said latch being selectively readable and clearable by the second microcomputer.

21. A system according to Claim 16, wherein said second set of
5 elements are arranged to view space through a system of lenses to effect a cooperative pattern of viewing fields, wherein substantially twenty degree horizontal by one degree vertical field cross-sections of each element are effective to view mutually exclusive but juxtaposed fields in space, and wherein the
10 combination of all fields is arranged to cover the entire optically effective field of view of the first optical means.

22. A system according to Claim 17, wherein said single element receiver comprises a light detector and lense system arranged to sense the entire optically effective field of the first optical
15 means and a signal amplifier, and wherein the output of said amplifier is coupled to said second range processing circuit.

23. A system according to Claim 17, wherein said second range processing circuit comprises a heterodyne phase comparator effective to measure the propagation phase delay between the transmitted
20 modulation wave and the received modulation wave and to transfer the phase delay data to said second microcomputer.

24. A system according to Claim 23, wherein said second microcomputer is effective for: selectively enabling each said transmitter element, executing a delay, selectively reading and
25 clearing the binary state of each said receiver element and storing said delay data and data identifying the transmitter and receiver elements associated with each target return.

25. A system according to Claim 24, wherein said second microcomputer is effective to transfer target data to said data
30 processing means.

26. A system according to Claim 3, wherein said third optoelectronic sensor is adapted to operably scan the target over ranges of approximately five meters to essentially zero, to illuminate said retroreflective image plate of the second optical
35 means, to image the returned light radiation, to sense the direction, attitude and range of said retroreflective image plate and to transfer target information to said data processing means.

- 37 -

27. A system according to Claim 26, wherein said third sensor comprises a continuously emitting diode laser array effective to illuminate said image plate; an arrangement of multiple narrow beam diode lasers having the same wavelength of said illumination lasers effective to designate predetermined spots on the image plate of the target spacecraft; a solid state imaging device having a field of view essentially equivalent to the optically effective field of view of said first optical means and a central optical axis and being sensitive solely to a narrow band of radiation of the wavelength of said illuminating lasers effective to generate two dimensional, time sequential image frames of said image plate scene; video processing means effective to generate pre-selected data for identifying the position, size and shape of said image plate perimeter and crosshair pattern; and a third microcomputer effective to process said data from said video processor to determine target spacecraft direction, range and attitude.

28. A system according to Claim 27, wherein all elements of said diode laser array are effective to emit continuously through an optical lens system to generate an illumination field equivalent to the optically effective field of view of the first optical means.

29. A system according to claim 28, wherein said narrow beam lasers are composed of three or more continuously emitting lasers arranged offset from and symmetrically about said imaging device with each said beam being directed through the field of view of the imaging device toward a common point on said central axis effective to designate spots on the image plate, wherein the position of each said spot in said image has a known relation to the range from said imaging device to the spot designated on the target.

30. A system according to Claim 27, wherein said solid state imaging device comprises a charge coupled television camera having a two dimensional array of light sensitive pixel elements and a pinhole optical system effective to create time sequential frames of focused and properly exposed images of said image plate and to output a digital representation of each image pixel of each said frame to said video processing means.

- 38 -

31. A system according to Claim 27, wherein said video processing means comprises a pre-programmed digital system effective to identify the perimetric image of said image plate and said crosshair pattern, to output data relating the shape and orientation of said images, to output the relative image location of the image plate centroid and to output the relative image location of each of said bright spots with all of said outputs transferred to said third microcomputer.

32. A system according to Claim 27, wherein said third microcomputer is effective to process data from said video processing means to generate target information including direction, range and attitude and to transfer the information to said data processing system.

33. A system according to Claim 3, wherein said data processing system is effective to test the operational state of each of said sensors, to activate said first sensor to acquire said target spacecraft and to sequentially activate said second and third sensors, depending on target range, to track said target during the docking operation.

34. A system according to Claim 3, wherein said data processing system is effective to process information from said first, second and third sensors for generating guidance commands to maneuver said host spacecraft and for maintaining the central axis of said optically effective field of view of said first optical means directed at said docking port for the duration of the docking operation.

35. A system according to Claim 3, wherein said data processing system is effective to process information from said second and third sensors to generate guidance commands to maneuver said host spacecraft and to maintain the appropriate attitude relative to the attitude of said docking port, to dock with said target spacecraft.

36. An optoelectronic system for docking or engaging a host spacecraft with a spaceborne target body comprising:

optoelectronically active system means secured on said host spacecraft effective to illuminate the target body and to detect and

- 39 -

process returned illumination light waves to establish the direction, range and attitude of the target body; and

data processing system means associated with said active system means effective to analyze said target body information to produce
5 guidance commands to maneuver said host spacecraft to engage or dock with said body.

37. A system according to Claim 36, wherein said active system means is comprised of essentially nonmoveable parts, and is effective to operably scan said target body through an optically
10 effective field of view of twenty degrees by twenty degrees, said field having a central optical axis.

38. A system according to Claim 37, wherein said active system means comprises first, second and third optoelectronic sensor means.

39. A system according to Claim 38, wherein first
15 optoelectronic sensor means is effective to operably scan the target body over ranges from approximately three hundred meters to approximately thirty meters, illuminate the target body, detect said returned illumination, sense the angular direction and range of the body and to transfer the acquired data to said data processing means.

20 40. A system according to Claim 39, wherein said first sensor means comprises a two dimensional array of laser transmitters combined with a beam forming optical means for target illumination; a single element receiver being sensitive only to a narrow band of light radiation of the wavelength of said transmitters for sensing
25 said target light radiation returns; a first target range processing circuit effective to measure the round trip propagation time of said illumination; and a first microcomputer effective to selectively activate said transmitters and process data from said receiver and said range processor circuit to determine target direction and range.

30 41. A system according to Claim 40, wherein each said transmitter comprises a combination of a laser pulse forming network and a pulsed diode laser.

42. A system according to 40, wherein said beam forming optical means is effective to generate a two dimensional matrix of said
35 transmitter light beams with each beam cross-section arranged juxtaposed but nonoverlapping with each adjacent beam cross-section

- 40 -

and, wherein the combination of all beams is effective to cover the entire optically effective field of view of said active system.

43. A system according to Claim 40, wherein said single element receiver means comprises a combination of objective lens, light
5 detector, signal amplifier and digital latch circuit, and wherein the binary state of said latch effective to represent the presence or absence of a target return and being readable and clearable by said first microcomputer and readable by said range processing circuit.

10 44. A system according to Claim 43, wherein said objective lens is arranged to collect incident light over the entire optically effective field of view of said active system.

45. A system according to Claim 38, wherein said second optoelectronic sensor means is effective to: operably scan the
15 target body within an approximate range of one to fifteen meters; illuminate the target; detect the returning light; sense the direction, range, and attitude of the target body and to transfer the acquired information to said data processing means.

46. A system according to Claim 45, wherein said second sensor
20 means comprises a two dimensional array of laser transmitters and a beam forming optical means for target illumination; a single element receiver being sensitive only to a narrow band of light radiation of the wavelength of said transmitter for sensing said target light radiation returns; a second target range processing circuit
25 effective to measure the round trip propagation time of said illumination; and a second microcomputer effective to selectively activate said transmitters and process data from said receivers and said second range processing circuit to determine target direction, range and attitude.

30 47. A system according to Claim 46, wherein each said transmitter comprises a combination of a laser intensity modulation circuit and a continuously emitting diode laser.

48. A system according to Claim 47, wherein the intensity of said laser beams are modulated in the waveform of a sine function.

35 49. A system according to Claim 46, wherein said beam forming optical means is effective to generate a two dimensional matrix of

- 41 -

said transmitter light beams with each beam cross-section arranged juxtaposed but nonoverlapping with each adjacent beam cross-section and, wherein the combination of all beams is effective to cover the entire optically effective field of view of said active system.

5 50. A system according to Claim 46, wherein said single element receiver means comprises a combination of objective lens, light detector, signal amplifier and digital latch circuit, wherein the binary state of said latch is effective to represent the presence or absence of a target return and being readable and clearable by said
10 second microcomputer, and the output of said amplifier is coupled to said second range processing circuit.

51. A system according to Claim 50, wherein said objective lens is arranged to collect incident light over the entire optically effective field of view of said active system.

15 52. A system according to Claim 38, wherein third optoelectronic sensor means is effective to: operably scan the target body over ranges from approximately five meters to zero; illuminate the target body; image said returned illumination; sense the angular direction, range and attitude of the body and to
20 transfer the acquired data to said data processing means.

53. A system according to Claim 52, wherein said third sensor means comprises a two dimensional array of continuously emitting laser diodes for illuminating the target body; an arrangement of narrow beam lasers for designating spots on said body; a two
25 dimensional imaging device being sensitive solely to a narrow band of light radiation of the wavelength of said lasers and effective to generate a video image of the illuminated body; video processing means effective to generate data identifying contrast features in the image; and a third microcomputer effective to process
30 information from said video processing means to determine the direction, range and attitude of the target body and to transfer target information to said data processing means.

54. A system according to Claim 53, wherein said two dimensional array of laser diodes is operated continuously with all
35 diode elements radiating simultaneously, and wherein the combined

- 42 -

beam pattern is effective to cover the entire optically effective field of view of said active system.

55. A system according to Claim 53, wherein said imaging device comprises a charged coupled television camera having a two dimensional array of light sensitive pixel elements combined with a system of optics with a central optical axis and a field of view essentially identical to the optically effective field of view of said active system.

56. A system according to Claim 55, wherein said system of optics comprises a stationary pinhole effective to maintain the focus and exposure of said target image and wherein said camera is effective to generate time sequential video frames of said image and to output a digital representation of each image pixel of each said frame to said video processing means.

57. A system according to Claim 55, wherein three or more narrow beam diode lasers, of the same wavelength of said lasers of said two dimensional array, are arranged offset from and symmetrically about said imaging device with each beam directed through a common point on the central optical axis of said imaging device effective to designate spots on the target body.

58. A system according to Claim 57, wherein the relative position of each spot in the video image of said target body has a known relation to the range from said imaging device to each designated spot.

59. A system according to Claim 53, wherein said video processing means comprises a preprogrammed system effective to identify contrast features of said target body image and to output data relating the shape and orientation of said features, the image location of a selected contrast reference point and the relative image location of said spot to said third microcomputer.

60. A system according to Claim 59, wherein said third microcomputer is effective to process target information from said video processing means to determine target body direction, range and attitude information and to transfer all such information to said data processing system.

61. A system according to Claim 38, wherein said data processing means is effective to test the operational state of each of said first, second and third sensor means, to activate said first sensor means to acquire the target body, and to sequentially
5 activate said second and third sensor means, depending on range, to actively engage or dock with said target body.

62. A system according to Claim 61, wherein said data processing means processes target information from said first, second and third microcomputers to generate guidance commands
10 effective to maneuver the host spacecraft to engage or dock with the target body; to maintain the central axis of the optically effective field of view of the active system directed at said target body and to maintain the appropriate attitude relative to the attitude of said target body for the duration of said maneuver.

15 63. An optoelectronic system for acquiring and tracking one or more targets comprising:

an arrangement of one or more optical reflectors securely attached to each of the targets and effective to return incident light radiation in the direction of a source of said radiation;

20 multi-element, solid state scanning means effective to sequentially transmit independently triggered and directed beams of light and to detect and process light waveforms returned from said reflectors to establish target orientation data;

and a data processing means effective to process said target
25 orientation data to identify the direction and range of each of said reflectors from the location of said scanning means.

64. An optoelectronic system for acquiring and tracking one or more reflective targets comprising:

multi-element, solid state scanning means effective to
30 sequentially transmit independently triggered and directed illumination beams, to detect and process illumination waveforms reflected from said target and to generate target orientation data;

data processing means effective to process said target
orientation data to identify the direction, range and attitude of
35 said target from the location of said scanning means.

- 44 -

65. A system according to either Claim 63 or Claim 64, wherein said optoelectronic system means is comprised of essentially nonmoveable parts.

66. An optoelectronic system for acquiring and tracking a target and for sensing the attitude and range of said target comprising:

an image plate with an optically identifiable centroid, secured on the target; comprising a perimetric shape of retroreflective material and a selected crosshair pattern of nonretroreflective material, effective to identify the location of the plate centroid; continuous laser light source means effective to illuminate said target;

an imaging device comprising a two dimensional array of light sensitive image pixels effective to provide a digital representation of the light intensity at each said pixel and being solely responsive to the wavelength of said laser source; and an arrangement of optical lenses having a field of view with a central axis effective to image light reflected from said image plate, and to maintain focus and exposure of the target image;

three or more narrow beam lasers located offset from and arranged symmetrically about said imaging device with each said beam directed through a common point on said central axis of said imaging device effective to designate spots on said image plate, wherein the location of each spot in the image has a known relation to the range from said imaging device to each said spot;

video processing means effective to process said digital data from said imaging device for identifying the shape and the orientation of said plate image and the relative image location of said plate centroid and the relative image locations of said spots;

data processing means effective to process data from said video processing means for identifying the direction, range and attitude of said image plate.

67. An optoelectronic system for acquiring and tracking a target and for sensing the attitude of said target comprising:

continuous laser light source means effective to illuminate said target;

- 45 -

an imaging device comprising a two dimensional array of light sensitive image pixels and a digital representation of the light intensity at each pixel and being solely responsive to the wavelength of said laser source; and an arrangement of optical
5 lenses having a field of view with a central axis effective to image light reflected from said image plate, and to maintain focus and exposure of the target image;

three or more narrow beam lasers located offset from and arranged symmetrically about said imaging device, with each said
10 beam directed through a common point on said central axis of said imaging device effective to designate spots on said target, wherein the location of each spot in the image has a known relation to the range from said imaging device to each said spot;

video processing means effective to process said digital data
15 from said imaging device for identifying image contrast features and for determining the shape and the orientation of said features and the relative location of a selected contrast reference point in said image and the relative location of each said spot in the image;

data processing means effective to process said outputs of said
20 video processing means to indicate the direction, range and attitude of said target.

68. A system according to either Claim 66 or Claim 67, wherein said optoelectronic system means is comprised of essentially nonmoveable parts.

1 / 9

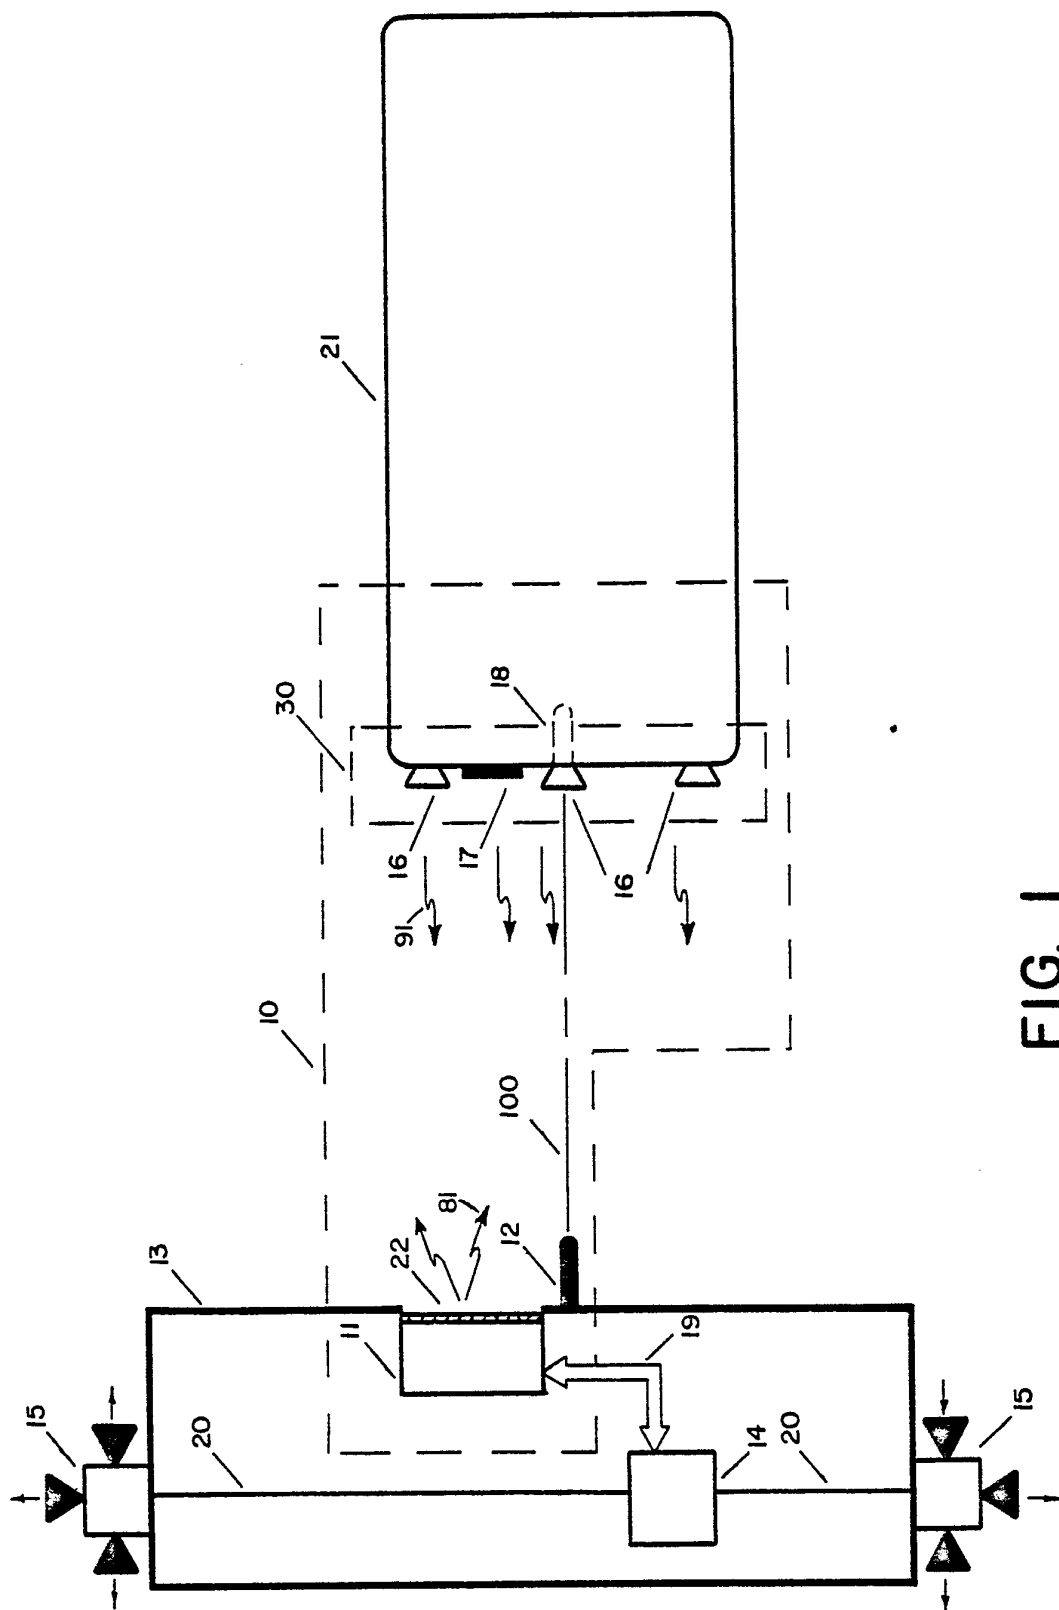


FIG. 1

2/9


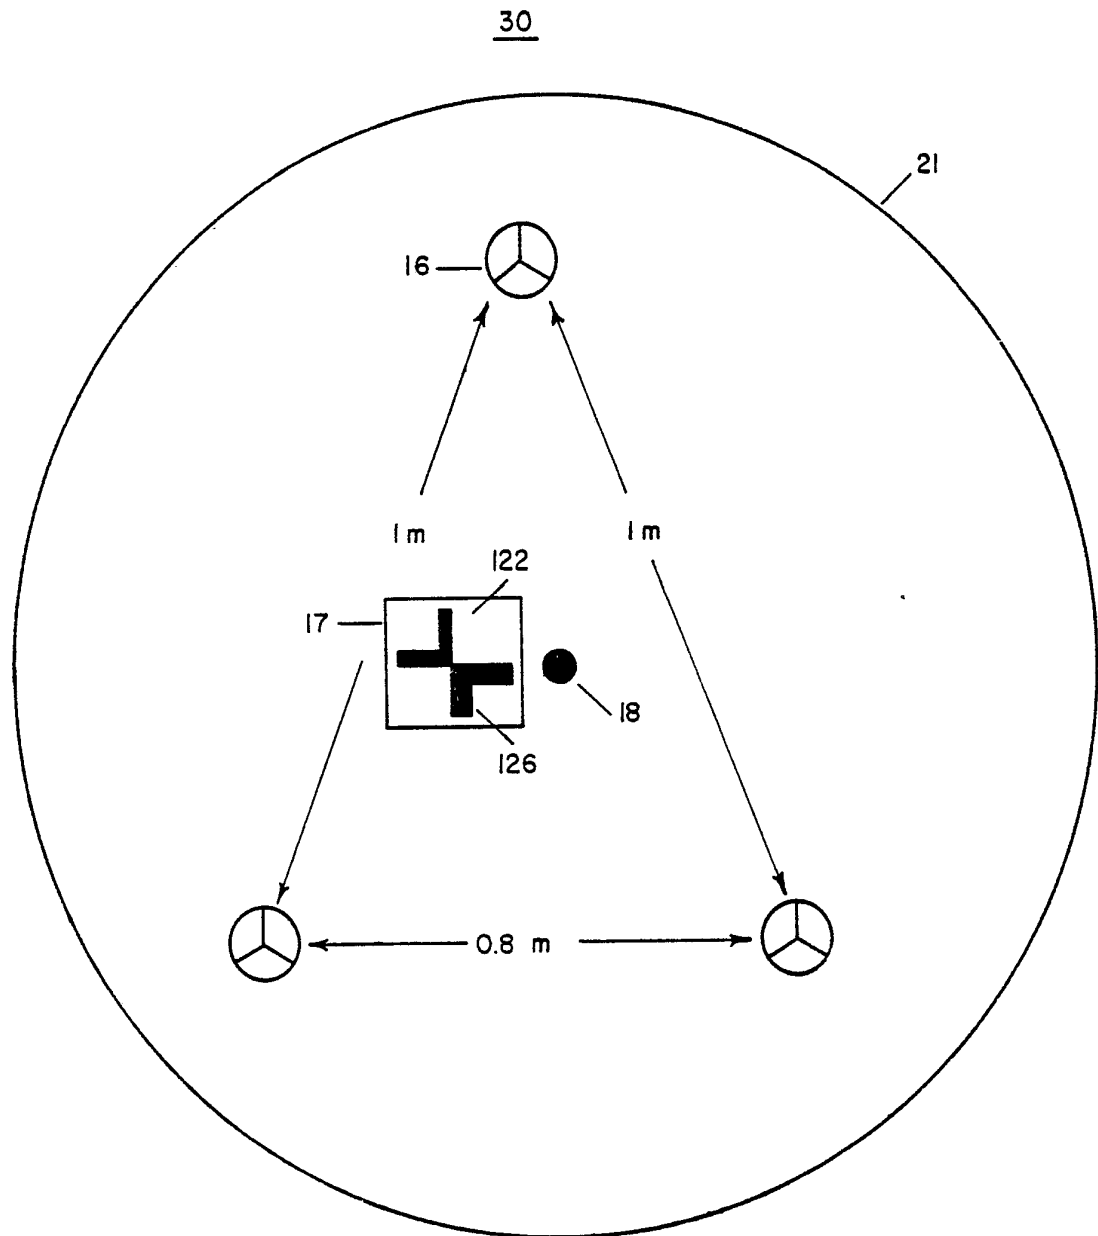


FIG. 2

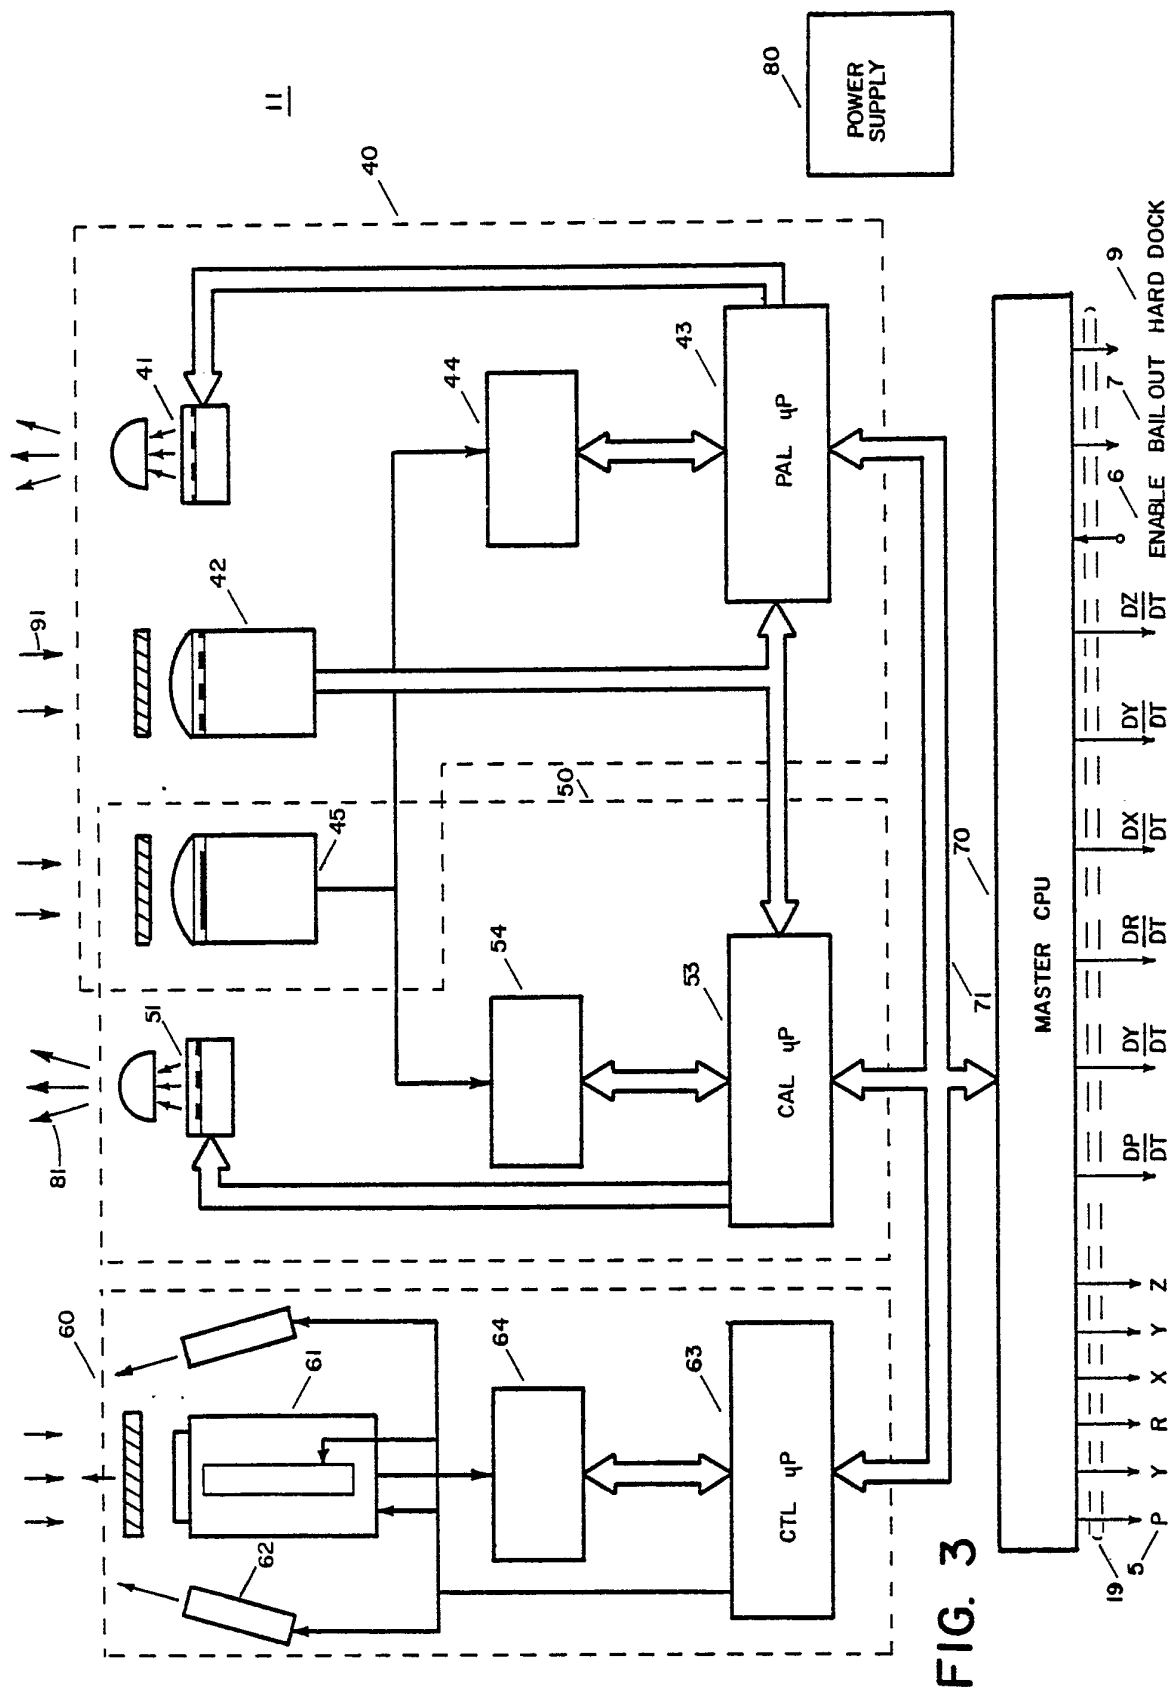

5 / 9

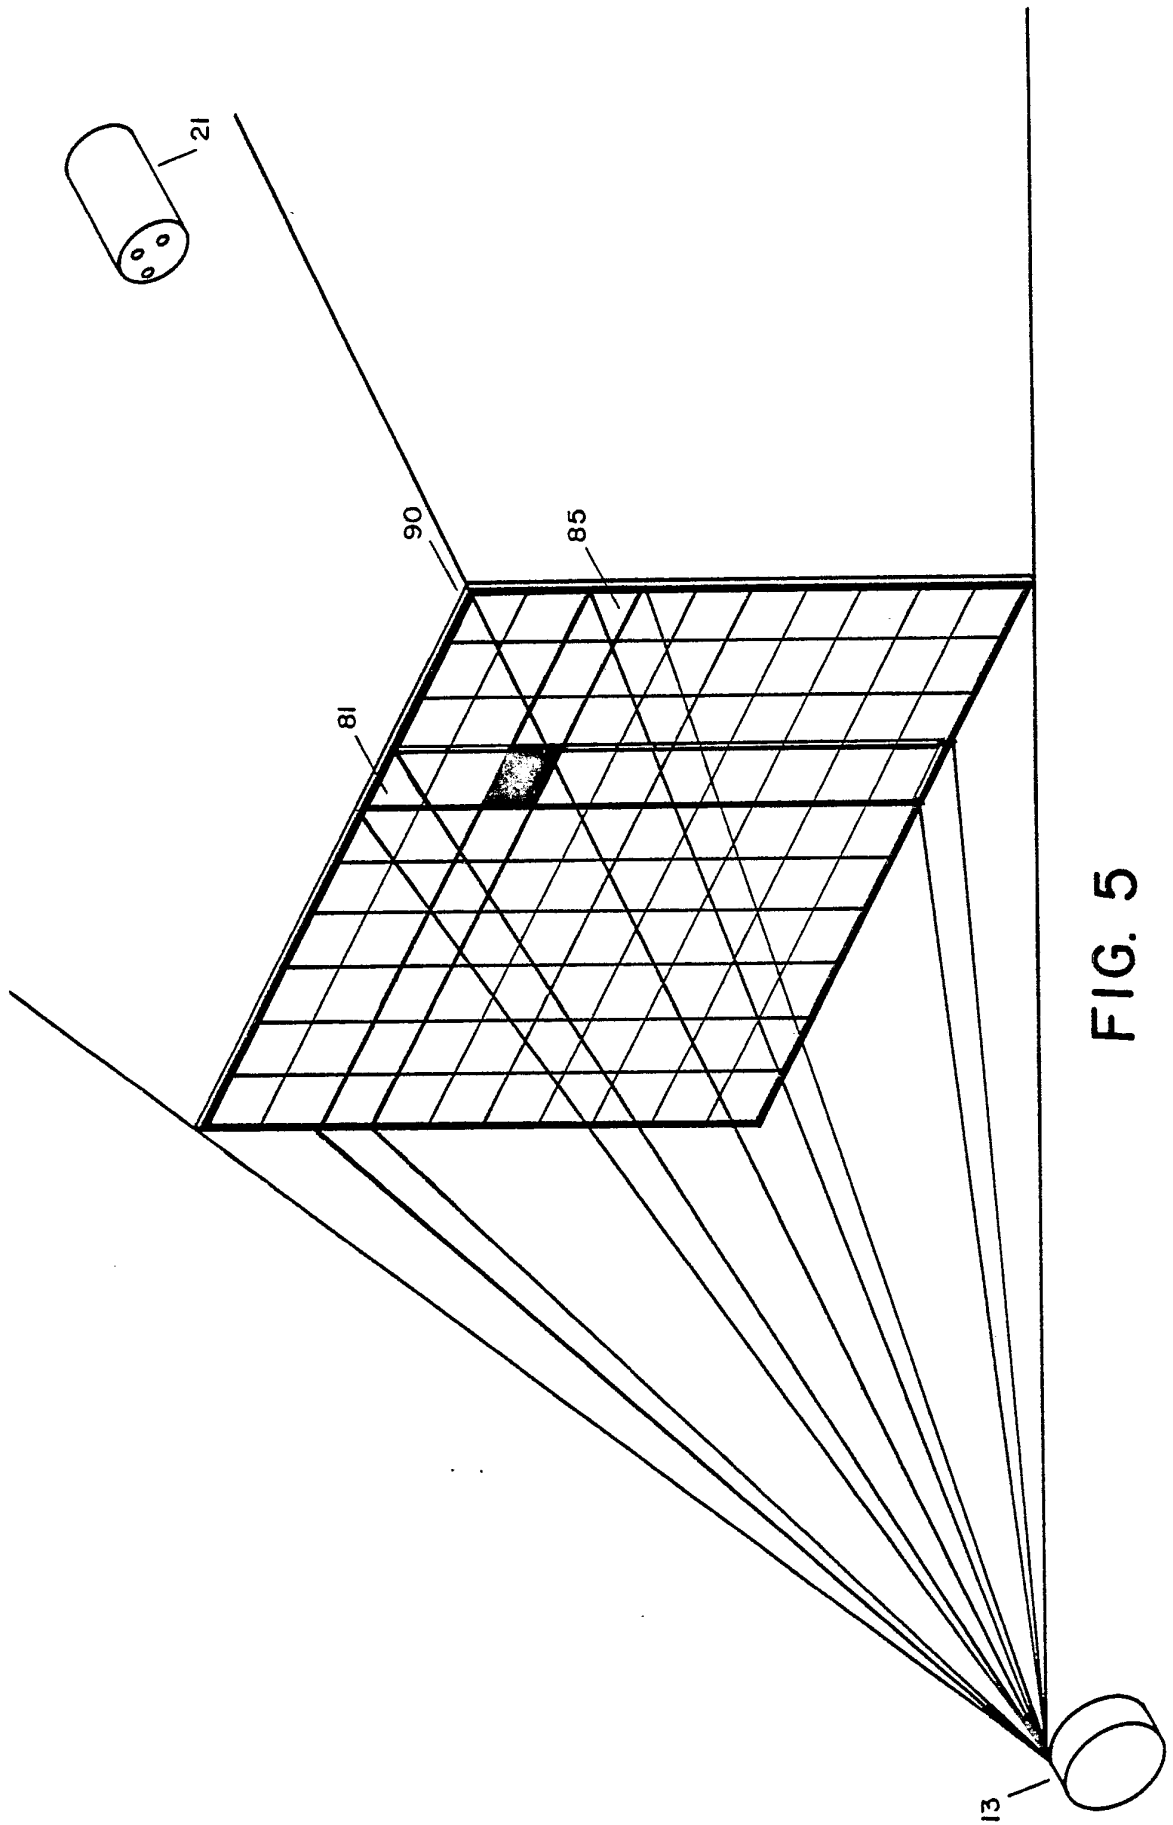


FIG. 5

6 / 9

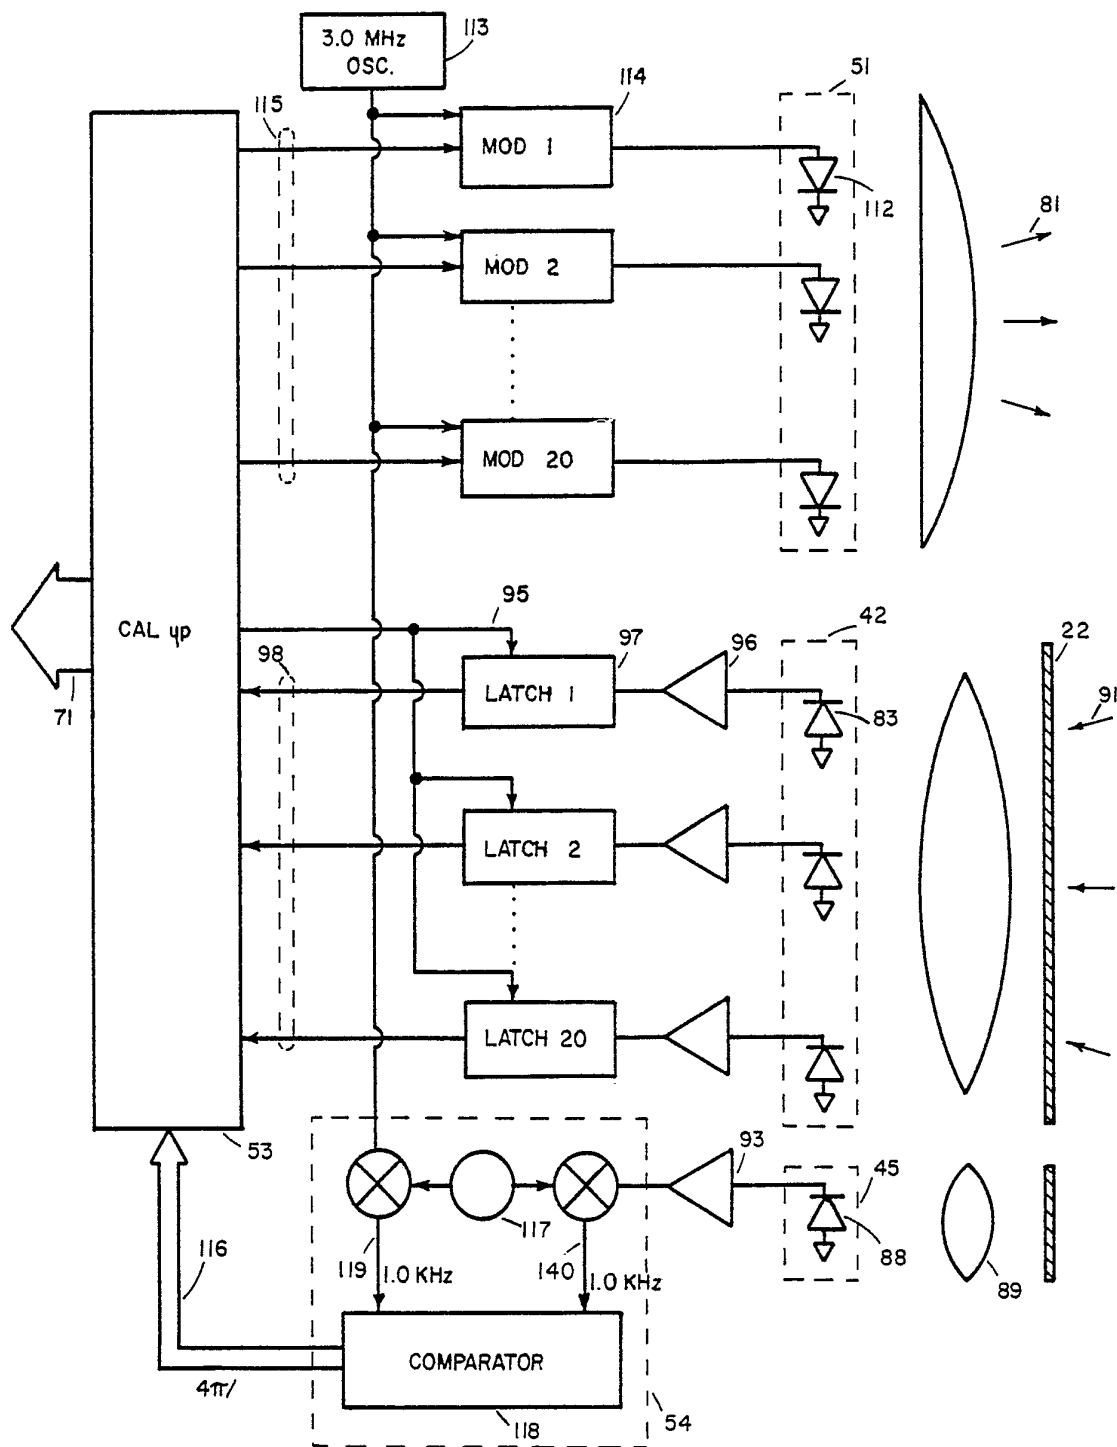


FIG. 6

7/9

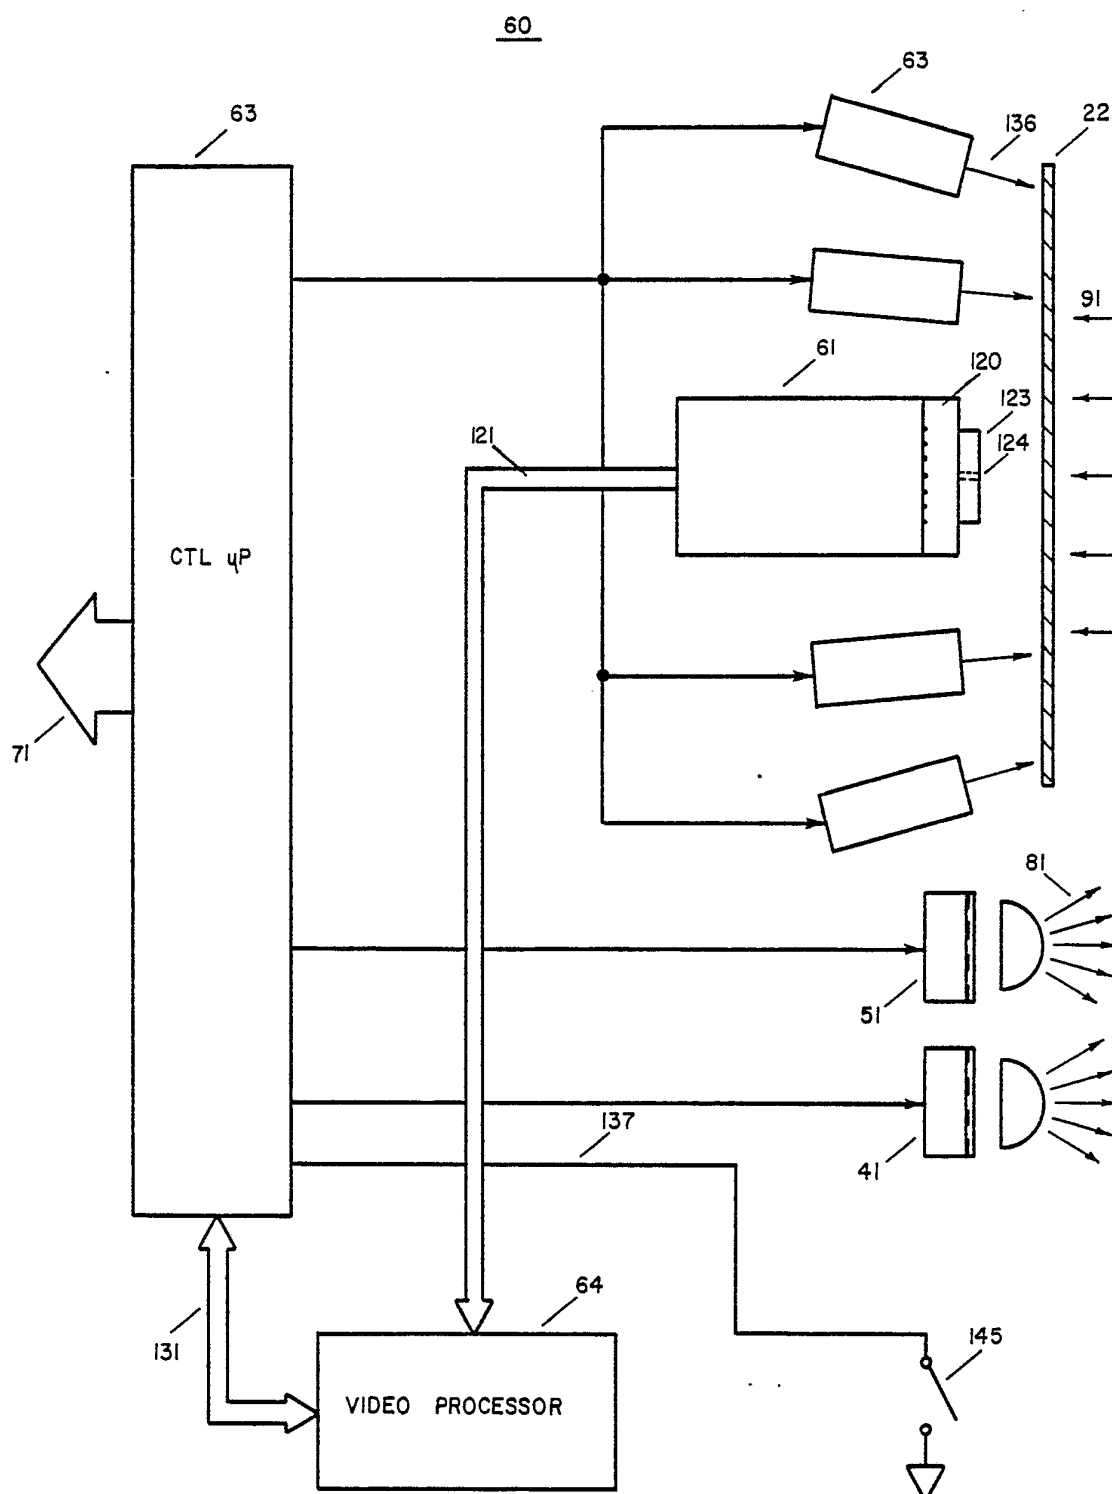


FIG. 7

8/9



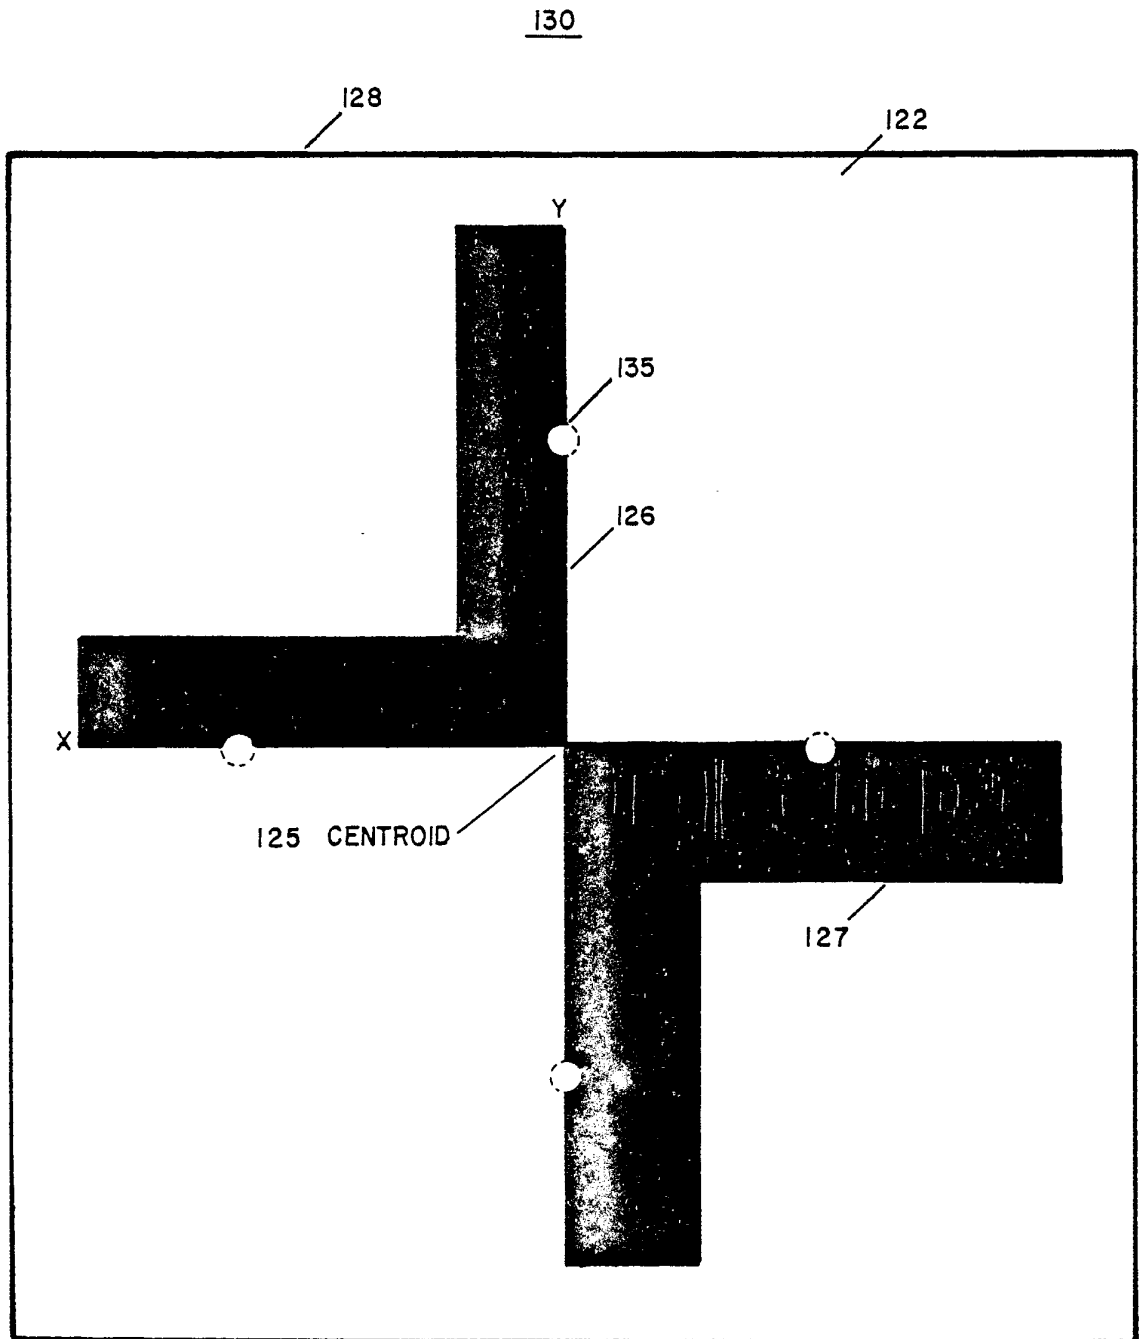


FIG. 8


9 / 9

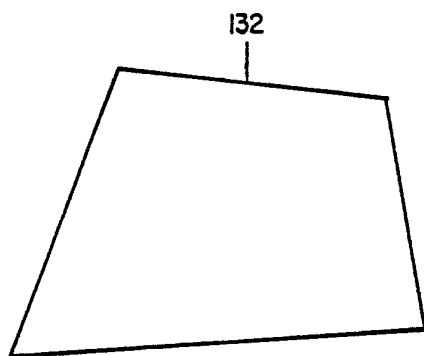

INITIAL ACQUISITION

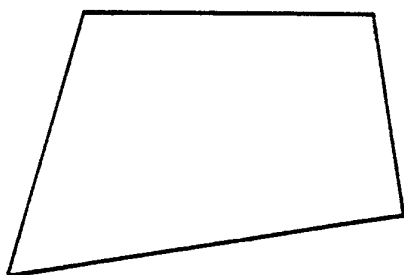


ROLL CORRECTION

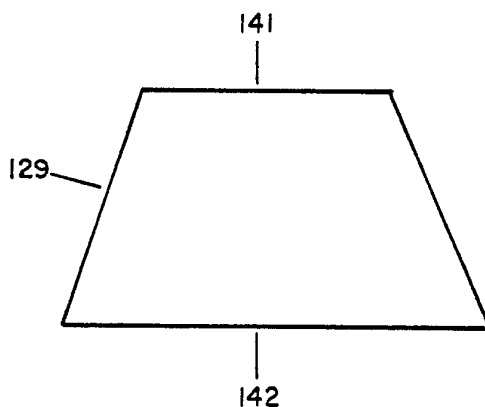

+X CORRECTION

CORRECTED
ATTITUDE




+Y CORRECTION

FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 86/02249

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁴ : G 05 D 1/12; B 64 G 1/64; G 01 S 17/87		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁴	G 05 D; B 64 G; G 01 S	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *		
III. DOCUMENTS CONSIDERED TO BE RELEVANT *		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	EP, A, 0122890 (AERITALIA) 24 October 1984 see page 8, lines 13-30; page 11, line 20 - page 13, line 25; figures 5,6 --	1
A	US, A, 3917196 (C. POND) 4 November 1975 see abstract; column 6, line 30 - column 8, line 49; column 15, line 50 - column 16, line 45; figures 1-3,9,10 --	1
A	FR, A, 2186658 (THOMSON-CSF) 11 January 1974 see page 1, lines 1-18; page 1, line 34 - page 2, line 4; page 3, line 22 - page 4, line 15; figures 1,2 --	
A	FR, A, 2433760 (THOMSON-CSF) 14 March 1980 see page 4, line 14 - page 6, line 26; page 10, line 33 - page 11, line 31; figures 1,7 -----	
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
26th February 1987		1-2 APR 1987
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		M. VAN MOL 

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO. PCT/US 86/02249 (SA 15237)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 09/03/87

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A- 0122890	24/10/84	US-A- 4607815	26/08/86
US-A- 3917196	04/11/75	US-A- 4025193	24/05/77
FR-A- 2186658	11/01/74	None	
FR-A- 2433760	14/03/80	None	

For more details about this annex :
see Official Journal of the European Patent Office, No. 12/82