



(86) Date de dépôt PCT/PCT Filing Date: 2004/07/28
(87) Date publication PCT/PCT Publication Date: 2005/03/31
(85) Entrée phase nationale/National Entry: 2006/02/03
(86) N° demande PCT/PCT Application No.: US 2004/024271
(87) N° publication PCT/PCT Publication No.: 2005/029636
(30) Priorité/Priority: 2003/08/04 (10/633,929) US


(51) Cl.Int./Int.Cl. *H01Q 9/28* (2006.01),
H01Q 15/02 (2006.01), *H01Q 1/38* (2006.01),
H01Q 1/36 (2006.01)

(71) Demandeur/Applicant:
HARRIS CORPORATION, US

(72) Inventeurs/Inventors:
DURHAM, TIMOTHY E., US;
BROWN, STEPHEN B., US;
GOTHARD, GRIFFIN K., US

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : ABSORBEUR D'ANTENNE A RESEAU A ELEMENTS EN PHASE ET PROCEDES ASSOCIES
(54) Title: PHASED ARRAY ANTENNA ABSORBER AND ASSOCIATED METHODS

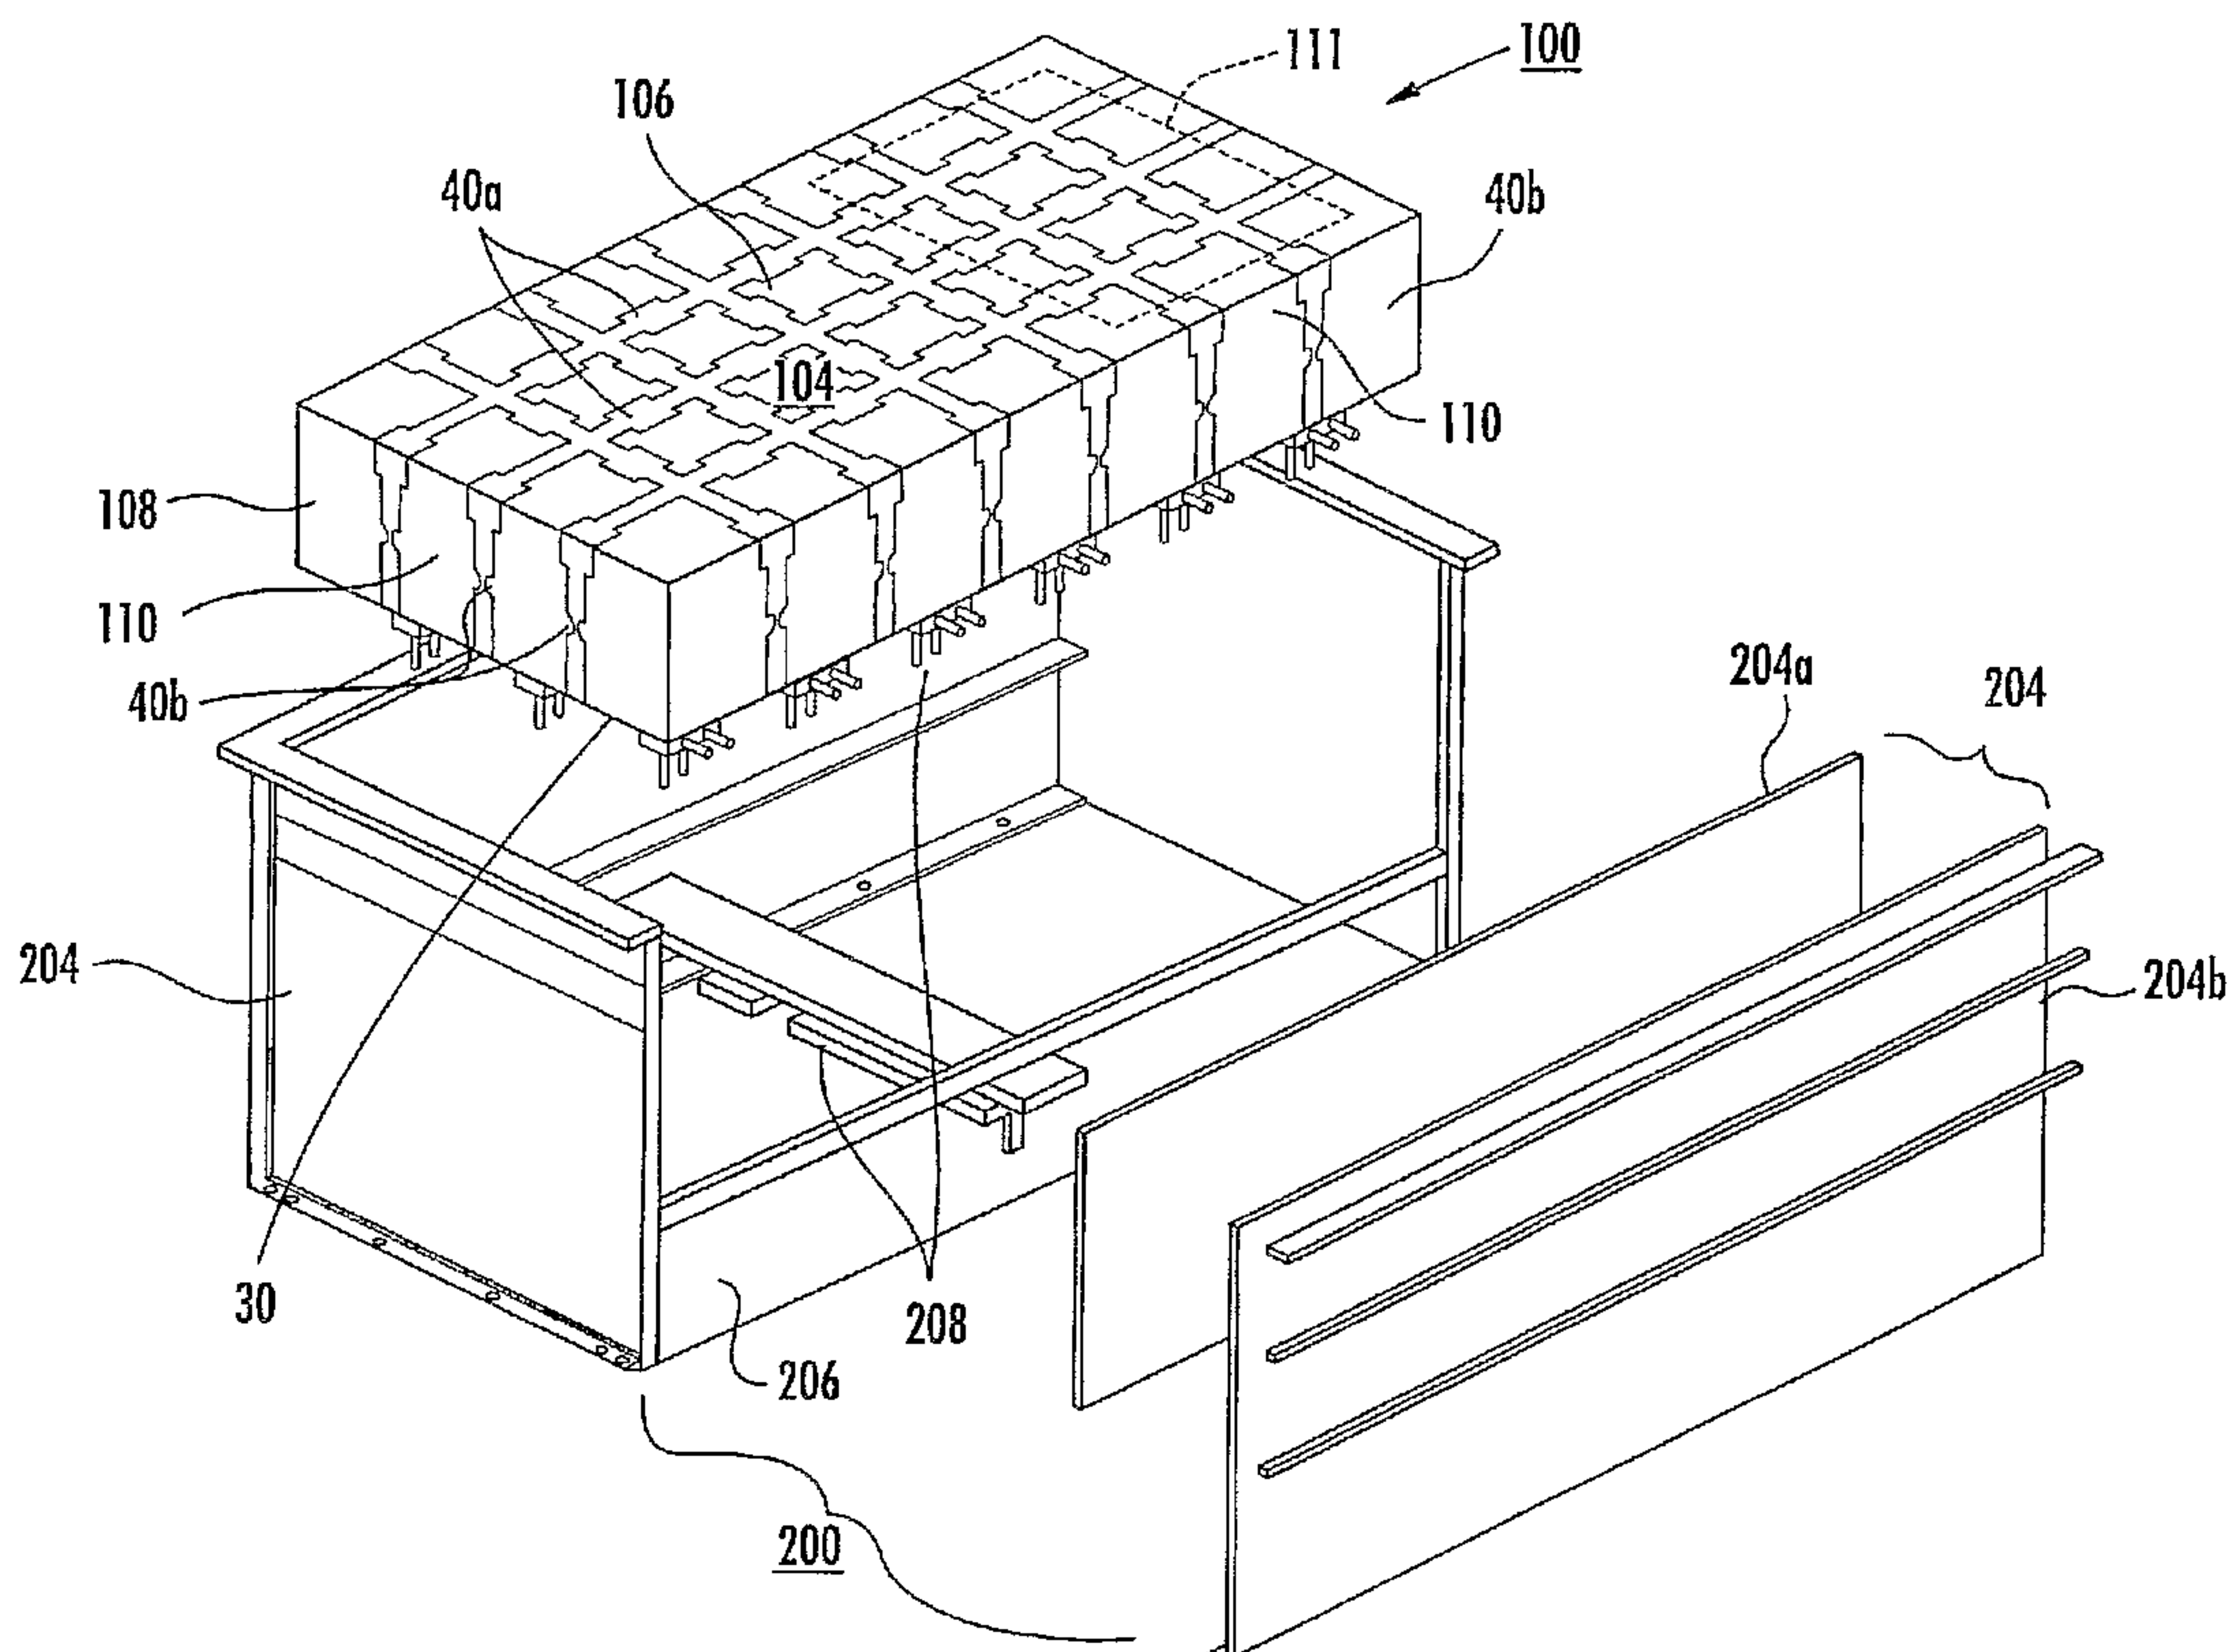

(57) **Abrégé/Abstract:**

A phased array antenna (100) includes a substrate (104), and an array of dipole antenna elements (40) on the substrate (104). Each dipole antenna element (40) includes a medial feed portion (42), and a pair of legs (44) extending outwardly therefrom. Each dipole antenna element (40) further includes a passive load (304), and a switch (302) connected thereto for selectively coupling the passive load (304) to the medial feed portion (42) so that the dipole antenna element (40) selectively functions as an absorber for absorbing received signals while the passive load (304) dissipates energy associated therewith.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/029636 A3

(51) International Patent Classification⁷: **H01Q 9/28**,
1/38, 15/02, 1/36

(74) Agents: **YATSKO, Michael, S.** et al.; Harris Corporation,
1025 W. Nasa Blvd., Melbourne, FL 32919 (US).

(21) International Application Number:
PCT/US2004/024271

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 28 July 2004 (28.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/633,929 4 August 2003 (04.08.2003) US

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **HARRIS CORPORATION** [US/US]; 1025 West Nasa Blvd., Melbourne, FL 32919 (US).


(72) Inventors: **DURHAM, Timothy, E.**; 170 Dickinson Street NE, Palm Bay, FL 32907 (US). **BROWN, Stephen, B.**; 2025 Advana Street, Palm Bay, FL 32905 (US). **GOTHARD, Griffin, K.**; 309 Harwood Avenue, Satellite Beach, FL 32937 (US).

Published:

— with international search report

[Continued on next page]

(54) Title: PHASED ARRAY ANTENNA ABSORBER AND ASSOCIATED METHODS

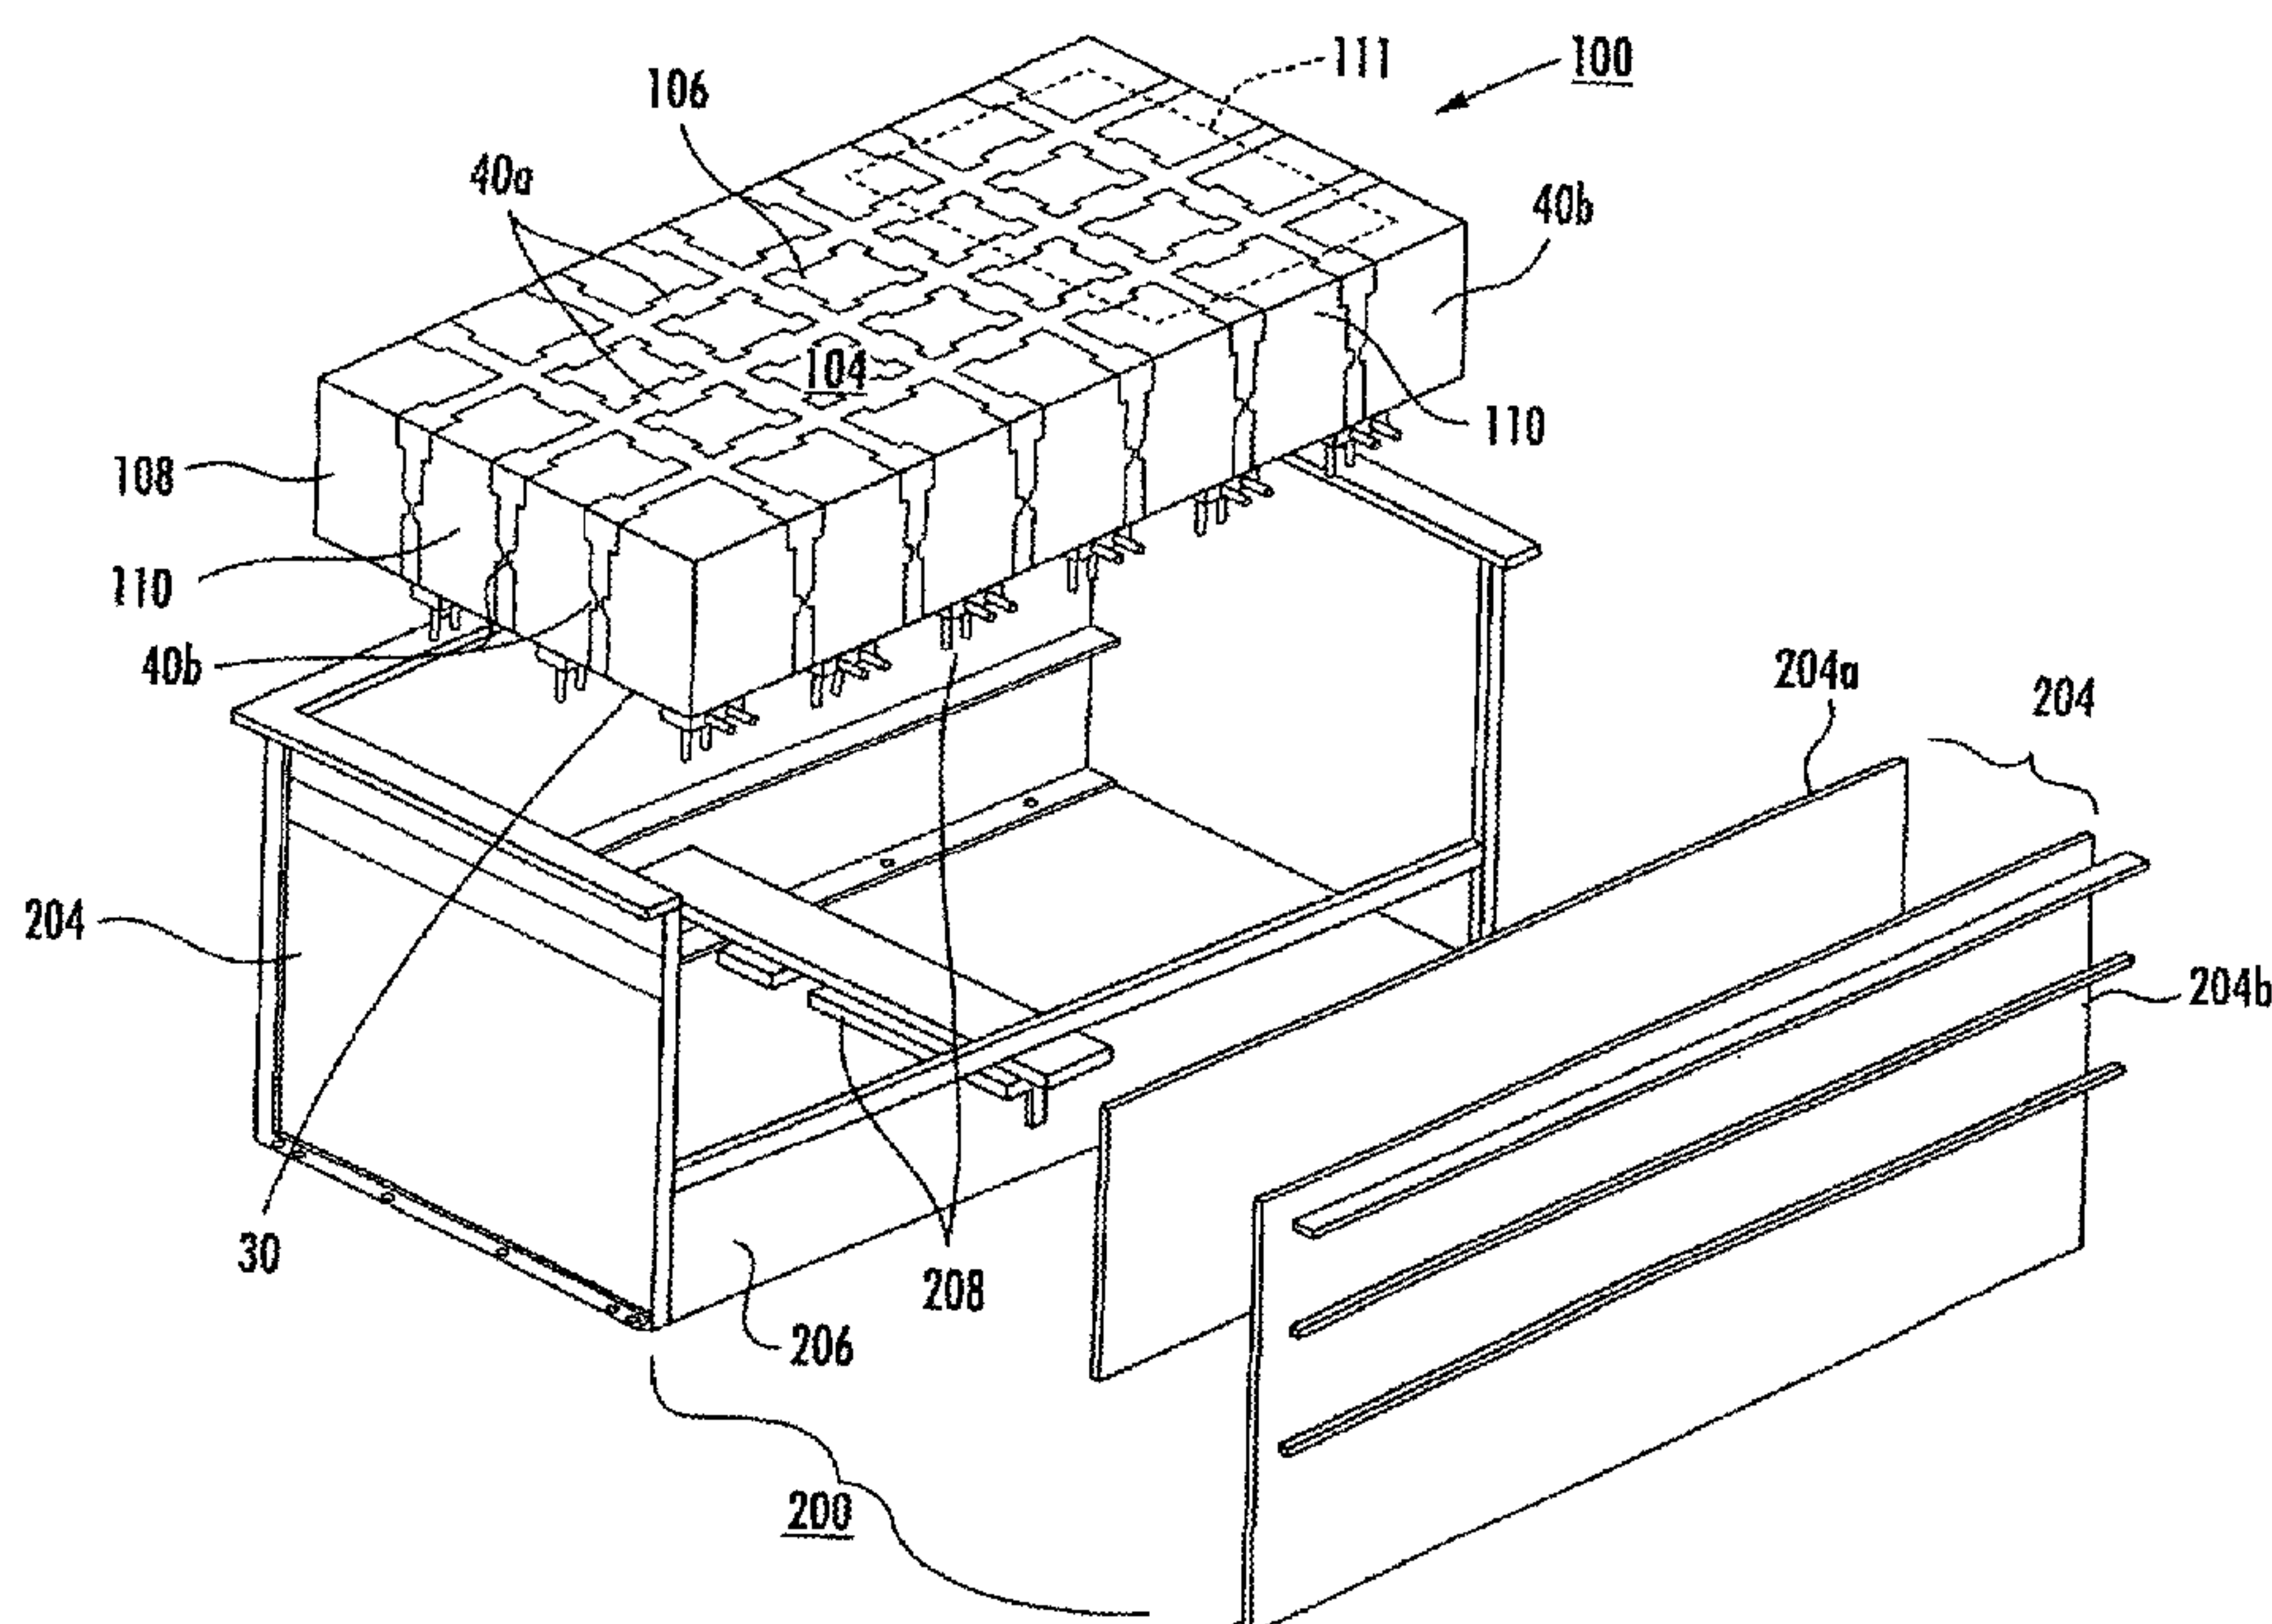

(57) Abstract: A phased array antenna (100) includes a substrate (104), and an array of dipole antenna elements (40) on the substrate (104). Each dipole antenna element (40) includes a medial feed portion (42), and a pair of legs (44) extending outwardly therefrom. Each dipole antenna element (40) further includes a passive load (304), and a switch (302) connected thereto for selectively coupling the passive load (304) to the medial feed portion (42) so that the dipole antenna element (40) selectively functions as an absorber for absorbing received signals while the passive load (304) dissipates energy associated therewith.

WO 2005/029636 A3

WO 2005/029636 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

17 November 2005

PHASED ARRAY ANTENNA ABSORBER AND ASSOCIATED METHODS**Background of the Invention**

Existing microwave antennas include a wide variety
5 of configurations for various applications, such as satellite
reception, remote broadcasting, or military communication. The
desirable characteristics of low cost, light weight, low
profile and mass producibility are provided in general by
printed circuit antennas. The simplest forms of printed
10 circuit antennas are microstrip antennas wherein flat
conductive elements, such as monopole or dipole antenna
elements, are spaced from a single essentially continuous
ground plane by a dielectric sheet of uniform thickness. An
example of a microstrip antenna is disclosed in U.S. Patent
15 No. 3,995,277 to Olyphant.

The antennas are designed in an array and may be
used for communication systems such as identification of
friend/foe (IFF) systems, personal communication service (PCS)
systems, satellite communication systems, and aerospace
20 systems, which require such characteristics as low cost, light
weight, low profile, and a low sidelobe. The bandwidth and
directivity capabilities of such antennas, however, can be
limiting for certain applications.

The use of electromagnetically coupled dipole
25 antenna elements can increase bandwidth. Also, the use of an
array of dipole antenna elements can improve directivity by
providing a predetermined maximum scan angle.

However, utilizing an array of dipole antenna
elements presents a dilemma. The maximum grating lobe free
30 scan angle can be increased if the dipole antenna elements are
spaced closer together, but a closer spacing can increase
undesirable coupling between the elements, thereby degrading
performance. This undesirable coupling changes rapidly as the

frequency varies, making it difficult to maintain a wide bandwidth.

One approach for compensating the undesirable coupling between dipole antenna elements is disclosed in U.S. Patent No. 6,417,813 to Durham, which is incorporated herein by reference in its entirety and which is assigned to the current assignee of the present invention. The Durham patent discloses a wideband phased array antenna comprising an array of dipole antenna elements, with each dipole antenna element comprising a medial feed portion and a pair of legs extending outwardly therefrom.

In particular, adjacent legs of adjacent dipole antenna elements include respective spaced apart end portions having predetermined shapes and relative positioning to provide increased capacitive coupling between the adjacent dipole antenna elements. The increased capacitive coupling counters the inherent inductance of the closely spaced dipole antenna elements, in such a manner as the frequency varies so that a wide bandwidth may be maintained.

Each phased array antenna has a desired frequency range, and the ground plane is typically spaced from the array of dipole antenna elements less than about one-half a wavelength of a highest desired frequency. When the frequency is in the GHz range, the separation between the array of dipole antenna elements and the ground plane is less than 0.20 inch at 30 GHz, for example. However, if the frequency of operation of the phased array antenna is in the MHz range, the separation between the array of dipole antenna elements and the ground plane increases to about 19 inches at 300 MHz, for example.

Fielding a phased array antenna with a relatively large separation between the ground plane and the array of dipole antenna elements becomes rather cumbersome because of its bulkiness. Inflatable or collapsible antennas are

sometimes used because they are light in weight, easily portable and are easily deployed. For example, U.S. Patent No. 5,132,699 to Rupp et al. discloses an inflatable phased array antenna formed on one or more generally planar and
5 vertically inclined panels.

Each panel has a continuous outer wall, a continuous inner wall and a plurality of web partitions extending between the inner and outer walls to form a series of inflatable tubular members. The inner wall is covered with a conducting
10 material so that it forms a ground plane, and a plurality of dipole antenna elements are affixed to the web partitions and spaced from the ground plane in a predetermined relationship so that the phased array antenna will operate at the desired frequency range.

15 As the frequency range decreases from the GHz range to the MHz range, the size of the phased array antenna increases. This presents a problem when a low radar cross section (RCS) mode is required. For example, the RCS of a ship having a phased array antenna operating in the MHz range
20 would be adversely affected because of the increased size of the array.

An ideal antenna is inherently a low RCS structure. An antenna is a transducer whose function is to maximize power transfer from a propagating electromagnetic wave in free space
25 to a receiver. Some antennas, of course, are intended to maximize power transfer from a transmitter to a propagating free space wave, but a basic principle of electromagnetics known as reciprocity insures that the same structure works both ways. Since the ideal antenna maximizes power transfer
30 to the receiver, it minimizes power scattered back to a hypothetical radar, i.e., RCS.

Of course, actual antennas are non-ideal. Typically, the maximum power transfer condition is only satisfied for a limited range of frequencies and for a limited

range of incident wave directions. Directional selectivity is often a design goal for antennas, so that the maximum power transfer condition is only met for a small range of directions and power transfer is minimized for undesired directions.

5 However, over its operating range a good antenna is an efficient absorber of incident energy. Therefore, a broadband antenna with broad angular coverage has the potential to be a radar absorptive material (RAM).

10 Summary of the Invention

In view of the foregoing background, it is therefore an object of the present invention to provide a phased array antenna that acts as a wideband absorber, and therefore supports a low RCS mode when required.

15 This and other objects, features, and advantages in accordance with the present invention are provided by a phased array antenna to be connected to a transceiver and comprising a substrate, and an array of dipole antenna elements on the substrate to be connected to the transceiver. Each dipole
20 antenna element may comprise a medial feed portion, and a pair of legs extending outwardly therefrom. Each dipole antenna element may further comprise a load, and a switch connected thereto for selectively coupling the load to the medial feed portion so that the dipole antenna element selectively
25 functions as an absorber for absorbing received signals while the load dissipates energy associated therewith.

The respective switches and loads allow the phased array antenna to operate as an absorber. For example, if a ship or platform deploying the phased array antenna intends to
30 maintain a low RCS, then the elements are selectively coupled to their respective loads for dissipating the energy associated with the received signals. When communications is required, the respective switches uncouple the loads so that

the signals are passed along to the transmission and reception controller.

The phased array antenna may comprise an inflatable substrate with the array of dipole antenna elements thereon.

5 An inflating device is used to inflate the substrate. The inflatable substrate addresses the deployment concerns of a large sized phased array antenna. When the phased array is not being deployed, or it is being transported, the inflatable substrate is deflated.

10 The inflating device may be an air pump, and when inflated, a dielectric layer of air is provided between the array of dipole antenna elements and the ground plane. At 300 MHz, for example, the thickness of the inflatable substrate is about 19 inches. Baffles or connections may extend between
15 the two opposing sides of the inflatable substrate so that a uniform thickness is maintained by the substrate when inflated.

The respective switches and loads may be packaged within the inflatable substrate, or external the inflatable
20 substrate. When the phased array antenna is to operate as an absorber, a controller switches the switches so that the loads are connected across the medial feed portions of the dipole antenna elements in the array.

An optional dielectric layer may be added between
25 the array of dipole antenna elements and the inflatable substrate. This dielectric layer preferably has a higher dielectric constant than the dielectric constant of the inflatable substrate when inflated. The higher dielectric constant helps to improve performance of the phased array
30 antenna, particularly when the substrate is inflated with air, which has dielectric constant of 1. The inflatable substrate may be filled with a gas other than air. The inflatable substrate may comprise a polymer or an equivalent material for maintaining an enclosed flexible substrate when inflated.

In an alternate embodiment, the dipole antenna elements are permanently configured as an absorber by having a resistive element connected to the respective medial feed portions. Such an absorber may be used in an anechoic chamber, or may be placed adjacent to an object (e.g., a truck, a tank, etc.) to reduce its RCS, or may be even be placed on top of a building to reduce multipath interference from other signals. This absorber may be applicable to many other applications requiring a wideband absorber.

Another aspect of the present invention is directed to a method of making a phased array antenna that selectively functions as an absorber. The method comprises providing a substrate, and forming an array of dipole antenna elements on the substrate, with each dipole antenna element comprising a medial feed portion, and a pair of legs extending outwardly therefrom. Each dipole antenna element further comprises a passive load and a switch connected thereto for selectively coupling the passive load to the medial feed portion so that the dipole antenna element selectively functions as an absorber for absorbing received signals while the passive load dissipates energy associated therewith.

Brief Description of the Drawings

FIG. 1 is a schematic diagram of a phased array antenna in accordance with the present invention mounted on a ship.

FIG. 2 is a schematic perspective view of the phased array antenna of FIG. 1 and a corresponding cavity mount.

FIG. 3 is an exploded view of the phased array antenna of FIG. 2.

FIG. 4 is a greatly enlarged view of a portion of the array of FIG. 2.

FIGS. 5A and 5B are enlarged schematic views of the spaced apart end portions of adjacent legs of adjacent dipole

antenna elements as may be used in the phased array antenna of FIG. 2.

FIG. 5C is an enlarged schematic view of an impedance element electrically connected across the spaced apart end portions of adjacent legs of adjacent dipole antenna elements as may be used in the wideband phased array antenna of FIG. 2.

FIG. 5D is an enlarged schematic view of another embodiment of an impedance element electrically connected across the spaced apart end portions of adjacent legs of adjacent dipole antenna elements as may be used in the wideband phased array antenna of FIG. 2.

FIGS. 6A and 6B are enlarged schematic views of a discrete resistive element and a printed resistive element connected across the medial feed portion of a dipole antenna element as may be used in the phased array antenna of FIG. 2.

FIGS. 7A and 7B are plots of computed VSWR versus frequency for an active dipole antenna element adjacent the edge elements in the phased array antenna of FIG. 2, and for the same active dipole antenna element without the edge elements in place.

FIGS. 8A and 8B are plots of computed VSWR versus frequency for an active dipole antenna element in the center of the phased array antenna of FIG. 2 with the edge elements in place, and for the same dipole antenna element without the edge elements in place.

FIG. 9 is a schematic diagram of a dipole antenna element having a switch and a load connected thereto so that the element selectively functions as an absorber in accordance with the present invention.

FIG. 10 is a cross-sectional diagram of a phased array antenna that includes the dipole antenna elements of FIG. 9.

FIG. 11 is top plan view of a building partly in sectional illustrating a feedthrough lens antenna in accordance with the present invention positioned in a wall of the building.

5

Detailed Description of the Preferred Embodiments

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown.

10 This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to

15 those skilled in the art. Like numbers refer to like elements throughout, and prime, double prime and triple prime notations are used to indicate similar elements in alternate embodiments.

Referring initially to FIGS. 1 and 2, a wideband

20 phased array antenna **100** in accordance with the present invention will now be described. The phased array antenna **100** is particularly advantageous when design constraints limit the number of active dipole antenna elements in the array. The design constraints may be driven by a platform having limited

25 installation space, and one which also requires a low radar cross section (RCS), such as the ship **112** illustrated in FIG. 1, for example. The illustrated phased array antenna **110** is connected to a transceiver and controller **114**, as would be appreciated by those skilled in the art.

30 The phased array antenna **100** has edge elements **40b**, and a corresponding cavity mount **200**, as illustrated by the schematic perspective view in FIG. 2. The phased array antenna **100** comprises a substrate **104** having a first surface **106**, and second surfaces **108** adjacent thereto and defining

respective edges **110** therebetween. A plurality of dipole antenna elements **40a** are on the first surface **106** and at least a portion of at least one dipole antenna element **40b** is on one of the second surfaces **108**. The dipole antenna elements **40b** on the second surfaces **108** form the "edge elements" for the phased array antenna **100**.

Normally, active and passive dipole antenna elements are on the same substrate surface. However, by separating the active and passive dipole antenna elements **40a**, **40b** onto two different substrate surfaces **106**, **108** having respective edges **110** defined therebetween, more space is available for the active dipole antenna elements. Consequently, antenna performance is improved for phased array antennas affected by design constraints.

In the illustrated embodiment, the second surfaces **108** are orthogonal to the first surface **106**. The substrate **104** has a generally rectangular shape having a top surface, and first and second pairs of opposing side surfaces adjacent the top surface and defining the respective edges **110** therebetween. The first surface **106** corresponds to the top surface, and the second surfaces **108** correspond to the first and second pairs of opposing side surfaces. The illustrated edge elements **40b** are on each of the pairs of opposing side surfaces. In different embodiments, the edge elements **40b** may be on just one of the pairs of opposing side surfaces, or even just one side surface. In addition, the substrate **104** is not limited to a rectangular shape, and is not limited to orthogonal side surfaces with respect to the top surface.

The edge elements **40b**, that is, the dipole antenna elements on the second surfaces **108**, may be completely formed on the second surfaces, or they may be formed so that part of these elements extend onto the first surface **106**. For the later embodiment, the substrate **104** may be a monolithic flexible substrate, and the second surfaces are formed by

simply bending the substrate so that one of the legs of the edge elements **40b** extends onto the first surface **106**.

Alternatively, at least one of the legs of the dipole antenna elements **40a** on the first surface **106** may extend onto the
5 second surface **108**.

The bend also defines the respective edges **110** between the first and second surfaces **106, 108**. In lieu of a monolithic substrate, the first and second surfaces **106, 108** may be separately formed (with the respective dipole antenna
10 elements **40a, 40b** being formed completely on the respective surfaces **106, 108**), and then joined together to form the substrate **104**, as would be readily appreciated by those skilled in the art.

The illustrated phased array antenna **100** includes
15 first and second sets of orthogonal dipole antenna elements to provide dual polarization. In alternate embodiments, the phased array antenna **100** may include only one set of dipole antenna elements.

The phased array antenna **100** is formed of a
20 plurality of flexible layers, as shown in FIG. 3. As discussed above, the substrate **104**, which is included within the plurality of flexible layers, may be a monolithic flexible substrate, and the second surfaces **108** are formed by simply bending the layers along the illustrated dashed line, for
25 example. Excess material in the corners of the folded layers resulting from the second surfaces **108** being formed are removed, as would be appreciated by those skilled in the art.

The substrate **104** is sandwiched between a ground plane **30** and a cap layer **28**. The substrate **104** is also known
30 as a dipole layer or a current sheet, as would be readily understood by those skilled in the art. Additionally, dielectric layers of foam **24** and an outer dielectric layer of foam **26** are provided. Respective adhesive layers **22** secure the substrate **104**, ground plane **30**, cap layer **28**, and

dielectric layers of foam **24**, **26** together to form the phased array antenna **100**. Of course, other ways of securing the layers may also be used as would be appreciated by those skilled in the art.

5 The dielectric layers **24**, **26** may have tapered dielectric constants to improve the scan angle. For example, the dielectric layer **24** between the ground plane **30** and the dipole layer **20** may have a dielectric constant of 3.0, the dielectric layer **24** on the opposite side of the dipole layer
10 **20** may have a dielectric constant of 1.7, and the outer dielectric layer **26** may have a dielectric constant of 1.2.

Referring now to FIGS. 4, 5A and 5B, the substrate **104** as used in the phased array antenna **100** will now be described in greater detail. The substrate **104** is a printed
15 conductive layer having an array of dipole antenna elements **40** thereon, as shown in greater detail in the enlarged view of a portion **111** of the substrate **104**. Each dipole antenna element **40** comprises a medial feed portion **42** and a pair of legs **44** extending outwardly therefrom. Respective feed lines would be
20 connected to each feed portion **42** from the opposite side of the substrate **104**.

Adjacent legs **44** of adjacent dipole antenna elements **40** have respective spaced apart end portions **46** to provide increased capacitive coupling between the adjacent dipole
25 antenna elements. The adjacent dipole antenna elements **40** have predetermined shapes and relative positioning to provide the increased capacitive coupling. For example, the capacitance between adjacent dipole antenna elements **40** is between about 0.016 and 0.636 picofarads (pF), and preferably
30 between 0.159 and 0.239 pF. Of course, these values will vary as required depending on the actual application to achieve the same desired bandwidth, as readily understood by one skilled in the art.

As shown in FIG. 5A, the spaced apart end portions **46** in adjacent legs **44** may have overlapping or interdigitated portions **47**, and each leg **44** comprises an elongated body portion **49**, an enlarged width end portion **51** connected to an end of the elongated body portion, and a plurality of fingers **53**, e.g., four, extending outwardly from the enlarged width end portion.

The adjacent legs **44** and respective spaced apart end portions **46** may have the following dimensions: the length **E** of the enlarged width end portion **51** equals 0.061 inches; the width **F** of the elongated body portions **49** equals 0.034 inches; the combined width **G** of adjacent enlarged width end portions **51** equals .044 inches; the combined length **H** of the adjacent legs **44** equals 0.276 inches; the width **I** of each of the plurality of fingers **53** equals 0.005 inches; and the spacing **J** between adjacent fingers **53** equals 0.003 inches.

The wideband phased array antenna **10** has a desired frequency range, e.g., 2 GHz to 30 GHz, and the spacing between the end portions **46** of adjacent legs **44** is less than about one-half a wavelength of a highest desired frequency. Depending on the actual application, the desired frequency may be a portion of this range, such as 2 GHz TO 18 GHz, for example.

Alternatively, as shown in FIG. 5B, adjacent legs **44'** of adjacent dipole antenna elements **40** may have respective spaced apart end portions **46'** to provide increased capacitive coupling between the adjacent dipole antenna elements. In this embodiment, the spaced apart end portions **46'** in adjacent legs **44'** comprise enlarged width end portions **51'** connected to an end of the elongated body portion **49'** to provide the increased capacitive coupling between adjacent dipole antenna elements **40**. Here, for example, the distance **K** between the spaced apart end portions **46'** is about 0.003 inches.

To further increase the capacitive coupling between adjacent dipole antenna elements **40**, a respective discrete or bulk impedance element **70"** is electrically connected across the spaced apart end portions **46"** of adjacent legs **44"** of adjacent dipole antenna elements, as illustrated in FIG. 5C.

In the illustrated embodiment, the spaced apart end portions **46"** have the same width as the elongated body portions **49"**. The discrete impedance elements **70"** are preferably soldered in place after the dipole antenna elements **40** have been formed so that they overlay the respective adjacent legs **44"** of adjacent dipole antenna elements **40**. This advantageously allows the same capacitance to be provided in a smaller area, which helps to lower the operating frequency of the wideband phased array antenna **10**.

The illustrated discrete impedance element **70"** includes a capacitor **72"** and an inductor **74"** connected together in series. However, other configurations of the capacitor **72"** and inductor **74"** are possible, as would be readily appreciated by those skilled in the art. For example, the capacitor **72"** and inductor **74"** may be connected together in parallel, or the discrete impedance element **70"** may include the capacitor without the inductor or the inductor without the capacitor. Depending on the intended application, the discrete impedance element **70"** may even include a resistor.

The discrete impedance element **70"** may also be connected between the adjacent legs **44** with the overlapping or interdigitated portions **47** illustrated in FIG. 5A. In this configuration, the discrete impedance element **70"** advantageously provides a lower cross polarization in the antenna patterns by eliminating asymmetric currents which flow in the interdigitated capacitor portions **47**. Likewise, the discrete impedance element **70"** may also be connected between the adjacent legs **44'** with the enlarged width end portions **51'** illustrated in FIG. 5B.

Another advantage of the respective discrete impedance elements **70''** is that they may have different impedance values so that the bandwidth of the wideband phased array antenna **10** can be tuned for different applications, as would be readily appreciated by those skilled in the art. In addition, the impedance is not dependent on the impedance properties of the adjacent dielectric layers **24** and adhesives **22**. Since the discrete impedance elements **70''** are not effected by the dielectric layers **24**, this approach advantageously allows the impedance between the dielectric layers **24** and the impedance of the discrete impedance element **70''** to be decoupled from one another.

Yet another approach to further increase the capacitive coupling between adjacent dipole antenna elements **40** includes placing a respective printed impedance element **80'''** adjacent the spaced apart end portions **46'''** of adjacent legs **44'''** of adjacent dipole antenna elements **40**, as illustrated in FIG. 5D.

The respective printed impedance elements **80'''** are separated from the adjacent legs **44'''** by a dielectric layer, and are preferably formed before the dipole antenna layer **20** is formed so that they underlie the adjacent legs **44'''** of the adjacent dipole antenna elements **40**. Alternatively, the respective printed impedance elements **80'''** may be formed after the dipole antenna layer **20** has been formed. For a more detailed explanation of the printed impedance elements, reference is directed to U.S. Patent Application Serial No. 10/308,424 which is assigned to the current assignee of the present invention, and which is incorporated herein by reference.

A respective load **150** is preferably connected to the medial feed portions **42** of the dipole antenna elements **40d** on the second surfaces **108** so that they will operate as dummy dipole antenna elements. The load **150** may include a discrete

resistor, as illustrated in FIG. 6A, or a printed resistive element **152**, as illustrated in FIG. 6B. Each discrete resistor **150** is soldered in place after the dipole antenna elements **40d** have been formed. Alternatively, each discrete resistor **150** may be formed by depositing a resistive paste on the medial feed portions **42**, as would be readily appreciated by those skilled in the art. The respective printed resistive elements **152** may be printed before, during or after formation of the dipole antenna elements **40d**, as would also be readily appreciated by those skilled in the art. The resistance of the load **150** is typically selected to match the impedance of a feed line connected to an active dipole antenna element, which is in a range of about 50 to 100 ohms.

A ground plane **30** is adjacent the plurality of dipole antenna elements **40a**, **40b**, and to further improve performance of the phased array antenna **100**, the edge elements **40b** are electrically connected to the ground plane. The ground plane **30** is preferably spaced from the first surface **106** of the substrate **104** less than about one-half a wavelength of a highest desired frequency.

For an array of 18 active dipole antenna elements on the first surface **106** of the substrate **104**, FIG. 7A is a plot of computed VSWR versus frequency for the active dipole antenna element immediately adjacent the edge elements **40b**, and FIG. 7B is also a plot of computed VSWR versus frequency for the same active dipole antenna element except without the edge elements in place. Line **160** illustrates that there is advantageously a low VSWR between 0.10 and 0.50 GHz with the edge elements **40b** in place. The edge elements **40b** allow the immediately adjacent active dipole antenna elements to receive sufficient current, which is normally conducted through the dipole antenna elements **40a**, **40b** on the substrate **104**.

Referring now to FIGS. 8A and 8B, the VSWR versus frequency remains fairly the same between the two

configurations (i.e., with and without the edge elements **40b** in place) with respect to the active dipole antenna elements **40a** in or near the center of the first surface **106**. Line **164** illustrates the computed VSWR for an active dipole antenna element with the edge elements **40b** in place, and line **166** illustrates the computed VSWR for the same active dipole antenna element without the dummy elements in place.

In the illustrated phased array antenna **100**, there are 18 dipole antenna elements **40a** on the first surface **106** and 18 dipole antenna elements **40b** on the second surfaces **108**. Even though the number of dipole antenna elements for this type of phased array antenna **100** is not limited to any certain number of elements, it is particularly advantageous when the number of elements is such that the percentage of edge elements **40b** on the second surfaces **108** is large when compared to the percentage of active dipole antenna elements **40a** on the first surface **106**. Performance of the phased array antenna **100** is improved because the active elements **40a** extend to the edges **110** of the first surface **106** of the substrate **104**.

The corresponding cavity mount **200** for the phased array antenna **100** with edge elements **40d** will now be discussed in greater detail. The cavity mount **200** is a box having an opening therein for receiving the phased array antenna **100**, and comprises a signal absorbing surface **204** adjacent each second surface **108** of the substrate **104** having edge elements **40b** thereon.

As discussed above, the dipole antenna elements **40b** on the second surfaces **108** are dummy elements. Even though the dummy elements **40b** are not connected to a feed line, they still receive signals at the respective loads **150** connected across the medial feed portions **42**. To prevent these signals from being reflected within the cavity mount **200**, the signal absorbing surfaces **204** are placed adjacent the dummy elements **40b**.

Without the signal absorbing surfaces **204** in place, the reflected signals would create electromagnetic interference (EMI) problems, and they may also interfere with the adjacent active dipole antenna elements **40a** on the first surface **106** of the substrate **104**. The signal absorbing surfaces **204** thus absorb reflected signals so that the dipole antenna elements **40a** on the first surface **106** appear as if they are in a free space environment.

Each signal absorbing surface **204** comprises a ferrite material layer **204a** and a conducting layer **204b** adjacent thereto. The conducting layer **204b**, such as a metal layer, prevents any RF signals from radiating external the cavity mount **200**. Instead of a ferrite material layer, another type of RF absorbing material layer may be used, as would be readily appreciated by one skilled in the art.

In alternate embodiments, the signal absorbing surfaces **204** include a resistive layer and a conductive layer thereto. The resistive layer is coated on the conductive layer so that the conductive layer functions as a signal absorbing surface. The embodiment of the signal absorbing surfaces does not include the ferrite material layer **204a**, which reduces the weight of the cavity mount **200**. In yet another alternate embodiment, the signal absorbing surfaces **204** includes just the conductive layer.

When the phased array antenna **100** is positioned within the cavity mount **200**, the first surface **106** of the substrate **104** is substantially coplanar with an upper surface of the cavity mount. The height of the ferrite material layer **204a** is preferably at least equal to a height of the second surface **108** of the substrate **104**. In addition, the cavity mount **200** also carries a plurality of power dividers **208** for interfacing with the dipole antenna elements **40a** on the first surface **106** of the substrate **104**. When the second surface **108** is orthogonal to the first surface **106** of the substrate **104**,

the cavity mount **200** has a bottom surface **206** that is also orthogonal to the signal absorbing surfaces **204**.

Yet another aspect of the present invention is directed to a phased array antenna **300** that selectively functions as an absorber. In particular, each dipole antenna element **40** has a switch **302** connected to its medial feed portion **42** via feed lines **303**, and a passive load **304** is connected to the switch, as illustrated in FIG. 9. The switch **302**, in response to a control signal generated by a switch controller **307**, selectively couples the passive load **304** to the medial feed portion **42** so that the dipole antenna element **40** selectively functions as an absorber for absorbing received signals.

The passive load **304** is sized to dissipate the energy associated with the received signal, and may comprise a printed resistive element or a discrete resistor, as would be readily appreciated by those skilled in the art. For example, the resistance of the passive load **304** is typically between 50 to 100 ohms to match the impedance of the feed lines **303** when the dipole antenna element **40** passes along the received signals for processing.

As the frequency range decreases from the GHz range to the MHz range, the size of the phased array antenna significantly increases. This presents concerns when a low radar cross section (RCS) mode is required, and also in terms of deployment because of the increased size of the phased array antenna.

With respect to the RCS concerns, the respective switches **302** and passive loads **304** allow the phased array antenna **300** to operate as an absorber. For example, if a ship or any other type platform (fixed or mobile) deploying the phased array antenna **300** intends to maintain a low RCS, then the elements are selectively coupled to their respective passive loads **304** for dissipating the energy associated with

any received signals. When communications is required, the respective switches **306** uncouple the passive loads **304** so that the signals are passed along to the transmission and reception controller **14**.

5 Each phased array antenna has a desired frequency range, and the ground plane **310** is typically spaced from the array of dipole antenna elements **40** less than about one-half a wavelength of a highest desired frequency. In addition, the dipole antenna elements **40** may also be spaced apart from one
10 another less than about one-half a wavelength of the highest desired frequency.

 When the frequency is in the GHz range, the separation between the array of dipole antenna elements **40** and the ground plane **310** is less than 0.20 inch at 30 GHz, for
15 example. This does not necessarily present a problem in terms of RCS and deployment. However, when the frequency of operation of the phased array antenna **300** is in the MHz range, the separation between the array of dipole antenna elements **40** and the ground plane **310** increases to about 19 inches at 300
20 MHz, for example. This is where the RCS and deployment concerns arise because of the increased dimensions of the phased array antenna **300**.

 Referring now to FIG. 10, the illustrated phased array antenna **300** comprises an inflatable substrate **306** with
25 the array of dipole antenna elements **40** thereon. An inflating device **308** is used to inflate the substrate **306**. The inflatable substrate **306** addresses the deployment concerns. When the phased array **300** is not being deployed, or it is being transported, the inflatable substrate **306** is deflated.
30 However, once the phased array antenna **300** is in the field and is ready to be deployed, the inflatable substrate **306** is inflated.

 The inflating device **308** may be an air pump, and when inflated, a dielectric layer of air is provided between

the array of dipole antenna elements **40** and the ground plane **310**. At 300 MHz, the thickness of the inflatable substrate **306** is about 19 inches. Baffles or connections **312** may extend between the two opposing sides of the inflatable substrate **306** so that a uniform thickness is maintained by the substrate when inflated, as would be readily appreciated by those skilled in the art.

The respective switches **302** and loads **304** may also be packaged within the inflatable substrate **306**. Consequently, the corresponding feed lines **303** and control lines also pass through the inflatable substrate **306**. In alternate embodiments, the respective switches **302** and loads **304** may be packaged external the inflatable substrate **306**. When the phased array antenna **300** is to operate as an absorber, the controller **307** switches the switches **302** so that the loads **304** are connected across the medial feed portions **42** of the dipole antenna elements **40** in the array.

An optional dielectric layer **320** may be added between the array of dipole antenna elements **40** and the inflatable substrate **306**. The dielectric layer **320** preferably has a higher dielectric constant than the dielectric constant of the inflatable substrate **306** when inflated. The higher dielectric constant helps to improve performance of the phased array antenna **300**, particularly when the substrate **306** is inflated with air, which has dielectric constant of 1. The dielectric layer **320** would have a dielectric constant that is greater than 1, and preferably within a range of about 1.2 to 3, for example. The inflatable substrate **306** may be filled with a gas other than air, as would be readily appreciated by those skilled in the art, in which case the dielectric layer **320** may not be required. The inflatable substrate **306** may even be inflated with a curable material.

The inflatable substrate **306** preferably comprises a polymer. However, other materials for maintaining an enclosed

flexible substrate may be used, as would be readily appreciated by those skilled in the art. The array of dipole antenna elements **40** may be formed directly on the inflatable substrate **306**, or the array may be formed separately and
5 attached to the substrate with an adhesive. Similarly, the ground plane **310** may be formed as part of the inflatable substrate **306**, or it may be formed separately and is also attached to the substrate with an adhesive.

In an alternative embodiment of the phased array
10 antenna **300**, the dipole antenna elements **40** are permanently configured as an absorber by having a resistive element connected to the respective medial feed portions **42**, as illustrated in FIGS. 6A and 6B. Such an absorber may be used
in an anechoic chamber, or may be placed adjacent an object
15 (e.g., a truck, a tank, etc.) to reduce its RCS, or may be even be placed on top of a building to reduce multipath interference from other signals.

As discussed above, another aspect of the present invention is to further increase the capacitive coupling
20 between adjacent dipole antenna elements **40** using an impedance element **70''** or **80'''** electrically connected across the spaced apart end portions **46''**, **46'''** of adjacent legs **44''** of adjacent dipole antenna elements, as illustrated in FIG. 5C and 5D. This aspect of the present invention is not limited to the
25 phased array antenna **100** illustrated above. In other words, the impedance elements **70''**, **80'''** may be used on larger size substrate **104**, as discussed in U.S. Patent No. 6,512,487 to Taylor et al., which has been incorporated herein by reference.

30 For example, the substrate may be twelve inches by eighteen inches. In this example, the number of dipole antenna elements **40** correspond to an array of 43 antenna elements by 65 antenna elements, resulting in an array of 2795 dipole antenna elements.

For this larger size substrate, the array of dipole antenna elements **40** may be arranged at a density in a range of about 100 to 900 per square foot. The array of dipole antenna elements **40** are sized and relatively positioned so that the
5 phased array antenna is operable over a frequency range of about 2 to 30 GHz, and at a scan angle of about ± 60 degrees (low scan loss). Such an antenna **100'** may also have a 10:1 or greater bandwidth, includes conformal surface mounting (on an aircraft, for example), while being relatively light weight,
10 and easy to manufacture at a low cost. As would be readily appreciated by those skilled in the art, the array of dipole antenna elements **40** in accordance with the present invention may be sized and relatively positioned so that the wideband phased array antenna is operable over other frequency ranges,
15 such as in the MHz range, for example.

Referring now to FIG. 11, yet another aspect of the present invention is directed to a feedthrough lens antenna **60** that includes this larger size substrate. The feedthrough lens antenna **60** includes first and second phased array
20 antennas **100a'**, **100b'**, which are preferably substantially identical. For a more detailed explanation on the feedthrough lens antenna **60**, reference is directed to U.S. Patent No. 6,417,813 to Durham, which is incorporated herein by reference in its entirety and which is assigned to the current assignee
25 of the present invention.

The feedthrough lens antennas may be used in a variety of applications where it is desired to replicate an electromagnetic (EM) environment within a structure, such as a building **62**, over a particular bandwidth. For example, the
30 feedthrough lens antenna **60** may be positioned on a wall **61** of the building **62**. The feedthrough lens antenna **60** allows EM signals **63** from a transmitter **80** (e.g., a cellular telephone base station) to be replicated on the interior of the building **62** and received by a receiver **81** (e.g., a cellular telephone).

Otherwise, a similar signal **64** may be partially or completely reflected by the walls **61**.

The first and second phased array antennas **100a'**, **100b'** are connected by a coupling structure **66** in a back-to-back relation. The first and second phased array antennas **100a'**, **100b** are substantially similar to the antenna **100** described above, except with the edge elements **40b** preferably removed.

CLAIMS

1. A phased array antenna to be connected to a transceiver and comprising:

5

a substrate; and

an array of dipole antenna elements on said substrate to be connected to the transceiver, each dipole antenna element comprising

10

a medial feed portion, and a pair of legs extending outwardly therefrom, and

15

a load and a switch connected thereto for selectively coupling said load to the medial feed portion so that said dipole antenna element selectively functions as an absorber for absorbing received signals while said load dissipates energy associated therewith.

2. A phased array antenna according to Claim 1 wherein said load comprises a passive load.

20

3. A phased array antenna according to Claim 1 wherein said load comprises at least one of a printed resistive element and a discrete resistor.

25

4. A phased array antenna according to Claim 1 wherein adjacent legs of adjacent dipole antenna elements include respective spaced apart end portions having predetermined shapes and relative positioning to provide increased capacitive coupling between the adjacent dipole antenna elements.

30

5. A phased array antenna according to Claim 4 further comprising a respective impedance element electrically connected between the spaced apart end portions of adjacent

legs of adjacent dipole antenna elements for further increasing the capacitive coupling therebetween.

6. A method of making a phased array antenna that selectively functions as an absorber, the method comprising:
5 providing a substrate; and
forming an array of dipole antenna elements on the substrate, each dipole antenna element comprising a medial feed portion, and a pair of legs extending outwardly
10 therefrom, and a passive load and a switch connected thereto for selectively coupling the passive load to the medial feed portion so that the dipole antenna element selectively functions as an absorber for absorbing received signals while the passive load dissipates energy associated therewith.

15



7. A method according to Claim 6 wherein forming the dipole antenna elements comprises forming adjacent legs of adjacent dipole antenna elements to include respective spaced apart end portions having predetermined shapes and relative
20 positioning to provide increased capacitive coupling between the adjacent dipole antenna elements.

8. A method according to Claim 7 wherein the phased array antenna has a desired frequency range; and
25 further comprising forming a ground plane adjacent the array of dipole antenna elements, and wherein the ground plane is spaced from the array of dipole antenna elements less than about one-half a wavelength of a highest desired frequency.

30 9. A method according to Claim 7 wherein the substrate comprises an inflatable substrate.

10. A method according to Claim 9 further comprising forming a dielectric layer between the array of dipole antenna elements and the inflatable substrate, the dielectric layer having a dielectric constant greater than a
5 dielectric constant of the inflatable substrate when inflated.

1/11

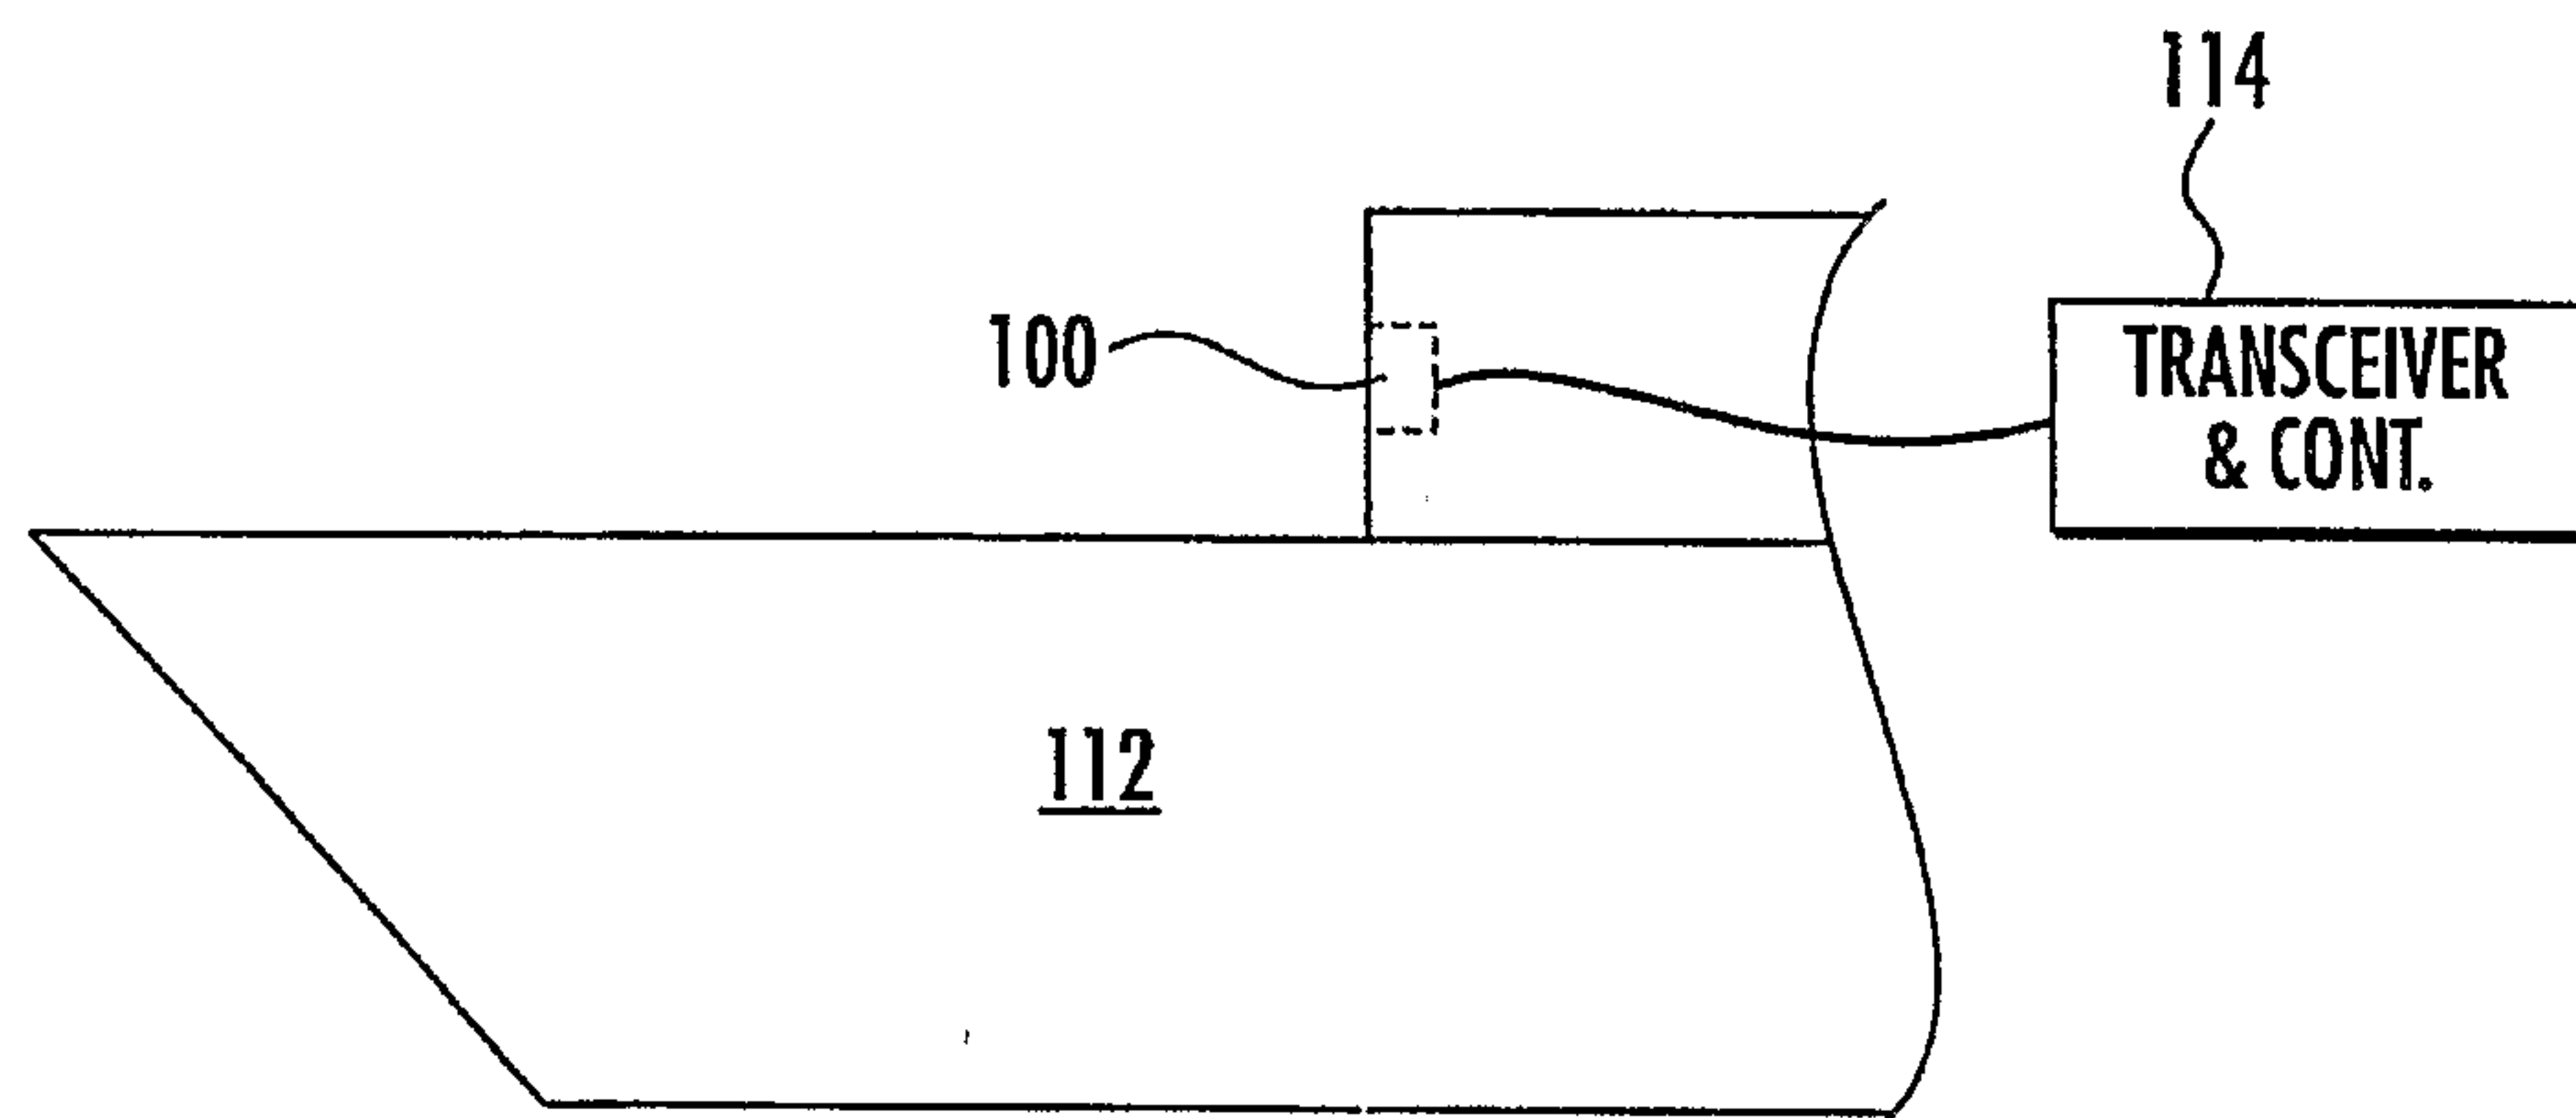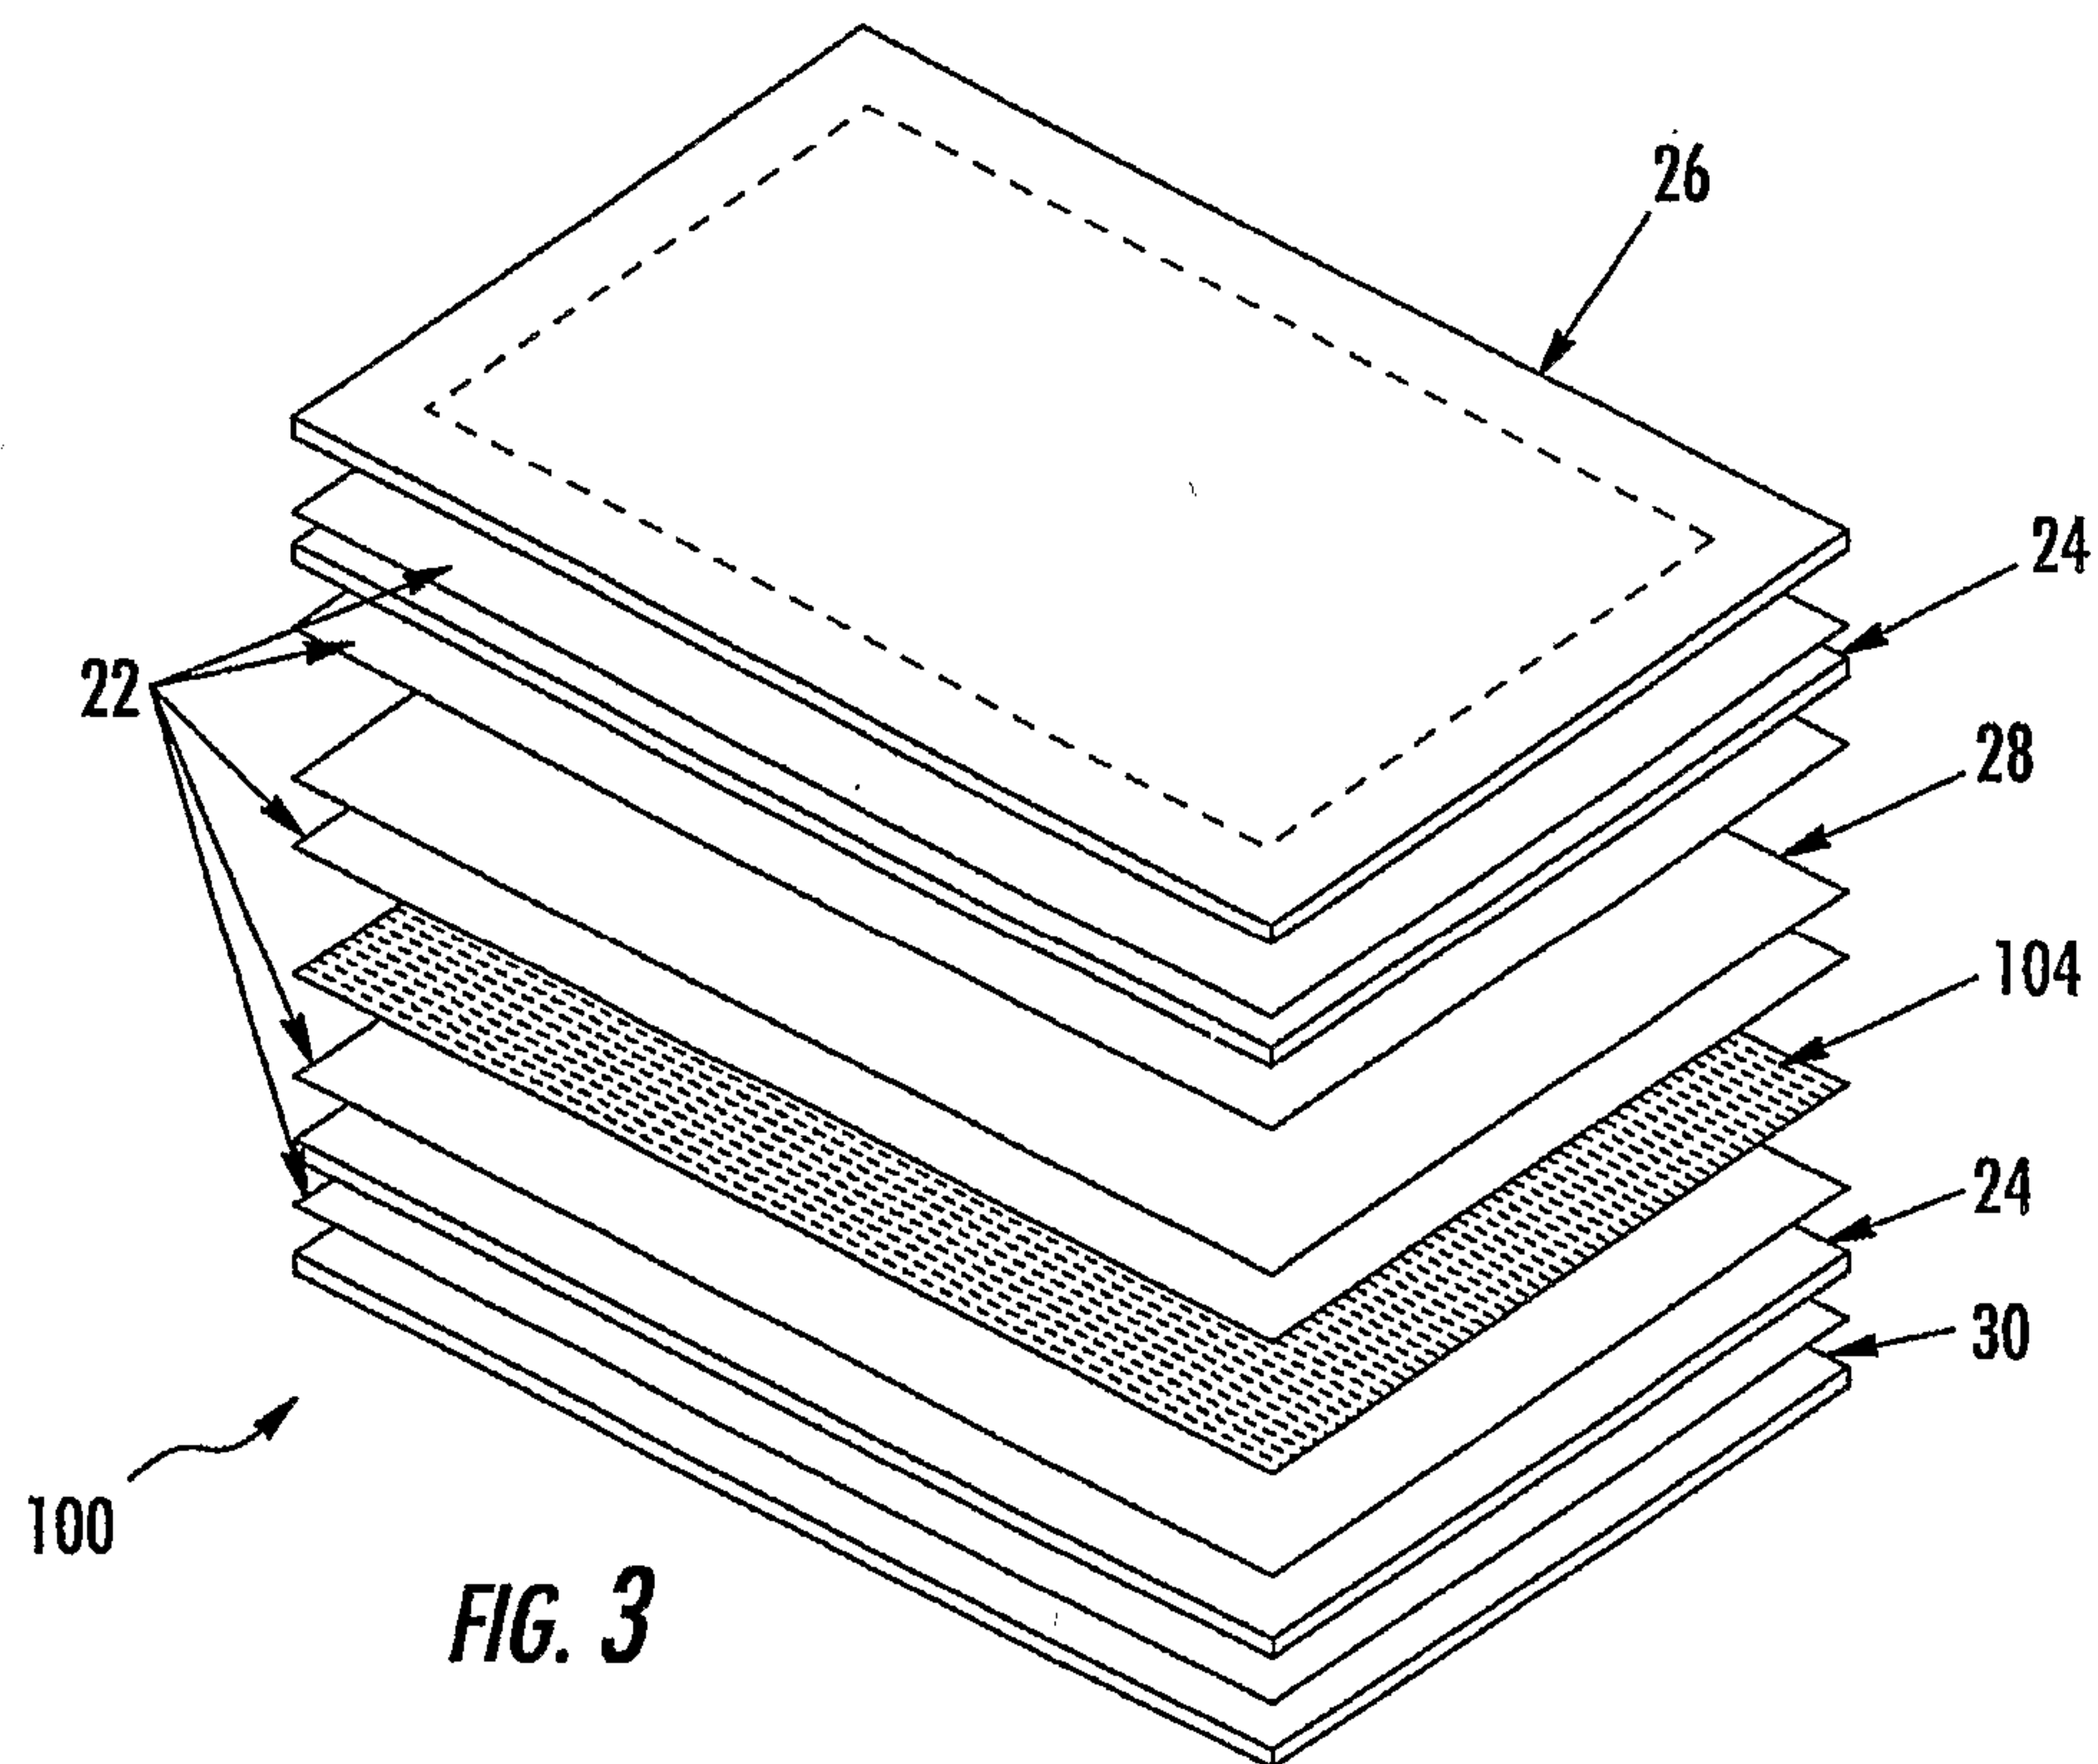**FIG. 1****FIG. 3**

2/11

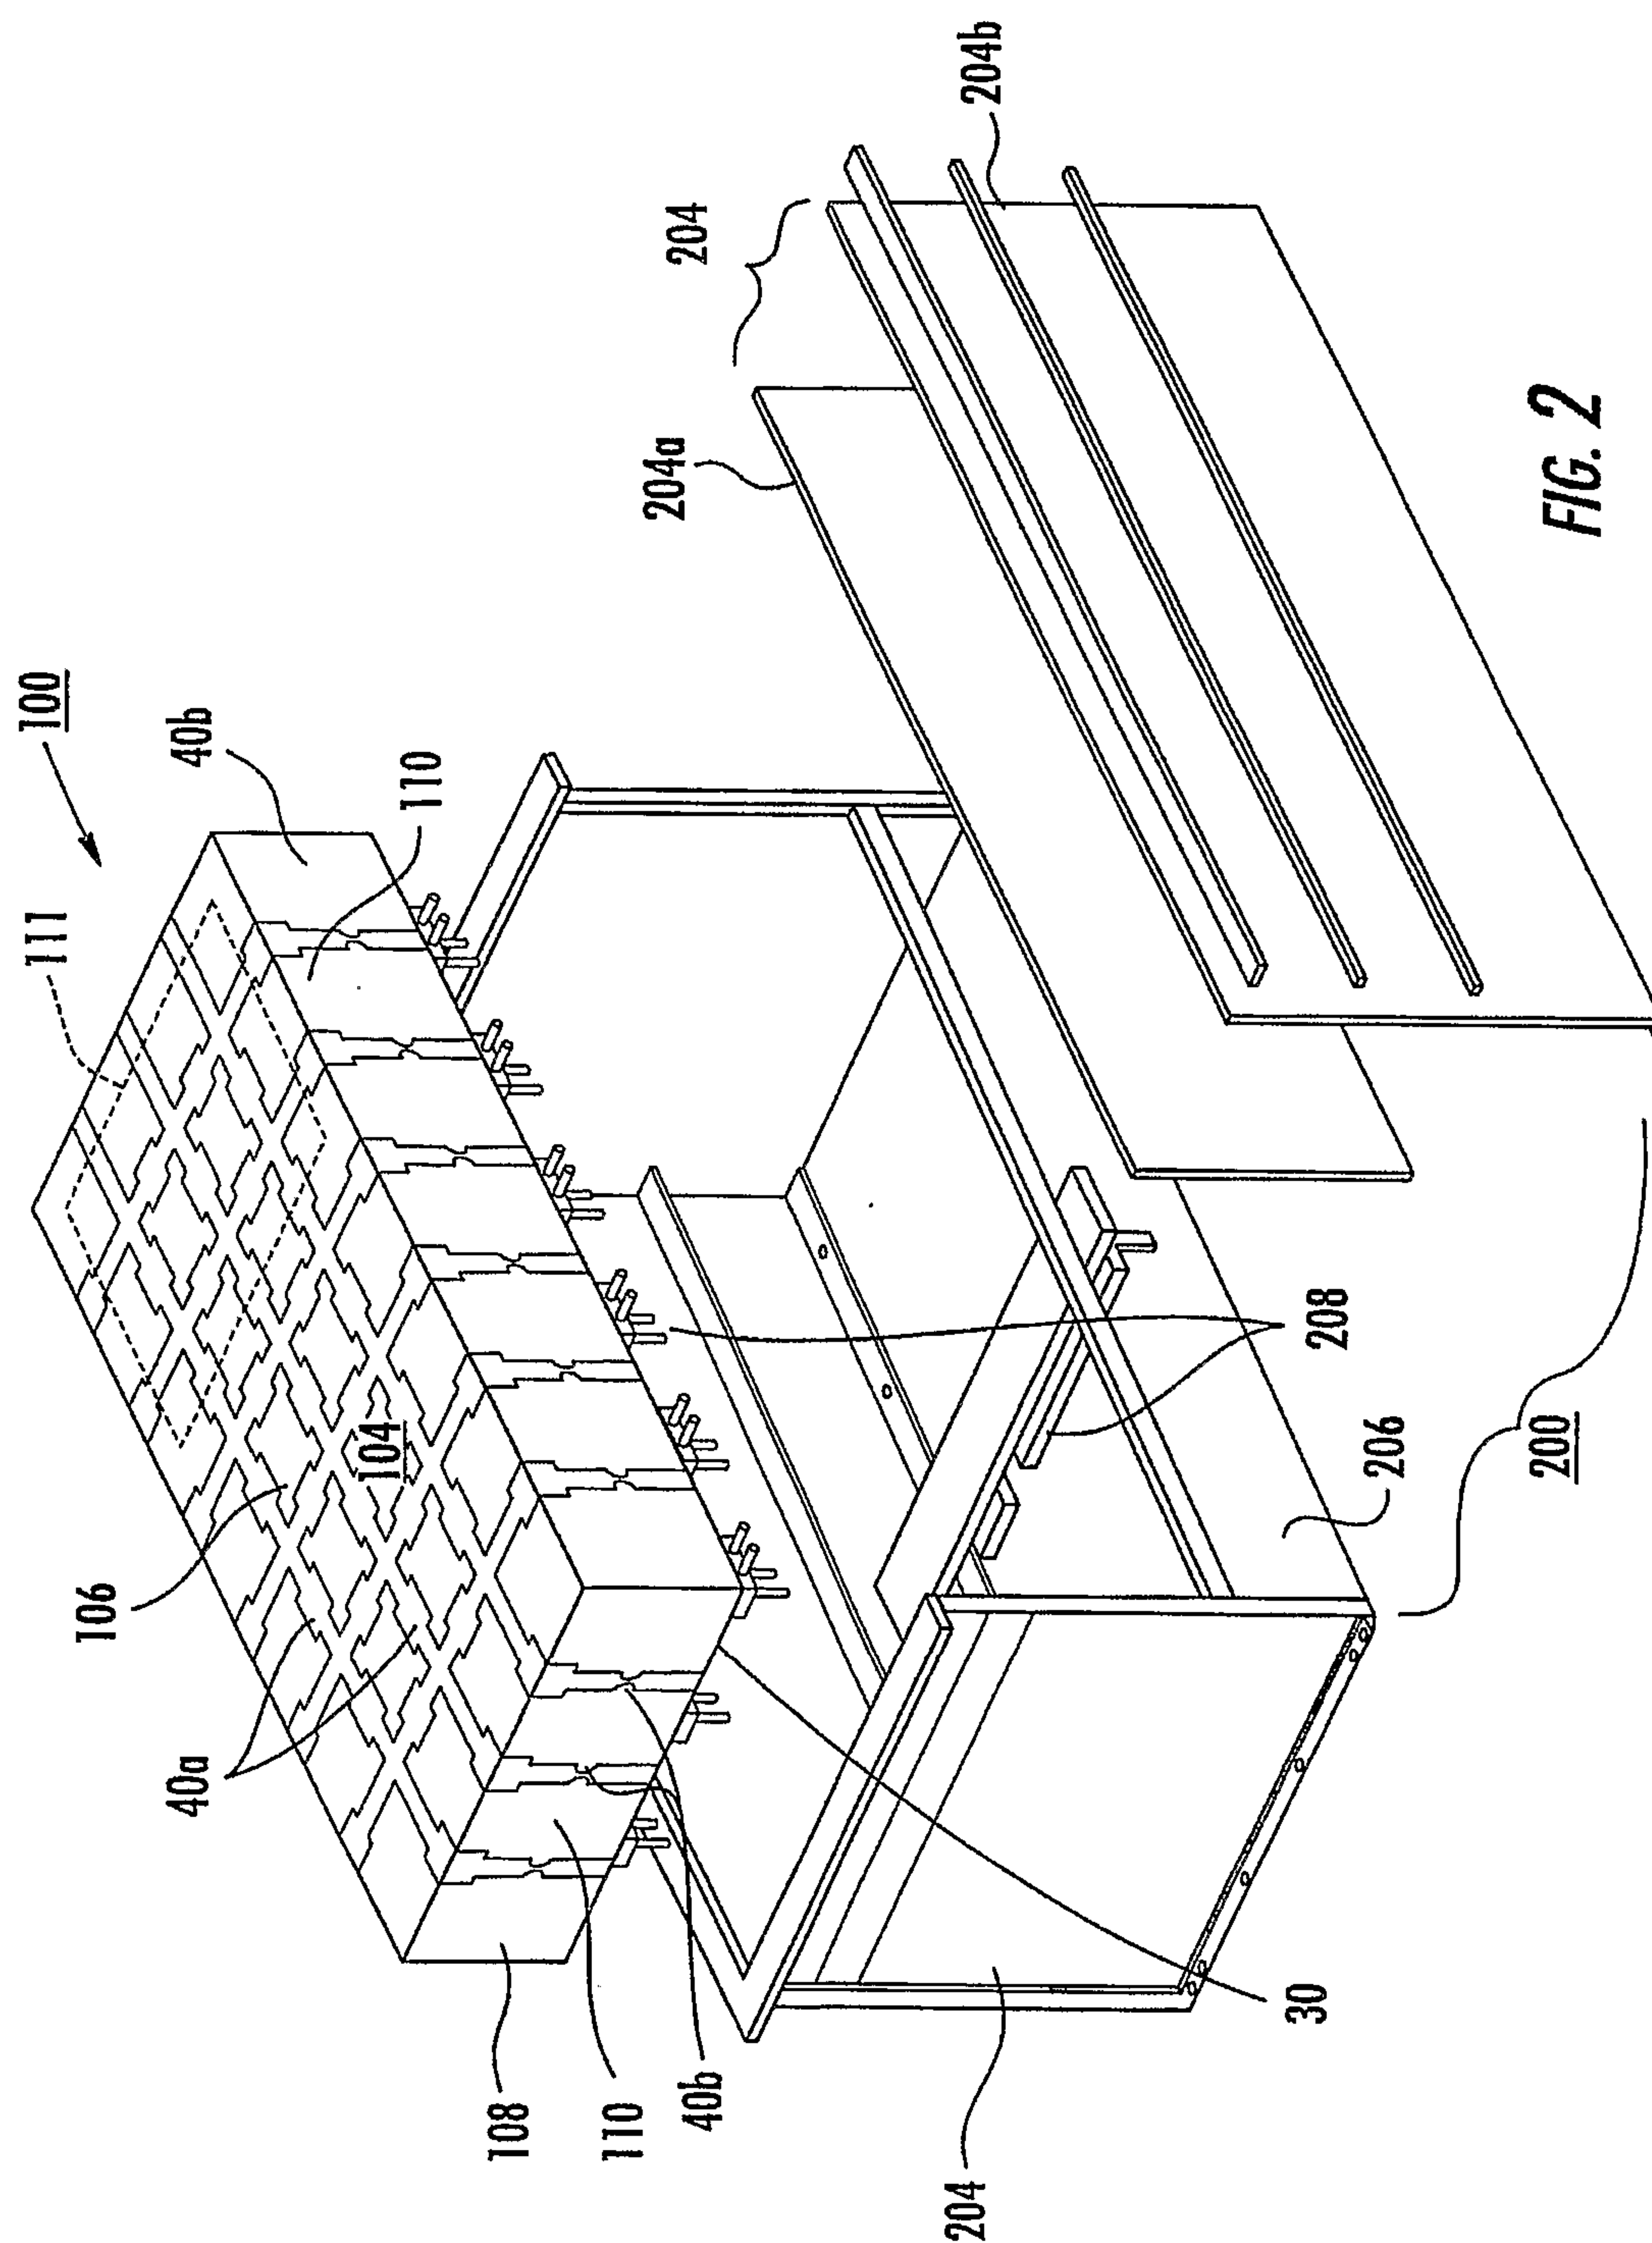
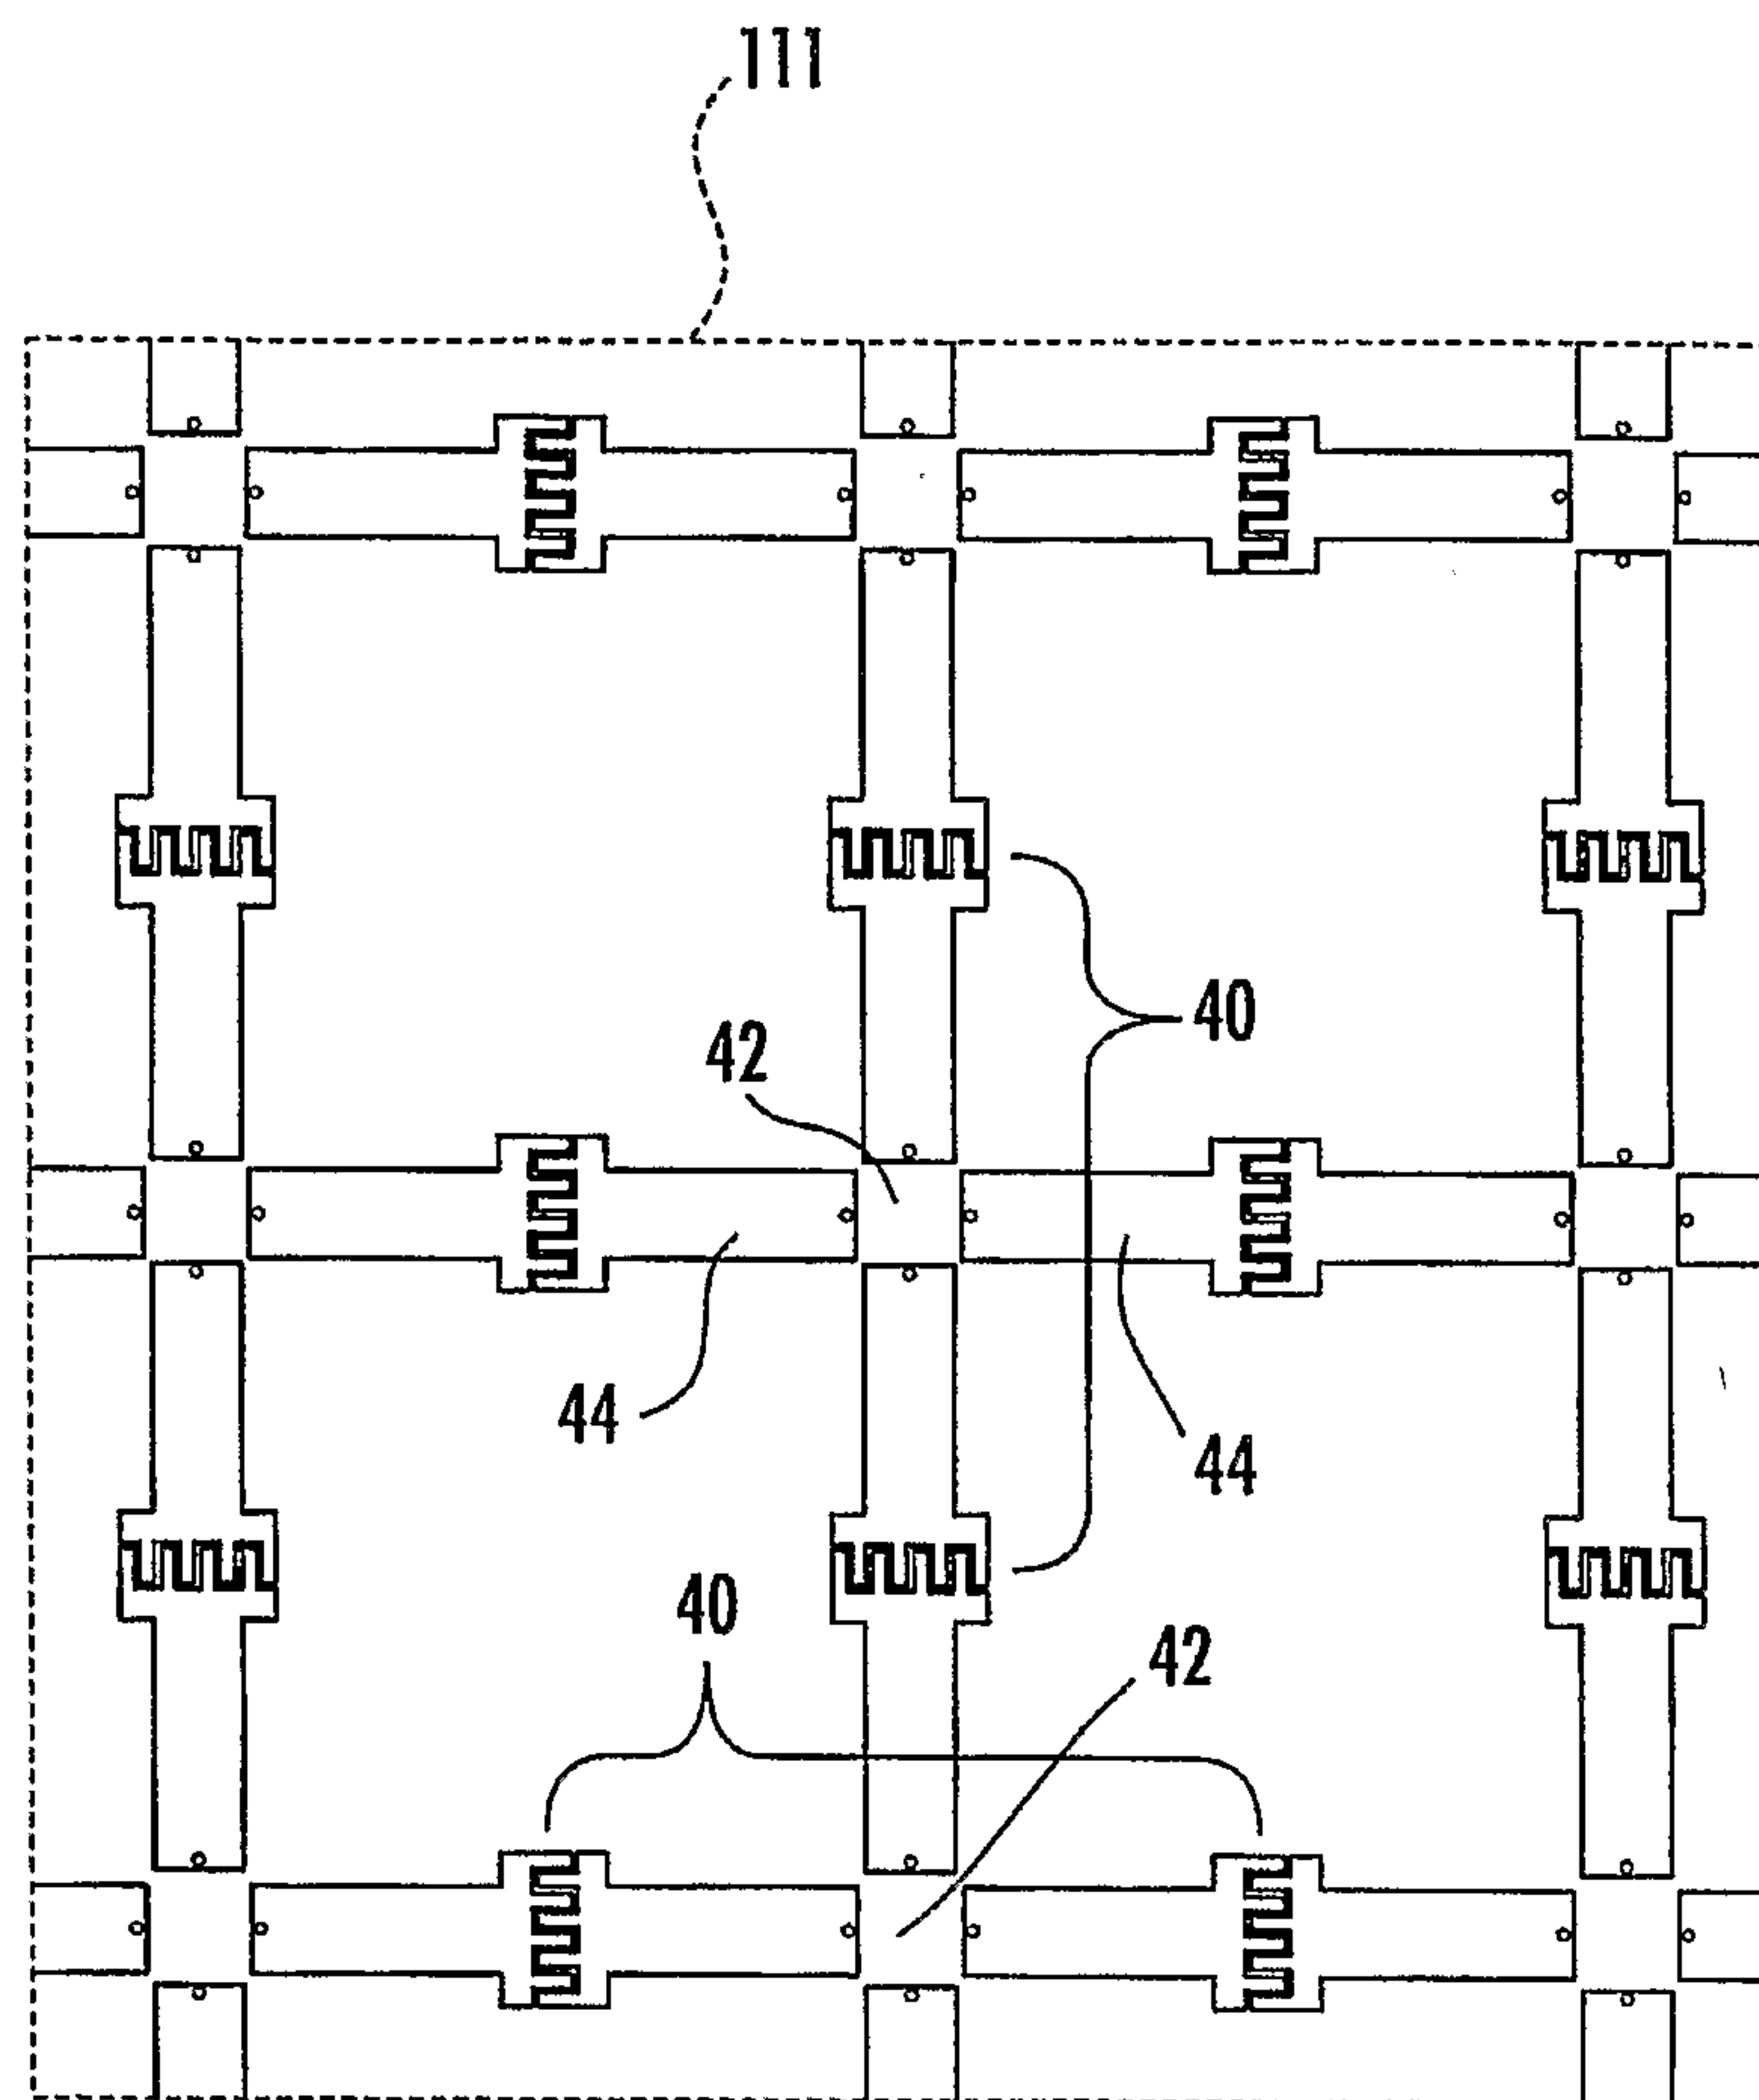


FIG. 2

3/11

**FIG. 4**

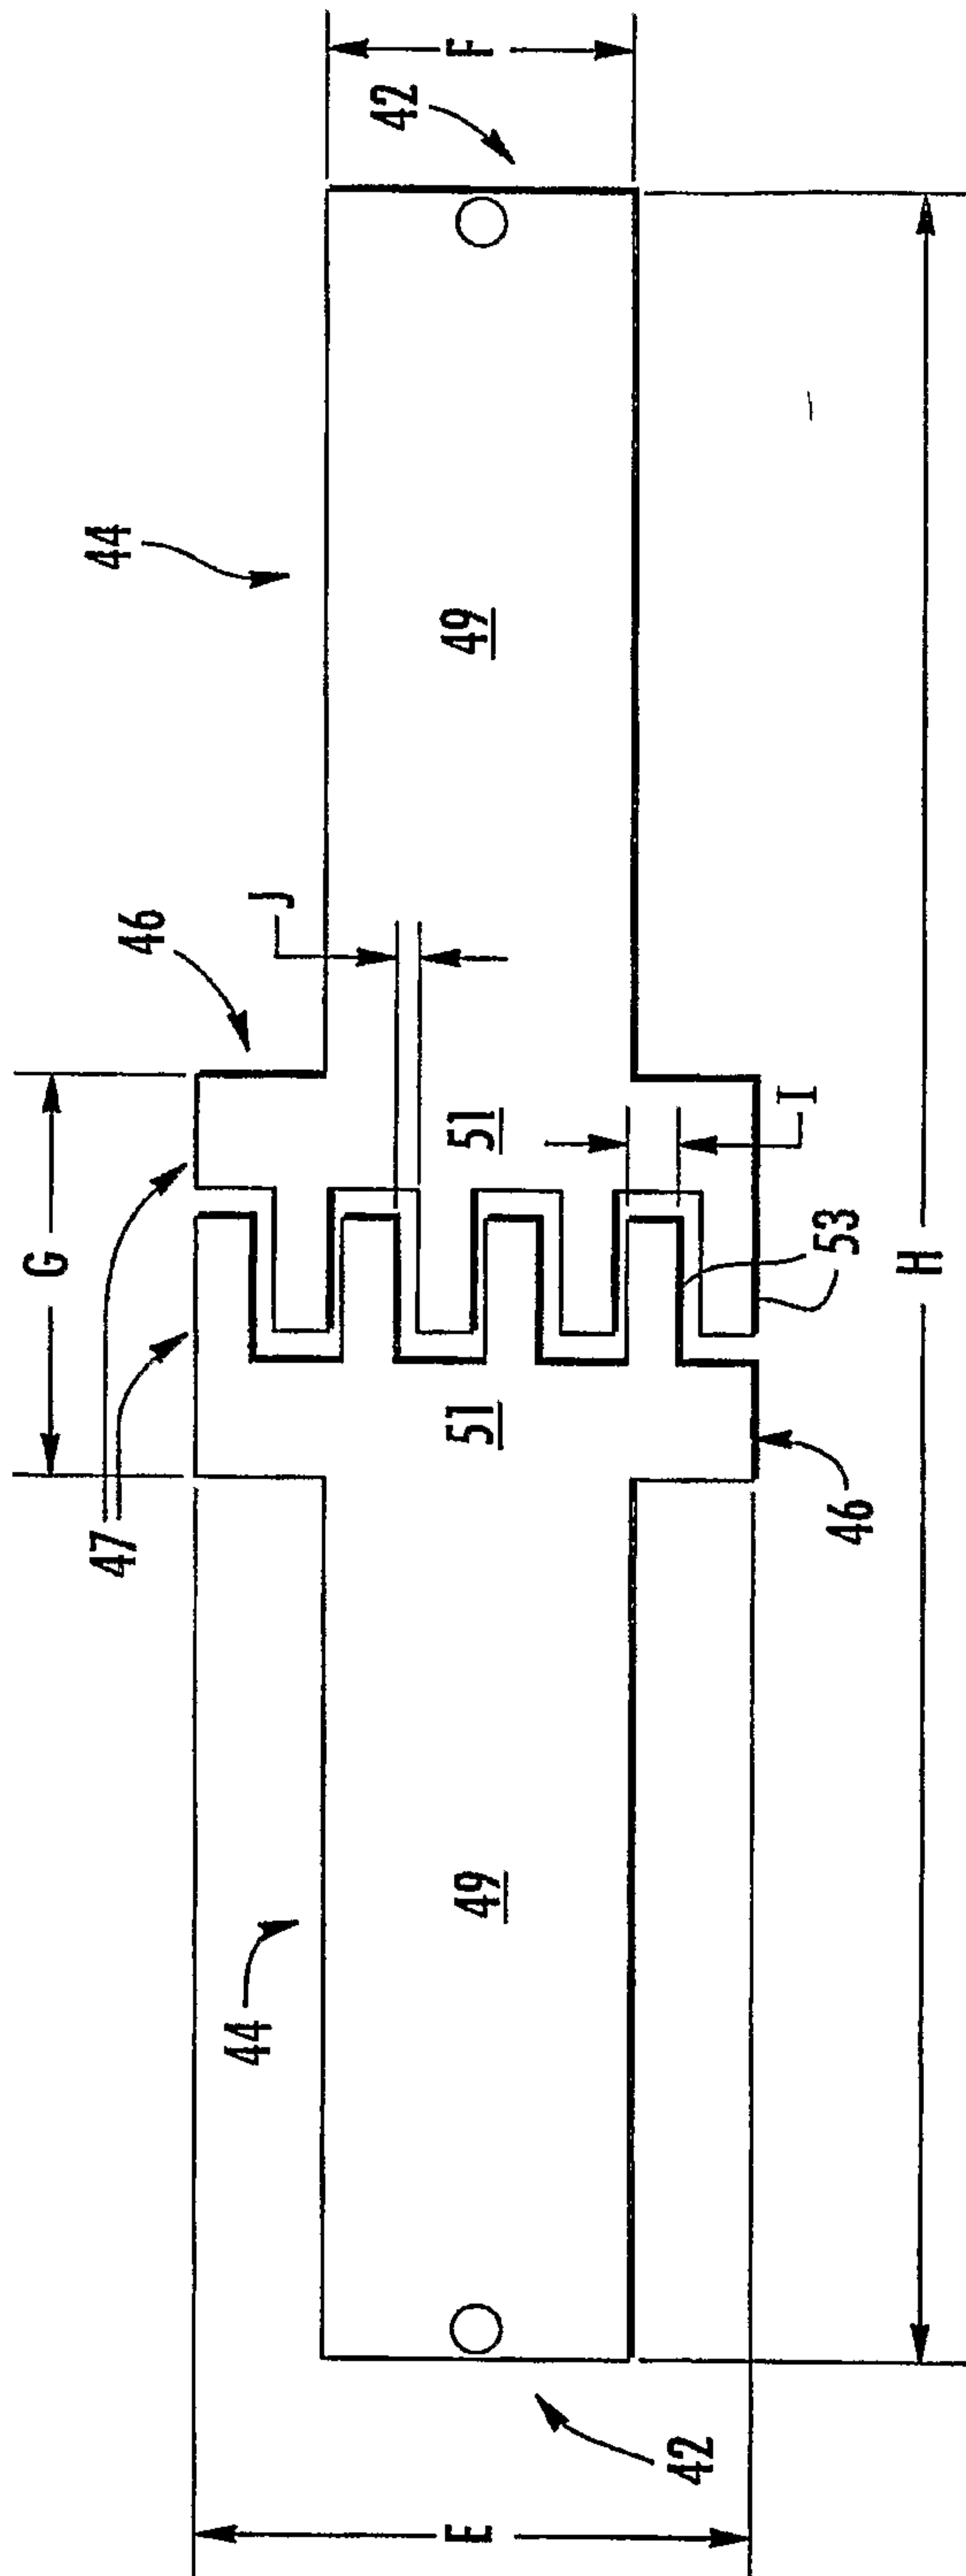


FIG. 5A



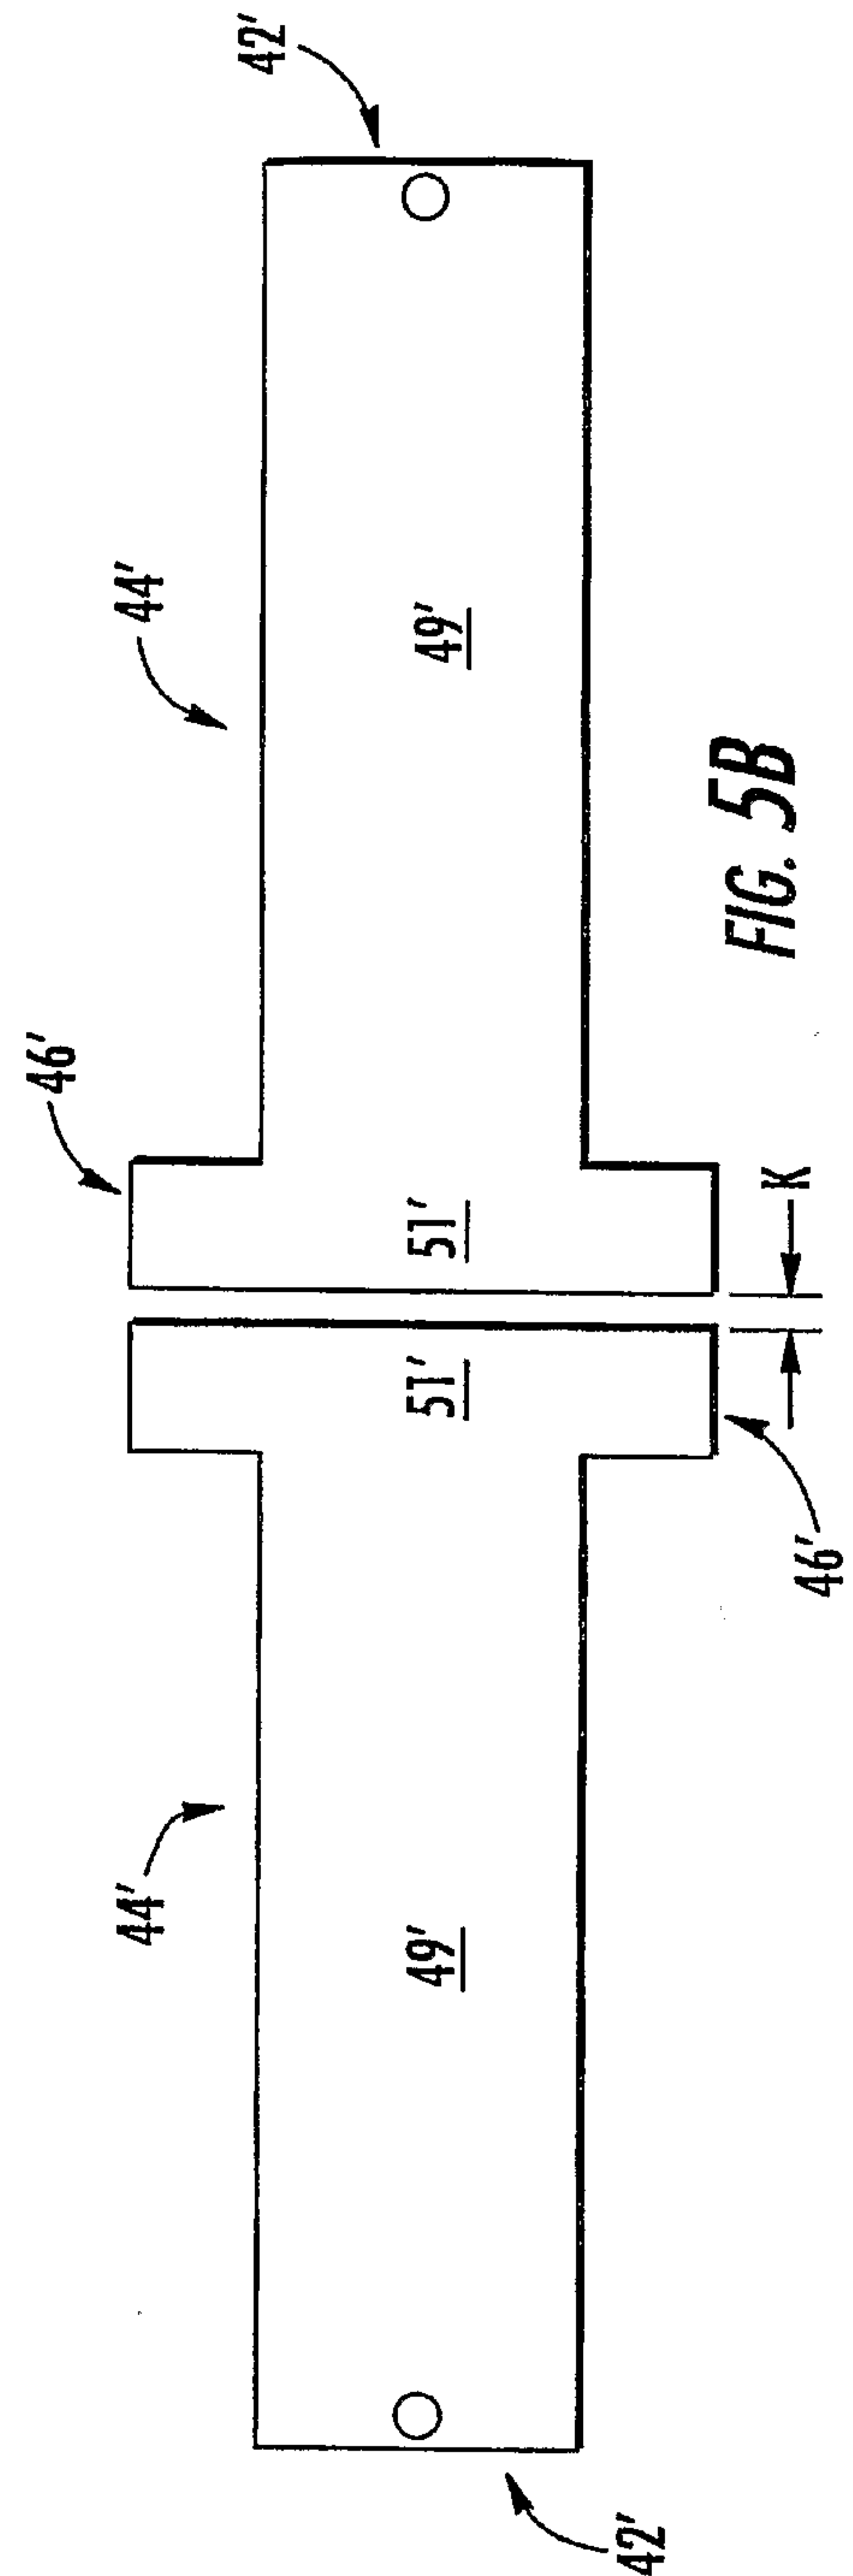


FIG. 5B

5/11

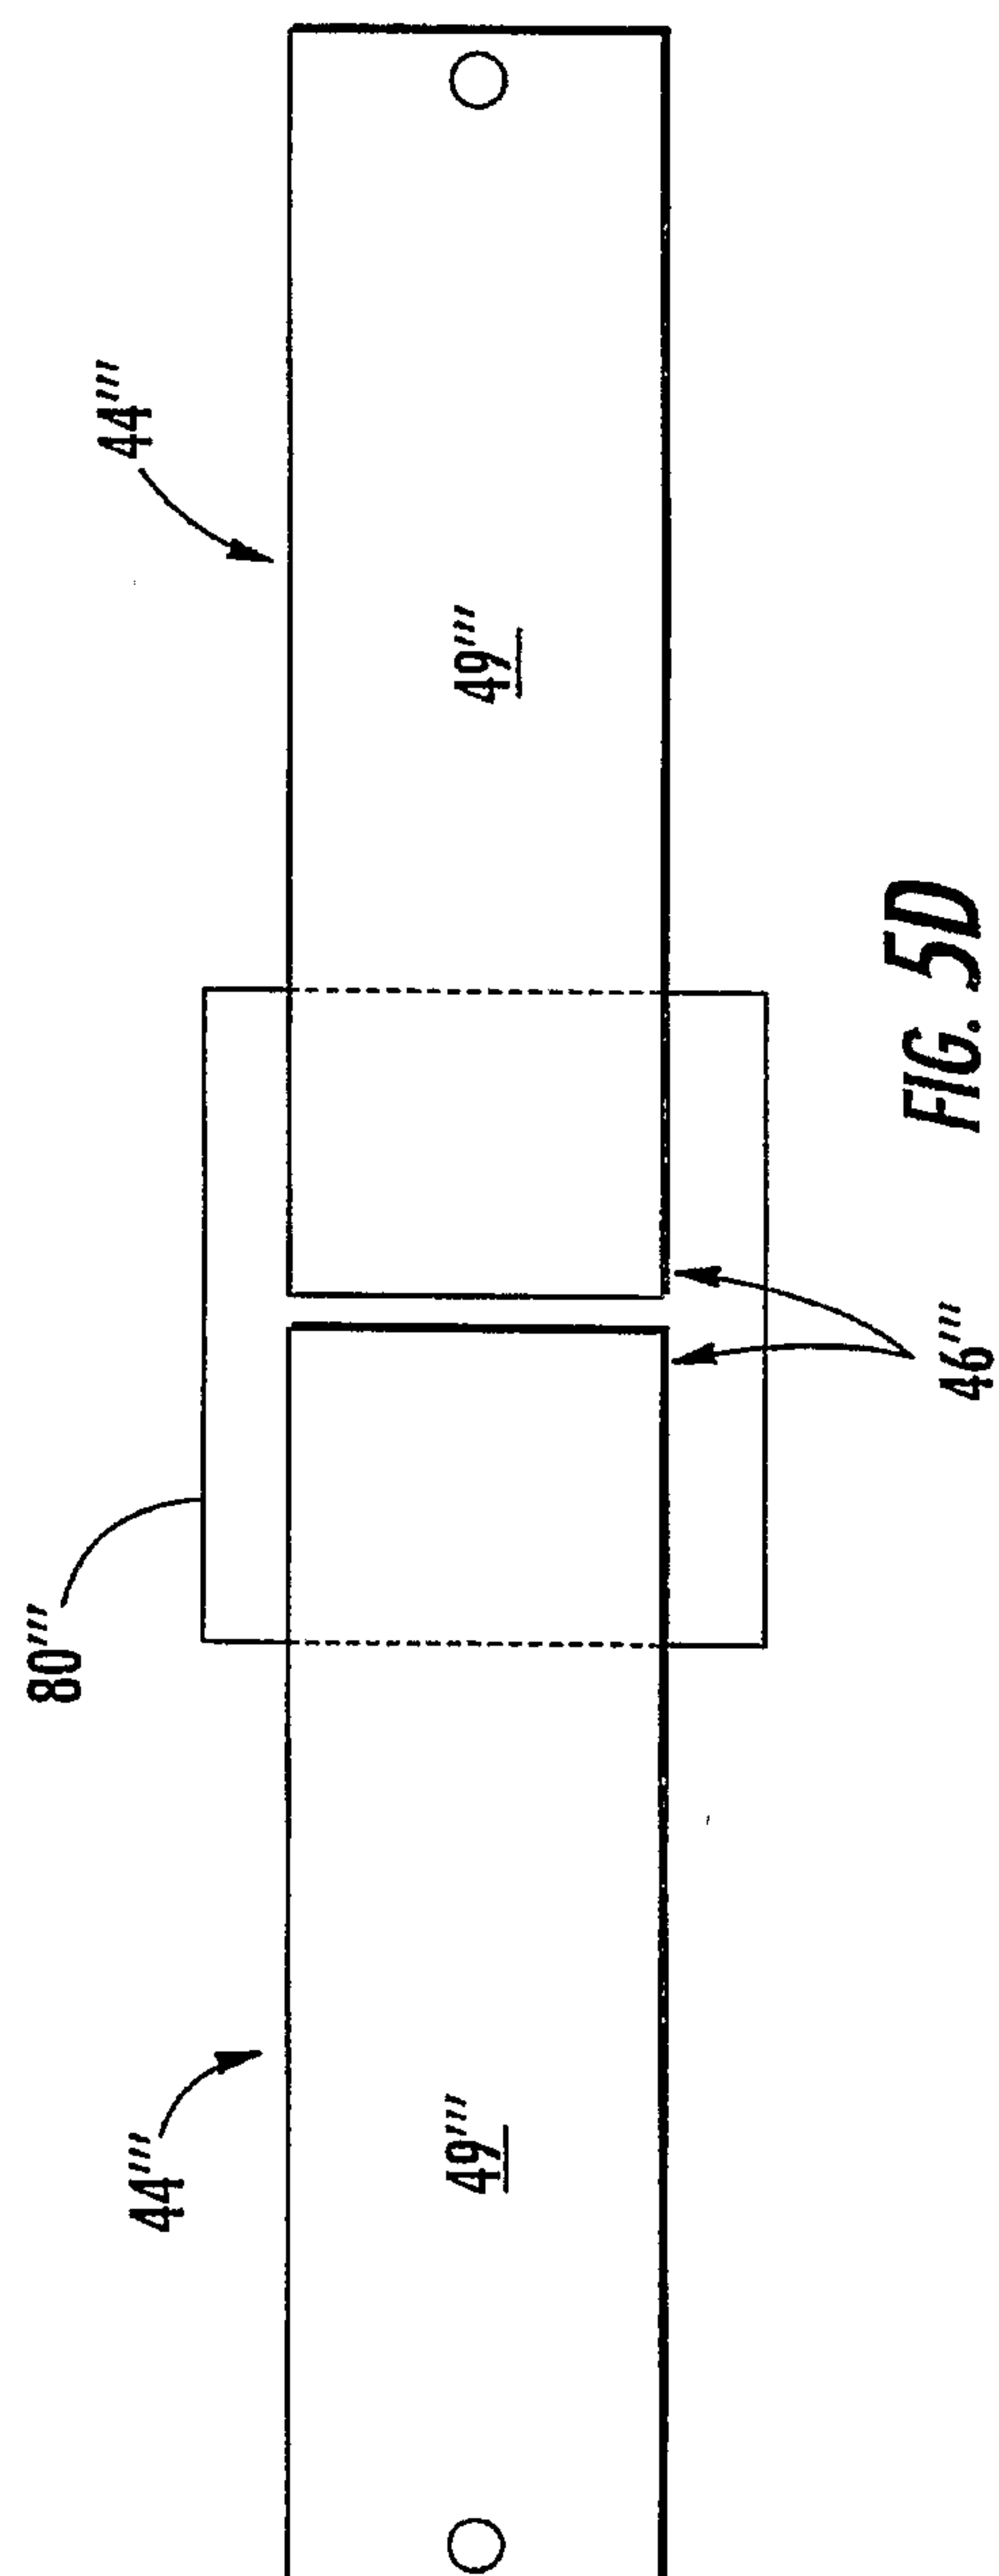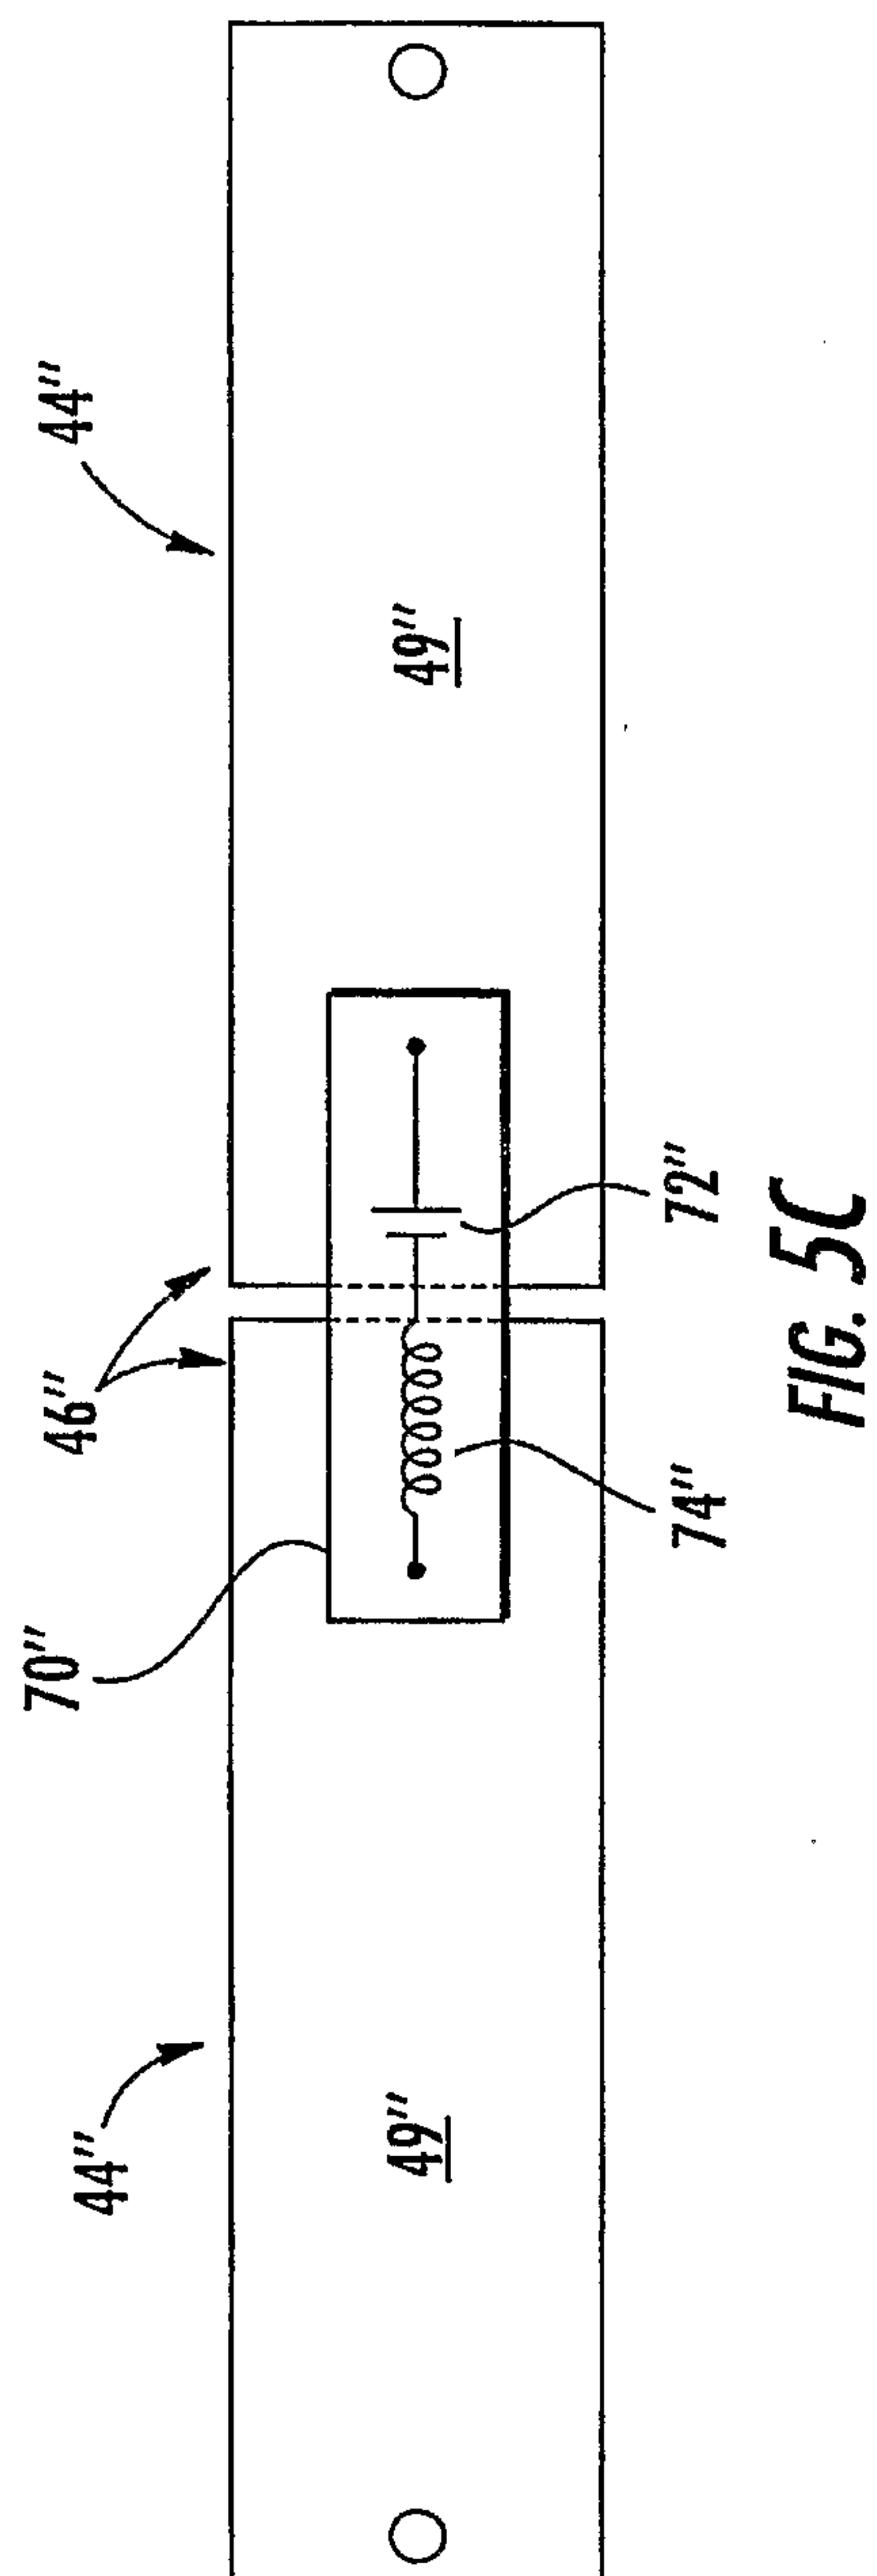

6/11

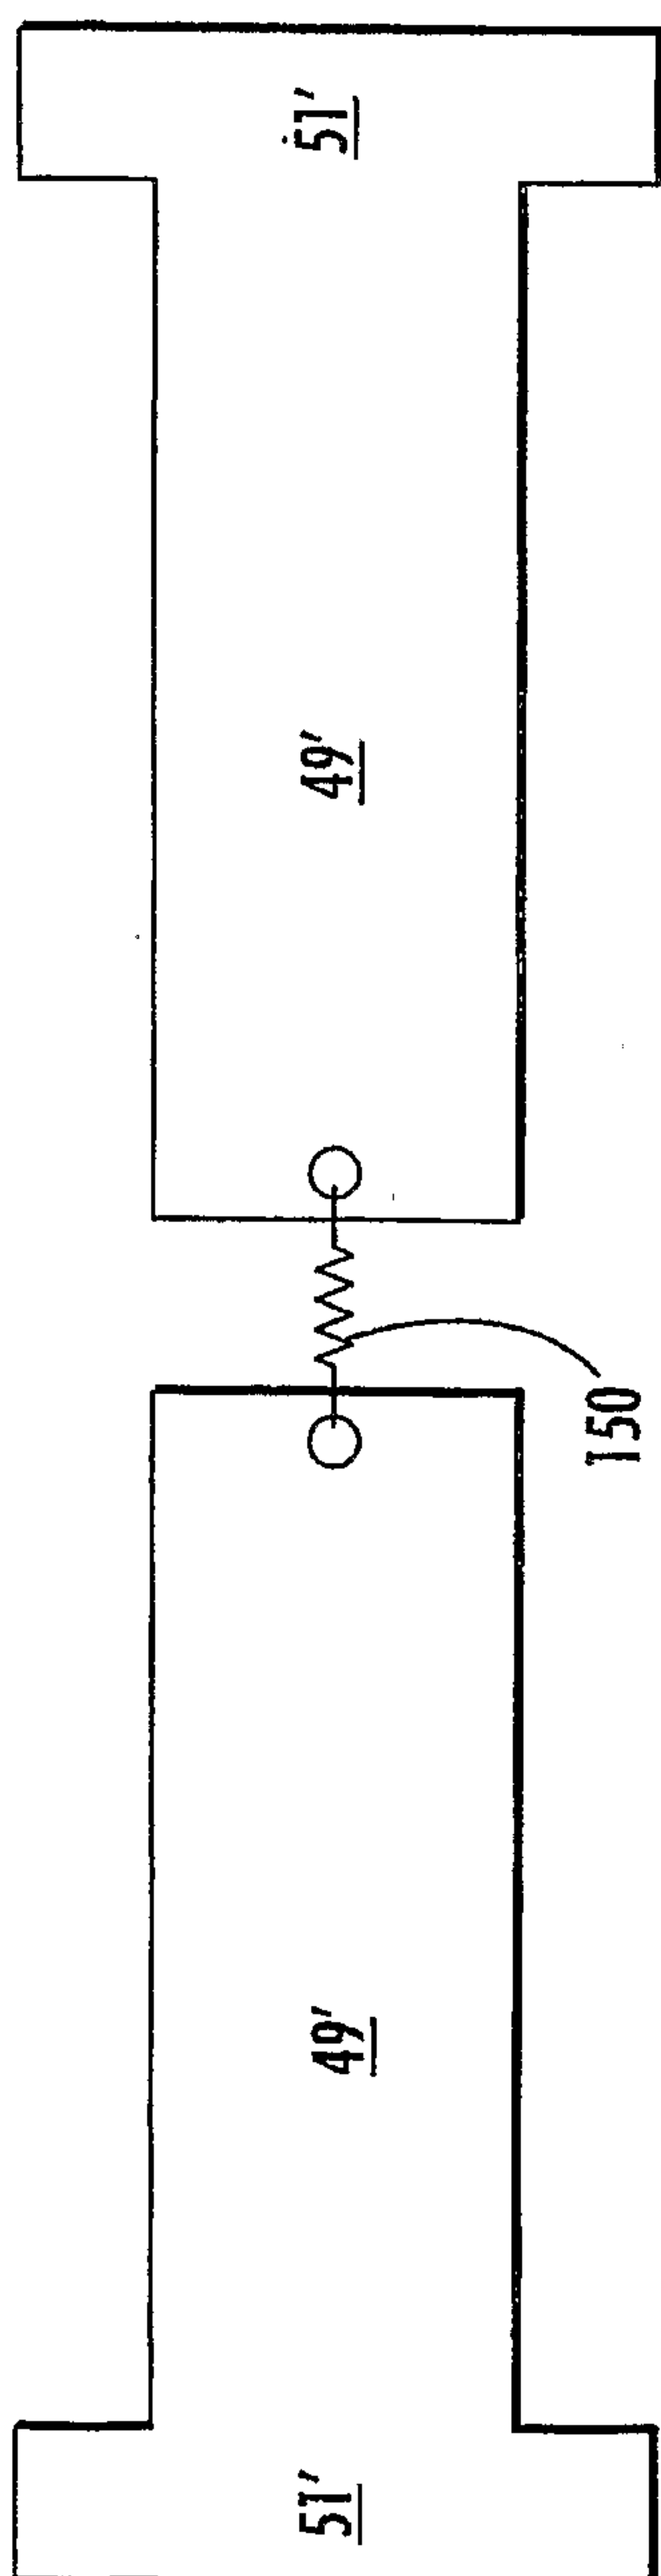


FIG. 6A

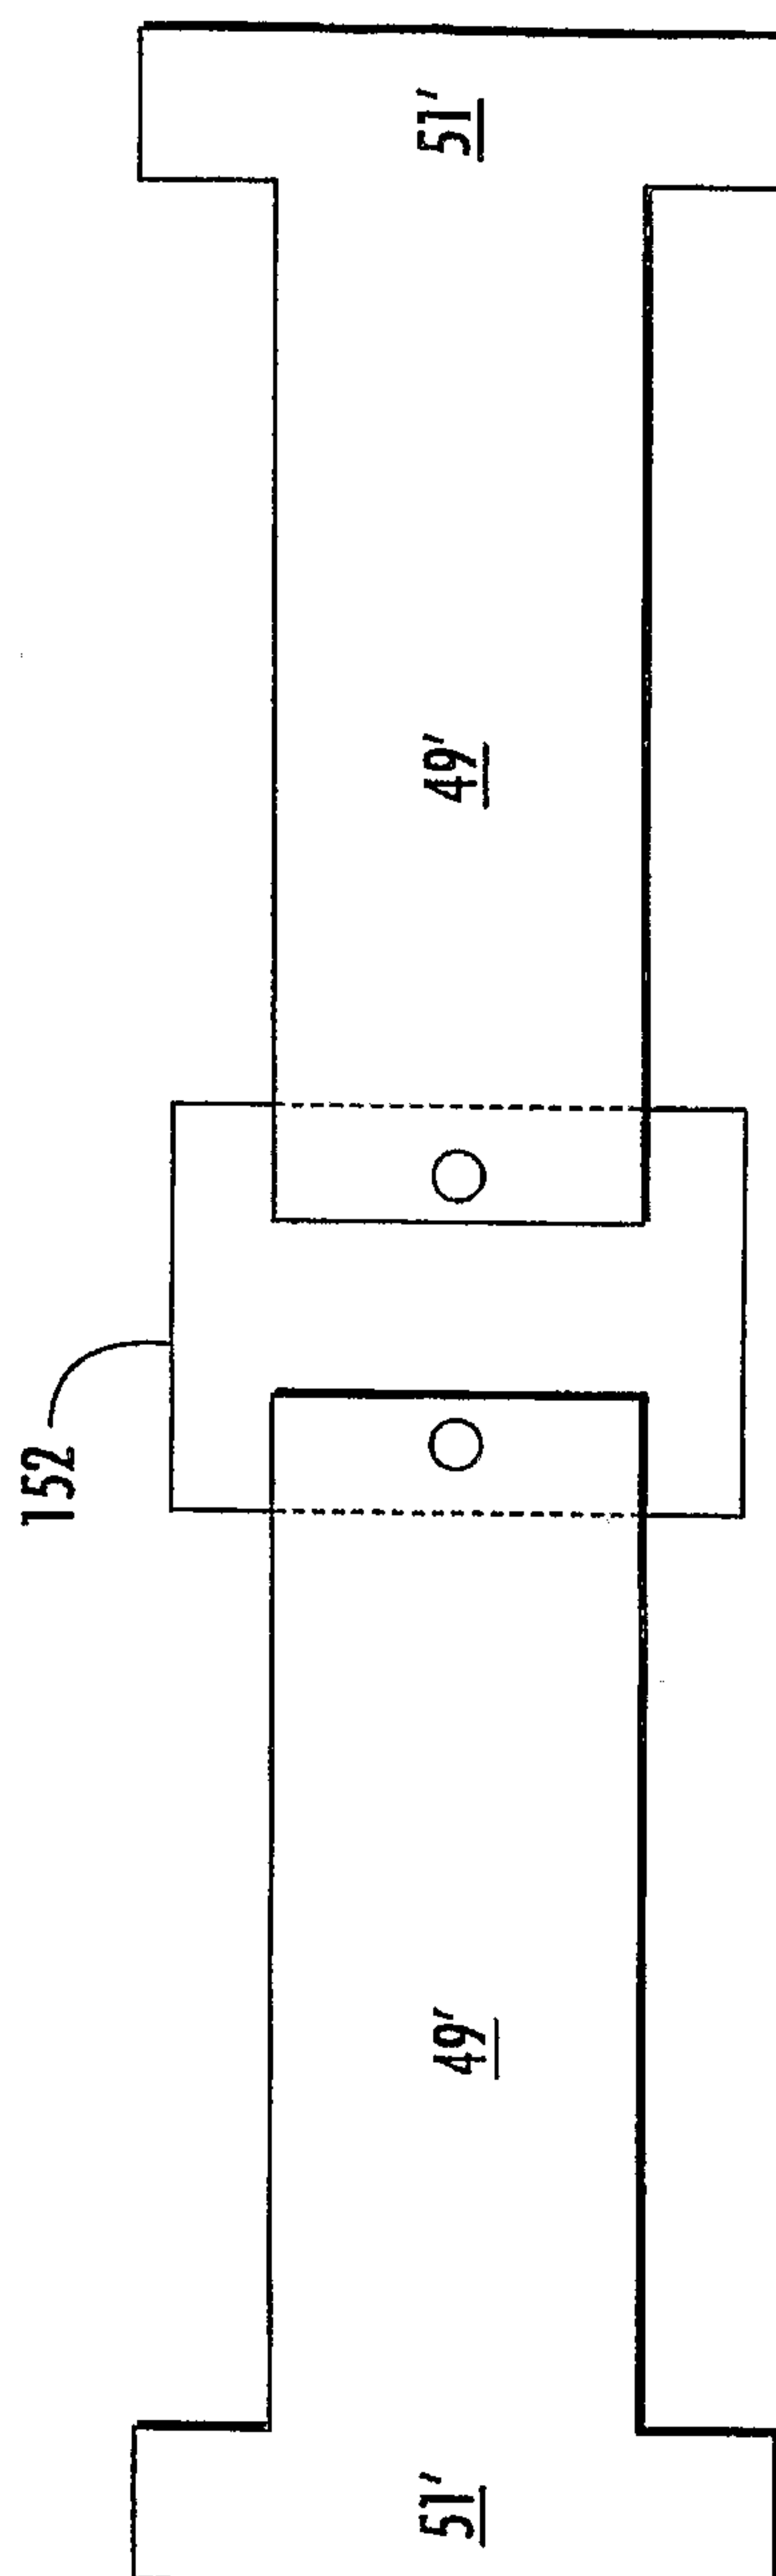
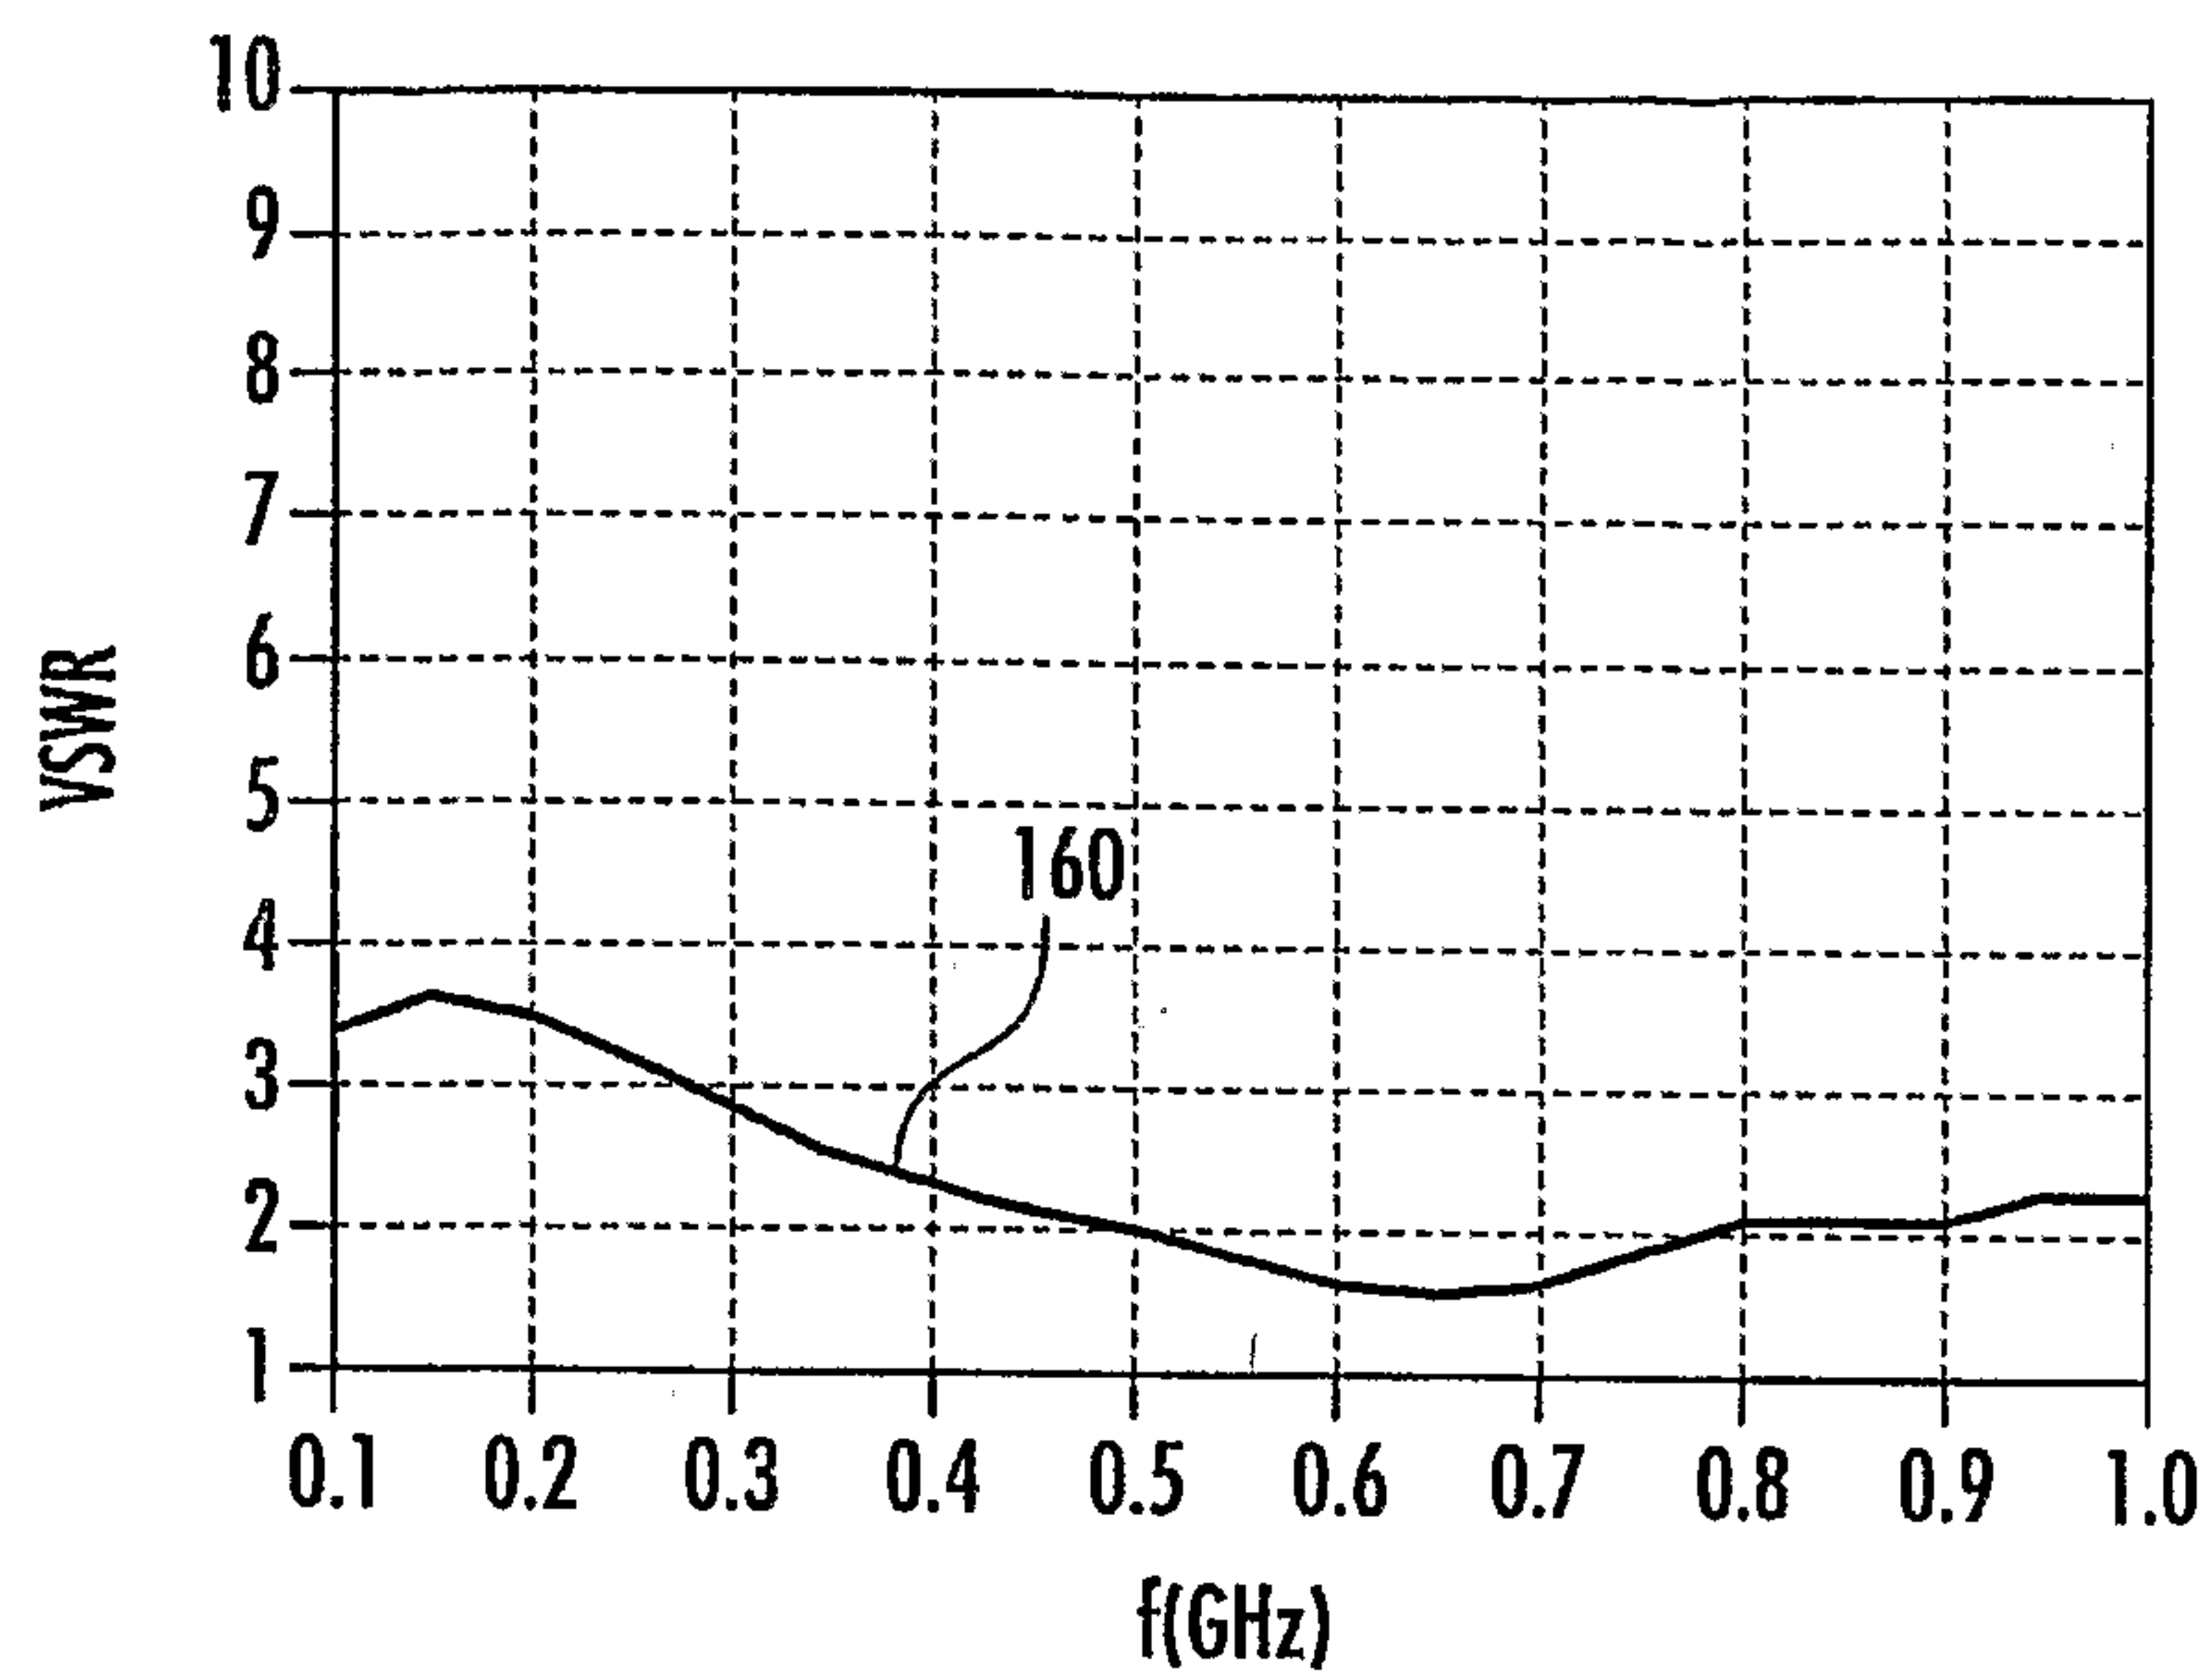
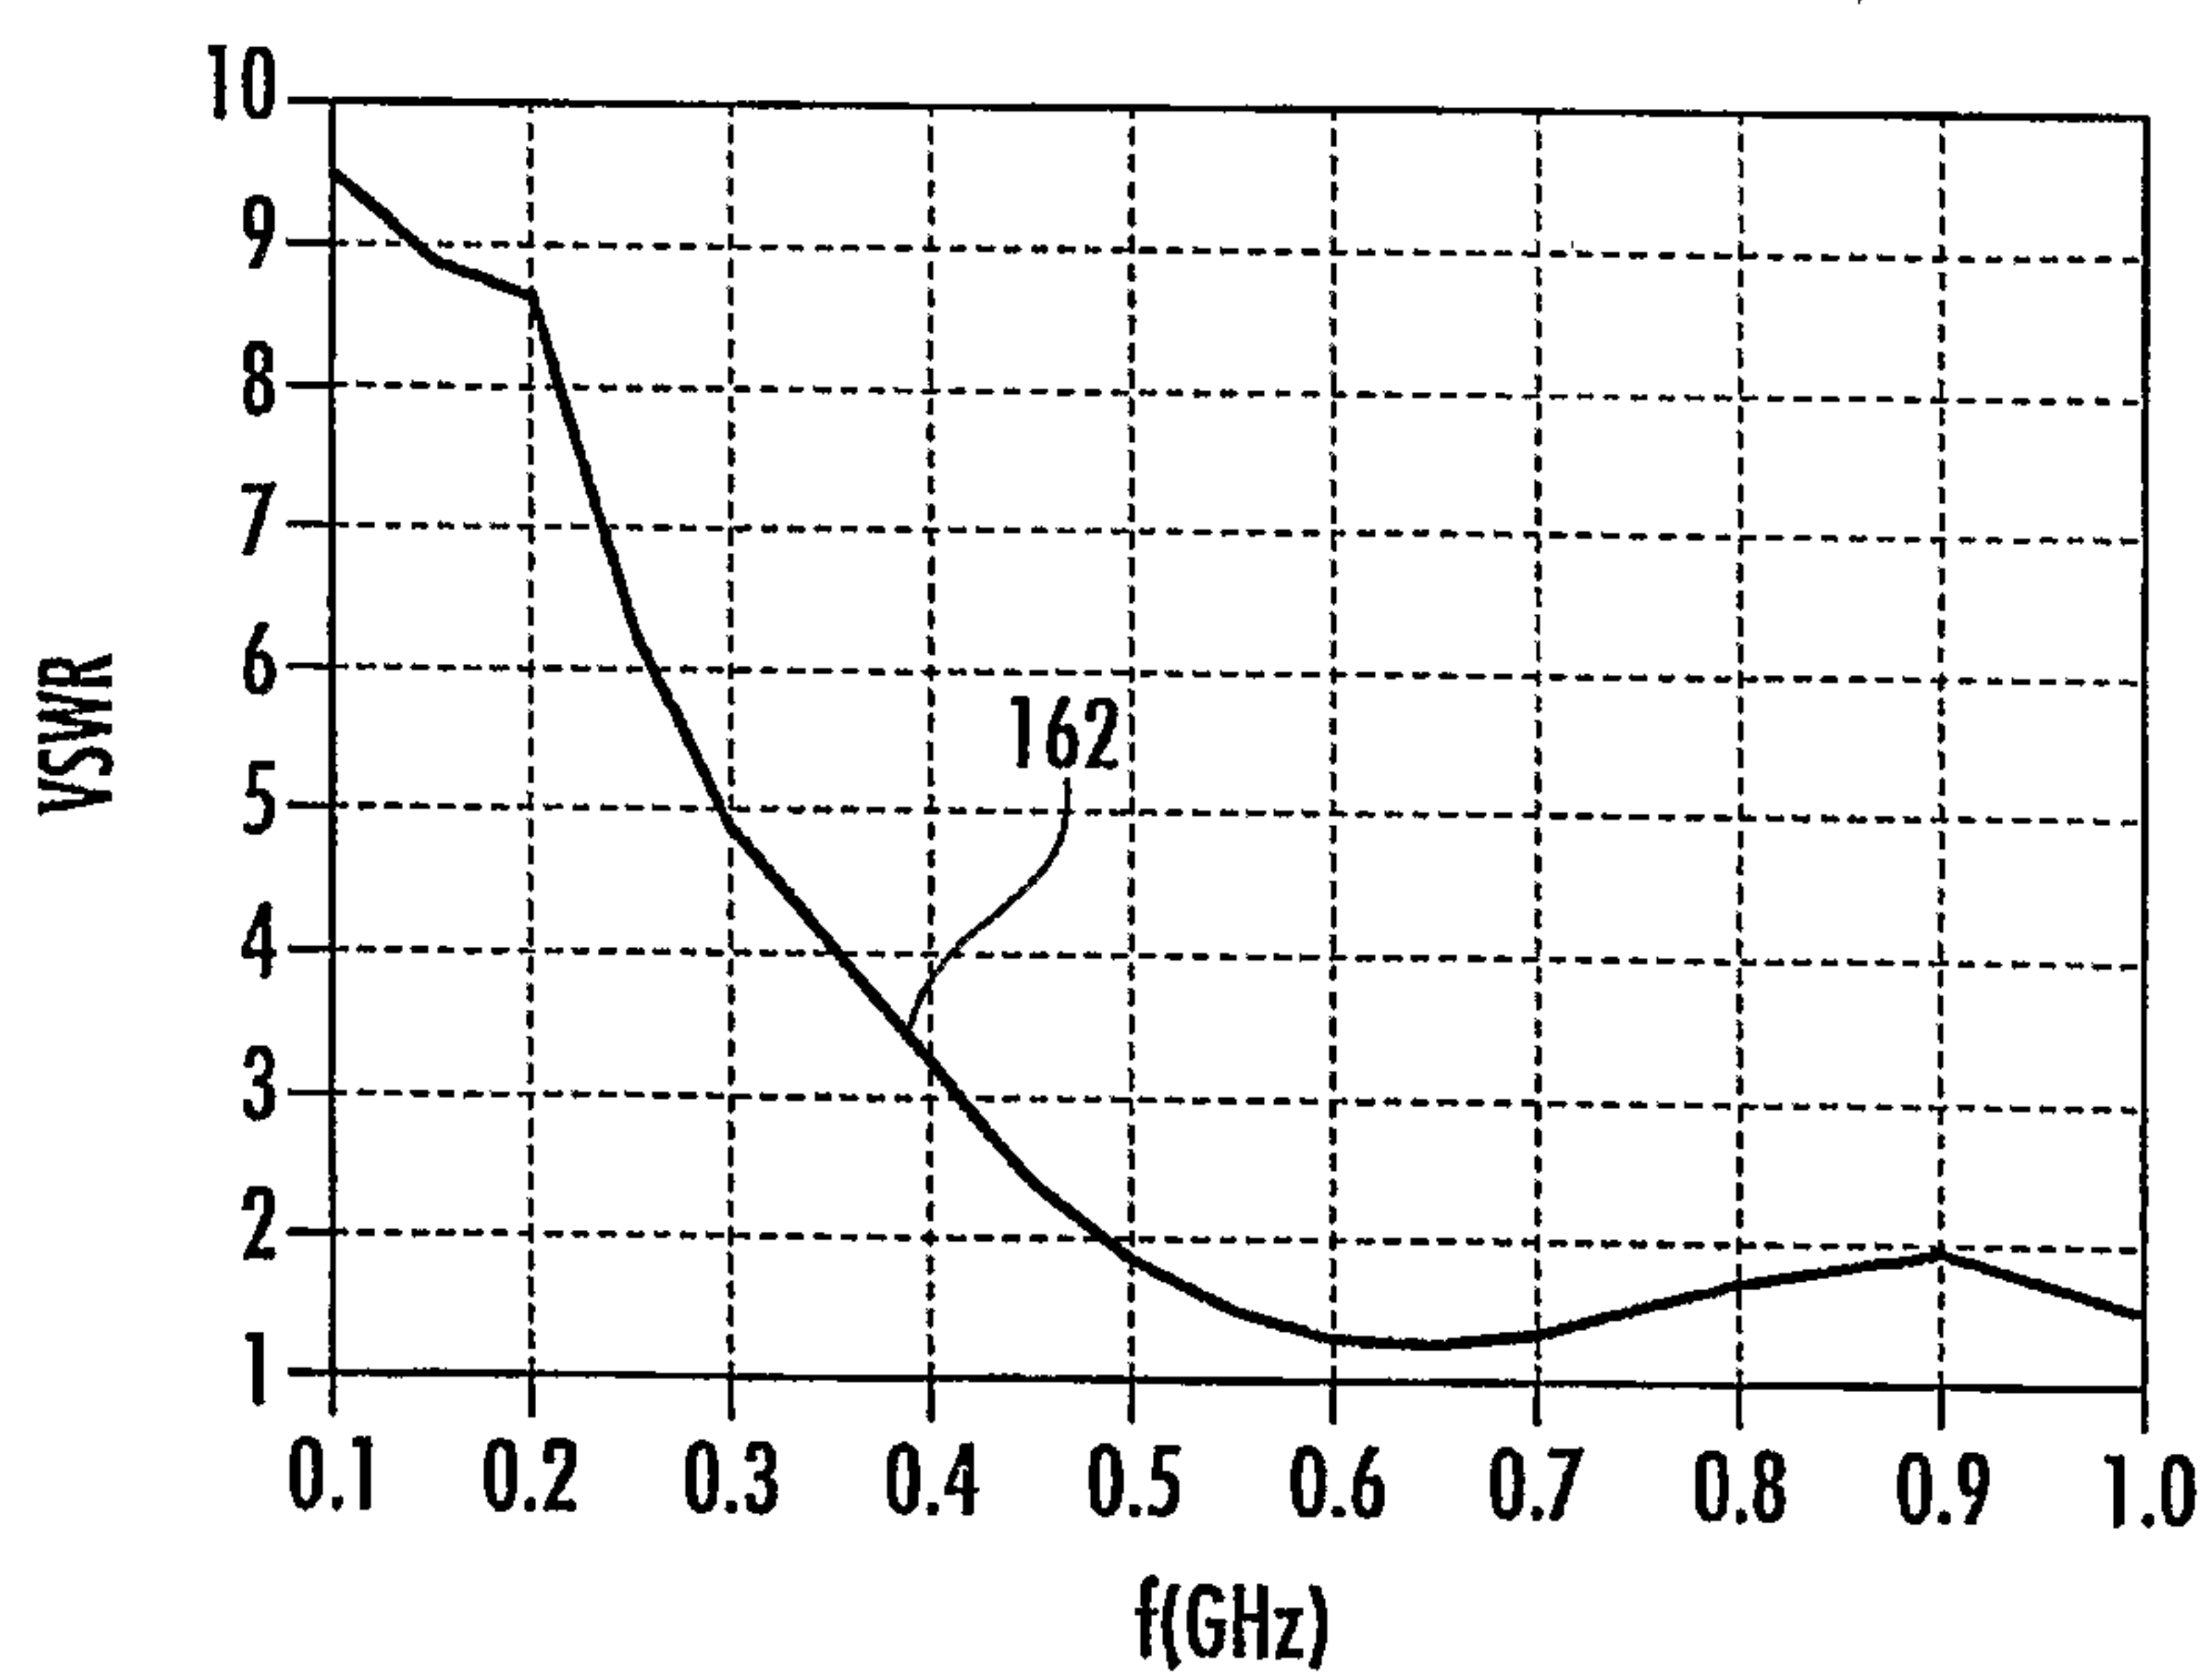
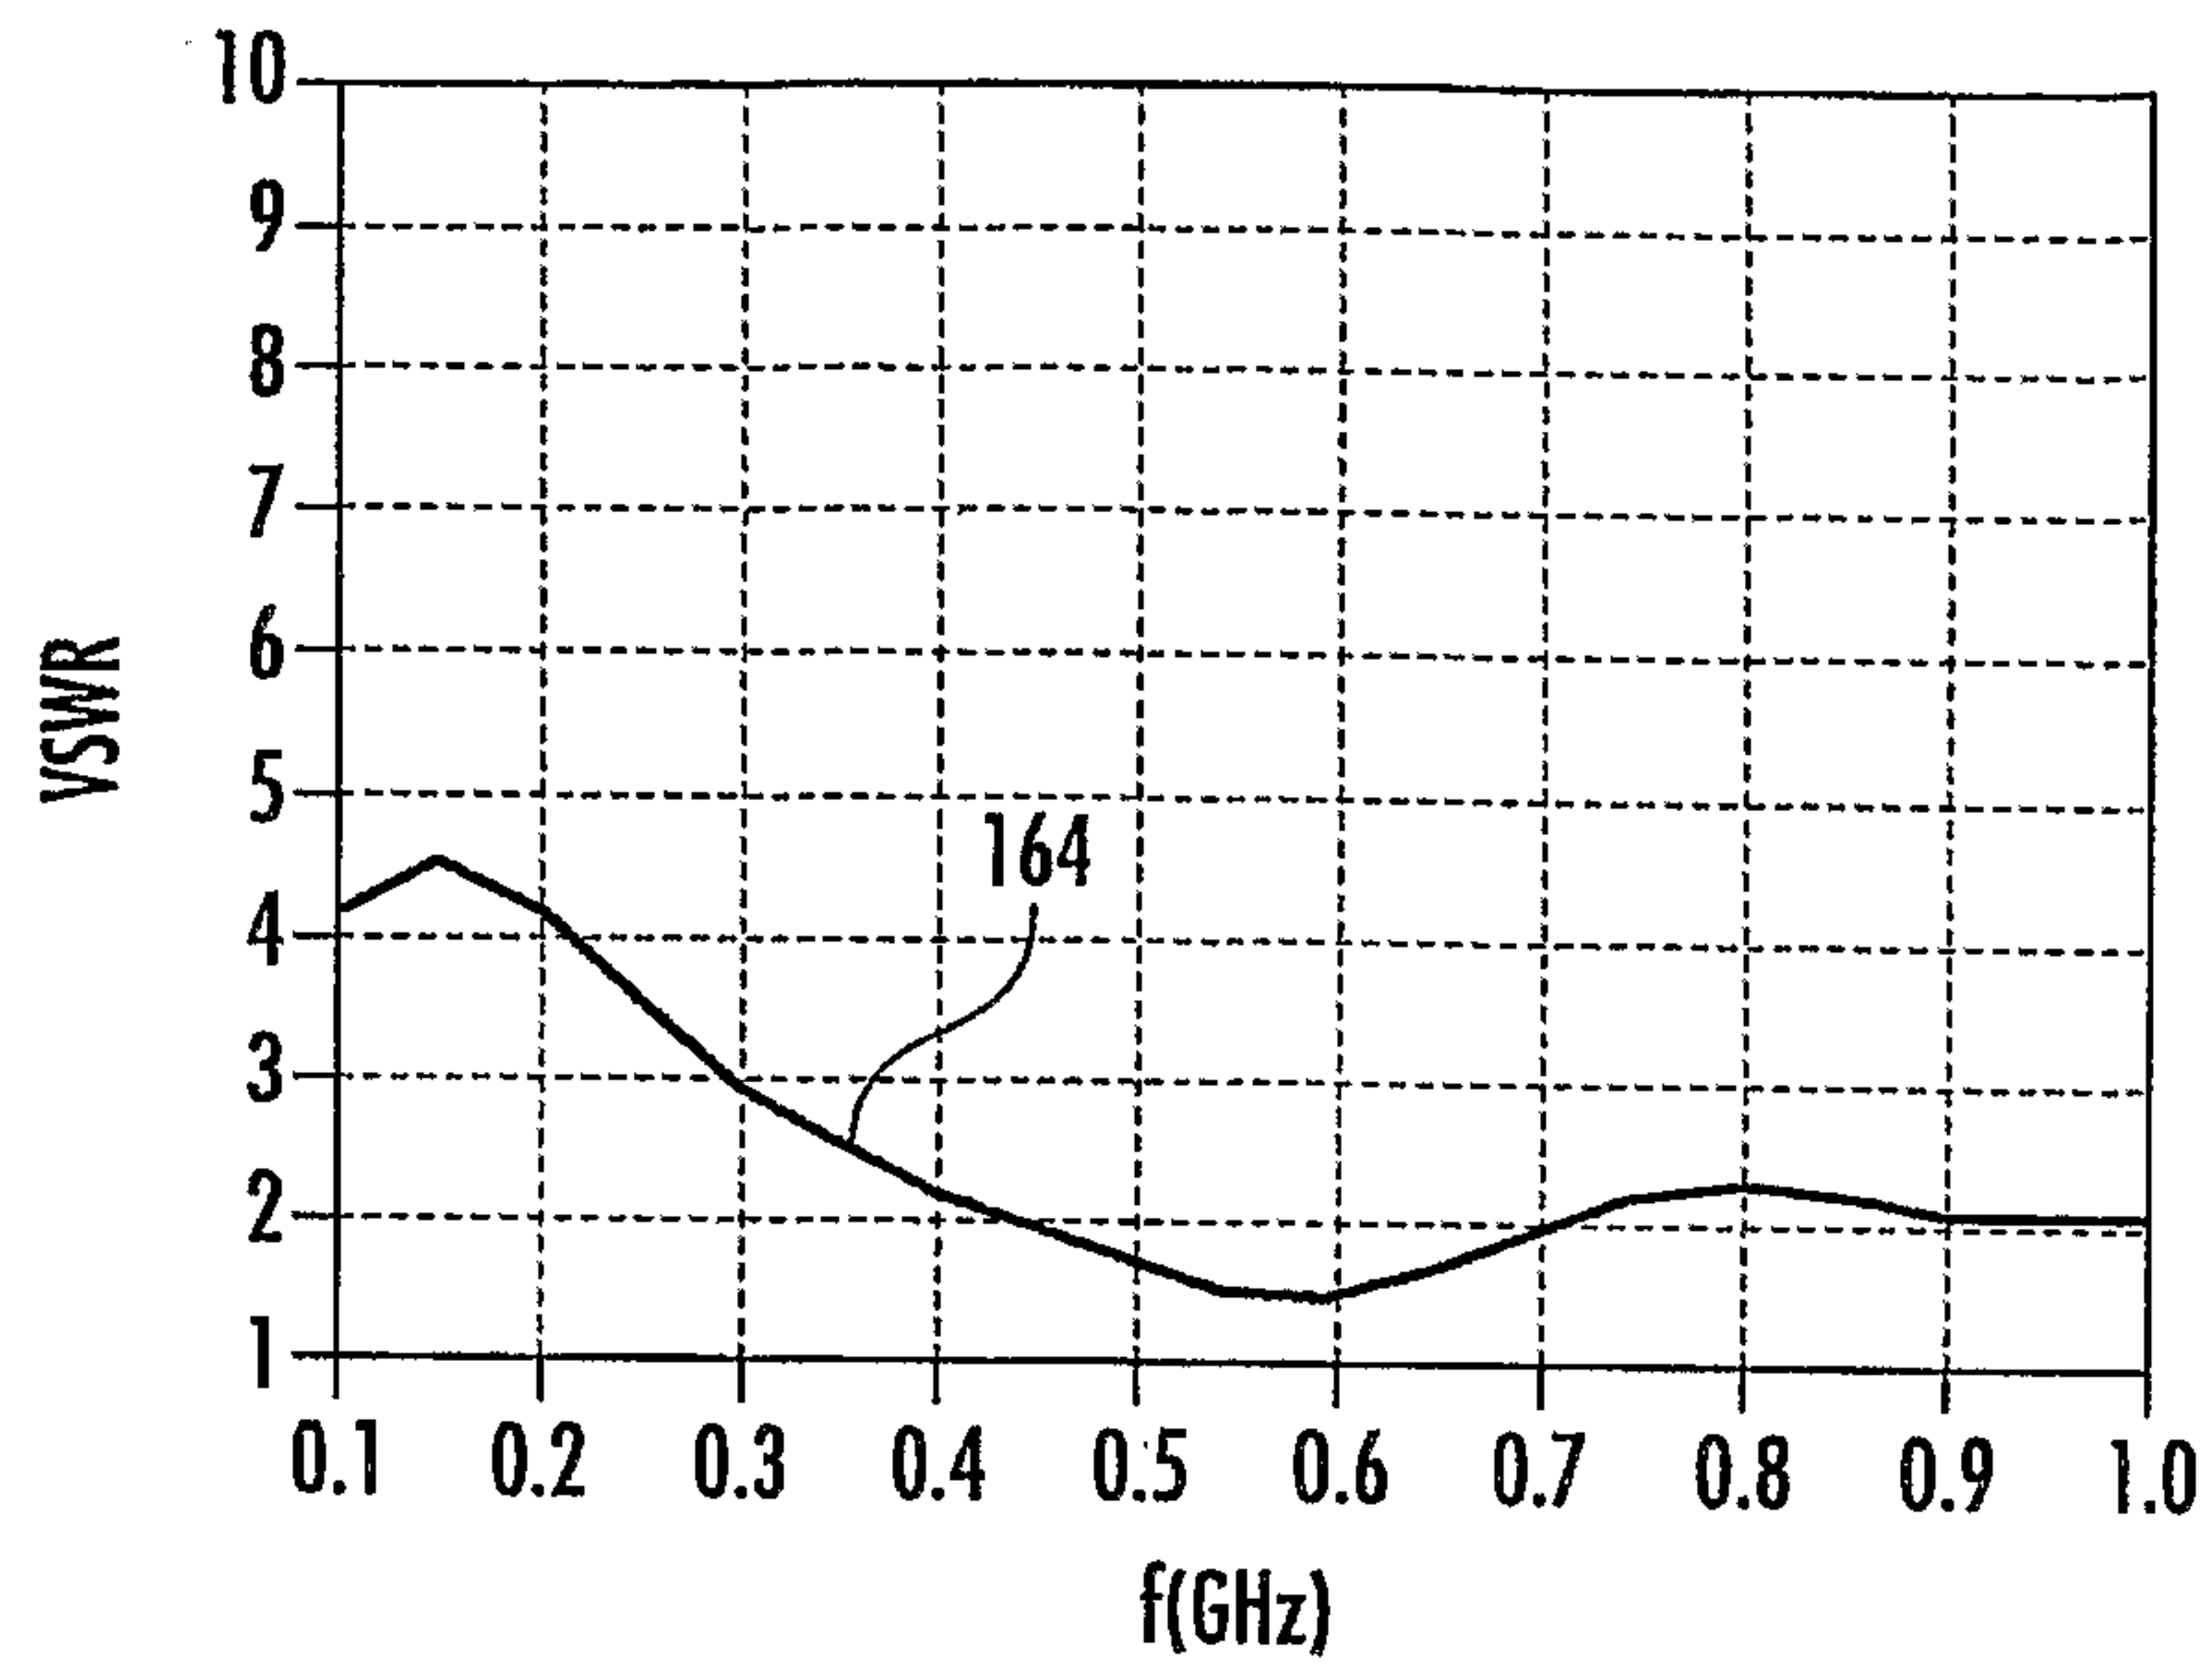
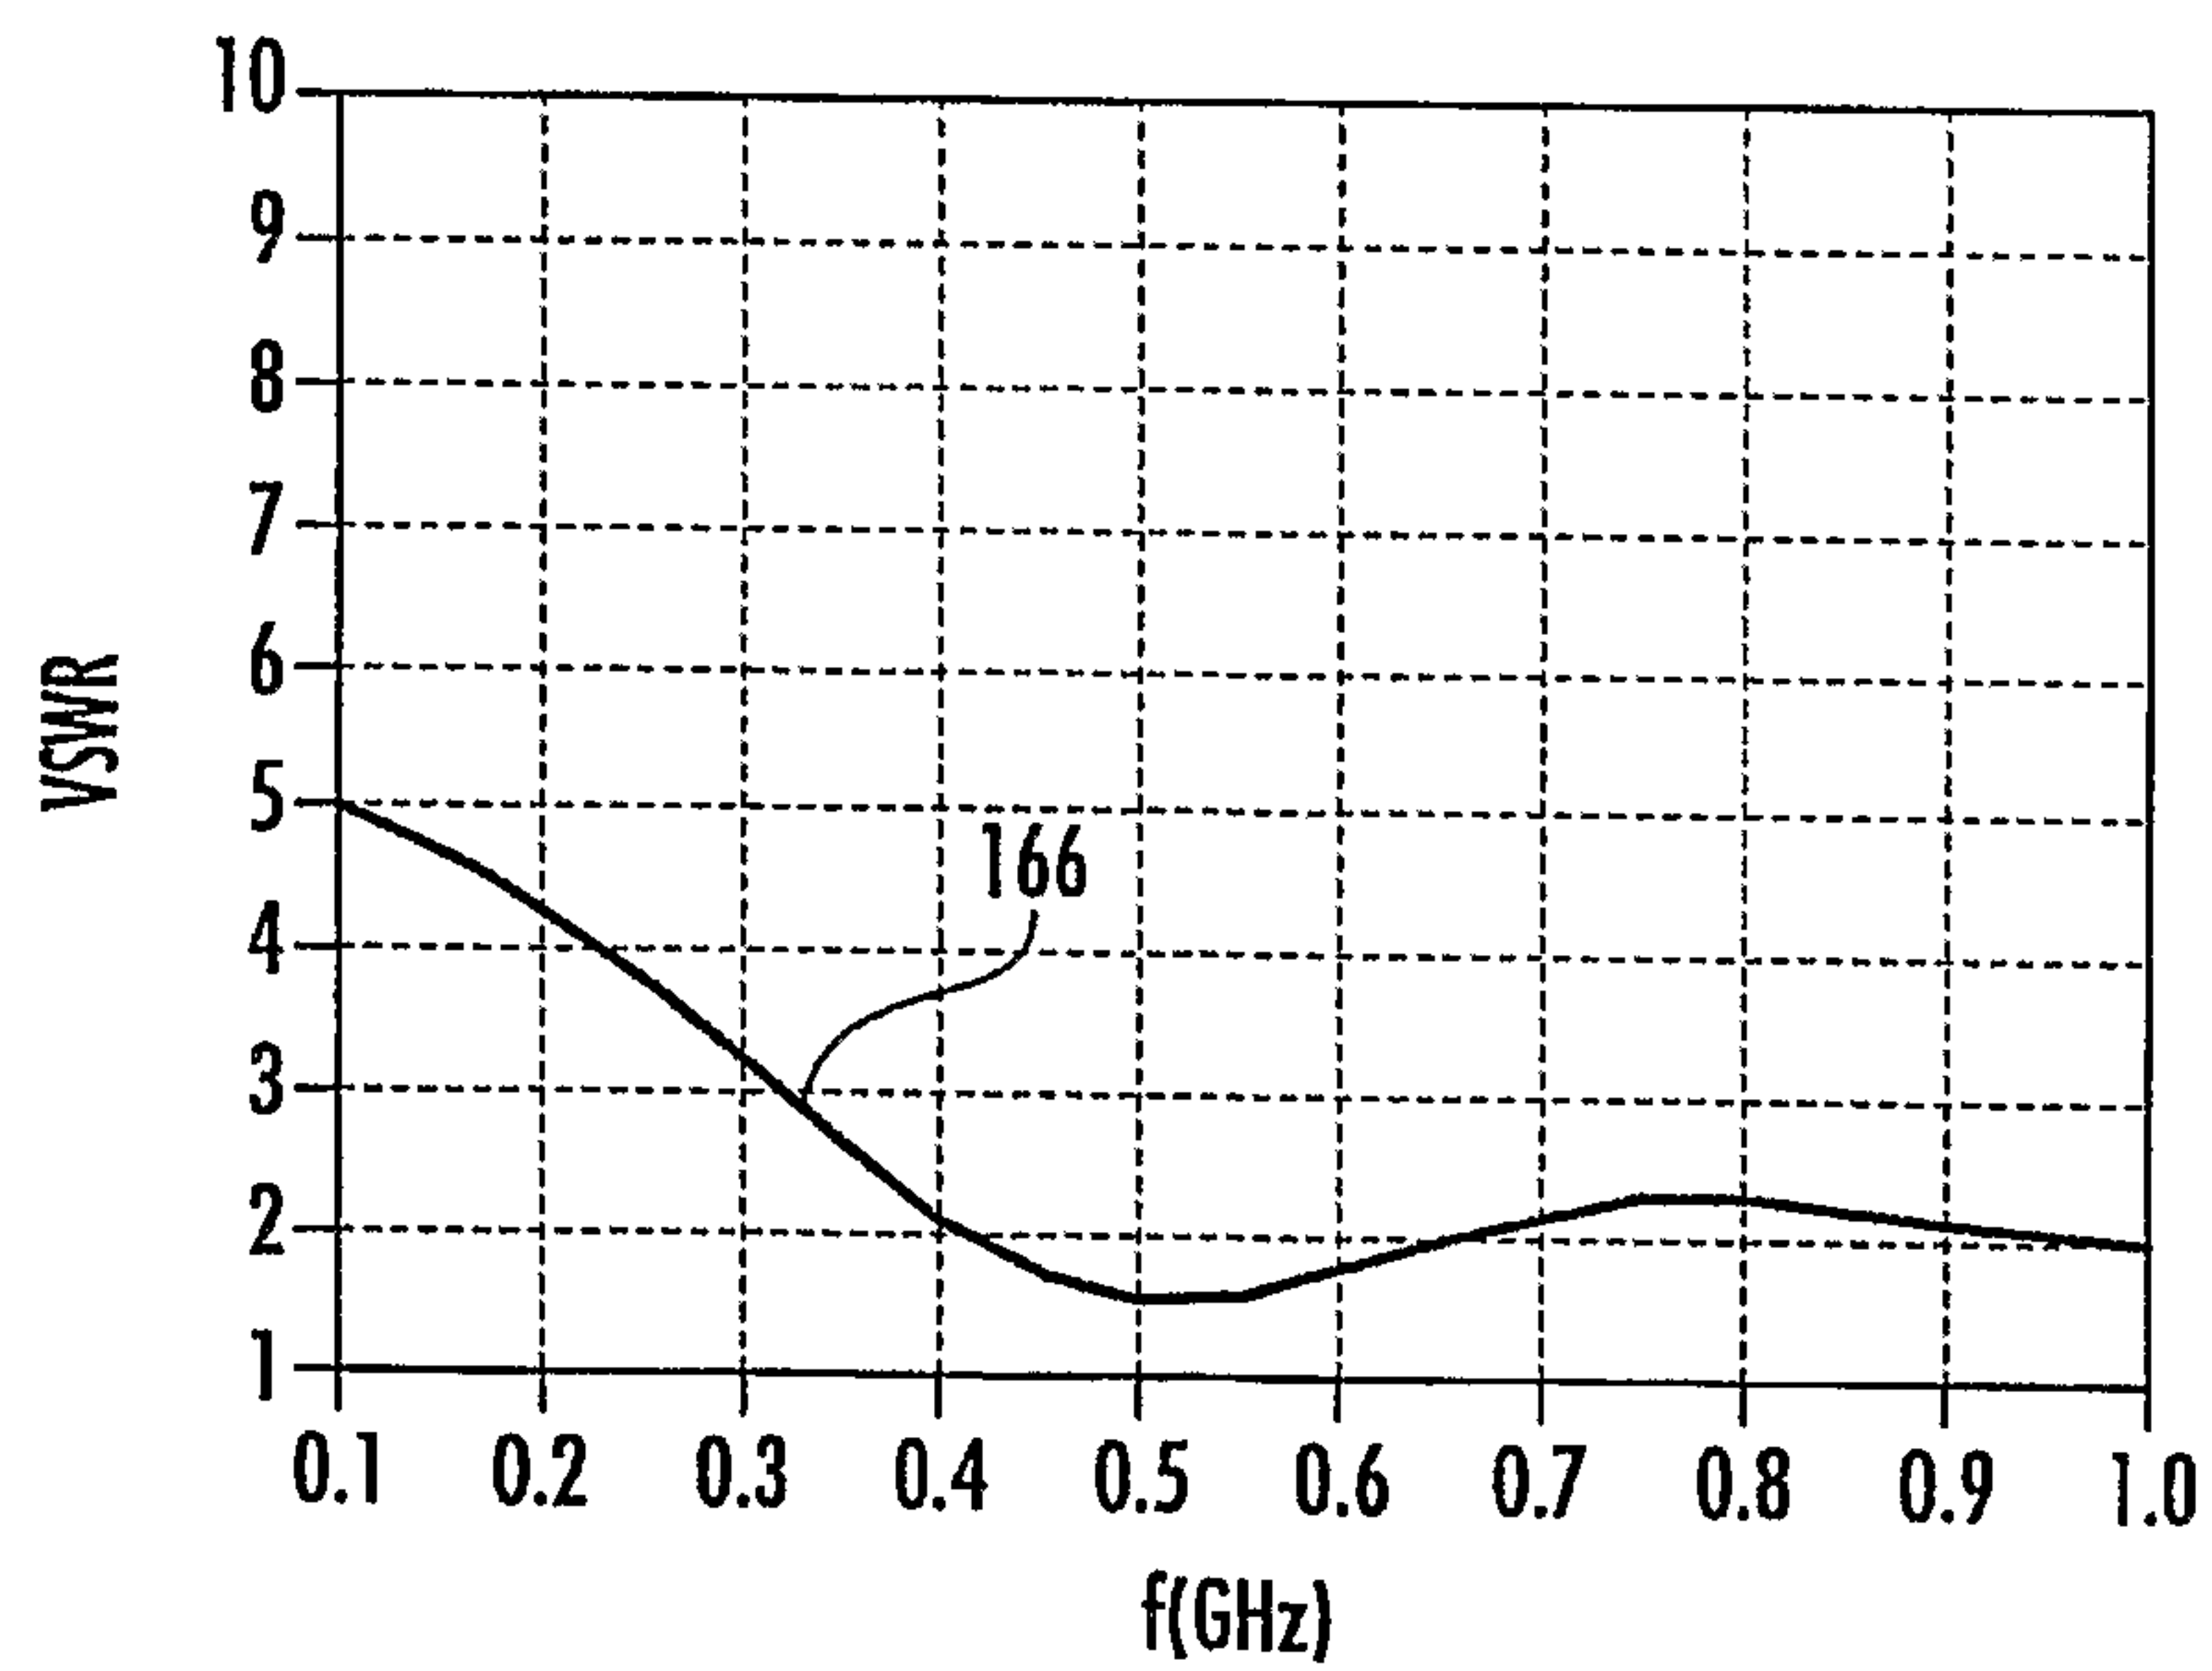


FIG. 6B

7/11

**FIG. 7A****FIG. 7B**

8/11

**FIG. 8A****FIG. 8B**

9/11

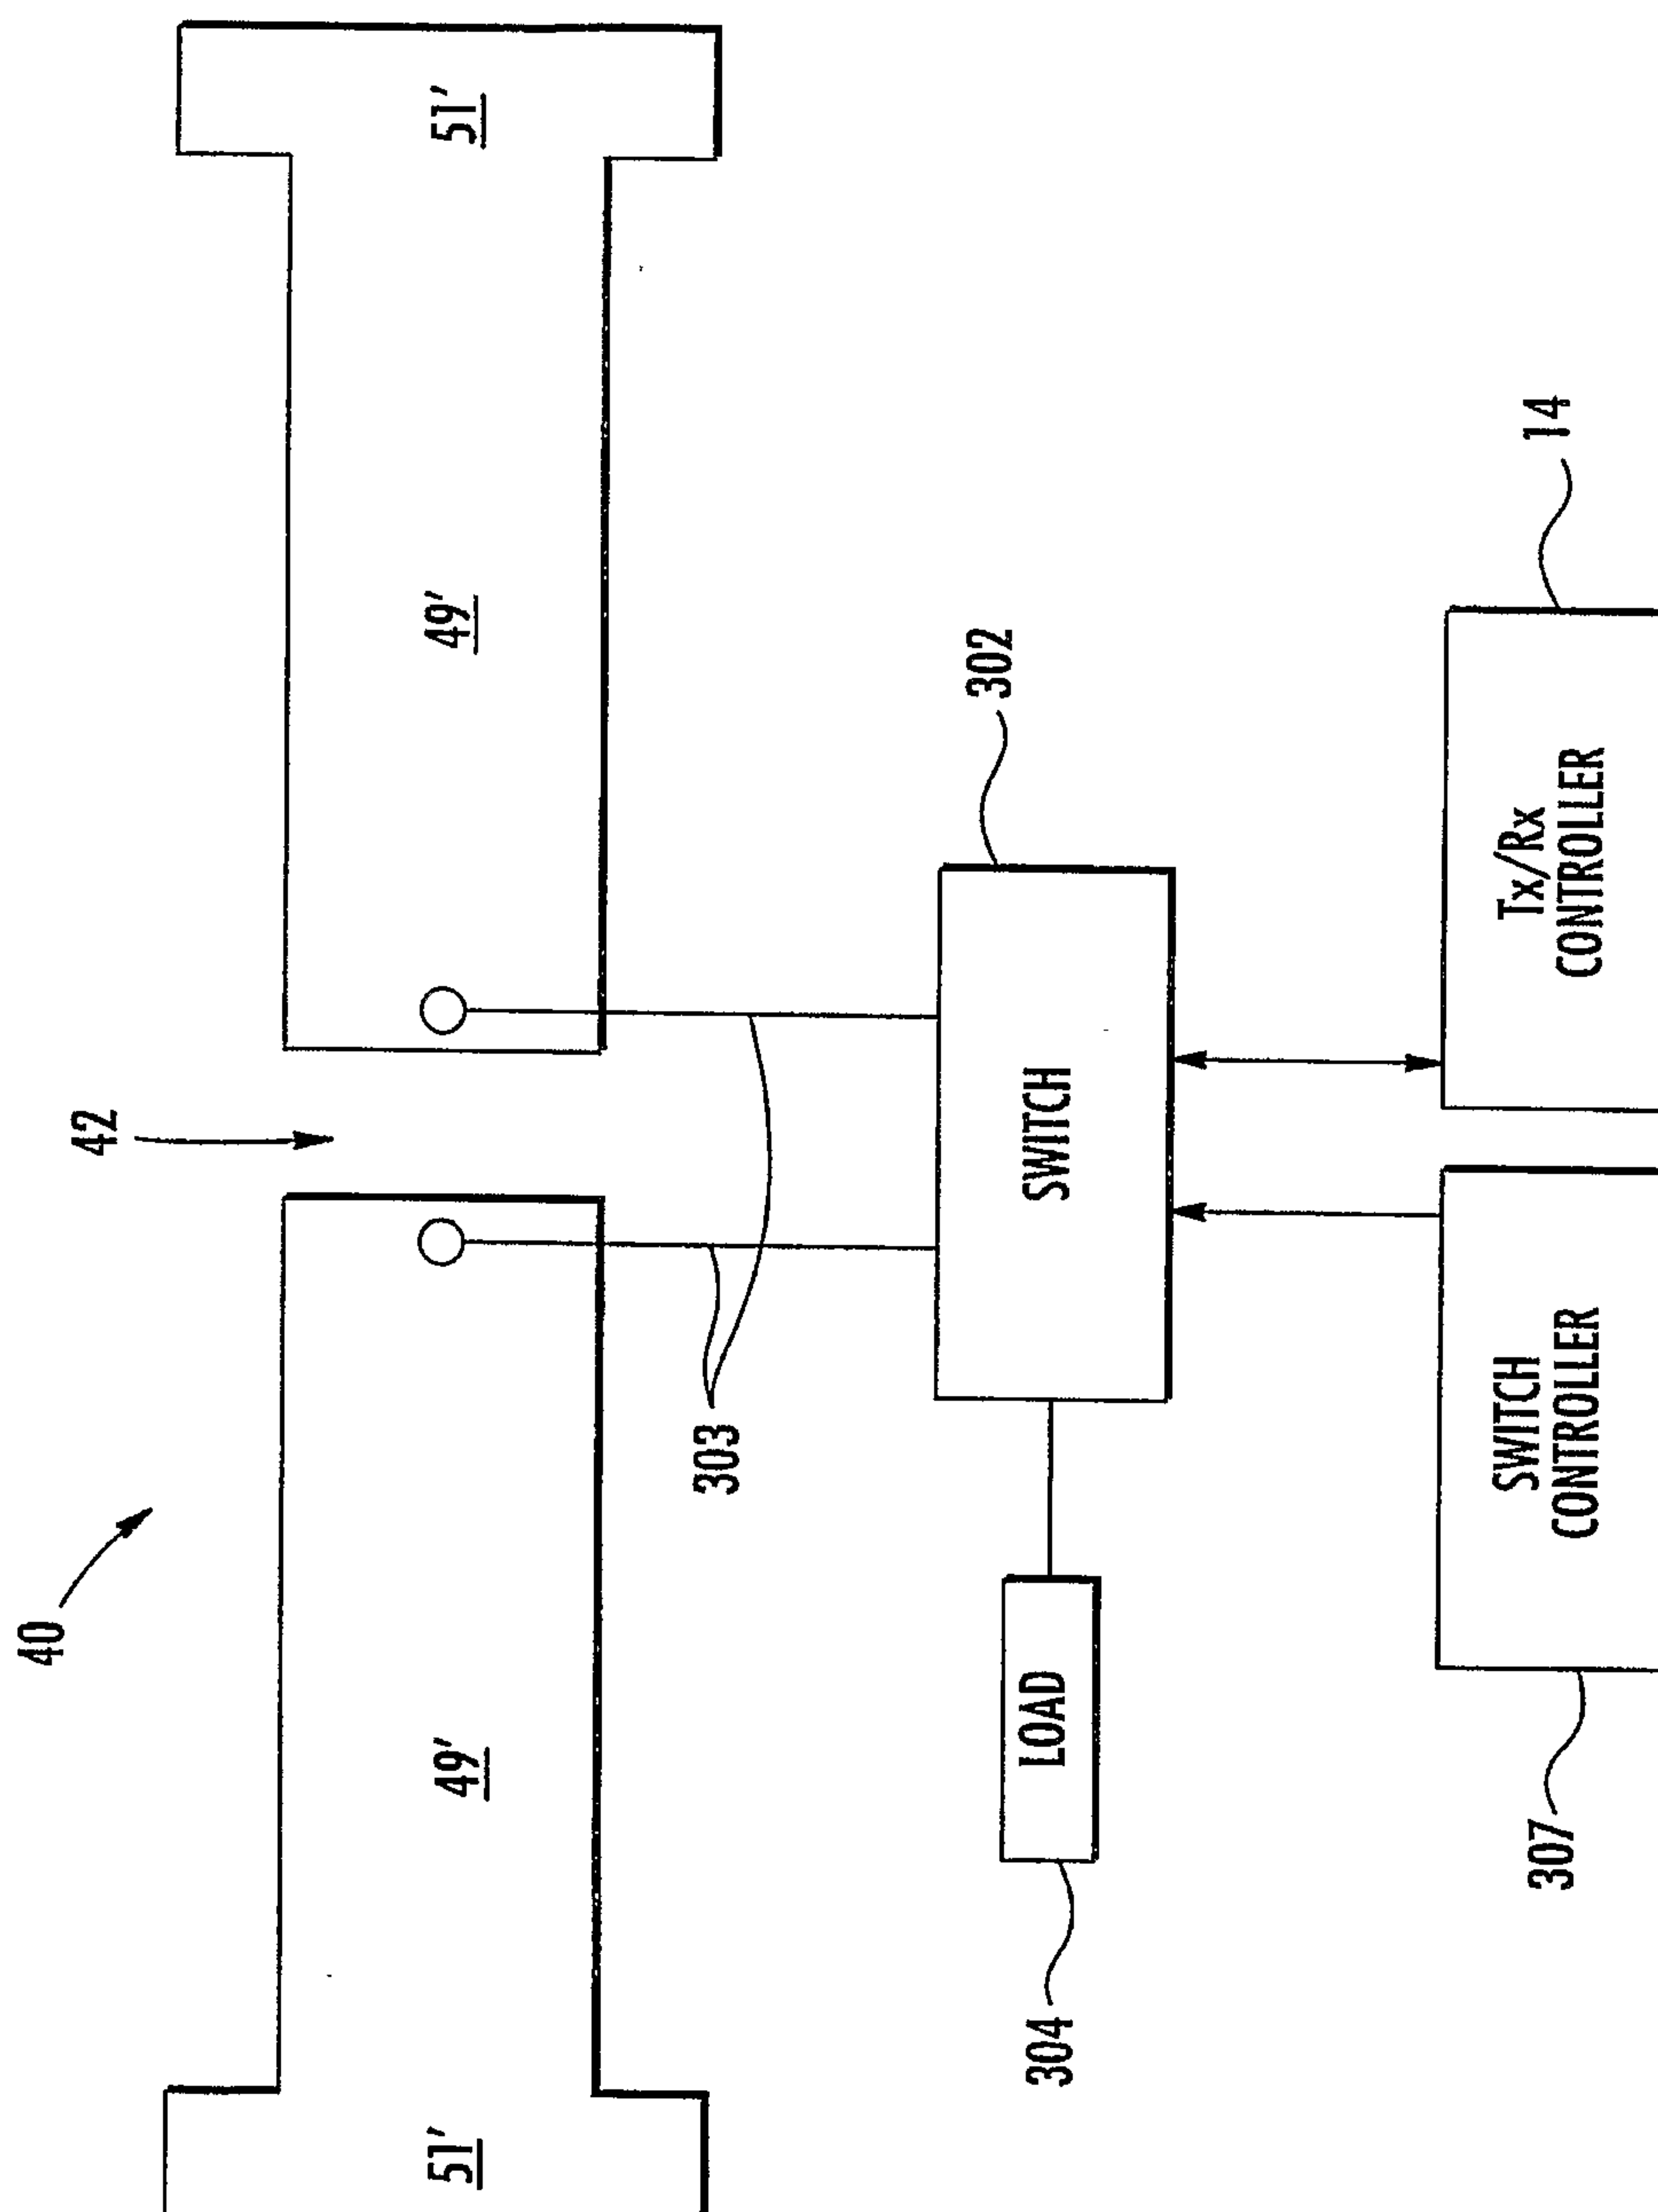


FIG. 9

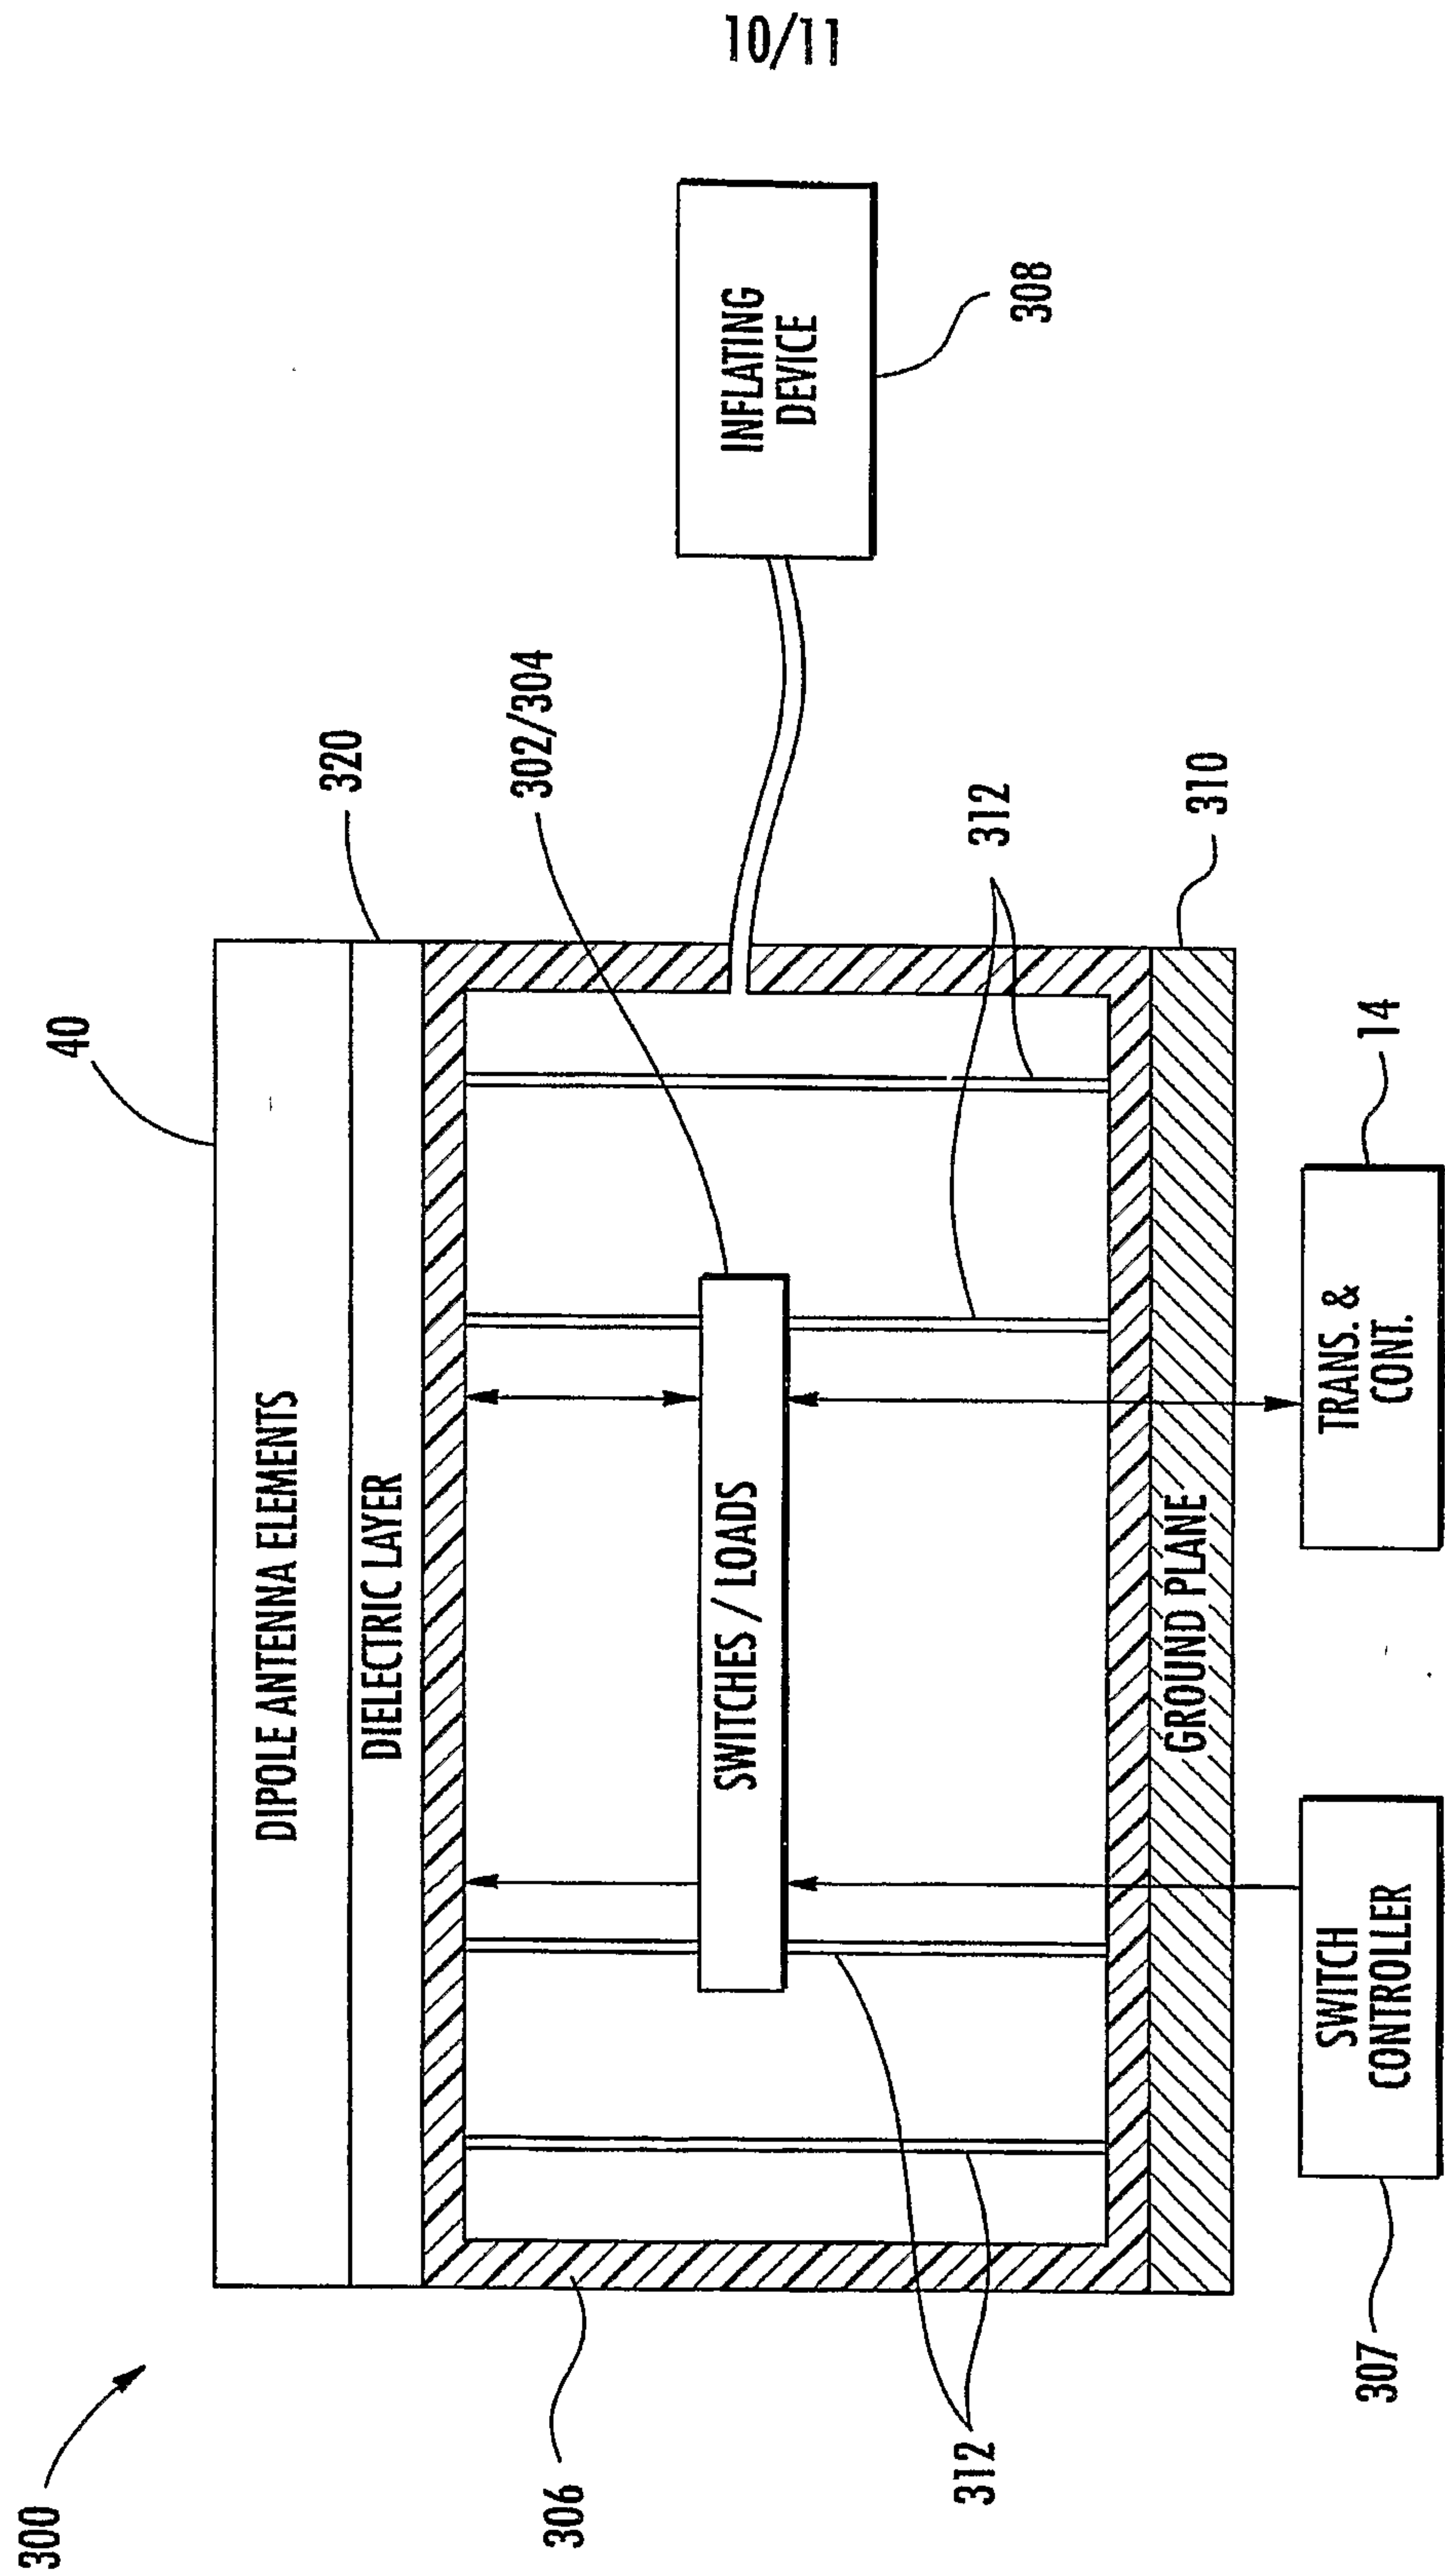


FIG. 10

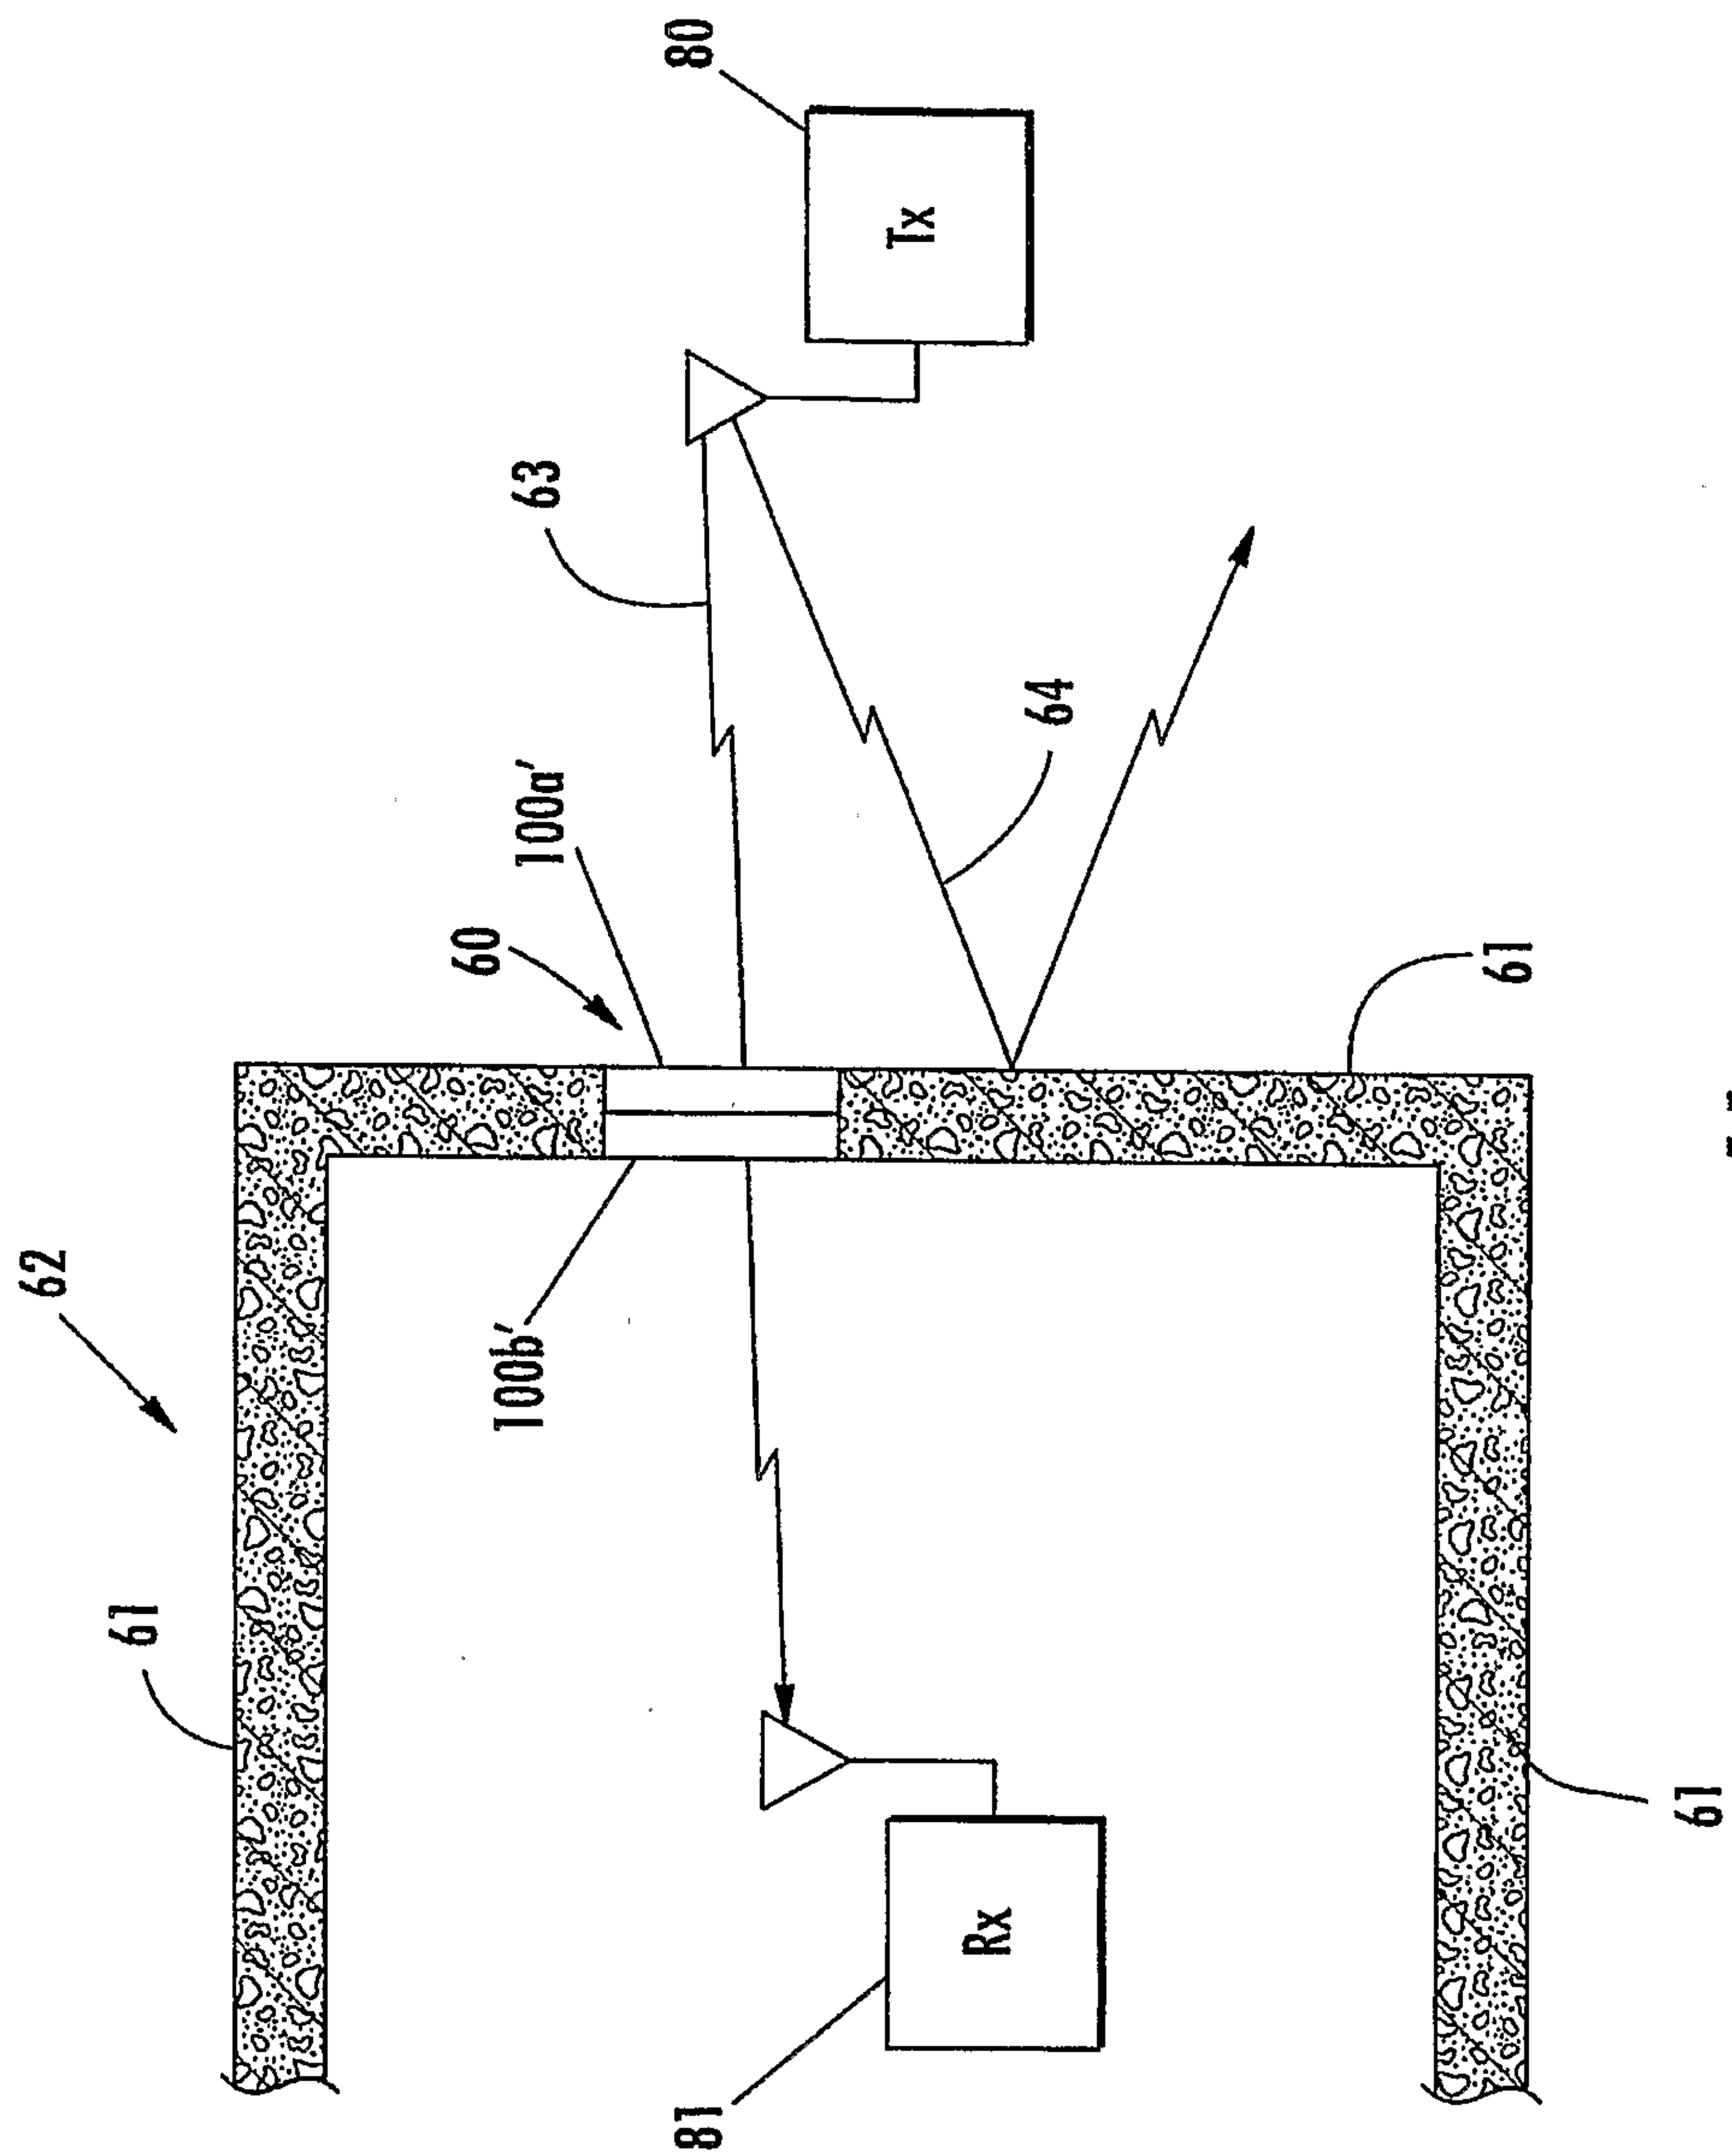


FIG. 11

