



US 20070173190A1

(19) **United States**(12) **Patent Application Publication****Hsu et al.**(10) **Pub. No.: US 2007/0173190 A1**(43) **Pub. Date: Jul. 26, 2007**(54) **SERIAL FAN WITH TOOTHED-TYPE
CONNECTING ELEMENTS**(75) Inventors: **Shuo-Shiu Hsu**, Taoyuan Hsien
(TW); **Shun-Chen Chang**,
Taoyuan Hsien (TW); **Wen-Shi
Huang**, Taoyuan Hsien (TW)


Correspondence Address:

**BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747**(73) Assignee: **Delta Electronics, Inc.**(21) Appl. No.: **11/645,495**(22) Filed: **Dec. 27, 2006**(30) **Foreign Application Priority Data**

Jan. 23, 2006 (TW) 95102482

Publication Classification(51) **Int. Cl.**
H05K 5/00 (2006.01)(52) **U.S. Cl.** **454/184**(57) **ABSTRACT**

A serial fan of the present invention includes a first fan and a second fan, each of which includes a housing and an impeller disposed in the housing. The housings respectively include a plurality of connecting elements, and there are several air-guiding recesses defined on the connecting elements of the first fan or the second fan, which can guide air to smoothly flow out from the housing so as to increase airflow and air pressure and reduce noise.

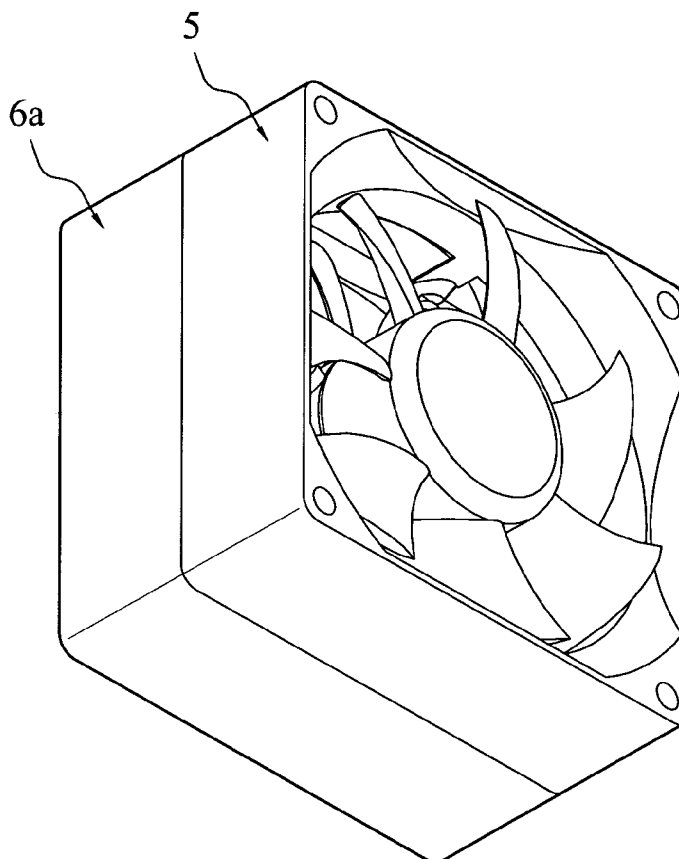F1

R

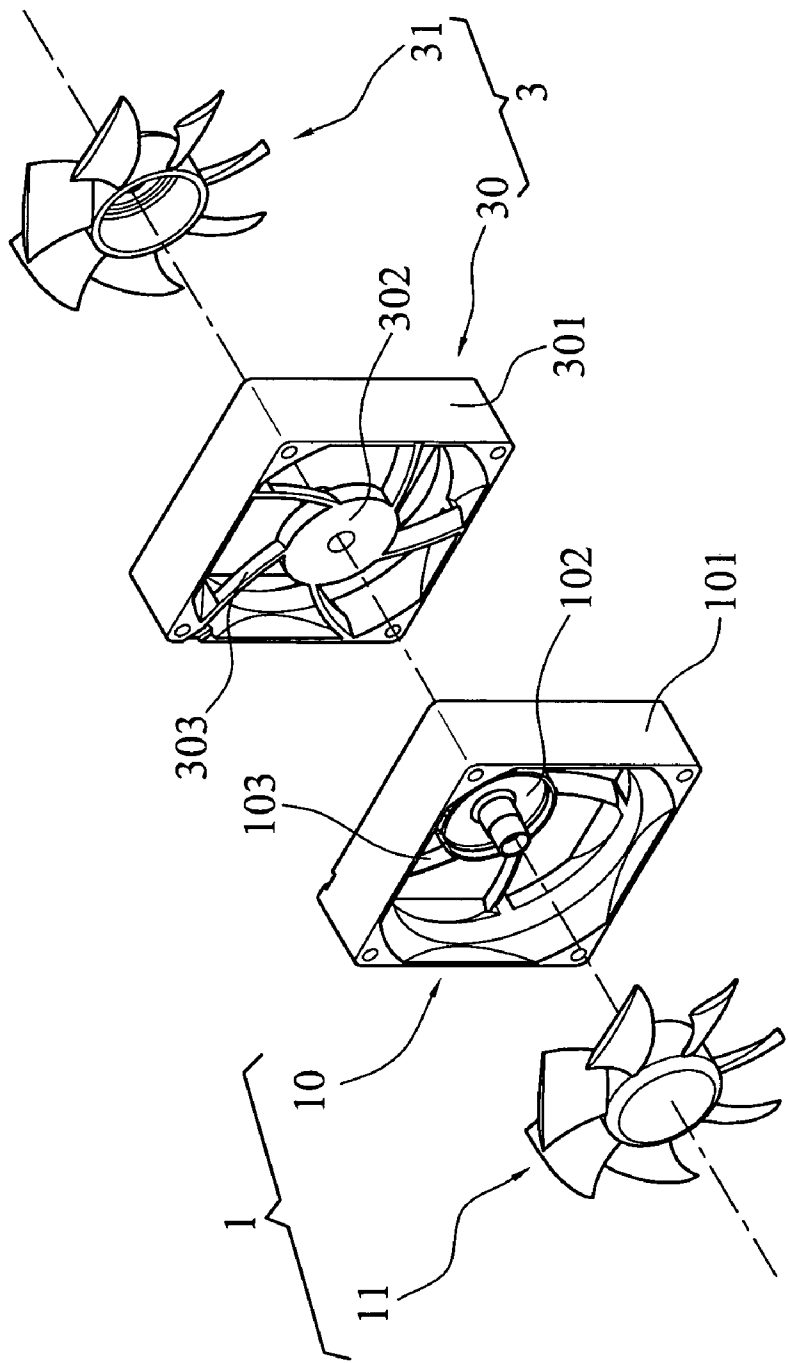


FIG. 1 (RELATED ART)

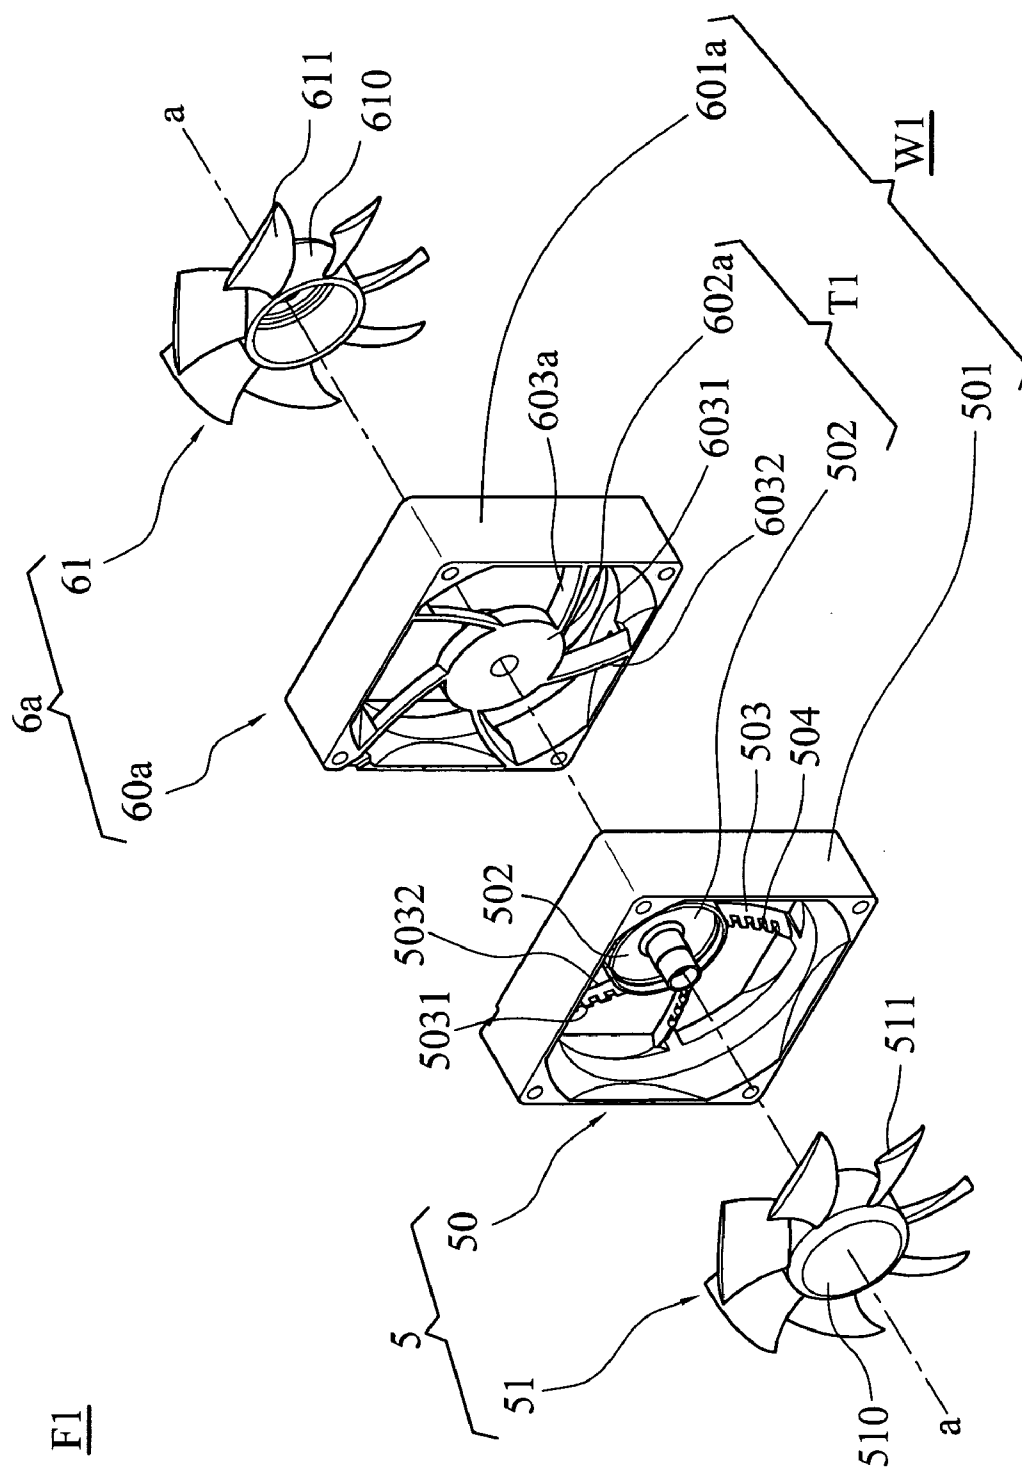


FIG. 2

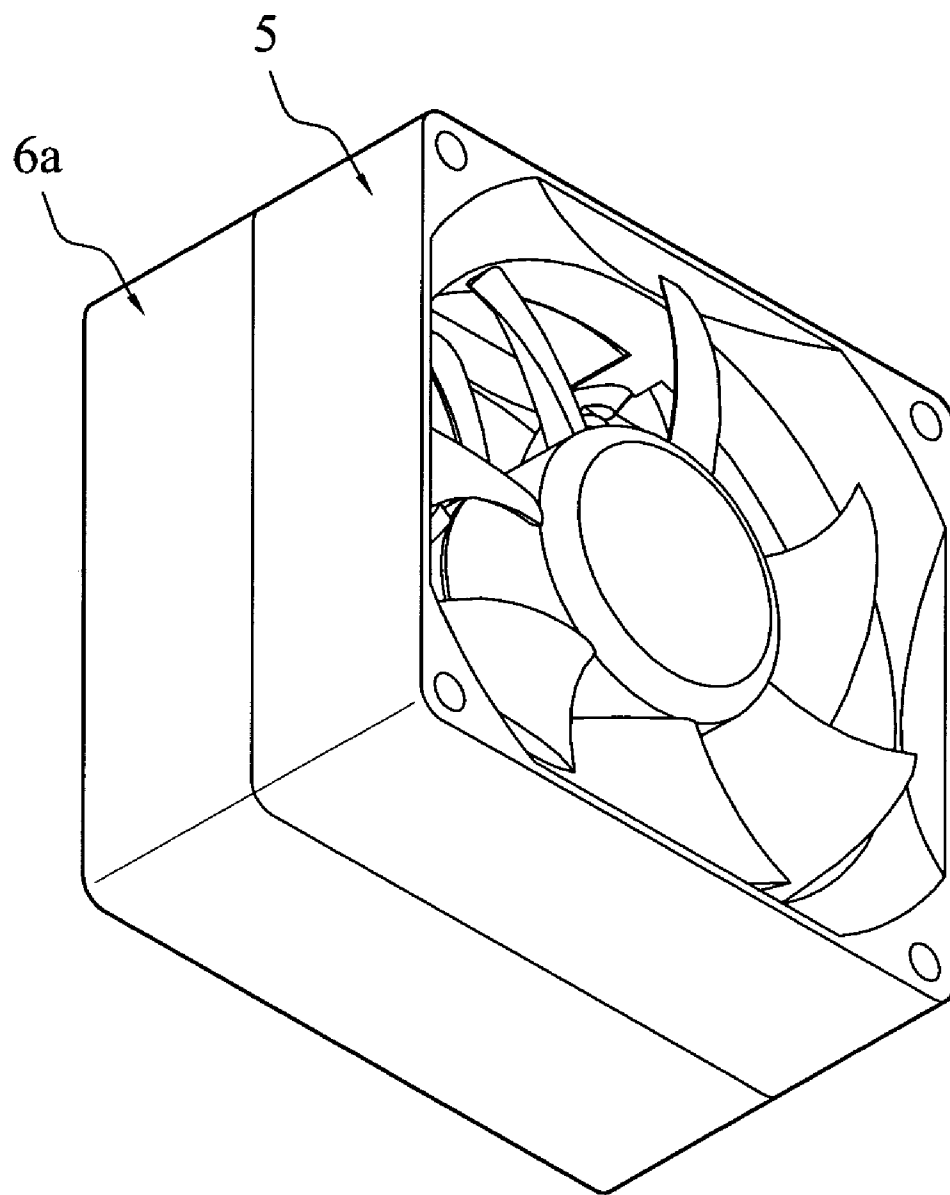
F1

FIG. 3

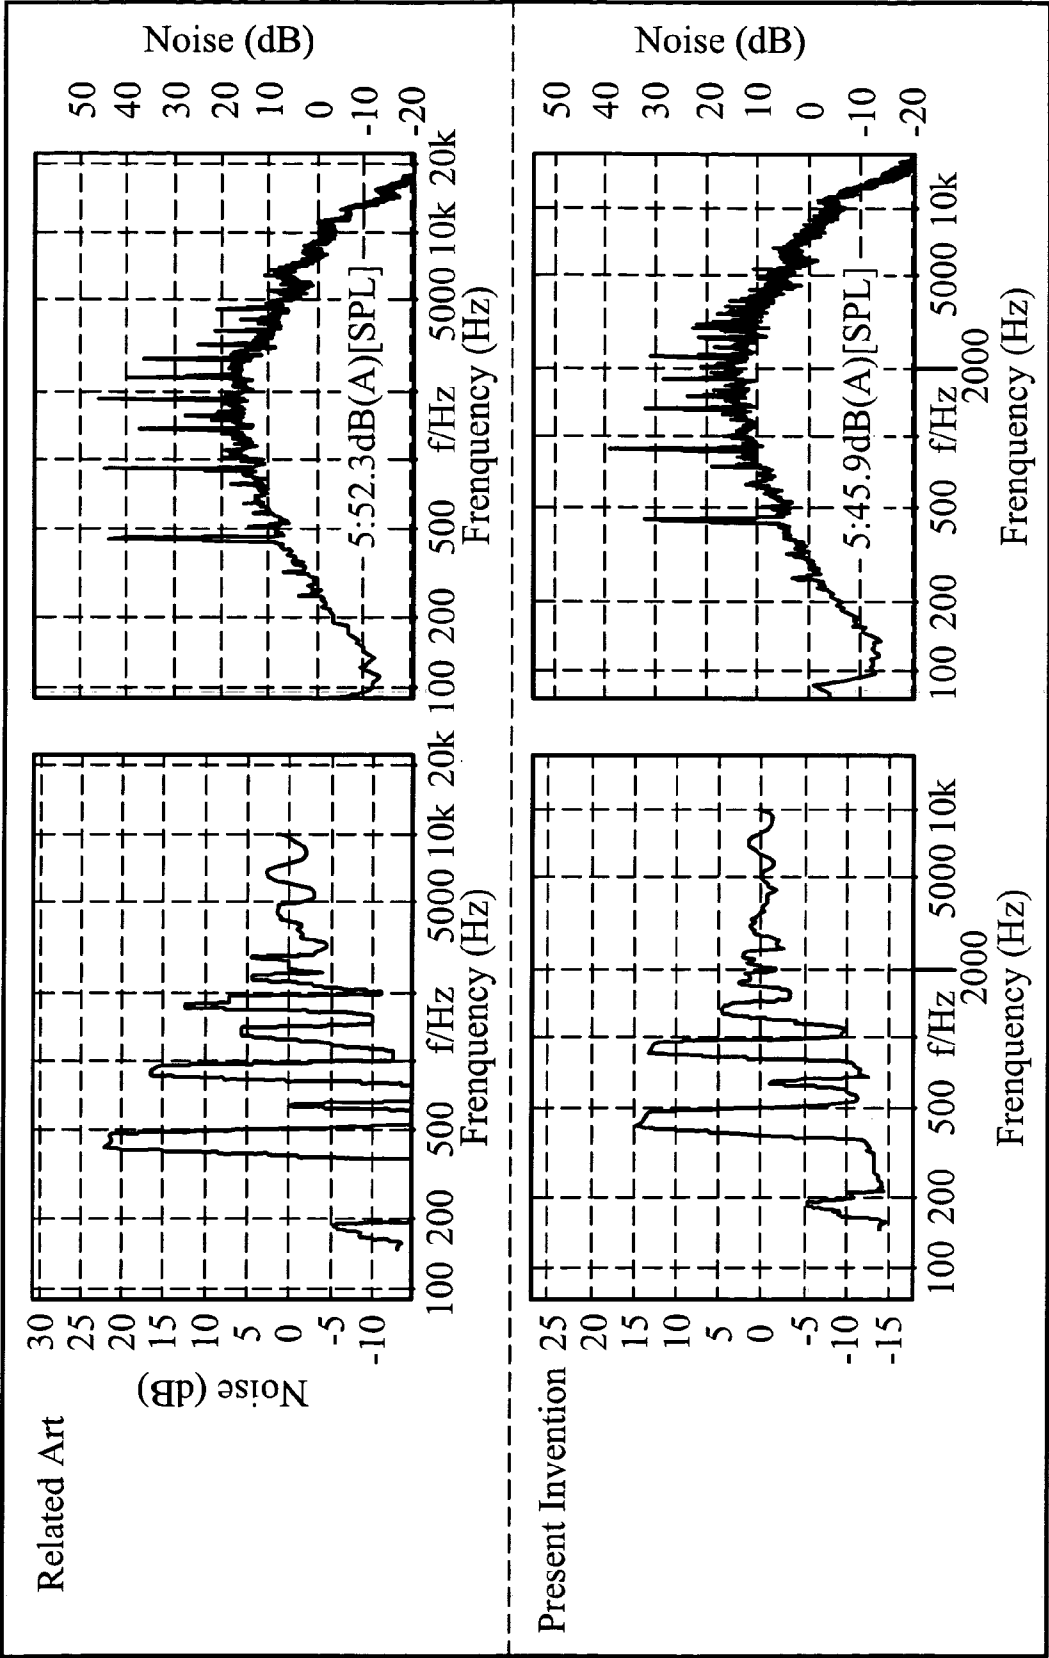


FIG. 4

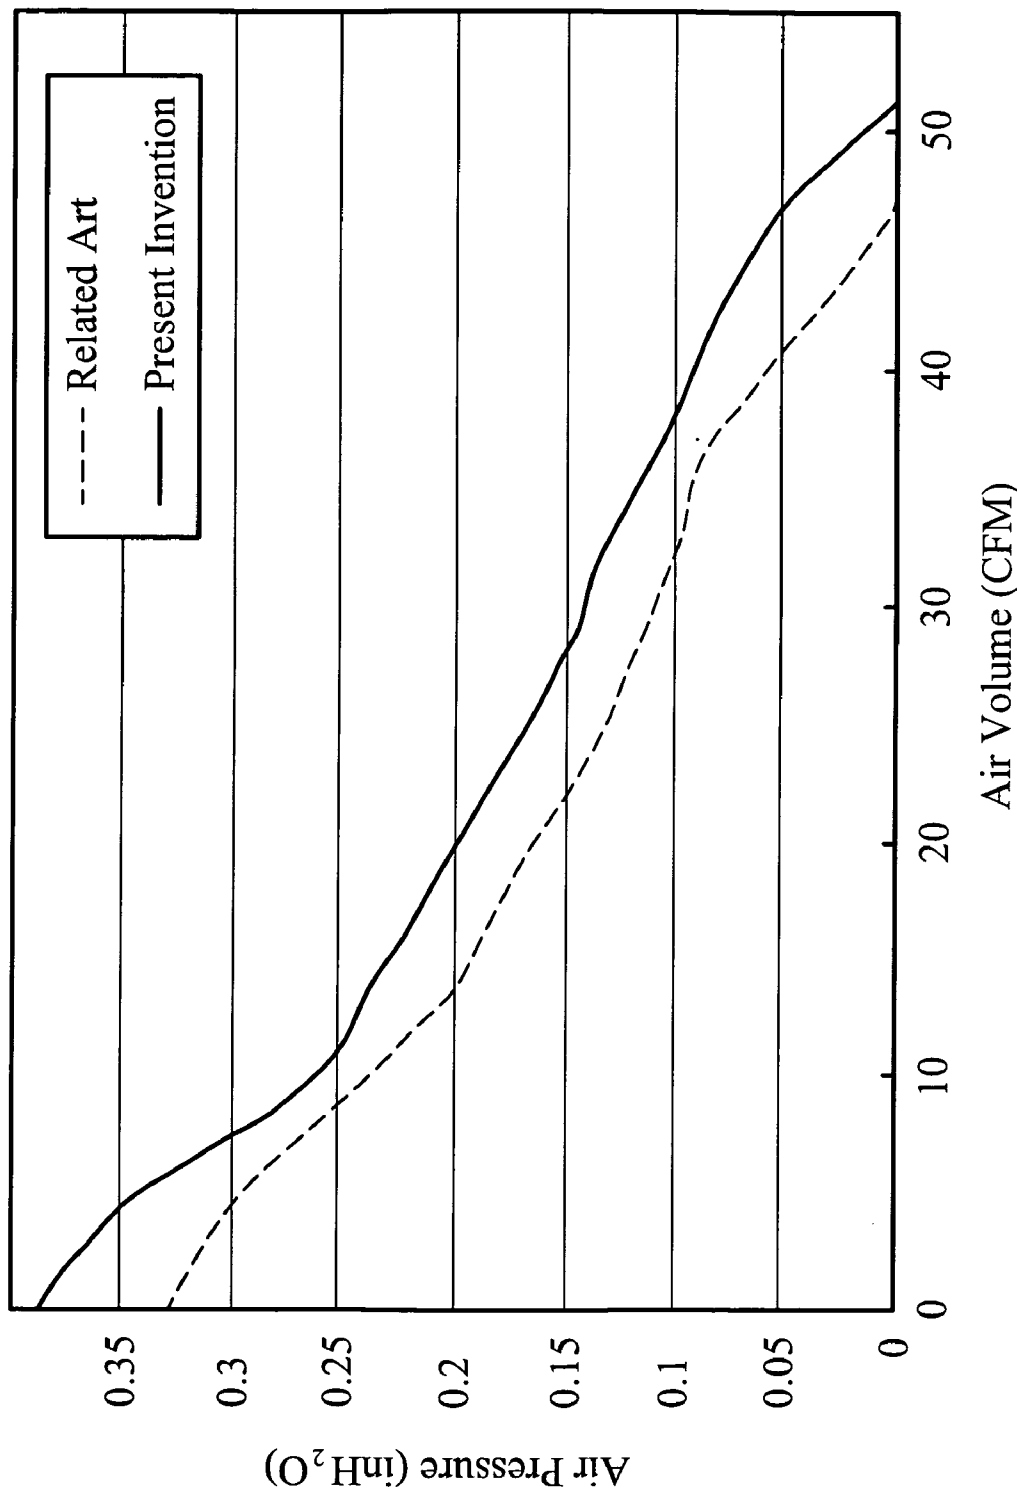


FIG. 5

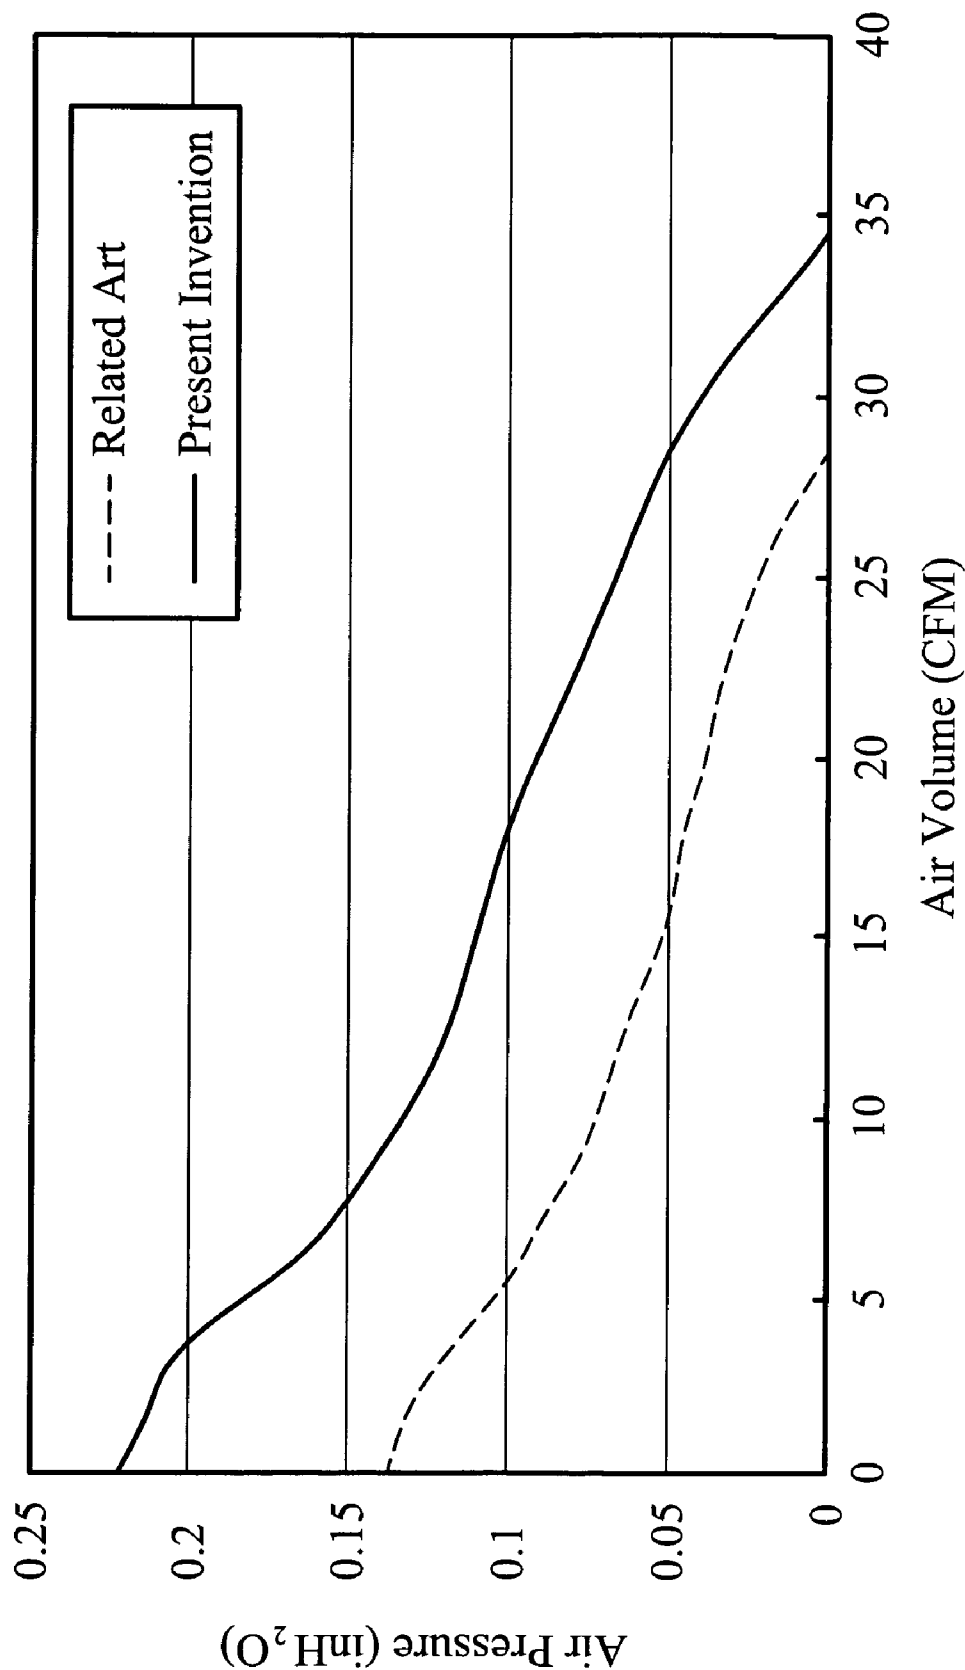


FIG. 6

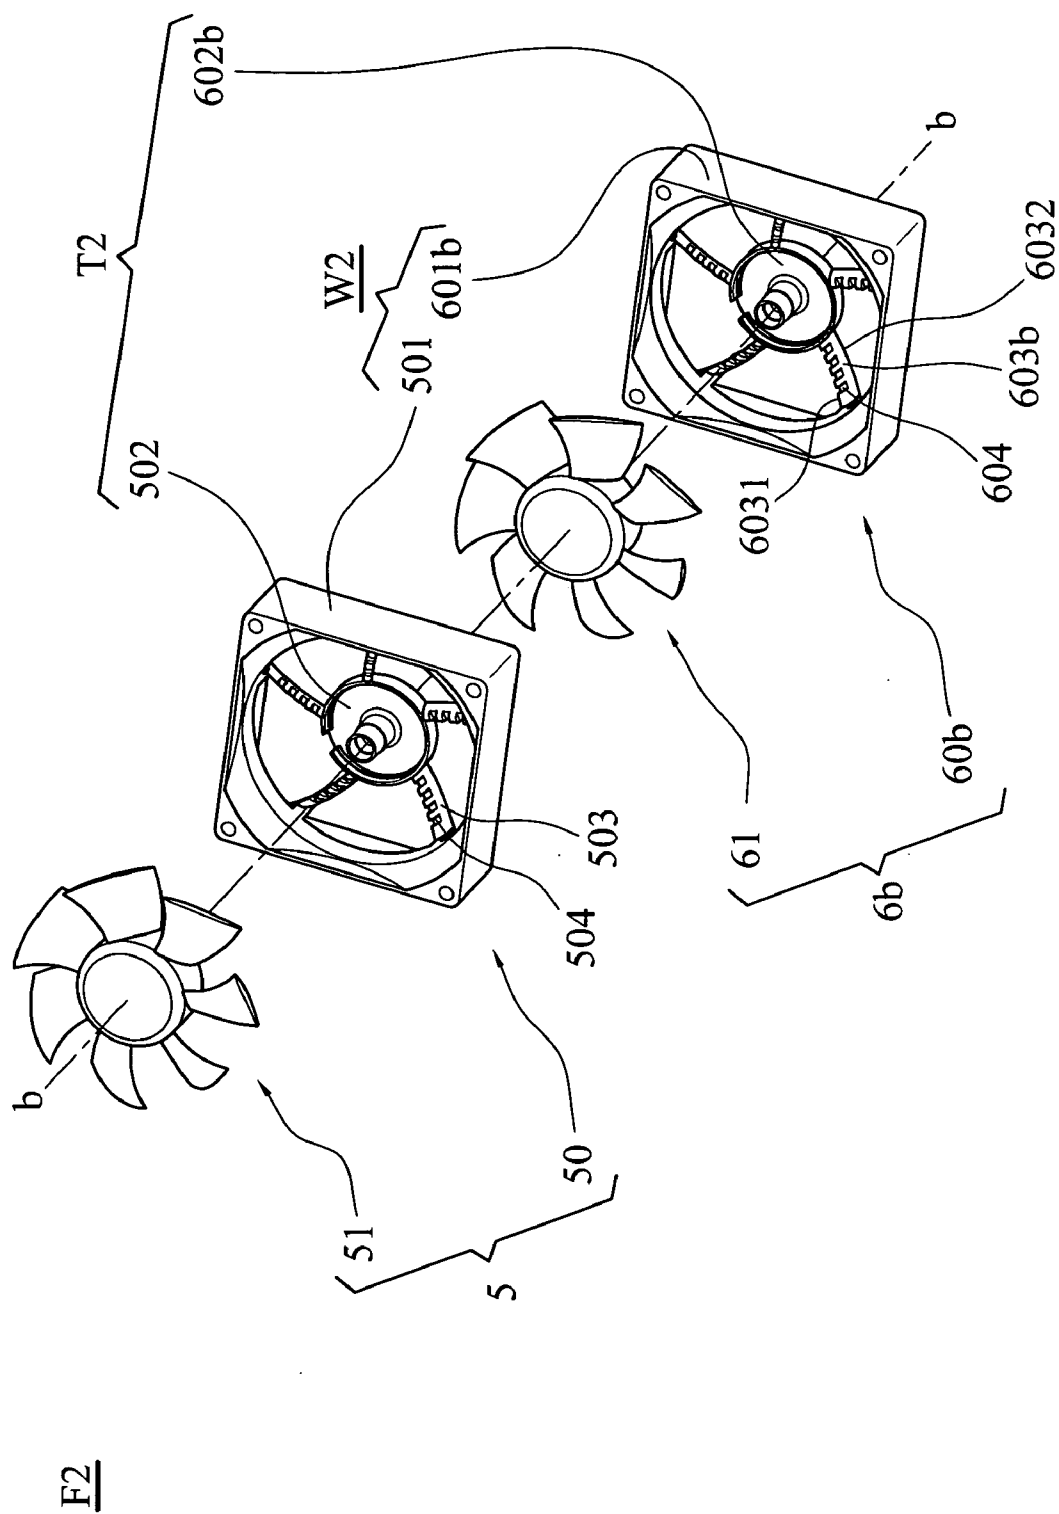


FIG. 7

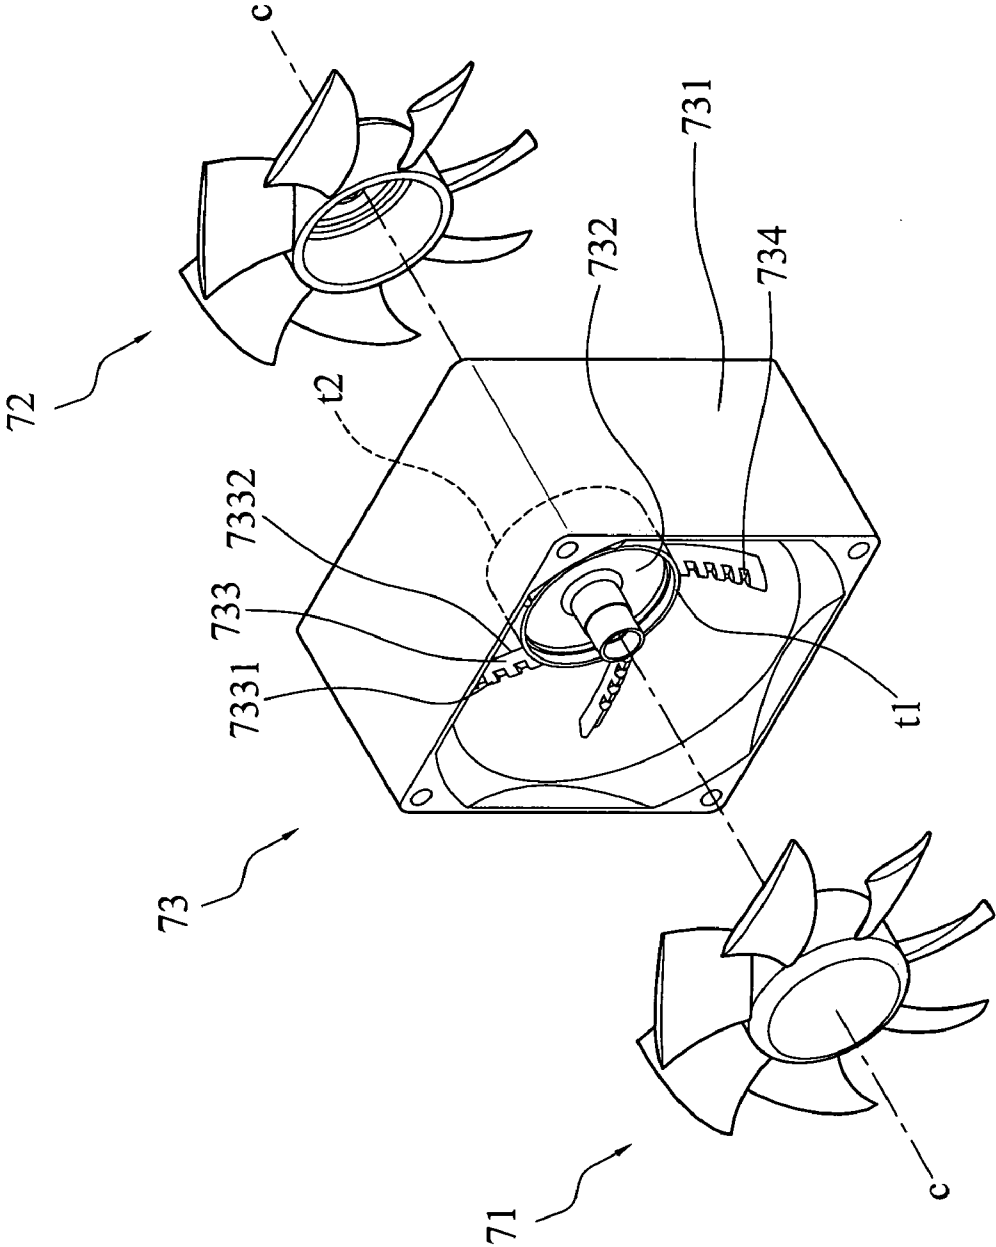


FIG. 8

SERIAL FAN WITH TOOTHED-TYPE CONNECTING ELEMENTS

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The invention relates to a serial fan, and in particular to a serial fan providing at least one connecting element formed with a plurality of air-guiding recesses.

[0003] 2. Description of the Related Art

[0004] FIG. 1 is an exploded view of two serial fans R assembled in series. The assembled fans R comprise a first fan 1 and a second fan 3 which have the same structure. The first fan 1 comprises a housing 10 and an impeller 11 disposed in the housing 10, and the second fan 3 comprises a housing 30 and an impeller 31 disposed in the housing 30. The housing 10 of the first fan 1 comprises a frame 101, a seat 102 disposed in the frame 101, and a plurality of ribs 103 disposed between the frame 101 and the seat 102. The housing 30 of the second fan 3 comprises a frame 301, a seat 302 disposed in the frame 301, and a plurality of ribs 303 disposed between the frame 301 to the seat 302. The configuration of the assembled fans R can increase airflow efficiency.

[0005] When the air sequentially travels through the impeller 11 and the ribs 103 of the first fan 1 and the ribs 303 and the impeller 31 of the second fan 3, however, the wind shear and noise are relatively increased.

BRIEF SUMMARY OF THE INVENTION

[0006] The invention provides a serial fan with a plurality of connecting elements. At least one connecting element is formed with a plurality of air-guiding recesses to efficiently guide air out of the fan and reduce air stagnation.

[0007] A serial fan of one embodiment comprises a first fan and a second fan. The first and second fans are assembled in series. The first fan comprises a first frame, a first seat disposed in the first frame, a plurality of first connecting elements disposed between the first frame and the first seat, and a first impeller disposed on the first seat. The second fan comprises a second frame, a second seat disposed in the second frame, a plurality of second connecting elements disposed between the second frame and the second seat, and a second impeller disposed on the second seat. A plurality of air-guiding recesses are defined on at least one of the edges of the first or second connecting elements to efficiently guide air so as to increase wind pressure and wind capacity and to reduce rotational noise. Furthermore, the air-guiding recesses can be defined on both edges of the first and second connecting elements.

[0008] The first and second connecting elements are ribs or static blades. The first connecting element of the first fan comprises a first edge facing the first impeller and a second edge opposite to the first edge, and the air-guiding recesses are defined on the first and second edges of the first connecting element of the first fan. The air-guiding recesses have toothed, arc, or acuminate cross-sectional profile.

[0009] The first impeller of the first fan, the first housing of the first fan, the second housing of the second fan, and the second impeller of the second fan are sequentially arranged, or the first impeller of the first fan, the first housing of the first fan, the second impeller of the second fan, and the second housing of the second fan are sequentially arranged.

[0010] Except for the first frame of the first fan and the second frame of the second fan assembled in series, the first and second frames can be integrally formed as a third frame so that the first and second impellers are disposed in the third frame.

[0011] A detailed description is given in the following embodiments with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein:

[0013] FIG. 1 is an exploded view of two fans assembled in series;

[0014] FIG. 2 is an exploded view of a serial fan (F1) of a first embodiment of the invention;

[0015] FIG. 3 is a perspective view of the assembled serial fan (F1) of FIG. 2;

[0016] FIG. 4 shows two sets of diagrams showing noise values of the conventional serial fan (R) shown in FIG. 1 and the serial fan (F1) shown in FIG. 2 at the speed of 3,800 rpm;

[0017] FIG. 5 is a characteristic diagram of the conventional serial fan (R) in FIG. 1 and the serial fan (F1) in FIG. 2, expressing air pressure and air volume under a noise of 39.4 dB;

[0018] FIG. 6 is a characteristic diagram of the conventional serial fan (R) in FIG. 1 and the serial fan (F1) in FIG. 2, expressing air pressure and air volume under a noise of 38.7 dB;

[0019] FIG. 7 is a perspective view of a serial fan (F2) of a second embodiment of the invention; and

[0020] FIG. 8 is a perspective view of a serial fan (F3) of a third embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0021] The following description is of the best-contemplated mode of carrying out the invention. This description is made for the purpose of illustrating the general principles of the invention and should not be taken in a limiting sense. The scope of the invention is best determined by reference to the appended claims.

[0022] In FIGS. 2 and 3, a serial fan F1 of a first embodiment comprises a first fan 5 and a second fan 6a arranged in series.

[0023] The first fan 5 comprises a first housing 50 and a first impeller 51 disposed in the first housing 50. The first housing 50 comprises a rectangular first frame 501, a first seat 502 disposed in the first frame 501, a plurality of first connecting elements 503 disposed between the first frame 501 and the first seat 502, and a plurality of first air-guiding recesses 504 defined on each of the first connecting element 503. In this embodiment, the first connecting elements 503 are formed in the shape of ribs. The first connecting elements 503 comprise a first edge 5031 and a second edge 5032. The first edge 5031 is a front edge facing the first impeller 51, and the second edge 5032 is a rear edge opposite to the first edge 5031. The air-guiding recesses 504 are inwardly square indentations defined on the first edge 5031 of the first connecting element 503 so as to form a rough profile thereon. Note that the depth and width of the side view of the air-guiding recesses 504 depend on the size of the fan and

the actual requirements. Except for the square profile, the air-guiding recesses **504** substantially have toothed, arc, peak, or acuminate cross-sectional profile. The first impeller **51** comprises a first hub **510** supported by the first seat **502** of the first housing **50** and a plurality of first blades **511** outwardly disposed on the first hub **510**.

[0024] The second fan **6a** comprises a second housing **60a** and a second impeller **61** disposed in the second housing **60a**. The second housing **60a** comprises a rectangular second frame **601a**, a second seat **602a** disposed in the second frame **601a**, a plurality of second connecting elements **603a** disposed between the second frame **601a** and the second seat **602a**. The first frame **501** and the second frame **601a** form a main frame **W1**, and the first seat **502** and the second seat **602a** form a seat structure **T1**. In this embodiment, the second connecting elements **603a** are formed in the shape of ribs or static blades. The second connecting element **603a** comprises a first edge **6031** and a second edge **6032**. The first edge **6031** is a front edge facing the second impeller **61**, and the second edge **6032** is a rear edge opposite to the first edge **6031**. The second impeller **61** comprises a second hub **610** supported by the second seat **602a** of the second housing **60a** and a plurality of second blades **611** outwardly disposed on the second hub **610**.

[0025] In the serial fan **F1**, the first impeller **51** of the first fan **5**, the first housing **50** of the first fan **5**, the second housing **60a** of the second fan **6a**, and the second impeller **61** of the second fan **6a** are sequentially arranged along an axis *a-a* shown in FIG. 2. In this embodiment shown in FIG. 3, the first fan **5** and the second fan **6a** can be assembled by screwing, engaging, riveting, adhering or other equivalent methods.

[0026] When the serial fan **F1** is started, air is efficiently guided by the first air-guiding recesses **504** defined on the first connecting elements **503** of the first housing **50** so as to increase wind pressure and wind capacity. Furthermore, rotational noise can be decreased by the first connecting elements **503** because that the first connecting elements **503** are different in height and wind pressure differences are formed therebetween.

[0027] In FIG. 4, two sets of diagrams respectively shows the noise values of the conventional serial fan **R** shown in FIG. 1 and the serial fan **F1** of the present invention shown in FIG. 2 at the speed of 3,800 rpm. With respect to the conventional serial fan **R** providing 52.3 dB of averaged noise value, the serial fan **F1** of one embodiment provides 45.9 dB of averaged noise value, accordingly decreasing rotational noise.

[0028] In FIG. 5, a characteristic diagram shows air pressure and air volume under a noise of 39.4 dB of the conventional serial fan **R** shown in FIG. 1 and the serial fan **F1** shown in FIG. 2. The serial fan **F1** of the first embodiment provides a maximum increased air pressure of 17% and a maximum increased air volume of 8.5%. In FIG. 6, a characteristic diagram shows air pressure and air volume under a noise of 38.7 dB of the conventional serial fan **R** shown in FIG. 1 and the serial fan **F1** shown in FIG. 2. The serial fan **F1** of the first embodiment provides a maximum increased air pressure of 62% and a maximum increased air volume of 21%. At the same decibel level, the serial fan **F1** of the invention provides a higher air pressure and air volume than the conventional serial fan **R** at high or low rotational speeds.

[0029] Except for the described first air-guiding recesses **504** defined on the first edge **5031**, the first air-guiding recesses **504** can also be defined on the second edge **5032** of the first connecting element **503**, or defined on both the first and second edges **5031**, **5032** of the first connecting element **503**.

[0030] Additionally, the air-guiding recesses defined on the first edge **5031** of the first connecting element **503** can symmetrically correspond to the air-guiding recesses defined on the second edge **5032** of the first connecting element **503**, or the air-guiding recesses defined on the first edge **5031** of the first connecting element **503** and the air-guiding recesses defined on the second edge **5032** of the first connecting element **503** can be asymmetrically or alternatively arranged. In other embodiments, the first connecting elements **503** can be ribs or static blades.

[0031] In FIG. 7, a serial fan **F2** of a second embodiment comprises the first fan **5** and a second fan **6b**. The serial fan **F2** differs from the serial fan **F1** in that the second fan **6b** has the same structure as the first fan **5**.

[0032] The serial fan **F2** comprises the first fan **5** and a second fan **6b**. The second fan **6b** comprises a second housing **60b** and a second impeller **61** disposed in the second housing **60b**. The second housing **60b** comprises a second frame **601b**, a second seat **602b** disposed in the second frame **601b**, a plurality of second connecting element **603b** disposed between the second frame **601b** and the second seat **602b**, and a plurality of first air-guiding recesses **604b** defined on the first edge **6031** of each second connecting elements **603b**. The first frame **501** of the first housing **5** and the second frame **601b** of the second housing **60b** form a main frame **W2**, and the first seat **502** of the first housing **50** and the second seat **602a** of the second housing **60b** form a seat structure **T2**. In this embodiment, the air-guiding recesses **504** and **604** have the same shape and size.

[0033] The first and second fans **5**, **6b** are isotropic with respect to an axis *b-b* shown in FIG. 7, i.e., the first air-guiding recesses **504** defined on the first connecting elements **503** of the first frame **501** and the air-guiding recesses **604b** defined on the second connecting elements **603b** of the second housing **60b** are directed to the same direction. Further, the first impeller **51** of the first fan **5** and the second impeller **61** of the second fan **6a** are isotropic with respect to the axis *b-b*.

[0034] Except for the described arrangement of the elements of the first and second fans **5**, **6a** in the first embodiment, the elements of the first and second fans **5**, **6b** of the second embodiment can have another arrangement as shown in FIG. 7. In the serial fan **F2**, the first impeller **51** of the first fan **5**, the first housing **50** of the first fan **5**, the second impeller **61**, and the second housing **60b** of the second fan **6a** are sequentially arranged along the axis *b-b*.

[0035] Except for the arrangements shown in FIGS. 2 and 7, the frames **101** and **301** can also be integrally formed in other embodiments for receiving the first and second impellers **51** and **61**.

[0036] In FIG. 8, a serial fan **F3** of a third embodiment comprises a first impeller **71**, a second impeller **72** and a housing **73**. The housing **73** comprises an frame **731**, a seat structure **732** disposed in the frame **731**, and a plurality of connecting elements **733** disposed between the frame **731** and the seat structure **732**. The seat structure **732** has two opposite sides *t1* and *t2*. The first and second impellers **71**, **72** disposed in the housing **73** are supported by the sides *t1*

and 12 of the seat structure 732, respectively. The first and second impellers 71, 72 have the same structure as the first and second impellers 51, 61 of the first embodiment.

[0037] The connecting element 733 comprises a first edge 7331 and a second edge 7332. The first edge 7331 is a front edge facing the first impeller 71. The second edge 7332 is a rear edge opposite to the first edge 7331. The air-guiding recesses 734 are defined on the first edge 7331 of each of the connecting elements 733 so as to form a rough profile thereon. Note that the depth and width of the air-guiding recesses 734 depend on the size of the fan structure and the actual requirements. Except for the square profile, the air-guiding recesses 734 substantially have toothed, arc, peak, or acuminate cross-sectional profile. Except for the described air-guiding recesses 734 defined on the first edge 7331 of the connecting element 733, the air-guiding recesses 734 can also be defined on the second edge 7332 of the connecting element 733, or the air-guiding recesses 704 can be defined on both the first and second edges 7331, 7332 of the connecting element 733. Additionally, the air-guiding recesses defined on the first edge 7331 of the connecting element 733 can symmetrically correspond to the air-guiding recesses defined on the second edge 7332 of the connecting element 733, or the air-guiding recesses defined on the first edge 7331 of the connecting element 733 and the air-guiding recesses defined on the second edge 7332 of the connecting element 733 can be symmetrically, asymmetrically or alternatively arranged. The described connecting elements 733 can be formed in the shape of rib or static blade.

[0038] While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. A serial fan comprising:
 - a frame structure;
 - a seat structure disposed in the frame structure;
 - a plurality of connecting elements disposed between the frame structure and the seat structure;
 - a plurality of air-guiding recesses defined on at least one of the connecting elements; and
 - at least one impeller disposed in the frame structure and supported by the seat structure.
2. The serial fan as claimed in claim 1, wherein the connecting elements are ribs or static blades.
3. The serial fan as claimed in claim 2, wherein the connecting element comprises a first edge and a second edge opposite to the first edge, and the air-guiding recesses are defined on the first and second edges or on one of the first and second edges.
4. The serial fan as claimed in claim 3, wherein the air-guiding recesses defined on the first and second edges are alternatively arranged or arranged in a symmetrical manner.
5. The serial fan as claimed in claim 3, wherein the air-guiding recesses have the same shape and size.
6. The serial fan as claimed in claim 5, wherein the air-guiding recesses have toothed, arc, or acuminate cross-sectional profile.

7. The serial fan as claimed in claim 1, wherein the air-guiding recesses are uniformly spaced on the connecting elements.

8. The serial fan as claimed in claim 1, wherein the seat structure comprises a first seat and a second seat, and the frame structure comprises a first frame for receiving the first impeller, the first seat and part of the connecting elements and a second frame for receiving the second impeller, the second seat and part of the connecting elements.

9. The serial fan as claimed in claim 8, wherein the first frame and the second frame are arranged in opposite.

10. The serial fan as claimed in claim 8, wherein the first frame and the second frame are isotropically arranged.

11. The serial fan as claimed in claim 8, wherein the connecting elements received in the first frame and the connecting elements received in the second frame respectively comprise the air-guiding teeth defined on the first edge or the second edge of the connecting elements, or both the first and the second edge of the connecting element, wherein the second edge is opposite to the first edge.

12. A serial fan comprising:

a first fan comprising a first frame, a first seat disposed in the first frame, a plurality of first connecting elements disposed between the first frame and the first seat, a plurality of first air-guiding recesses defined on at least one of the first connecting elements, and a first impeller supported by the first seat; and

a second fan comprising a second frame, a second seat disposed in the second frame, a plurality of second connecting elements disposed between the second frame and the second seat, a plurality of second air-guiding recesses defined on at least one of the second connecting elements, and a second impeller supported by the second seat;

wherein the first and second fans are assembled in series.

13. The serial fan as claimed in claim 12, wherein the first and second connecting elements are ribs or static blades.

14. The serial fan as claimed in claim 13, wherein the first and second connecting elements comprise a first edge and a second edge opposite the first edge, respectively, wherein the air-guiding recesses are defined on the first and second edges or defined on the first edges of the first and second connecting elements.

15. The serial fan as claimed in claim 14, wherein the air-guiding recesses defined on the first and second edges are alternatively arranged:

16. The serial fan as claimed in claim 14, wherein the air-guiding recesses have same shape and size.

17. The serial fan as claimed in claim 16, wherein the air-guiding recesses are in a shape of square, arc, peak side or combinations thereof.

18. The serial fan as claimed in claim 12, wherein the first and second fans are isotropically arranged or arranged in opposite.

19. The serial fan as claimed in claim 12, wherein the first and second fans are assembled by screwing, engaging, riveting, adhering or other equivalent methods

20. The serial fan as claimed in claim 12, wherein the first and second frames are integrally formed.