



US00RE42307E

(19) **United States**
(12) **Reissued Patent**
Walters et al.

(10) **Patent Number:** **US RE42,307 E**
(45) **Date of Reissued Patent:** **Apr. 26, 2011**

(54) **THERMALLY COMPENSATED CURRENT SENSING OF INTRINSIC POWER CONVERTER ELEMENTS**

(75) Inventors: **Michael M. Walters**, Apex, NC (US);
Matthew B. Harris, Raleigh, NC (US);
Bogdan M. Duduman, Raleigh, NC (US)

(73) Assignee: **Intersil Americas Inc.**, Milpitas, CA (US)

(21) Appl. No.: **11/726,407**

(22) Filed: **Mar. 21, 2007**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **6,870,352**
Issued: **Mar. 22, 2005**
Appl. No.: **10/858,586**
Filed: **Jun. 2, 2004**

U.S. Applications:

(63) Continuation of application No. 10/219,555, filed on Aug. 15, 2002, now Pat. No. 6,812,677.

(60) Provisional application No. 60/313,986, filed on Aug. 21, 2001.

(51) **Int. Cl.**
G05F 1/573 (2006.01)
G05F 1/565 (2006.01)

(52) **U.S. Cl.** **323/277; 323/275**

(58) **Field of Classification Search** **323/222, 323/223, 226, 265, 269, 271, 273, 275-277, 323/282, 285, 290, 907; 363/50, 56.02, 98, 363/132**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,174,496	A	11/1979	McFall et al.
4,325,017	A	4/1982	Schade, Jr.
4,334,263	A	6/1982	Adachi
4,535,378	A	8/1985	Endo
4,668,905	A	5/1987	Schierjott
5,237,262	A	8/1993	Ashley et al.
5,627,460	A	5/1997	Bazinet et al.
5,717,322	A	2/1998	Hawkes et al.
5,723,974	A	3/1998	Gray
5,793,193	A	8/1998	Hodgins
5,805,433	A	9/1998	Wood

(Continued)

FOREIGN PATENT DOCUMENTS

DE	19822525	11/1999
----	----------	---------

(Continued)

OTHER PUBLICATIONS

European Patent Office, "Office Action", Mar. 26, 2009, Published in: EP.


(Continued)

Primary Examiner — Matthew V Nguyen
(74) *Attorney, Agent, or Firm* — Fogg & Powers LLC

(57) **ABSTRACT**

A DC-to-DC converter includes one or more power switches, a pulse width modulation circuit for generating control pulses for the power switches, and an output inductor connected to the power switches. A thermally compensated current sensor is connected to an intrinsic current sensing element exhibiting a temperature-based parameter non-linearity. The thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of an intrinsic power converter element used to measure current flow, thus linearizing the current measurement. Also, a current feedback loop circuit cooperates with the pulse width modulation circuit to control the power switches responsive to the thermally compensated current sensor.

55 Claims, 3 Drawing Sheets

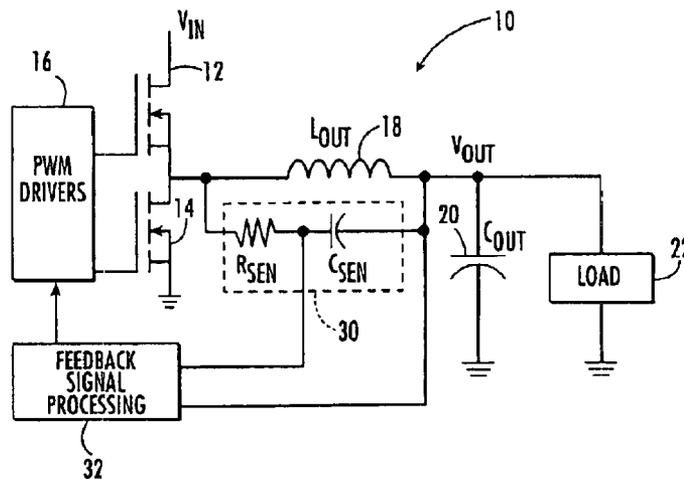

US RE42,307 E

Page 2

U.S. PATENT DOCUMENTS

5,825,234	A	10/1998	Sung et al.
5,920,241	A	7/1999	Mazzoche
5,982,160	A	11/1999	Walters et al.
6,246,220	B1	6/2001	Isham et al.
6,366,068	B1	4/2002	Morishita
6,469,916	B1	10/2002	Kerkman et al.
6,734,656	B2	5/2004	Miller et al.
6,812,677	B2	11/2004	Walters et al.
6,833,690	B2	12/2004	Walters et al.
6,870,352	B2	3/2005	Walters et al.

FOREIGN PATENT DOCUMENTS

EP	0483852	10/1991
EP	0 483 852	5/1992
EP	0 483852	* 5/1992
EP	0778509	6/1997
EP	0896417	2/1999
EP	0 992 799	* 4/2000
EP	0992799	4/2000

JP	61127866	8/1986
JP	61173671	8/1986
JP	03043809	2/1991
JP	06174489	6/1994
JP	6309045	11/1994
JP	09224367	8/1997
JP	11113163	4/1999
JP	11146637	5/1999
JP	2000078838	3/2000
JP	2000307402	11/2000
JP	2000341801	12/2000
JP	2001078439	3/2001
WO	0113503	2/2001

OTHER PUBLICATIONS

Patent Abstracts of Japan, published on Nov. 4, 1994 under Publication No. 06309045 entitled "Direct-Current Stabilizing Power Source", Applicant: Nec Tohoku Ltd.; Inventor: Matsuda Hideshi.

* cited by examiner

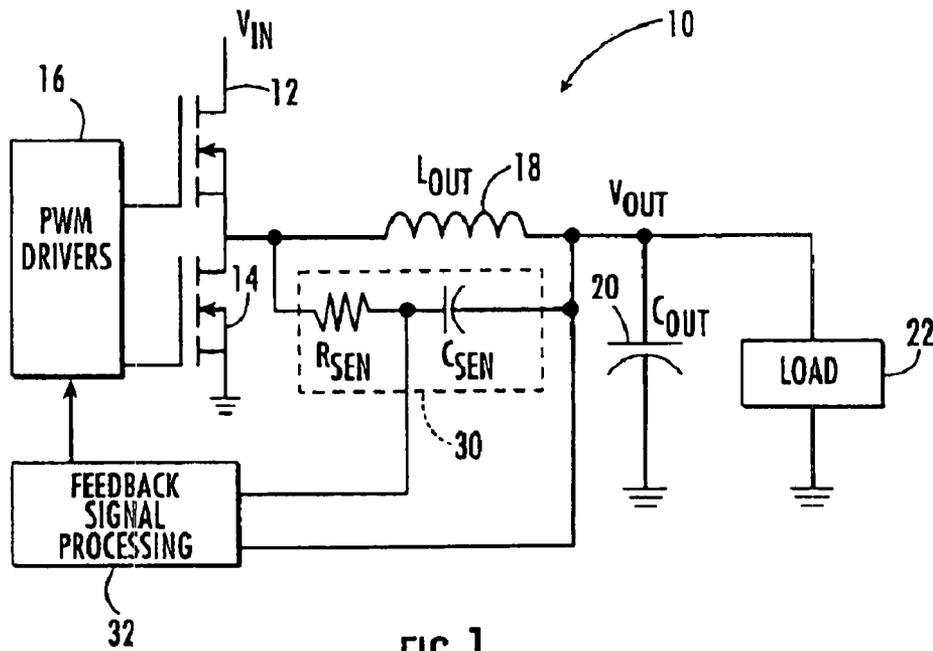


FIG. 1.

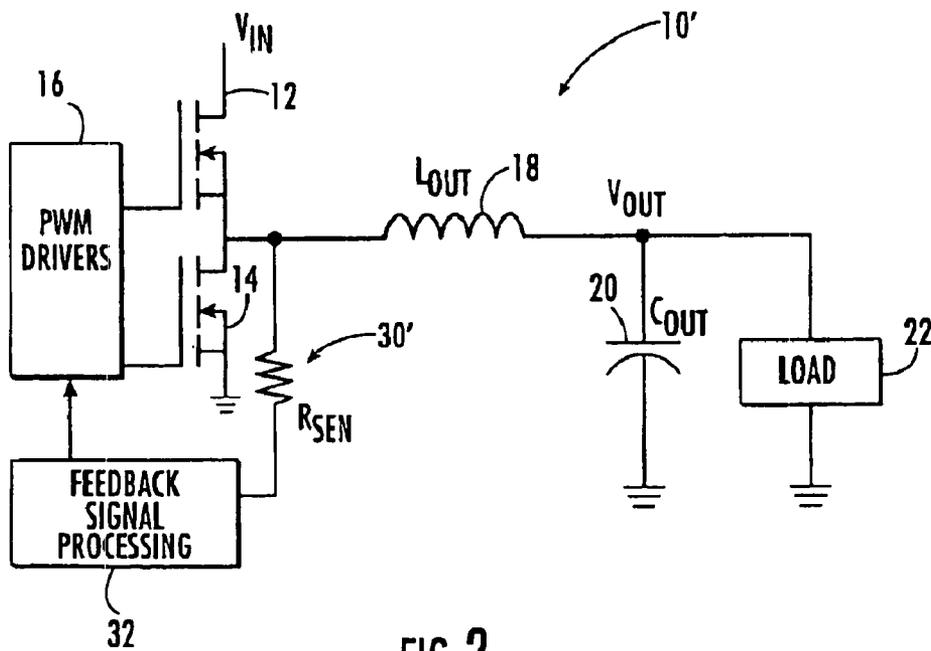


FIG. 2.

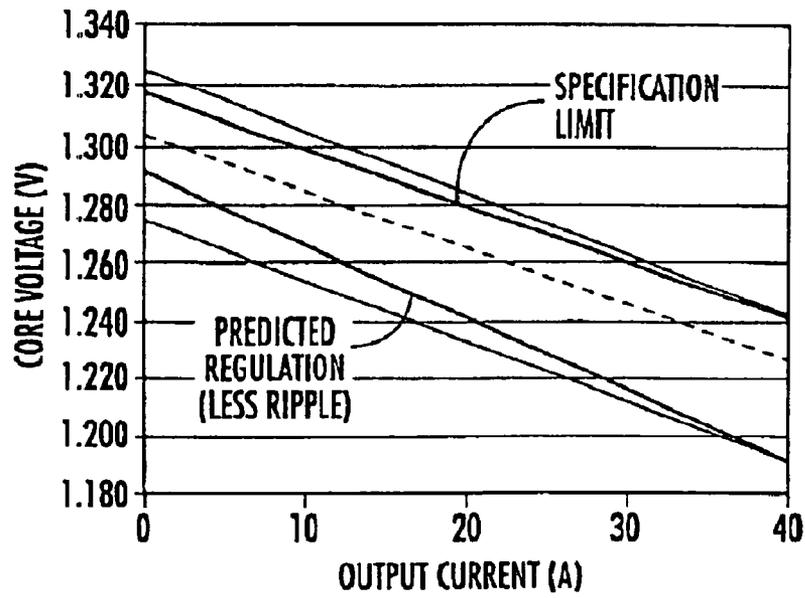


FIG. 3.

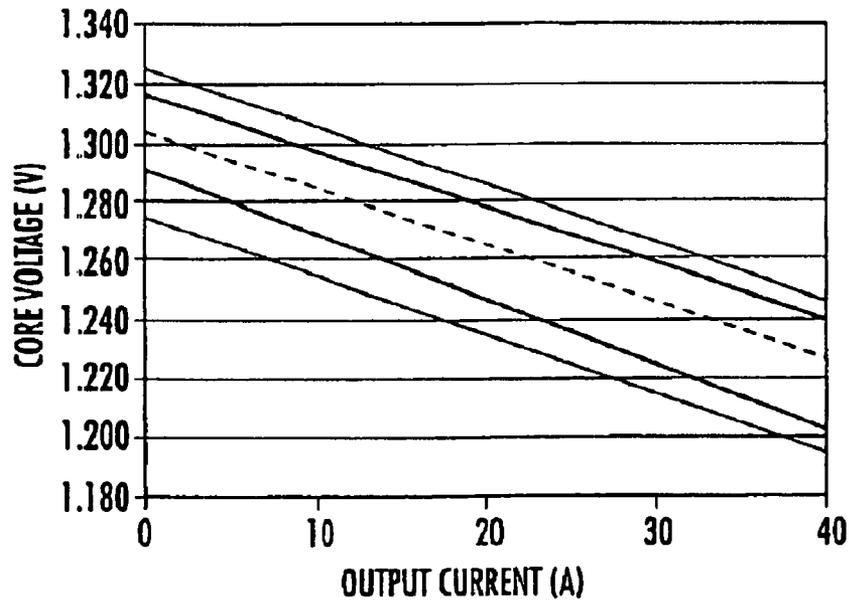


FIG. 4.

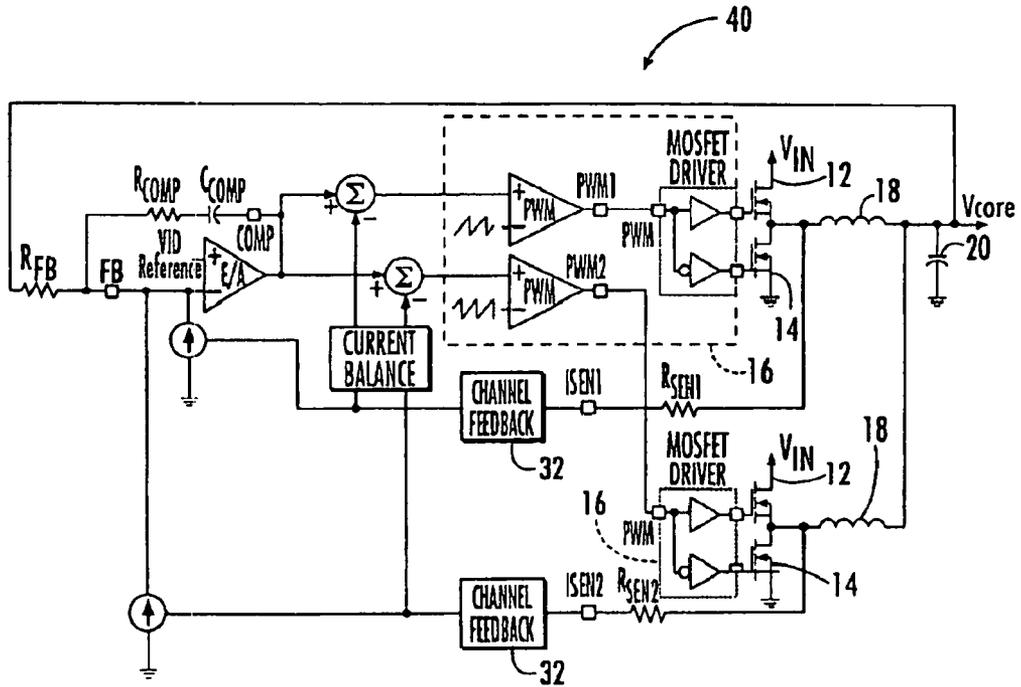


FIG. 5.

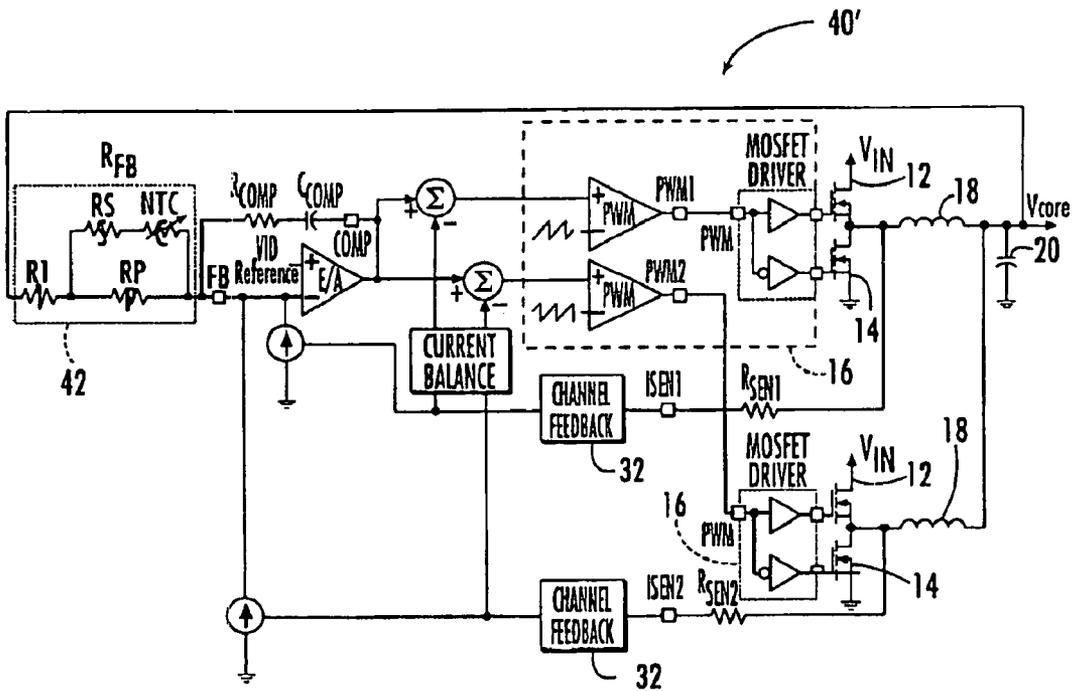


FIG. 6.

**THERMALLY COMPENSATED CURRENT
SENSING OF INTRINSIC POWER
CONVERTER ELEMENTS**

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

RELATED APPLICATION

This application is a *reissue application of U.S. Pat. No. 6,870,352 which is a Continuation Application of a U.S. patent application Ser. No. 10/219,555 filed Aug. 15, 2002, now U.S. Pat. No. 6,812,677, which is based upon prior filed provisional application No. 60/313,986 filed Aug. 21, 2001, the entire disclosure of which is incorporated herein by reference.*

FIELD OF THE INVENTION

The present invention relates to the field of electronic circuits, and more particularly, to DC-DC converters and associated methods.

BACKGROUND OF THE INVENTION

Typically, DC-DC converters use current flow information to provide value added functions and features. For example, limiting the current during an overload is commonly implemented as a safety feature. Such a current limit feature would use a signal proportional to output current limiting level. A resistor inserted between the output and the load could generate the desired signal. However, the resistance of this sensor is the subject of a trade-off between power dissipation and signal amplitude. Typically, the signal level at current limit is approximately 0.1 volt, to be well above the noise floor. The sensing resistor's power dissipation is proportional to the load current at the limit level. At high current levels, the power dissipation can be excessive.

Eliminating the sensing resistor improves the DC-DC converter's efficiency. Instead of an additional resistive element, current flow is measured using the intrinsic elements within the power converter components. For example, U.S. Pat. No. 5,982,160 to Walters et al. and entitled "DC-to-DC converter with inductor current sensing and related methods" teaches that the current flow information in an inductor can be reconstructed as a voltage across a resistor-capacitor network. This method uses the intrinsic resistance of the inductor's winding as the current sensing element.

Another method to eliminate the current sensing resistor measures the voltage dropped across the nearly constant, on-state resistance of one of the switching MOSFETs in the converter. The method samples the voltage drop during the conduction interval of the MOSFET to reconstruct the current flow information. Both of these methods make use of the fundamental power converter components as current sensing elements and they avoid using a dissipative element in the power path.

The intrinsic current sensing methods in the above examples can only approximate the actual current flow. These methods suffer in accuracy when compared with the current sensing resistor. For example, utilizing the inductor's winding resistance as the current sensing element suffers both an initial tolerance error and a variation with temperature. An inductor's winding initial resistance varies with the length

and diameter of the winding's wire, as well as the specific manufacturing procedure. This same wire resistance increases as a function of temperature. Therefore, the reconstructed voltage signal is a function of the inductor windings' mechanical tolerance and temperature as well as the current flow.

SUMMARY OF THE INVENTION

In view of the foregoing background, it is therefore an object of the invention to provide low power dissipation while accurately measuring and processing current information with thermal compensation in a switching DC-to-DC converter.

This and other objects, features and advantages in accordance with the present invention are provided by a DC-to-DC converter including one or more power switches, a pulse width modulation circuit for generating control pulses for the power switches, and an output inductor connected between the power switches and an output terminal. A thermally compensated current sensor is connected to the output inductor for sensing current in the output inductor. The thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of the output inductor. Also, a current feedback loop circuit cooperates with the pulse width modulation circuit to control the power switches responsive to the thermally compensated current sensor.

The power switches preferably include a low side field effect transistor and a high side field effect transistor connected together. The thermally compensated current sensor may be connected in parallel with the output inductor and may comprise a resistor and a capacitor connected in series. The resistor of the thermally compensated current sensor may be a positive temperature coefficient resistor.

Alternatively, the thermally compensated current sensor may be connected to the at least one power switch for providing a sensed current proportional to a current being conducted through the output inductor. Here, the thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the power switches. Also, in this embodiment, the thermally compensated current sensor is connected between the power switches and the current feedback loop circuit, and comprises a positive temperature coefficient resistor.

Another aspect of the present invention relates to a multiphase DC-to-DC converter having multiple channels. Each of the channels includes a power device with, e.g. a low side power switch and a high side power switch connected together. A pulse width modulation circuit generates control pulses for the power device, and an output inductor is connected between the power device and the output terminal. A thermally compensated current sensor is connected to the power device in each channel for providing a sensed current proportional to a current being conducted through the output inductor. The thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the low side power switch. Also, a current feedback loop circuit cooperates with the pulse width modulation circuit for controlling the power device responsive to the thermally compensated current sensor.

In an alternative embodiment of the multiphase DC-to-DC converter, instead of the thermally compensated current sensor, a feedback resistive network is connected between an input of the control circuit of each of channels and the output

terminal. The feedback resistive network includes a negative temperature coefficient resistor having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the monitored power switch of the power devices.

A method aspect of the present invention is directed to regulating a DC-to-DC converter comprising an output terminal, power switches, a pulse width modulation circuit for generating control pulses for the power switches, an output inductor connected between the power switches and the output terminal, and a current feedback loop circuit cooperating with the pulse width modulation circuit for controlling the power switches. The method includes sensing current passing through the inductor using a thermally compensated current sensor connected to the output inductor. Again, the thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of the output inductor. Furthermore, the current feedback loop circuit operates to control the at least one power switch in response to the thermally compensated current sensor.

Alternatively, the method may include providing a sensed current proportional to a current being conducted through the output inductor using a thermally compensated current sensor connected to at least one power switch. Here, the thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the at least one power switch. The current feedback loop circuit controls the at least one power switch in response to the thermally compensated current sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a DC-to-DC converter of the present invention.

FIG. 2 is a schematic diagram of a second embodiment of a DC-to-DC converter of the present invention.

FIG. 3 is a graph illustrating the load line characteristics of a conventional DC-to-DC converter without thermal compensation.

FIG. 4 is a graph illustrating the load line characteristics of the DC-to-DC converter of FIG. 2.

FIG. 5 is a schematic diagram of a multiphase DC-to-DC converter in accordance with the present invention.

FIG. 6 is a schematic diagram of an alternative embodiment of the multiphase DC-to-DC converter of FIG. 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

Some functions and features of the DC-DC converter do not require high precision current flow information and the intrinsic methods discussed above offer an efficiency advantage. However, other functions and features demand better precision. An example demanding high precision is load line characteristic or droop feature found in DC-DC power conversion for microprocessors. Here, the output voltage is programmed to decrease (droop) with increasing load current.

The droop feature positions the output voltage at the optimum level prior to a load transient so the transient voltage excursion stays within acceptable levels with the minimum output capacitance. The precision is required to minimize not only the bulk output capacitance but also the high-frequency distribution capacitance.

Turning now to FIG. 1 of the drawings, the DC-to-DC converter 10 in accordance with a first embodiment of the present invention is now described. The DC-to-DC converter 10 provides a controlled voltage V_{out} to a load 22. In the illustrated embodiment, the DC-to-DC converter 10 includes a pair of power switches, a high side switch 12, and a low side switch 14 connected to a source voltage V_{in} . Of course, as will be readily appreciated by those skilled in the art, the DC-to-DC converter 10 in other embodiments may include only the high side switch 12, with a diode substituted in the position of the low side switch 14. In addition, although MOSFET transistors are illustrated, other semiconductor switches may be used as will also be understood by those skilled in the art.

The DC-to-DC converter 10 also includes the schematically illustrated pulse width modulation circuit 16 which would also preferably include switch drivers. This circuit portion is more fully described, for example, in U.S. Pat. No. 5,717,322 to Hawkes et al. and U.S. Pat. No. 5,793,193 to Hodgins, both assigned to the assignee of the present invention. Both of these patents are also incorporated by reference herein in their entirety. The pulse width modulation circuit 16 generates a series of pulse width modulated control pulses for the power switches 12, 14 to regulate the output voltage V_{out} coupled to the load 22. Those of skill in the art will readily appreciate the construction and operation of the pulse width modulation circuit 16 without further detailed discussion.

The illustrated DC-to-DC converter 10 also includes an output inductor 18 coupled between the load 22 and a node between the high and low side switches 12, 14. A diode may also be connected between ground and the node between the high and low side power switches 12, 14. An output capacitor 20 is connected in parallel across the load 22 as will also be readily appreciated by those skilled in the art.

This embodiment of the present invention provides a current sensor 30 connected in parallel with the output inductor 18 for sensing current passing through the inductor. The current sensor 30 preferably comprises a resistor R_{sen} and a capacitor C_{sen} connected together in series. The current flow information in the inductor 18 can be reconstructed as a voltage across the resistor-capacitor network. This method uses the intrinsic resistance of the inductor's winding as the current sensing element. As would be appreciated by the skilled artisan, the intrinsic resistance of the inductor's winding has a temperature coefficient. The current sensor 30 is connected to the illustrated feedback signal processing loop circuit 32 cooperating with the pulse width modulation circuit 16 for controlling the power switches 12, 14 responsive to the current sensor. The resistor R_{sen} and capacitor C_{sen} may have respective values so that the current sensor 30 is a substantially instantaneous current sensor.

Importantly, the current sensor 30 is a thermally compensated current sensor having a temperature coefficient that substantially matches a temperature coefficient of the output inductor 18. The load line accuracy can be improved by compensating for the intrinsic current sensing temperature characteristic. In other words, the current loop gain is modified as a function of temperature to cancel the temperature characteristic of the intrinsic current sensing element, e.g. the output inductor 18. Accordingly, the disadvantages of the prior art inductor current sensing techniques are overcome.

The feedback signal processing circuit **32** may include a voltage regulation loop circuit cooperating with a peak current control loop circuit for setting a peak current level. The current sense signal is processed through the schematically illustrated feedback signal processing loop circuit **32** to properly condition the signal for pulse width modulation circuit **16**. Those of skill in the art will readily appreciate the construction of the many possible and equivalent variations of the feedback signal processing loop circuit **32**, such as disclosed, for example, in the above cited U.S. Pat. Nos. 5,717,322 and 5,793,193.

The DC-to-DC converter may also include an overload detection circuit which uses the sensed current signal from the current sensor **30** to prevent overloads as will be readily understood by those skilled in the art. The DC-to-DC converter **10** may also include additional features/circuit portions not shown for clarity including, for example, soft start and slope compensation circuit portions. The DC-to-DC converter **10** may also include a hysteretic comparator, not shown, for switching between a normal operating mode and a discontinuous low current demand mode.

Another embodiment of the invention will now be described while referring to FIGS. 2-4. Here, the DC-to-DC converter **10'** includes a thermally compensated current sensor **30'** connected to the power switches **12**, **14** for providing a sensed current proportional to a current being conducted through the output inductor **18**. Here, the thermally compensated current sensor **30'** has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of one of the power switches **12**, **14**, e.g. the low side power switch **14**. Also, in this embodiment, the thermally compensated current sensor **30'** is connected between the power switches **12**, **14** and the current feedback circuit **32**, and includes a positive temperature coefficient resistor.

As discussed above and in U.S. Pat. No. 6,246,220, the $R_{ds(on)}$ method samples the voltage drop during the conduction interval of the MOSFET to reconstruct the current flow information. For this example, the voltage is sampled across the lower MOSFET **14** (shown in FIG. 2) using the resistor R_{sen} connected to feedback signal processing **32** including virtual-ground. The sensed current (I_{sen}) is proportional to the inductor current (I_l) by the following relationship: $I_{sen} = I_l \times (R_{ds} / R_{sen})$. As the MOSFET temperature increases, its $R_{ds(on)}$ increases which causes a corresponding increase in the sensed current I_{sen} . The I_{sen} signal is further processed within the system to provide a load line characteristic that is also a function of MOSFET temperature.

The I_{sen} signal can be thermally compensated by selecting a R_{sen} resistor with the appropriate thermal characteristics. For example, selecting a positive temperature coefficient (PTC) resistor that matches the MOSFET's $R_{ds(on)}$ temperature coefficient minimizes the I_{sen} , and droop voltage, dependency on MOSFET temperature.

FIG. 3 shows a typical load line specification and the RSS tolerance analysis of a conventional DC-to-DC converter utilizing power switch's, e.g. a MOSFET's, on-state resistance ($R_{ds(on)}$) as the current sensing element. The analysis includes the variations due to the reference, voltage setting resistors, and MOSFET parameters. The largest variation is due to the temperature characteristic of the MOSFET.

FIG. 4 illustrates the RSS tolerance analysis of a DC-to-DC converter with thermal compensation in accordance with the present invention. The minimum and maximum load lines fall within the specification.

Another aspect of the present invention relates to a multiphase DC-to-DC converter **40** having first and second channels, and which will be described with reference to FIGS. 5

and 6. Each of the channels includes a power device with, e.g. a low side power switch **14** and a high side power switch **12** connected together. A pulse width modulation circuit **16** generates control pulses for the power device, and an output inductor **18** is connected between the power device and the output terminal. For multiphase power converters a PTC resistor is required on each power channel. Thus, a thermally compensated current sensor R_{sen1} , R_{sen2} is connected to the power device in each channel for providing a sensed current proportional to a current being conducted through the respective output inductor. The thermally compensated current sensor R_{sen1} , R_{sen2} has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the low side power switch **14**.

In an alternative embodiment, the multiphase DC-to-DC converter **40'** (FIG. 6), includes a feedback resistive network connected between an input of the pulse width modulation circuit or control circuit of each of channels and the output terminal. The feedback resistive network R_{fb} includes a negative temperature coefficient resistor R_{ntc} having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the low side power switch **14** of the power devices.

This approach compensates for the thermal effects of current sensing utilizing a negative temperature coefficient resistor R_{ntc} . The embodiment uses a single NTC device for temperature correction in multiphase converters as compared with the PTC compensation method. The resistor R_{fb} in the embodiment of FIG. 5 is replaced with an NTC resistor network to provide correction of the I_{sen} signal. NTC resistors typically have non-linear thermal characteristics. The resistance can be linearized over the temperatures of interest using a network of standard resistors **42** connected as shown in FIG. 6.

Another aspect of the invention relates to a method for regulating a DC-to-DC converter **10**, **10'** of the type as described above and comprising power switches **12**, **14**, a pulse width modulation circuit **16** for generating control pulses for the power switches, an output inductor **18**, and a feedback signal processing circuit **32** cooperating with the pulse width modulation circuit. The method preferably includes sensing current passing through the inductor **18** using a thermally compensated current sensor **30** connected in parallel with the output inductor. Again, the thermally compensated current sensor has a temperature coefficient that substantially matches a temperature coefficient of the output inductor. Furthermore, the current feedback loop circuit **32** operates to control the power switches **12**, **14** in response to the thermally compensated current sensor. The current sensor **30** preferably comprises a resistor R_{sen} and a capacitor C_{sen} connected together in series.

Alternatively, the method may include providing a sensed current proportional to a current being conducted through the output inductor **18** using a thermally compensated current sensor **30'** (FIG. 2) connected to the power switches. Here, the thermally compensated current sensor **30'** has a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of one power switch. The current feedback loop circuit **32** controls the at least one power switch in response to the thermally compensated current sensor **30'**.

It is understood by those skilled in the art that all the above described embodiments can be applied to the inductor wire current sensing approach or the $R_{ds(on)}$ current sensing approach.

Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the

benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and embodiments are intended to be included within the scope of the appended claims.

That which is claimed is:

1. A DC-to-DC converter comprising:
 - at least one power switch;
 - a control circuit for generating control pulses for the at least one power switch;
 - an output inductor connected to the at least one power switch; and
 - a thermally compensated current sensor operatively connected in parallel to the output inductor for sensing current in the output inductor, the thermally compensated current sensor having a temperature coefficient that substantially matches a temperature coefficient of the output inductor wherein the at least one power switch is responsive to the thermally compensated current sensor.
2. A DC-to-DC converter according to claim 1, wherein the at least one power switch comprises at least one field effect transistor.
3. A DC-to-DC converter according to claim 1, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor connected together.
4. A DC-to-DC converter according to claim 1, wherein the at least one power switch comprises a low side power switch and a high side power switch connected together.
5. A DC-to-DC converter according to claim 1, wherein the thermally compensated current sensor comprises a resistor and capacitor connected in series.
6. A DC-to-DC converter according to claim 5, wherein the resistor of the thermally compensated current sensor comprises a positive temperature coefficient resistor.
7. A DC-to-DC converter comprising:
 - at least one power switch;
 - a control circuit for generating control pulses for the at least one power switch;
 - an output inductor connected to the at least one power switch; and
 - a thermally compensated current sensor connected to the at least one power switch for providing a sensed current related to a current being conducted through the output inductor, and having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the at least one power switch wherein the at least one power switch is responsive to the thermally compensated current sensor.
8. A DC-to-DC converter according to claim 7, wherein the at least one power switch comprises at least one field effect transistor.
9. A DC-to-DC converter according to claim 7, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor connected together.
10. A DC-to-DC converter according to claim 7, wherein the at least one power switch comprises a low side power switch and a high side power switch connected together.
11. A DC-to-DC converter according to claim 7, wherein the thermally compensated current sensor is connected between the at least one power switch and a current feedback loop circuit.

12. A DC-to-DC converter according to claim 11, wherein the thermally compensated current sensor comprises a resistor.

13. A multiphase DC-to-DC converter comprising:

- at least first and second channels each comprising a power device including a low side power switch and a high side power switch connected together;
- a control circuit for generating control pulses for the power device;
- an output inductor connected to the power device; and
- a thermally compensated current sensor connected to the power device for providing a sensed current related to a current being conducted through the output inductor, the thermally compensated current sensor having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the low side power switch, wherein the power device is responsive to the thermally compensated current sensor.

14. A multiphase DC-to-DC converter according to claim 13, wherein each of the power switches comprises a field effect transistor.

15. A multiphase DC-to-DC converter according to claim 13, wherein the thermally compensated current sensor is connected between the power device and a current feedback loop circuit.

16. A multiphase DC-to-DC converter according to claim 15, wherein the thermally compensated current sensor comprises a resistor.

17. A multiphase DC-to-DC converter comprising:

- at least first and second channels each comprising a power device including a low side power switch and a high side power switch connected together;
- a control circuit for generating control pulses for the power device;
- an output inductor connected to the power device;
- a current sensor connected to the power device for providing a sensed current proportional to a current being conducted through the output inductor;
- a current feedback loop circuit cooperating with the control circuit for controlling the power device responsive to the current sensor; and
- a feedback resistive network connected between an input of the control circuit of each of the at least first and second channels and the output terminal, and comprising a resistor having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the low side power switch of the power device of the at least first and second channels.

18. A multiphase DC-to-DC converter according to claim 17, wherein each of the power switches comprises a field effect transistor.

19. A method of regulating a DC-to-DC converter comprising at least one power switch, a control circuit for generating control pulses for the at least one power switch, and an output inductor connected to the at least one power switch, the method comprising:

- sensing current passing through the inductor using a thermally compensated current sensor connected in parallel to the output inductor and having a temperature coefficient that substantially matches a temperature coefficient of the output inductor; and
- controlling the at least one power switch in response to the thermally compensated current sensor.

20. A method according to claim 19, wherein the at least one power switch comprises at least one field effect transistor.

21. A method according to claim 19, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor connected together.

22. A method according to claim 19, wherein the thermally compensated current sensor comprises a resistor and capacitor connected in series.

23. A method according to claim 22, wherein the resistor comprises a positive temperature coefficient resistor.

24. A method of regulating a DC-to-DC converter comprising at least one power switch, a control circuit for generating control pulses for the at least one power switch, and an output inductor connected to the at least one power switch, the method comprising:

providing a sensed current related to a current being conducted through the output inductor using a thermally compensated current sensor connected to the at least one power switch and having a temperature coefficient that substantially matches a temperature coefficient of an on-state resistance of the at least one power switch; and controlling the at least one power switch in response to the thermally compensated current sensor.

25. A method according to claim 24, wherein the at least one power switch comprises at least one field effect transistor.

26. A method according to claim 24, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor connected together.

27. A method according to claim 24, wherein the thermally compensated current sensor is connected between the at least one power switch and a current feedback loop circuit.

28. A method according to claims 24, wherein the thermally compensated current sensor comprises a resistor.

29. A DC-to-DC power converter adapted for use in electronic devices comprising:

a board adapted for mounting within the electronic device; and

at least one power switch, a control circuit for generating control pulses for the at least one power switch, an output inductor connected to the at least one power switch, and a thermally compensated current sensor operatively connected to the output conductor, said power switch, control circuit, output inductor and current sensor being mounted on the board and wherein the thermally compensated current sensor has a temperature coefficient matching a temperature coefficient of the output inductor and is responsive to the thermally compensated current sensor operative for sensing current in the output inductor.

30. A DC-to-DC converter according to claim 29, wherein the at least one power switch comprises at least one field effect transistor.

31. A DC-to-DC converter according to claim 29, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor connected together.

32. A DC-to-DC converter according to claim 29, wherein the at least one power switch comprises a low side power switch and a high side power switch connected together.

33. A DC-to-DC converter according to claim 29, wherein the thermally compensated current sensor comprises a resistor.

34. A DC-to-DC converter comprising:
at least one power switch;
a control circuit for generating control pulses for the at least one power switch;
an output inductor connected to the at least one power switch;

a current sensor connected for sensing current in the output inductor; and

a thermal compensation circuit having a temperature coefficient that substantially compensates for the effect of a temperature coefficient of the output inductor, wherein the at least one power switch is responsive to the thermal compensation circuit and the current sensor.

35. The DC-to-DC converter of claim 34, wherein the thermal compensation circuit comprises a portion of the current sensor.

36. The DC-to-DC converter of claim 34, wherein the thermal compensation circuit comprises a thermal compensation resistor.

37. The DC-to-DC converter of claim 34, wherein the thermal compensation circuit comprises a positive temperature coefficient resistor.

38. The DC-to-DC converter of claim 34, wherein the thermal compensation circuit comprises a negative temperature coefficient resistor.

39. The DC-to-DC converter of claim 34, wherein the at least one power switch comprises a low side field effect transistor and a high side field effect transistor coupled together.

40. The DC-to-DC converter of claim 34, wherein the current sensor comprises a resistor and capacitor coupled in series.

41. The DC-to-DC converter of claim 40, wherein the resistor of the current sensor comprises a positive temperature coefficient resistor.

42. A DC-to-DC converter comprising:

at least one power switch;

a control circuit for generating control pulses for the at least one power switch;

an output inductor connected to the at least one power switch;

a current sensor connected to the at least one power switch for providing a sensed current related to a current being conducted through the output inductor, wherein the current sensor is coupled across the output inductor; and
a thermal compensation circuit having a temperature coefficient that substantially matches a temperature coefficient of the output inductor to cancel the effect of the temperature coefficient of the output inductor wherein the at least one power switch is responsive to the thermal compensation circuit and the current sensor.

43. The DC-to-DC converter of claim 42, wherein the current sensor is connected between the at least one power switch and a current feedback loop circuit.

44. The DC-to-DC converter of claim 42, wherein the thermal compensation circuit comprises a portion of the current sensor.

45. The DC-to-DC converter of claim 42, wherein the thermal compensation circuit comprises a thermal compensation resistor.

46. The DC-to-DC converter of claim 42, wherein the thermal compensation circuit comprises a positive temperature coefficient resistor.

47. The DC-to-DC converter of claim 42, wherein the thermal compensation circuit comprises a negative temperature coefficient resistor.

48. A multiphase DC-to-DC converter comprising:

at least first and second channels each comprising a power device including a low side power switch and a high side power switch coupled together;

a control circuit for generating control pulses for the power devices;

an output inductor connected to the power devices;

11

a current sensor connected to the power devices for providing a sensed current related to a current being conducted through the output inductor, wherein the current sensor is coupled across the output inductor; and
 a thermal compensation circuit having a temperature coefficient that substantially cancels the effect of temperature on the output inductor caused by the temperature coefficient of the output inductor, wherein the power device is responsive to the thermal compensation circuit and to the current sensor.

49. The multiphase DC-to-DC converter of claim 48, wherein the thermal compensation circuit comprises a portion of the current sensor.

50. The multiphase DC-to-DC converter of claim 48, wherein the thermal compensation circuit comprises a thermal compensation resistor.

51. The multiphase DC-to-DC converter of claim 48, wherein the thermal compensation circuit comprises a positive temperature coefficient resistor.

52. The multiphase DC-to-DC converter of claim 48, wherein the thermal compensation circuit comprises a negative temperature coefficient resistor.

53. A multiphase DC-to-DC converter comprising:
 at least first and second channels each comprising a power device including a low side power switch and a high side power switch connected together;
 a control circuit for generating control pulses for the power devices;
 an output inductor connected to the power devices;
 a current sensor connected to the power devices for providing a sensed current proportional to a current being conducted through the output inductor, wherein the current sensor is coupled across the output inductor;
 a current feedback loop circuit cooperating with the control circuit for controlling the power devices responsive to the current sensor; and
 a resistive circuit element coupled to the control circuit, the resistive circuit element having a temperature coefficient that substantially matches a temperature coefficient of the output inductor such that the effect of fluctuations in

12

temperature in the output inductor are compensated for by the resistive circuit element.

54. A method of regulating a DC-to-DC converter comprising at least one power switch, a control circuit for generating control pulses for the at least one power switch, and an output inductor connected to the at least one power switch, the method comprising:
 sensing current passing through the inductor using a current sensor connected in parallel to the output inductor;
 compensating the sensed current with a circuit element having a temperature coefficient that is selected to substantially match a temperature coefficient of the output inductor such that the effect of temperature on the output inductor is substantially cancelled by the circuit element; and
 controlling the at least one power switch in response to the thermally compensated sensed current.

55. A DC-to-DC power converter adapted for use in electronic devices comprising:
 a board adapted for mounting within the electronic device; and
 at least one power switch,
 a control circuit for generating control pulses for the at least one power switch,
 an output inductor connected to the at least one power switch,
 a current sensor operatively connected to the output inductor, and
 a thermal compensation circuit coupled to the control circuit,
 said power switch, control circuit, output inductor, current sensor and thermal compensation circuit being mounted on the board, and
 wherein the thermal compensation circuit has a temperature coefficient that corrects the measure of the current sensed by the current sensor to account substantially for the effect of temperature on the current in the output inductor caused by a temperature coefficient of the output inductor.

* * * * *