



(51) International Patent Classification:

H01J 37/08 (2006.01) *H01J 37/32* (2006.01)

Apt 101-1004, Inheon-Dong, Gwanak-gu, Seoul, Seoul 08797 (KR).

(21) International Application Number:

PCT/US2017/058517

(74) Agent: ROY, Ronnen; Kacvinsky Daisak Bluni PLLC, 101 Carnegie Center, Suite 106, Princeton, New Jersey 08540 (US).

(22) International Filing Date:

26 October 2017 (26.10.2017)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/341,040 02 November 2016 (02.11.2016) US

(71) Applicant: VARIAN SEMICONDUCTOR EQUIPMENT ASSOCIATES, INC. [US/US]; 35 Dory Road, Gloucester, Massachusetts 01930 (US).

(72) Inventors: KOO, Bon-Woong; 41 Juniper Road, Andover, Massachusetts 01810 (US). HWANG, Yong-Seok; Dae-woo Hyoryung Apt 101-306, 84 Hyoryung-ro, Seocho-gu, Seoul, Seoul 06696 (KR). CHUNG, Kyong-Jae; Euncheon

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: RF ION SOURCE WITH DYNAMIC VOLUME CONTROL

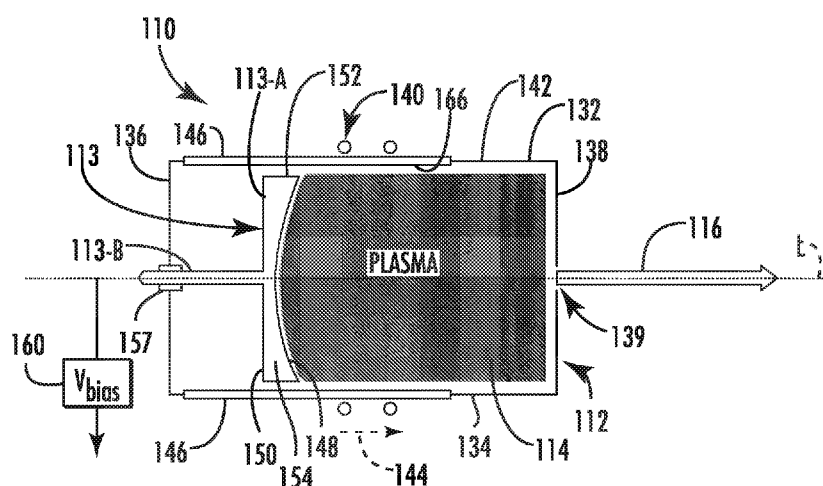


FIG 2

(57) Abstract: Provided herein are approaches for dynamically modifying plasma volume in an ion source chamber by positioning an end plate and radio frequency (RF) antenna at a selected axial location. In one approach, an ion source includes a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, and an RF antenna adjacent a plasma within the plasma chamber, wherein the RF antenna is configured to provide RF energy to the plasma. The ion source may further include an end plate disposed within the plasma chamber, adjacent the first end wall, the end plate actuated along the longitudinal axis between a first position and a second position to adjust a volume of the plasma. By providing an actuatable end plate and RF antenna, plasma characteristics may be dynamically controlled to affect ion source characteristics, such as composition of ion species, including metastable neutrals.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

RF ION SOURCE WITH DYNAMIC VOLUME CONTROL

Field of the Disclosure

[0001] The disclosure relates generally to ion sources, and more particularly to an ion source having components for dynamically modifying plasma chamber volume.

Background of the Disclosure

[0002] Ion implantation is a process of introducing dopants or impurities into a substrate via bombardment. In semiconductor manufacturing, the dopants are introduced to alter electrical, optical, or mechanical properties. For example, dopants may be introduced into an intrinsic semiconductor substrate to alter the type and level of conductivity of the substrate. In manufacturing an integrated circuit (IC), a precise doping profile provides improved IC performance. To achieve a particular doping profile, one or more dopants may be implanted in the form of ions in various doses and various energy levels.

[0003] The beam line components of an ion implanter may include a series of electrodes configured to extract ions from the source chamber, a mass analyzer configured with a particular magnetic field where just ions having a desired mass-to-charge ratio are allowed to pass through the analyzer, and a corrector magnet configured to provide a ribbon beam directed to the platen almost orthogonally with respect to the ion beam to implant the ions into a target substrate. The ions lose energy when the ions collide with nuclei and electrons in the substrate and come to rest at a desired depth within the substrate based on the acceleration energy. The depth of implantation into the substrate is a function of ion

energy and the mass of the ions generated in the source chamber. In some approaches, arsenic or phosphorus may be doped to form n-type regions in a substrate, and boron, gallium, or indium may be doped to create p-type regions in a substrate.

[0004] Various types of ion sources may be employed for ionizing feed gases. Such sources may be selected based on the type of plasma intended as well as an associated ion beam profile for implantation into a target substrate. One type of ion source is a hot-cathode ion source utilizing an indirectly heated cathode (IHC) to ionize a feed gas in a source chamber. Another type of ion source is an inductively-coupled, RF (radio frequency) plasma ion source utilizing an RF coil to excite, through electromagnetic induction, a feed gas in a source chamber. A dielectric RF window separates the interior of the source chamber from the RF coil, in some cases, at atmospheric pressure. The power delivered to the RF coil can be adjusted to control the density of the plasma and the extracted ion beam current. Due to inherent weaknesses such as low fractionation of the monoatomic ion species, low power density and low temperature operation, RF ion sources face challenges.

Summary

[0005] In view of the foregoing, what is needed are systems and methods for dynamically modifying plasma characteristics in an RF ion source by positioning an end plate and RF antenna at a selected axial location of a plasma chamber. In one approach, an ion source includes a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, and an RF antenna adjacent a plasma within the plasma chamber, wherein the RF antenna is configured to provide RF energy to the plasma. The

ion source may further include an end plate disposed within the plasma chamber, adjacent the first end wall, the end plate actuated along the longitudinal axis between a first position and a second position to adjust a volume of the plasma. By providing an actuatable end plate and RF antenna, dynamically controlling plasma characteristics is possible, as is the ability to affect ion source characteristics, such as composition of ion species including metastable neutrals.

[0006] An exemplary ion source in accordance with the present disclosure may include a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, and a radio frequency (RF) antenna adjacent a plasma within the plasma chamber, wherein the RF antenna is configured to provide RF energy to the plasma. The ion source may further include an end plate disposed within the plasma chamber, the end plate actuated along the longitudinal axis between a first position and a second position to adjust a volume of the plasma.

[0007] An exemplary plasma chamber in accordance with the present disclosure may include a housing having a side wall, a first end wall, and a second end wall, wherein the second end wall includes an exit opening (e.g., orifice or slit geometry for ion beam extraction) for delivering an ion beam from the plasma chamber. The plasma chamber may further include a radio frequency (RF) antenna adjacent the plasma chamber, the RF antenna actuatable between the first end wall and the second end wall. The plasma chamber may further include an end plate disposed within the plasma chamber, the end plate actuatable along a longitudinal axis of the plasma chamber, between the first end wall and the second end wall, to adjust a volume of the plasma.

[0008] An exemplary method in accordance with the present disclosure may include providing a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, and positioning a radio frequency (RF) antenna adjacent a plasma within the plasma chamber, wherein the RF antenna is actuatable between the first end wall and the second end wall. The method may further include providing an end plate disposed along the longitudinal axis within the plasma chamber, the end plate actuatable between a first position and a second position to adjust a volume of the plasma.

Brief Description of the Drawings

[0009] **FIG. 1** is a side cross-sectional view of an ion source in accordance with an embodiment of the present disclosure.

[0010] **FIG. 2** is a side cross-sectional view of a plasma chamber in accordance with an embodiment of the present disclosure.

[0011] **FIG. 3** is a side cross-sectional view of a plasma chamber in accordance with an embodiment of the present disclosure.

[0012] **FIG. 4A** is a side cross-sectional view of a plasma chamber in accordance with an embodiment of the present disclosure.

[0013] **FIG. 4B** is a side cross-sectional view of the plasma chamber of **FIG. 4A** in accordance with an embodiment of the present disclosure.

[0014] **FIG. 5A** is a side cross-sectional view of a plasma chamber in accordance with an embodiment of the present disclosure.

[0015] **FIG. 5B** is a side cross-sectional view of the plasma chamber of **FIG. 5A** in accordance with an embodiment of the present disclosure.

[0016] **FIG. 6** is a flowchart illustrating an exemplary method in accordance with embodiments of the present disclosure.

[0017] The drawings are not necessarily to scale. The drawings are merely representations, not intended to portray specific parameters of the disclosure. The drawings are intended to depict exemplary embodiments of the disclosure, and therefore are not to be considered as limiting in scope. In the drawings, like numbering represents like elements.

Detailed Description

[0018] A system and method in accordance with the present disclosure will now be described more fully hereinafter with reference to the accompanying drawings, where embodiments of the system and method are shown. The system and method may be embodied in many different forms and are not to be construed as being limited to the embodiments set forth herein. Instead, these embodiments are provided so this disclosure will be thorough and complete, and will fully convey the scope of the system and method to those skilled in the art.

[0019] For the sake of convenience and clarity, terms such as "top," "bottom," "upper," "lower," "vertical," "horizontal," "lateral," and "longitudinal" will be used herein to describe the relative placement and orientation of these components and their constituent parts, with respect to the geometry and orientation of a component of a semiconductor

manufacturing device as appearing in the figures. The terminology will include the words specifically mentioned, derivatives thereof, and words of similar import.

[0020] As used herein, an element or operation recited in the singular and proceeded with the word "a" or "an" are understood as potentially including plural elements or operations as well. Furthermore, references to "one embodiment" of the present disclosure are not intended to be interpreted as precluding the existence of additional embodiments also incorporating the recited features.

[0021] As stated above, provided herein are approaches for dynamically modifying plasma volume in an ion source chamber by positioning an end plate and radio frequency (RF) antenna at a selected axial location. In one approach, an ion source includes a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, and an RF antenna adjacent a plasma within the plasma chamber, wherein the RF antenna is configured to provide RF energy to the plasma. The ion source may further include an end plate disposed within the plasma chamber, adjacent the first end wall, the end plate actuated along the longitudinal axis between a first position and a second position to adjust a volume of the plasma. By providing an actuatable end plate and RF antenna, dynamic control of plasma characteristics is achievable, as is the modification of ion source characteristics, such as composition of ion species, plasma density, electron temperature, and also including metastable neutrals.

[0022] Furthermore, approaches herein provide an end plate made of either an electrically conducting material (e.g. doped Si, doped SiC, Aluminum, Tungsten) or an insulating material (e.g., Si, SiC, ceramics). The end plate may also be used as a

gas baffle for introducing a dopant gas either uniformly or along an outer region (e.g., closer to the RF coil) for improved power coupling. In some embodiments, the end plate can be biased, either positively or negatively, to control the plasma characteristics further. For example, the end plate can be RF biased using either low frequency (kHz range) or high frequency (MHz) range. In other examples, plasma volume may be set to a maximum if molecular ion species are intended, such as BF_2^+ , N_2^+ , dimers (P_2^+ , As_2^+ , B_2^+), or trimers (P_3^+ , As_3^+). In contrast, if monoatomic ion species, such as B^+ or N^+ are desired, the plasma chamber volume is set to a minimum by moving the end plate towards the exit opening (e.g., orifice or slit) of the plasma chamber in order to maximize the power density and change the ratio of the plasma volume to boundary area.

[0023] In addition, a bias voltage can be applied to the end plate in order to further control the plasma characteristics. The end plate can be fabricated with the desired dopant containing material (e.g. boron carbide, LaB_6 , GaN). In such cases, the desired dopant material can be sputtered via ion bombardment by negative bias on the end plate, ionized in the plasma, and then extracted as an ion beam. This phenomenon can increase the desired ion beam current. In other cases, where dopant material needs special delivery, such as when Ga is a liquid metal and therefore hard to feed into the plasma chamber for ionization, an end plate having the desired dopant material sputtered via ion bombardment can be used to create and extract the desired ion species. The positively bias voltage can be applied to the end plate, thus altering the plasma potential and electron temperature and, serving as an alternative way to tune the plasma parameters for an optimal condition. Also, RF bias can be applied to

the end plate, either kHz range or MHz range, to establish a self-bias voltage (e.g., negative) on the end plate. The benefit of RF bias on the end plate is the ability to use electrically conducting and/or electrically insulating materials as an end plate.

[0024] Furthermore, approaches herein may be applied to a negative ion source. For example, a hot plasma characteristics in a driver region of the negative ion source can be adjusted by positioning and bias voltage of the end plate and the RF antenna. For H^- beam generation, high-density and high T_e (electron temperature) plasma may be generated in the driver region. In addition, an extra electrode with negative voltage bias can be added near the end plate to generate additional surface-produced H^- ions with appropriate materials such as tantalum. For other negative ion species (e.g. He^- , O^- , F^- , Cl^-), the plasma chamber volume could similarly be adjusted for optimal effect.

[0025] Referring now to **FIGs. 1-2**, an exemplary embodiment demonstrating an ion source 100 for dynamically modifying plasma volume in an ion source chamber in accordance with the present disclosure is shown. The ion source 100 represents an apparatus containing, among other components, a plasma chamber 110 including a housing 112, wherein the plasma chamber 110 producing a plasma 114 and allowing extraction of an ion beam 116 through an exit aperture 139 (e.g., an extraction orifice or slit). The plasma chamber 110 includes an end plate 113 disposed therein, for adjusting the volume of the plasma 114. The plasma chamber 110 is configured to receive a flow of gas 117, and generate ions therein. The ion source 100 may also comprise a power source and a set of electrodes disposed near the plasma chamber 110. In some embodiments, the ion source 100 may include a voltage source 160 and one or more extraction electrodes 121

and 122, wherein the voltage source is electrically coupled to the housing 112, for example as demonstrated in **FIG. 1**, or to the end plate 113, for example as demonstrated in **FIG. 2**.

[0026] In various embodiments, different species may be introduced via the gas 117. Examples of the source and/or additional material may include atomic or molecular species containing boron (B), carbon (C), oxygen (O), germanium (Ge), phosphorus (P), arsenic (As), silicon (Si), helium (He), neon (Ne), argon (Ar), krypton (Kr), nitrogen (N), hydrogen (H), fluorine (F), and chlorine (Cl). Those of ordinary skill in the art will recognize the above listed species are non-limiting, and other atomic or molecular species may also be used. Depending on the application(s), the species may be used as the dopants or the additional material. In particular, one species used as the dopants in one application may be used as the additional material in another application, or vice-versa.

[0027] Although not shown, the ion source 100 may further include one or more magnets formed around the plasma chamber 110. In some embodiments, the ion source 100 includes a filter magnet (e.g., transverse magnet) within the housing 112 for producing an electron filter field within the plasma. In other embodiments, the ion source 100 may further include a plurality of pole cusp magnets provided adjacent the filter magnet.

[0028] Referring now to **FIG. 2**, the plasma chamber 110 according to exemplary embodiments will be described in greater detail. As shown, the plasma chamber 110 includes a housing having a first side wall 132, a second side wall 134, a first end wall 136, and a second end wall 138, wherein an exit aperture 139 (e.g., opening or slit) is formed

through the second end wall 138 to allow extraction of the ion beam 116 therefrom. In cases where the plasma chamber 110 is cylindrical, one will appreciate the first side wall 136 and the second side wall 138 may be considered joined/continuous.

[0029] The plasma chamber 110 further includes a radio frequency (RF) antenna, shown as RF antenna 140, (e.g., a coil) provided adjacent an exterior surface 142 of the plasma chamber 110, wherein the RF antenna 140 is connected to a RF supply (not shown). The RF antenna 140 is provided to excite, through electromagnetic induction, the gas in the plasma chamber 110, and to control the density of the plasma 114 and a current of the extracted ion beam 116. In exemplary embodiments, the RF antenna 140 is actuable along the exterior surface 142, between the first end wall 136 and the second end wall 138, for example, as indicated by arrow 144. The plasma chamber 110 may include an RF window 146 formed along at least one of the first side wall 132 and the second side wall 134, wherein the RF antenna 140 is disposed adjacent the RF window 146. During operation, ions are produced in the plasma chamber 110 by inductively coupling RF power from the RF antenna 140 into the gas within the plasma chamber 110. In one embodiment, RF power frequency can vary, for example, between 2 MHz 40 MHz. The ions are then extracted through the exit aperture 139 as the ion beam 116. The ions can be positive or negative in various embodiments.

[0030] As further shown, the plasma chamber 110 includes the end plate 113 disposed therein. The end plate 113 is actuable along the longitudinal axis 'L' of the plasma chamber 110, between the first end wall 136 and the second end wall 138, to adjust a volume of the plasma 114 contained therein. In one embodiment, end plate 113 includes a

first section 113-A disposed within the plasma chamber 110, the first section having a first surface 148 exposed to the plasma 114. As shown, the first surface 148 may be curved to motivate the plasma 114 towards the longitudinal axis 'L.' The first section 113-A further includes a second surface 150, opposite the first surface 148, the second surface 150 remaining generally unexposed to the plasma 114. As further shown, and first section 113-A includes first and second ends 152, 154 adjacent respective side walls 132 and 134 of the plasma chamber 110. Although not shown, in some embodiments, the first and second ends 152, 154 are in contact with an inner surface 166 of the plasma chamber 110 to form a seal therebetween.

[0031] The end plate 113 further includes a second section 113-B coupled to the first section 113-A, for example, in a perpendicular arrangement. As shown, the second section 113-B extends outside of the plasma chamber 110, beyond the first end wall 136. The second section 113-B may be provided with a vacuum feedthrough 157 for coupling and sealing the second section 113-B of the end plate 113 to the first end wall 136. The vacuum feedthrough 157 provides a vacuum seal as well as motion and electrical isolation for bias voltage. Although not shown, the second section 113-B may be driven by a mechanical device configured to actuate the end plate 113 to an intended axial position within the plasma chamber 110.

[0032] During operation, the end plate 113 may be actuated from a first position, for example, proximate the first end wall 136, to a second position closer to the exit aperture 139. As the end plate 113 moves towards the second end wall 138, the first section 113-A increases a density and temperature of the plasma 114 by reducing a volume

available to the plasma 114 within the plasma chamber 110. In the first position, the plasma volume is set to the maximum, for example, in the case molecular ion species are desired (e.g. BF_2^+ , N_2^+ , dimers, trimers, etc.). In contrast, in the case monoatomic ion species (e.g. B^+ , N^+ , C^+ , etc.) are desired, the plasma chamber volume is set to the minimum by moving the end plate 113 towards the second end wall 138 in order to maximize the power density and change the ratio of plasma volume to boundary area.

[0033] In some embodiments, the second section 113-B may be further coupled to a voltage source 160 for providing a voltage (negative or positive) to the end plate 113. The voltage source 160 may provide a bias voltage to the end plate 113 in order to further control the plasma characteristics. For example, the end plate 113 may be negatively biased for electrostatic confinement, and positively biased for plasma potential control. Furthermore, in the case the end plate 113 contains a dopant element such as Boron or Phosphorous, the beam current may be increased. The bias voltage on the end plate 113, whether negative DC or RF, causes sputtering of the end plate. Sputtered dopant elements are then ionized in the plasma 114, and extracted as an ion beam 116. Unlike DC bias, RF bias polarity cannot be switched between positive and negative, and the RF net bias (self-bias) is generally negative. RF bias is useful for sputtering the dopant material included in electrically insulating materials.

[0034] Additionally, the RF antenna 140 may simultaneously move towards the second end wall 138 along the exterior surface 142 of the plasma chamber 110. In one embodiment, the end plate 113 and the RF antenna 140 may move together in a fixed or

proportional amount. In another embodiment, the end plate 113 and the RF antenna 140 may move independent of one another.

[0035] In some embodiments, the end plate 113 can be made of either an electrically conducting material, such as doped Si, doped SiC, Aluminum, or Tungsten, or an insulating material, such as Si, quartz or ceramics. In addition, in the case the end plate 113 is made of an electrically conducting material, the end plate 113 may be electrically biased to further control characteristics of the plasma, as described above. The RF bias on the end plate 113 can be applied to electrically conducting and insulating materials.

[0036] Turning now to **FIG. 3**, a plasma chamber 210 according another exemplary embodiment of the disclosure will be described in greater detail. In this embodiment, the end plate 213 may also be used as a gas baffle for introducing a dopant gas 217 to the plasma 214. Specifically, the end plate 213 is provided with a plurality of internal fluid passageways 270 extending between first and second ends 252, 254 for introducing the dopant gas 217 to the plasma 214 within the plasma chamber 210. As shown, the end plate 213 includes first and second sections 213A-B, wherein the second section 213-B initially receives and transports the dopant gas 217 via a central orifice 272. The dopant gas 217 is then transported to the plurality of fluid passageways 270, where the dopant gas 217 is conducted to the plasma 214. In one embodiment, the plurality of internal fluid passageways 270 are evenly spaced between the first and second ends 252, 254 of the end plate 213 so as to more uniformly deliver the dopant gas 217 to the plasma 214. Furthermore, by positioning the internal fluid passageways 270 within the end plate 213,

the dopant gas 217 may be introduced into the plasma 214 in an area closer to an RF antenna 240, thus improving power coupling.

[0037] Similar to the plasma chamber 110 shown in **FIG. 2**, the plasma chamber 210 further includes the RF antenna 240 adjacent an RF window 246 along an exterior surface 242 of the plasma chamber 210, wherein the RF antenna is connected to a RF supply (not shown). In exemplary embodiments, the RF antenna 240 is actuable between a first end wall 236 and a second end wall 238, for example, as indicated by arrow 244.

[0038] Furthermore, the end plate 213 is actuable along the longitudinal axis 'L' of the plasma chamber 210, between the first end wall 236 and the second end wall 238, to adjust a volume of the plasma 214 contained therein. The second section 213-B may be coupled to a mechanical device (not shown) for actuating the end plate 213 to an intended axial position within the plasma chamber 210. In some embodiments, the second section 213-B may be further coupled to a voltage source 260 for providing a voltage (e.g., negative or positive DC, pulsed DC or RF) to the end plate 213.

[0039] During operation, the end plate 213 may be actuated from a first position, for example, proximate the first end wall 236, to a second position closer to an exit aperture 239. As the end plate 213 moves towards the second end wall 238 along the longitudinal axis 'L,' the first section 213-A pushes against the plasma 214, moving the plasma 214 towards the second end wall 238. As a result, a volume of the plasma 214 decreases, causing a density and temperature of the plasma 214 within the plasma chamber 210 to increase. Conversely, the end plate 213 may also be actuated towards the

first end wall 236 to increase a volume of the plasma 214, causing the density and temperature of the plasma 214 within the plasma chamber 210 to decrease. As such, the position of the end plate 213 can be dynamically adjusted to optimize ion species and to promote the intended negative ion species within the plasma 214.

[0040] Additionally, the RF antenna 240 may simultaneously move towards the second end wall 238 along the exterior surface 242 of the plasma chamber 210. In one embodiment, the end plate 213 and the RF antenna 240 may move together in a fixed or proportional amount. In another embodiment, the end plate 213 and the RF antenna 240 are independently actuable.

[0041] Turning now to **FIGs. 4A-B**, a plasma chamber 310 according another exemplary embodiment of the disclosure will be described in greater detail. In this embodiment, the plasma chamber 310 may be part of a negative ion source. As such, the plasma chamber 310 includes a first region 311 (e.g., a hot plasma region), also known as a driver region, and a second region 316 (e.g., a colder region) separated, generally, by magnetic field lines 315 generated by a filter magnet 328 disposed proximate the plasma chamber 310. In some embodiments, the filter magnet 328 can be a permanent magnet or coil magnet.

[0042] As shown, the plasma chamber 310 further includes an RF antenna 340 (e.g., a coil) provided adjacent an RF window 346 along an exterior surface 342 of the plasma chamber 310, the RF antenna 340 connected to an RF supply (not shown). In exemplary embodiments, the RF antenna 340 is actuable between a first end wall 336 and

a second end wall 338, for example, along the exterior surface 342 of the plasma chamber 310, as indicated by arrow 344.

[0043] In exemplary embodiments, the end plate 313 may be actuable along the longitudinal axis 'L' of the plasma chamber 310, between the first end wall 336 and the second end wall 338, to adjust a volume of the plasma 314 contained therein. For example, the end plate 313 may be actuated from a first position proximate the first end wall 336, as demonstrated in **FIG. 4A**, to a second position further along the longitudinal axis 'L' within the plasma chamber 310, as demonstrated in **FIG. 4B**. As the end plate 313 moves towards the second end wall 338, e.g., by a distance 'D,' the end plate 313-A increases a density and temperature of the plasma 314 by reducing a volume of the plasma 314 within the plasma chamber 310. As a result, the hot plasma within the first region 311 causes a higher electron temperature and density, thus producing more radicals present in the colder region, second region 316. The radicals are then converted to negative ions and extracted from the plasma chamber 310.

[0044] In one example, the plasma chamber 310 may generate an H^- ion beam. The end plate 313 may be positioned in the position shown in **FIG. 4B** to promote high-density and high electron temperature (T_e) of the plasma 314. A negative DC voltage can be simultaneously applied by the voltage source 360 to the end plate 313 to generate the hyper-thermal neutrals, thus promoting H^- generation via dissociative attachment. In other embodiments, the voltage source may provide a negative pulsed DC or RF bias). For other negative ion species, such as He^- , O^- , Cl^- , the volume of

the plasma chamber 310 may be individually adjusted to promote optimal ion generation specific to individual ion species.

[0045] In some embodiments, the RF antenna 340 may simultaneously move towards the second end wall 338 along the exterior surface 342 of the plasma chamber 310. In one embodiment, the end plate 313 and the RF antenna 340 may move together in a fixed or proportional amount. In another embodiment, the end plate 313 and the RF antenna 340 are independently actuatable.

[0046] Turning to **FIGs. 5A-B**, a plasma chamber 410 according to another exemplary embodiment of the disclosure will now be described. Similar to the plasma chambers shown in **FIGs. 1-4**, the plasma chamber 410 includes an end plate 413 actuatable along a longitudinal axis 'L' of the plasma chamber 410, between a first end wall 436 and a second end wall 438, to adjust a volume of a plasma 414 contained therein. During operation, the end plate 413 may be actuated from a first position, demonstrated in **FIG. 5A**, to a second position, demonstrated in **FIG. 5B**. As the end plate 413 moves towards the second end wall 438, the end plate 413 increases a density and temperature of the plasma 414 by reducing a volume of the plasma 414 within the plasma chamber 410. Conversely, the end plate 413 may also be actuated towards the first end wall 436 to increase a volume of the plasma 414, causing the density and temperature of the plasma 414 within the plasma chamber 410 to decrease. As such, the position of the end plate 413 can be dynamically adjusted to optimize ion species and to promote the intended negative ion species within the plasma 414.

[0047] In this embodiment, an RF antenna 440 (e.g., a coil) and an RF window 446 are provided within the end plate 413. The RF antenna 440 will therefore simultaneously move towards the second end wall 438 with the end plate 413. As shown, the RF window 446 is adjacent to and generally exposed to the plasma 414 within the plasma chamber 410. The plasma chamber 410 may further include a vacuum feedthrough 457 for coupling/sealing the end plate 413 to the first end wall 436. In some embodiments, the vacuum feedthrough includes an expandable baffle for allowing a flexible seal between the end plate 413 and the first end wall 432 of the plasma chamber 410.

[0048] Referring now to **FIG. 6**, a flow diagram illustrating an exemplary method, method 500, for adjusting a volume of a plasma chamber in accordance with the present disclosure is shown. The method 500 will be described in conjunction with the representations shown in **FIGS. 1-5B**.

[0049] Method 500 includes providing a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall, as shown in block 501. In some embodiments, the plasma chamber further includes first and second side walls, and an exit aperture formed through the second end wall. In some embodiments, the plasma chamber contains a plasma. In some embodiments, a vacuum feedthrough couples the second section of the end plate to the second end wall of the plasma chamber.

[0050] Method 500 further includes positioning an RF antenna adjacent the plasma within the plasma chamber, as shown at block 503. In some embodiments, the RF antenna is actuable between the first and second end walls of the plasma chamber. In some embodiments, the RF antenna is a coil. In some embodiments, the plasma chamber further

includes an RF window formed along a sidewall of the plasma chamber, wherein the RF antenna is disposed adjacent the RF window.

[0051] Method 500 further includes providing an end plate disposed along the longitudinal axis within the plasma chamber, as shown at block 505, wherein the end plate is actuatable between a first position and a second position to adjust a volume of a plasma. In some embodiments, the end plate includes a first section disposed within the plasma chamber, the first section extending between the first and second side walls of the plasma chamber. The end plate further includes a second section coupled to the first section, the second section extending outside of the plasma chamber.

[0052] Method 500 may further include an optional process of applying a voltage to the end plate, as shown at block 507. In some embodiments, the voltage is applied to the second section of the end plate by a voltage source. In some embodiments, the voltage to the end plate can be DC (positive / negative), pulsed DC (positive / negative) or RF.

[0053] In view of the foregoing, at least the following advantages are achieved by the embodiments disclosed herein. A first advantage includes the ability to provide positive and negative ion sources with adjustable volume control in existing implantation tools. A second advantage includes the ability to provide additional control knobs in existing processing tools for controlling plasma characteristics. A third advantage includes the applicability to multiple species such as B^+ , BF_2^+ , P^+ , and As^+ , molecular species, dimers, trimers, as well as negative ion species.

[0054] While certain embodiments of the disclosure have been described herein, the disclosure is not limited thereto, as the disclosure is as broad in scope as the art will

allow and the specification may be read likewise. Therefore, the above description are not to be construed as limiting. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

Claims

1. An ion source comprising:
 - a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall;
 - a radio frequency (RF) antenna adjacent a plasma within the plasma chamber, the RF antenna configured to provide RF energy to the plasma; and
 - an end plate disposed within the plasma chamber, the end plate actuated along the longitudinal axis between a first position and a second position to adjust a volume of the plasma.
2. The ion source of claim 1, further comprising a voltage source coupled to the end plate.
3. The ion source of claim 1, wherein the end plate includes a set of internal fluid passageways for delivering a gas into the plasma chamber.
4. The ion source of claim 1, wherein the end plate comprises:
 - a first section disposed within the plasma chamber, the first section extending to a sidewall of the plasma chamber; and
 - a second section coupled to the first section, the second section extending outside of the plasma chamber.

5. The ion source of claim 4, further comprising an exit aperture formed through a first end wall of the plasma, the exit aperture disposed along the longitudinal axis.
6. The ion source of claim 4, further comprising a vacuum feedthrough coupling the second section of the end plate to a second end wall of the plasma chamber.
7. The ion source of claim 4, the sidewall of the plasma chamber comprising an RF window, wherein the RF antenna is disposed adjacent the RF window.
8. A plasma chamber for generating a plasma, the plasma chamber comprising:
 - a housing comprising a side wall, a first end wall, and a second end wall, wherein the second end wall includes an exit aperture for delivering an ion beam from the plasma chamber;
 - a radio frequency (RF) antenna adjacent the plasma, the RF antenna actuatable between the first end wall and the second end wall; and
 - an end plate disposed within the plasma chamber, the end plate actuatable along a longitudinal axis of the plasma chamber, between the first end wall and the second end wall, to adjust a volume of the plasma.
9. The plasma chamber of claim 8, wherein the end plate is electrically coupled to a voltage source.

10. The plasma chamber of claim 8, wherein the RF antenna is disposed along an exterior surface of the side wall of the plasma chamber.

11. The plasma chamber claim 8, wherein the RF antenna is disposed within the end plate.

12. The plasma chamber of claim 8, wherein the end plate includes a set of fluid passageways for introducing a gas to the plasma chamber.

13. A method for adjusting a volume of plasma within a plasma chamber, the method comprising:

providing a plasma chamber having a longitudinal axis extending between a first end wall and a second end wall;

positioning a radio frequency (RF) antenna adjacent a plasma within the plasma chamber, the RF antenna actuatable between the first end wall and the second end wall; and

providing an end plate within the plasma chamber, the end plate actuatable along the longitudinal axis between a first position and a second position to adjust a volume of the plasma.

14. The method of claim 13, further comprising applying a voltage to the end plate.

15. The method of claim 13, further comprising actuating the end plate and an RF antenna towards the second end wall to increase a density of the plasma, the second end wall including an exit aperture for delivering an ion beam from the plasma chamber.

1/5

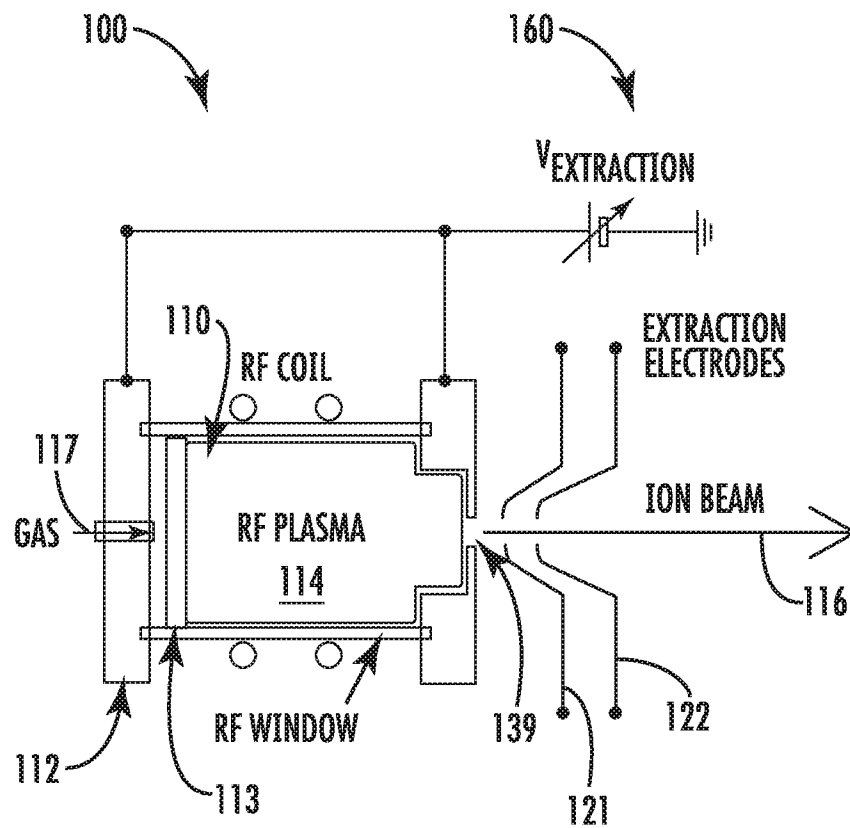


FIG. 1

2/5

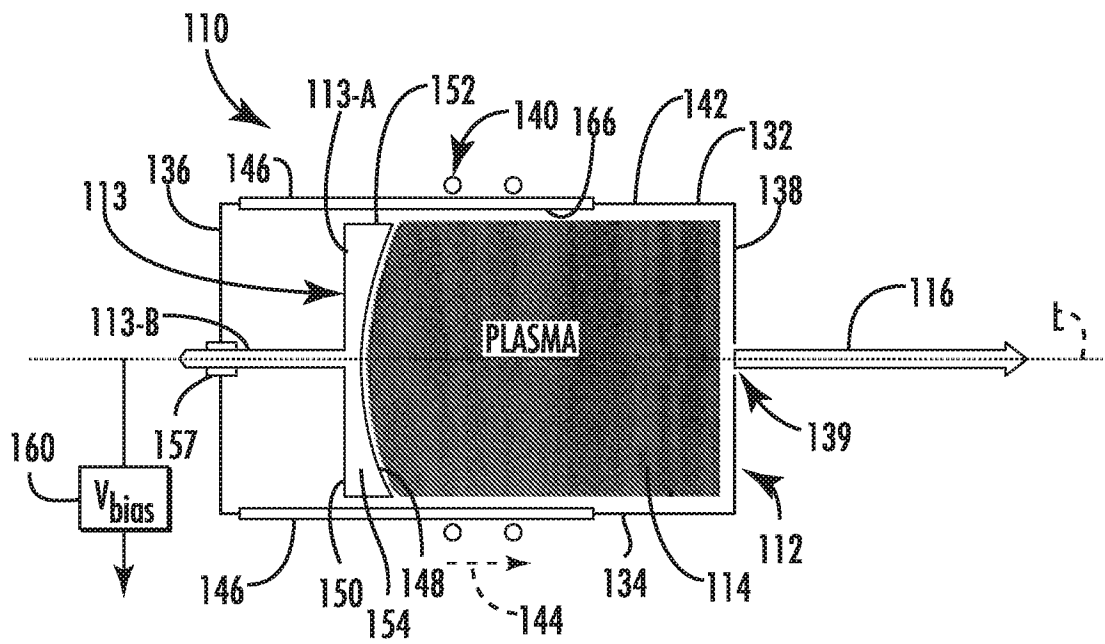


FIG 2

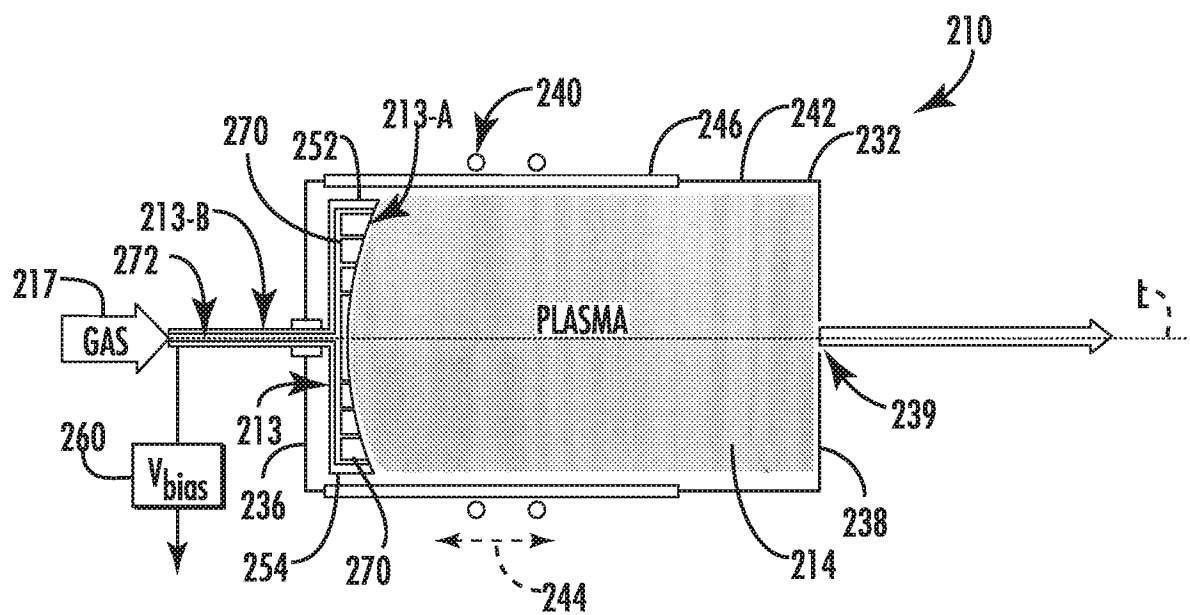


FIG 3

3/5

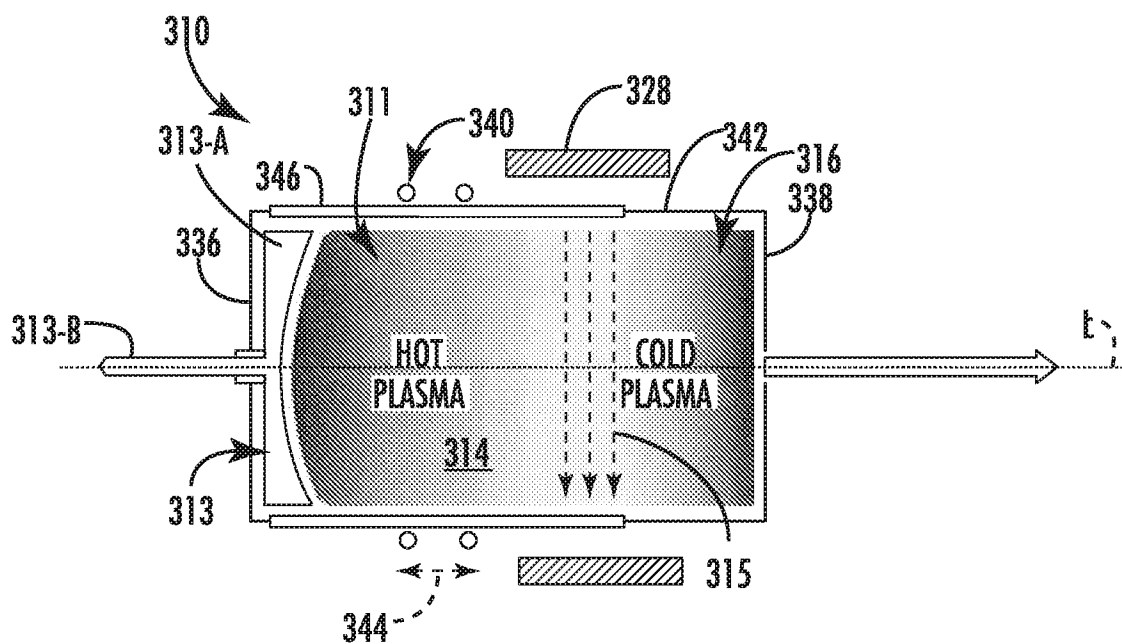


FIG 4A

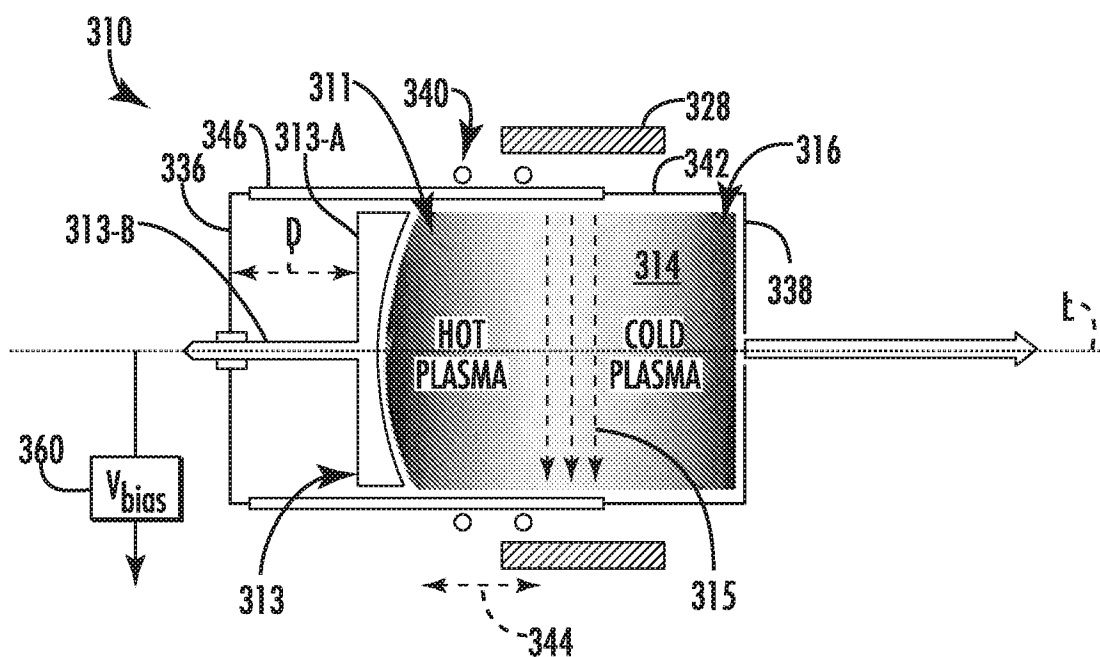


FIG 4B

4/5

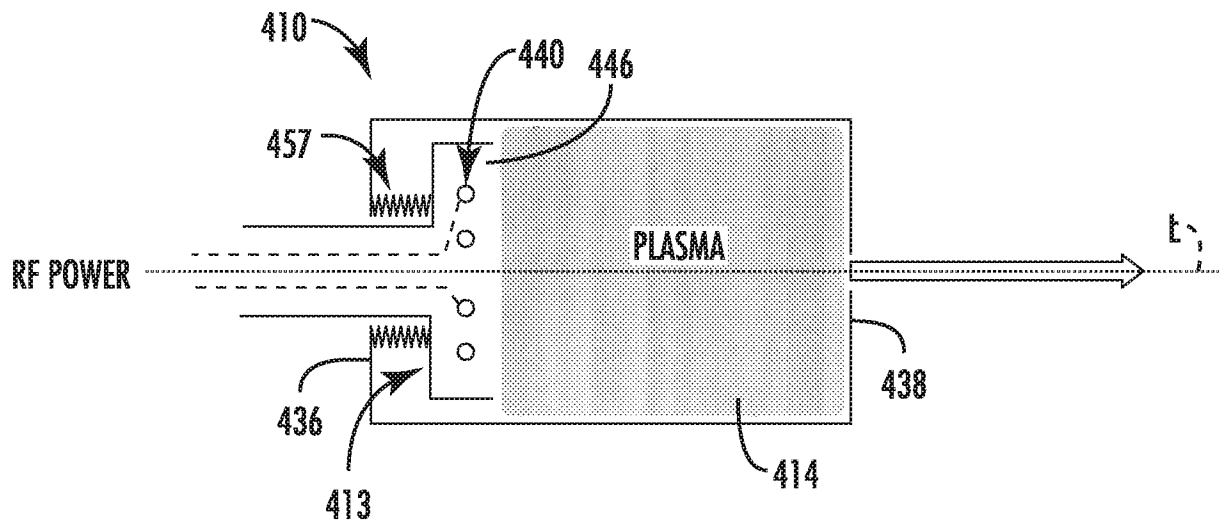


FIG 5A

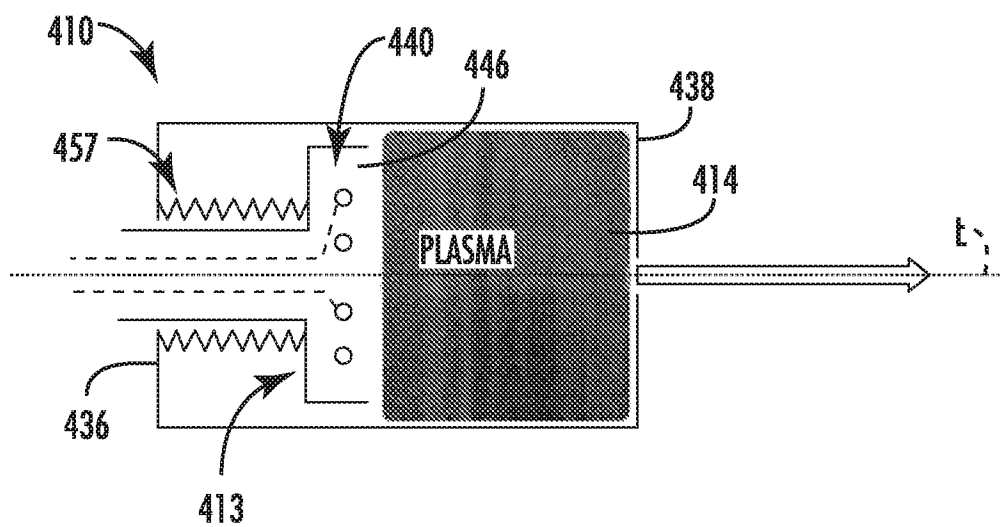


FIG 5B

5/5

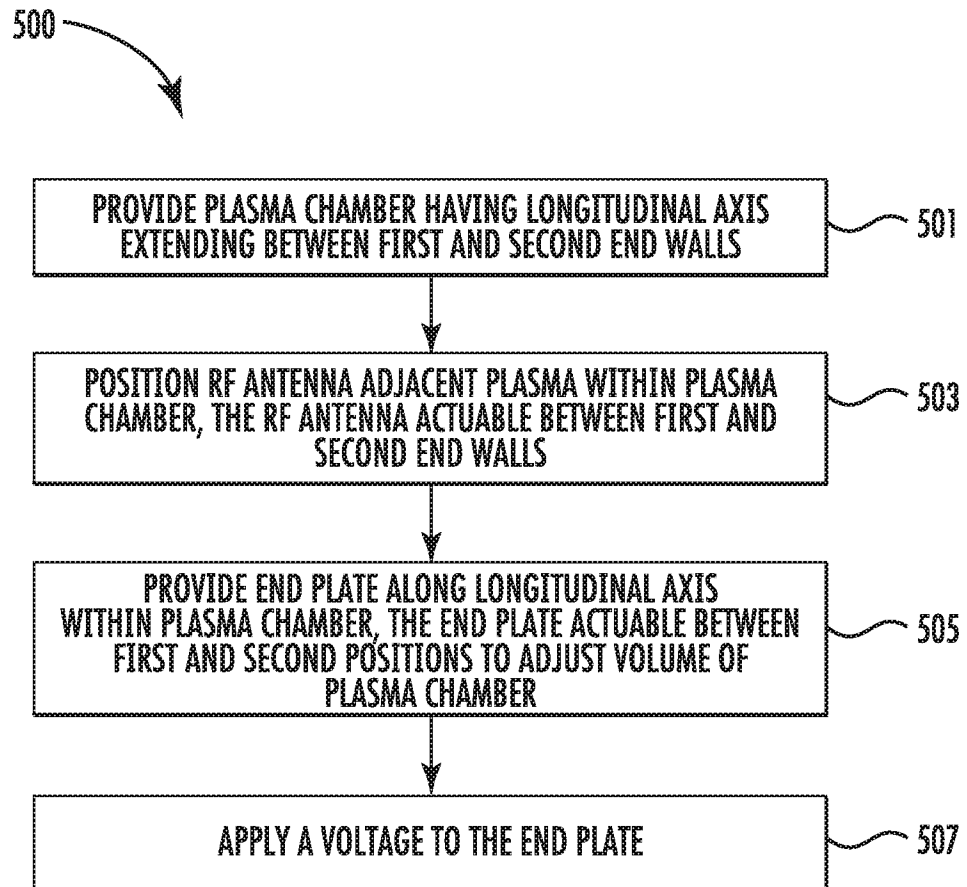


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/058517**A. CLASSIFICATION OF SUBJECT MATTER****H01J 37/08(2006.01)i, H01J 37/32(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01J 37/08; H05H 1/24; H01J 7/24; H01J 27/00; B05C 9/00; H01J 27/16; H01L 21/26; H01L 21/461; C23C 16/00; H01J 37/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: implantation, ion, plasma, antenna, beam

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012-0211166 A1 (RUSTAM YEVTUKHOV et al.) 23 August 2012 See paragraphs [0044]-[0070], [0128]-[0134]; claim 1; and figures 1, 15.	1-2, 4-11, 13-15
Y		3, 12
Y	US 5576600 A (LEON E. MCCRARY et al.) 19 November 1996 See column 4, lines 14 - column 5, line 14; and figure 1.	3, 12
A	US 2003-0082891 A1 (STEVEN R. WALTHER) 01 May 2003 See paragraphs [0036]-[0049]; and figures 2-4.	1-15
A	US 2006-0288938 A1 (VIJAYEN VEERASAMY et al.) 28 December 2006 See paragraphs [0051]-[0070]; and figures 3A-3F.	1-15
A	US 2003-0205679 A1 (VICTOR M. BENVENISTE) 06 November 2003 See paragraphs [0035]-[0039]; and figures 1A-2E.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

09 February 2018 (09.02.2018)

Date of mailing of the international search report

09 February 2018 (09.02.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

KIM, Sung Gon

Telephone No. +82-42-481-8746



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/058517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0211166 A1	23/08/2012	CN 101681781 A	24/03/2010
		CN 101681781 B	03/04/2013
		EP 2132764 A2	16/12/2009
		EP 2587516 A1	01/05/2013
		JP 2010-519710 A	03/06/2010
		JP 5091258 B2	05/12/2012
		MY 152905 A	28/11/2014
		US 2004-0163766 A1	26/08/2004
		US 2007-0194245 A1	23/08/2007
		US 2008-0179284 A1	31/07/2008
		US 7183716 B2	27/02/2007
		US 7557362 B2	07/07/2009
		US 8158016 B2	17/04/2012
		US 8835869 B2	16/09/2014
		WO 2008-106448 A2	04/09/2008
US 5576600 A	19/11/1996	None	
US 2003-0082891 A1	01/05/2003	AT 445226 T	15/10/2009
		CN 1592944 A	09/03/2005
		CN 1592944 C	30/07/2008
		EP 1438734 A2	21/07/2004
		EP 1438734 B1	07/10/2009
		ES 2333782 T3	01/03/2010
		JP 2005-508088 A	24/03/2005
		JP 4587364 B2	24/11/2010
		KR 10-0876049 B1	26/12/2008
		KR 10-2004-0054745 A	25/06/2004
		TW 582061 B	01/04/2004
		US 6716727 B2	06/04/2004
		WO 03-038879 A2	08/05/2003
US 2006-0288938 A1	28/12/2006	AT 296482 T	15/06/2005
		AU 3224297 A	05/01/1998
		AU 3293097 A	05/01/1998
		CA 2158592 A1	21/03/1996
		CA 2158592 C	05/09/2000
		DE 4433380 A1	21/03/1996
		DE 69729982 T2	21/07/2005
		DE 69733350 T2	27/04/2006
		EP 0703075 A2	27/03/1996
		EP 0703075 B1	09/12/1998
		EP 0810653 A1	03/12/1997
		EP 0810653 B1	28/07/2004
		EP 0906636 A1	10/11/2004
		EP 0906636 B1	25/05/2005
		EP 0909445 A1	09/02/2005
		JP 08-103992 A	23/04/1996
		JP 10-084097 A	31/03/1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/058517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003-0205679 A1	06/11/2003	JP 2000-512053 A	12/09/2000
		JP 2008-077833 A	03/04/2008
		JP 2008-091022 A	17/04/2008
		JP 2008-117521 A	22/05/2008
		JP 2008-120676 A	29/05/2008
		JP 2008-123671 A	29/05/2008
		JP 2008-138289 A	19/06/2008
		JP 2865597 B2	08/03/1999
		US 2003-0148103 A1	07/08/2003
		US 2003-0152746 A1	14/08/2003
		US 2004-0161579 A1	19/08/2004
		US 2007-0098979 A1	03/05/2007
		US 2007-0098980 A1	03/05/2007
		US 2009-0162572 A1	25/06/2009
		US 5678486 A	21/10/1997
		US 5858477 A	12/01/1999
		US 6537668 B1	25/03/2003
		US 6544627 B1	08/04/2003
		US 6740384 B2	25/05/2004
		US 6805891 B2	19/10/2004
		US 7402350 B2	22/07/2008
		US 7513215 B2	07/04/2009
		US 7544397 B2	09/06/2009
		US 7604881 B2	20/10/2009
		US 7931748 B2	26/04/2011
		WO 97-45834 A1	04/12/1997
		WO 97-45855 A1	04/12/1997
		AU 2003-225218 A1	17/11/2003
		AU 2003-256973 A1	25/02/2004
		AU 2003-256974 A1	25/02/2004
		CN 100372048 C	27/02/2008
		CN 100538987 C	09/09/2009
		CN 1666313 A	07/09/2005
		CN 1666313 C	27/02/2008
		CN 1672232 A	21/09/2005
		CN 1672232 C	21/09/2005
		CN 1672235 A	21/09/2005
		CN 1672235 C	21/09/2005
		CN 1795528 A	28/06/2006
		CN 1795528 C	28/06/2006
		DE 60130945 T2	24/07/2008
		EP 1176624 A2	30/01/2002
		EP 1176624 A3	15/06/2005
		EP 1176624 B1	17/10/2007
		EP 1502278 A1	02/02/2005
		EP 1527473 A2	04/05/2005
		EP 1527474 A1	04/05/2005
		EP 1627411 A2	22/02/2006
		JP 2002-134049 A	10/05/2002

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/058517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2005-529453 A	29/09/2005
		JP 2005-535096 A	17/11/2005
		JP 2005-535097 A	17/11/2005
		JP 2007-500430 A	11/01/2007
		JP 4378632 B2	09/12/2009
		JP 5057196 B2	24/10/2012
		KR 10-0615533 B1	25/08/2006
		KR 10-2002-0009503 A	01/02/2002
		KR 10-2004-0099468 A	26/11/2004
		KR 10-2005-0021573 A	07/03/2005
		KR 10-2005-0021574 A	07/03/2005
		KR 10-2006-0008328 A	26/01/2006
		SG 98451 A1	19/09/2003
		TW 200405388 A	01/04/2004
		TW 200423179 A	01/11/2004
		TW 200504783 A	01/02/2005
		TW 261856 B	11/09/2006
		TW 511114 A	21/11/2002
		TW 511114 B	21/11/2002
		TW I261856 B	11/09/2006
		TW I304993 A	01/01/2009
		TW I304993 B	01/01/2009
		TW I354308 B	11/12/2011
		US 2002-0014587 A1	07/02/2002
		US 2003-0201402 A1	30/10/2003
		US 2003-0205680 A1	06/11/2003
		US 2003-0205683 A1	06/11/2003
		US 6414329 B1	02/07/2002
		US 6664547 B2	16/12/2003
		US 6664548 B2	16/12/2003
		US 6703628 B2	09/03/2004
		US 6759665 B2	06/07/2004
		US 6885014 B2	26/04/2005
		WO 03-094194 A1	13/11/2003
		WO 2004-015735 A2	19/02/2004
		WO 2004-015737 A1	19/02/2004
		WO 2004-107386 A2	09/12/2004