

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/32099 A2

(51) International Patent Classification⁷: **A61F**

Himanshu, N.; 1114 Nevada Avenue, San Jose, CA 95125 (US).

(21) International Application Number: **PCT/US00/28944**

(74) Agent: ENGLISH, William, A.; Lyon & Lyon LLP, Suite 4700, 633 West Fifth Street, Los Angeles, CA 90071-2066 (US).

(22) International Filing Date: 18 October 2000 (18.10.2000)

(81) Designated States (national): CA, JP.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(26) Publication Language: English

Published:

(30) Priority Data:
09/427,260 25 October 1999 (25.10.1999) US


— *Without international search report and to be republished upon receipt of that report.*

(71) Applicant: **ENDOTEX INTERVENTIONAL SYSTEMS, INC. [US/US]**; 10231 Bubb Road, Cupertino, CA 95014 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: **KHOSRAVI, Farhad**; Apartment 212, 1700 De Anza Boulevard, San Mateo, CA 94403 (US). **PATEL,**

(54) Title: STRETCHABLE ANTI-BUCKLING COILED-SHEET STENT

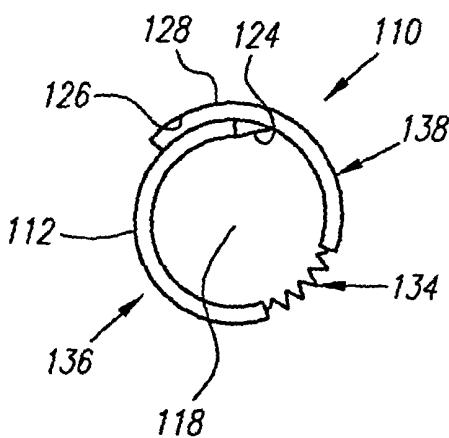

WO 01/32099 A2

(57) **Abstract:** A stretchable coiled-sheet stent includes a coiled-up sheet having overlapping inner and outer longitudinal sections that is expandable between contracted and enlarged conditions, and a plurality of stretchable elements formed in the coiled-up sheet which are expandable between unstretched and stretched conditions. The coiled-up sheet is preferably formed from a temperature-based shape memory material, such as Nitinol, and at least one of the unstretched and stretched shapes is programmed into the shape memory. For example, the stretchable elements may be initially formed in the stretched shape, and the sheet heat treated to program the stretched shape into the shape memory. After cooling, the stretchable elements may be constrained in the unstretched shape for delivery. Alternatively, the stretchable elements may be formed in the unstretched shape and plastically deformed to their stretched shape, and the sheet may be heat treated to program the stretched shape into the shape memory. Upon cooling, the stretchable elements may return to their unstretched shape. The coiled-sheet stent is delivered in its contracted condition with the stretchable elements in the unstretched shape. The stent is introduced into a blood

vessel and advanced to a target location, exposing the stent to the body temperature and activating the shape memory to bias the stretchable elements towards the stretched shape. The stent is deployed, at least partially expanding towards the enlarged condition due to the bias of the stretchable elements towards the stretched shape.

DESCRIPTION**STRETCHABLE ANTI-BUCKLING COILED-SHEET STENT**5 FIELD OF THE INVENTION

The present invention relates generally to prostheses for implantation within body lumens, and more particularly to a coiled-sheet stent including one or more stretchable regions.

10

BACKGROUND

Tubular prostheses or "stents" are often implanted within blood vessels, for example, within the coronary and carotid arteries, for treating atherosclerotic disease which 15 may involve one or more stenoses. Stents generally have a tubular shape capable of assuming a radially contracted condition to facilitate introduction into a patient's vasculature, and an enlarged condition for engaging the vessel wall at a treatment location. In its contracted 20 condition, the stent may be placed on or in a delivery device, such as a catheter, percutaneously introduced into a patient's vasculature and advanced to a target treatment location. Once at the treatment location, the stent may be deployed and expanded to its enlarged condition, thereby 25 engaging the wall of the vessel and substantially anchoring the stent in place.

Plastically deformable stents have been suggested that are initially provided in their contracted condition, and placed over a balloon on an angioplasty catheter. At the 30 treatment location, the balloon is inflated to plastically deform the stent until it is expanded to its enlarged condition. Thus, the stent may be expanded to any size within a specified range to ensure that the stent substantially engages the wall of the vessel. Plastically deformable stents, however, may not expand uniformly and may 35

not provide a desired delivery profile because of the need for a balloon on the delivery device underlying the stent.

Stents have also been suggested that are self-expanding or elastically deformable, i.e., that are biased to assume 5 their enlarged condition but may be radially compressed to a contracted condition. The stent may be mounted to a delivery device and constrained in its contracted condition during delivery, for example, by an overlying sheath. At the treatment location, the stent may be released, for 10 example, by retracting the overlying sheath, the stent automatically resuming its enlarged condition to engage the vessel wall. Such stents, however, may not provide as small a delivery profile as desired and may not anchor against the wall of a vessel as securely as desired, which may lead to 15 migration of the stent within the vessel.

In addition to tubular stents, coiled-sheet stents have been suggested. A flat sheet is provided that is rolled into a spiral shape having overlapping inner and outer longitudinal sections that defines a contracted condition. 20 The coiled-up sheet may be biased to at least partially unroll to assume an enlarged condition, and/or may be caused to unroll and radially expand using a balloon. The coiled-sheet stent may have a nondeformable lattice-like structure and a plurality of fingers or teeth along the inner 25 longitudinal section for engaging openings in the lattice.

Once the coiled-sheet stent is deployed at the treatment location and at least partially expands, a balloon may be introduced within the stent and inflated to further expand the stent to a desired enlarged condition. When the 30 balloon is deflated, the stent may try to radially contract, but the fingers on the inner longitudinal section may then engage corresponding openings in the lattice to lock the stent in the enlarged condition.

Coiled-sheet stents may provide enhanced anchoring 35 within the blood vessel because the size of the fully

expanded stent may be more precisely controlled. A coiled-sheet stent, however, may be more rigid transverse to its longitudinal axis than tubular stents, potentially resulting in a less flexible stent, which may not be implanted as effectively in tortuous anatomical conditions. Further, because the lattice-like structure of coiled-sheet stents is substantially nondeformable, if the stent is subjected to radially compressive forces, e.g., when the vessel wall attempts to contract, the stent may tend to buckle rather than recoil from the stress.

Accordingly, there is a need for a stent that provides improved flexibility, while still providing substantial anchoring within a blood vessel.

15

SUMMARY OF THE INVENTION

The present invention is directed to coiled-sheet stents having stretchable regions, preferably having programmed shape memories, and to methods for making and using such stents. In accordance with one aspect of the present invention, a stretchable stent is provided that includes a coiled-up sheet having overlapping inner and outer longitudinal sections extending generally parallel to a longitudinal axis thereof. The coiled-up sheet is expandable between a contracted condition and one or more enlarged conditions. A plurality of stretchable elements are formed in the coiled-up sheet, the stretchable elements being expandable between an unstretched condition and a stretched condition.

In a preferred form, the coiled-up sheet may be at least partially biased to expand from the contracted condition towards the one or more enlarged conditions. The stretchable elements may be biased to assume the stretched condition, thereby at least partially biasing the coiled-up sheet to radially expand from the contracted condition towards the one or more enlarged conditions.

More preferably, the coiled-up sheet may be formed from a material having a temperature-based shape memory, whereby the stretchable elements are biased towards the unstretched condition when exposed to a first temperature and towards the stretched condition when exposed to a second temperature. Preferably, the second temperature is at or above body temperature, and the first temperature is at or below about 25 degrees Celsius. Even more preferably, the coiled-up sheet is formed from Nitinol such that the Nitinol is substantially in its martensitic phase at the first temperature and substantially in its austenitic phase at the second temperature.

In alternative forms, the entire coiled-up sheet may have stretchable elements formed therein, the stretchable elements may define a longitudinal stretchable region extending between first and second ends of the coiled-up sheet and/or the stretchable elements may define a stretchable crowning end on one end of the coiled-up sheet.

In the latter embodiments, the coiled-up sheet generally includes a substantially nondeformable region which may have a substantially rigid lattice-like structure. The stent may also include a plurality of locking elements extending from the inner longitudinal section for engaging openings in the outer longitudinal section to selectively secure the coiled-up sheet in the one or more enlarged conditions.

In accordance with another aspect of the present invention, a method is provided for making a coiled-sheet stent. A substantially flat sheet may be provided defining a length and a width. A plurality of stretchable elements may be formed in the sheet, the stretchable elements being expandable along the width of the sheet between an unstretched condition and a stretched condition. If desired, a plurality of locking elements may also be formed along an edge of the sheet extending along the length thereof. The stretchable elements and/or locking elements

may be formed in the sheet, for example, by chemical etching, laser cutting or die punching. The flat sheet may be rolled about the width into a coiled-up sheet having overlapping inner and outer longitudinal sections, thereby 5 providing a coiled-sheet stent having stretchable elements formed therein.

In a preferred form, the sheet is formed from a shape memory material, and at least one of the unstretched and stretched shapes is programmed into the shape memory 10 material during the step of forming the stretchable elements. For example, the stretchable elements may be formed in the sheet in the stretched shape, and the sheet may be heat treated to program the stretched shape into the shape memory material. The stretchable elements may then be 15 constrained in the unstretched shape after the heat treating step, for example, upon cooling the sheet after the heat treating step, and may be plastically deformed to their unstretched shape after the cooling step.

More preferably, the flat sheet is formed from Nitinol. 20 During the heating step, the Nitinol may include austenite, and preferably the sheet is heated to a temperature of at least about body temperature, the temperature being sufficiently high such that the Nitinol substantially completes austenitic transformation. Upon cooling the sheet 25 after the heat treating step, the Nitinol may include martensite, and preferably the sheet is cooled to a temperature of about 25 degrees Celsius or less, the temperature being sufficiently low such that the Nitinol substantially completes martensitic transformation.

30 In an alternative method, the stretchable elements may be formed in the sheet in their unstretched shape, and then plastically deformed to their stretched shape. The sheet may be heat treated to program the stretched shape into the shape memory material. After the heat treating step, the

sheet may be cooled, thereby causing the stretchable elements to return to their unstretched shape.

The resulting coiled-sheet stent may then be used in a method for treating a patient, for example, at a target 5 stenosis in a blood vessel, such as in the carotid or coronary arteries. A coiled-sheet stent is provided that preferably is formed from a temperature-activated shape memory material, the coiled-sheet stent including a plurality of stretchable elements having a shape memory defining an unstretched condition and a stretched condition. 10 The stretchable elements are preferably biased to assume the stretched condition when exposed to a temperature at or above body temperature.

The coiled-sheet stent may be provided in a contracted 15 condition on a delivery device, for example, within a distal end of a tubular sheath, at a temperature substantially below body temperature. For example, the coiled-sheet stent may be placed on a catheter which may be introduced into a lumen within the sheath, or the coiled-sheet stent may be 20 placed within the distal end of the sheath adjacent a slidabile bumper member.

The distal end of the sheath, with the stent therein, may be percutaneously introduced into a blood vessel or other body lumen of a patient, and advanced to a target 25 treatment location. As the coiled-sheet stent becomes exposed to the body temperature within the patient during advancement, the stretchable elements become biased to assume the stretched shape due to the stent's shape memory. The stent may then be deployed, for example, by retracting 30 the sheath while maintaining the stent at the target treatment location, the coiled-sheet stent at least partially expanding towards an enlarged condition due to the bias of the stretchable elements towards the stretched shape.

If necessary or desired, the stent may be further expanded to an enlarged condition at which the coiled-sheet substantially engages the vessel wall at the target treatment location, for example, by introducing a balloon 5 within the deployed stent. When the balloon is deflated and withdrawn, the stent may attempt to return to its contracted condition. However, the stent preferably includes locking elements which substantially engage openings in the stent to substantially lock the stent in its enlarged condition.

10 The stretchable elements formed in the sheet of the coiled-sheet stent may be useful to allow recoil of the stent after implantation in a blood vessel. For example, after implantation of the stent, the blood vessel may tend to contract, thereby subjecting the stent to radially 15 compressive forces. The stretchable elements may elastically or plastically deform from the stretched shape towards the unstretched shape to substantially reduce the risk that the stent may buckle under the compressive forces, thereby allowing the stent to partially recoil under the 20 compressive forces.

The stretchable elements may also contribute to the initial expansion of the coiled-sheet stent upon deployment, thereby facilitating withdrawal of the delivery device, such as an underlying catheter. The combination of the bias of 25 the stretchable elements and a bias of the coiled-sheet itself to at least partially unwind may eliminate the need for subsequent further expansion of the coiled-sheet stent, as will be appreciated by those skilled in the art.

Other objects and features of the present invention 30 will become apparent from consideration of the following description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a side view of an unrolled coiled-sheet for a fully stretchable coiled-sheet stent, in accordance with one aspect of the present invention.

FIG. 1B is an end view of the coiled-sheet of FIG. 1A 5 rolled into a coiled-sheet stent.

FIG. 2A is an end view of a coiled-sheet stent with a longitudinal anti-buckling region.

FIG. 2B is a top view of an unrolled coiled-sheet corresponding to the stent of FIG. 2A.

10 FIG. 3A is a top view of an unrolled coiled-sheet corresponding to a coiled-sheet stent having a stretchable end region.

FIG. 3B is a perspective view of the coiled-sheet of FIG. 3A being rolled into a coiled-sheet stent with 15 stretchable end region.

FIGS. 4A and 4B are top views of an unrolled stretchable segment of a coiled-sheet stent, showing a first preferred embodiment of a stretchable cell structure in unstretched and stretched conditions, respectively.

20 FIGS. 5A and 5B are details of the stretchable cell structure of FIGS. 4A and 4B, shown in unstretched and stretched conditions, respectively.

FIGS. 6A and 6B show a second preferred embodiment of 25 an unrolled stretchable segment made of inverting elements, shown in unstretched and stretched conditions, respectively.

FIGS. 7A and 7B show a third preferred embodiment of an unrolled stretchable segment made of trapezoidal elements, shown in unstretched and stretched conditions, respectively.

30 FIG. 8A shows a fourth preferred embodiment of an unrolled stretchable segment, shown in its unstretched condition.

FIG. 8B is a detail of an individual stretchable element of the stretchable segment of FIG. 8A, in its stretched condition.

FIG. 9 shows a fifth preferred embodiment of an unrolled stretchable segment, shown in its unstretched condition.

FIGS. 10A and 10B are details of the stretchable 5 segment of FIG. 9, shown in unstretched and stretched conditions, respectively.

FIG. 11 shows a sixth preferred embodiment of a unrolled stretchable segment in its unstretched condition.

FIG. 12 shows a seventh preferred embodiment of an 10 unrolled coiled-sheet having stretchable elements.

FIG. 13 is a top view of an unrolled coiled-sheet having a flared crowning end on one end of a uniform segment.

FIG. 14 shows alternate preferred embodiments of an 15 unrolled stretchable segment formed from interwoven sinusoidal segments.

FIGS. 15A and 15B show details of a conventional stent strut structure, in perspective and cross-sectional views, respectively.

FIGS. 16A and 16B show details of an inverted stent strut structure in accordance with the present invention, in perspective and cross-sectional views, respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Turning now to the drawings, FIGS. 1A and 1B show a 25 first preferred embodiment of a coiled-sheet stent 10, in accordance with one aspect of the present invention. The coiled-sheet stent 10 is formed from a substantially flat sheet 12 having first and second ends 14, 16 defining a longitudinal axis 18 therebetween. The sheet 12 also includes first and second longitudinal edges 20, 22, the first edge 20 having a plurality of fingers or teeth 24 extending therefrom substantially perpendicular to the longitudinal axis 18.

The sheet 12 also includes a plurality of stretchable elements 30 formed therein, thereby defining a multi-cellular structure capable of expanding and/or contracting in a direction substantially perpendicular to the 5 longitudinal axis 18. Preferably, the stretchable elements 30 define a lattice-like structure providing a plurality of openings 32 for receiving the teeth 24, as described further below. The stretchable elements 30 may be elastically deformable, i.e., biased to assume a first shape but 10 temporarily deformable from that first shape, and/or may be plastically deformable, i.e., assuming any shape to which the stretchable elements 30 are deformed.

As best seen in FIG. 1B, the sheet 12 is preferably provided in a coiled-up condition, defining overlapping inner and outer longitudinal sections 26, 28 that may slide with respect to one another to allow radial expansion of the coiled-sheet 12 between a contracted condition and one or 15 more enlarged conditions. The coiled-up sheet 12 may be biased to the contracted condition, thereby requiring a balloon or other expandable member to radially expand the 20 stent 10 to the enlarged condition, and/or the coiled-sheet 12 may be biased to at least partially radially expand.

In a preferred form, the stretchable elements 30 have a temperature-activated shape memory. For example, at a first 25 temperature, the stretchable elements 30 may be biased to assume a peripherally contracted or "unstretched" shape, while at a higher second temperature, the stretchable elements 30 may become biased to assume a peripherally expanded or "stretched" shape. Preferably, the first 30 temperature is generally about ambient temperature, such as about 25 degrees Celsius or less, and the second temperature is generally about body temperature, such as about 37 degrees Celsius or higher.

To manufacture a coiled-sheet stent 10 as described, a 35 relatively thin, substantially flat sheet 12 is provided,

for example, having a thickness of about 2-4 mm, formed from a biocompatible material, such as stainless steel or a polymer. More preferably, the sheet 12 is formed from a shape memory polymer or metal, such as a nickel-titanium 5 alloy ("Nitinol"), more preferably having a thermally- activated shape memory. Alternatively, an elastic material, such as tantalum, platinum or tungsten alloy, or a super- elastic material, such as Nitinol, may be used. The stretchable elements 30, the teeth 24 and/or any other 10 openings in the sheet 12 may be formed using a number of conventional metal working processes, such as die and punch, laser cutting, or chemical etching.

In one preferred method, the stretchable elements 30 are formed in their stretched shape and the sheet 12 is 15 subsequently heat treated, for example, to a temperature of about 500 degrees Celsius or more, for a predetermined time to activate the shape memory of the material, as is known in the art. After the sheet 12 has cooled, the stretchable elements 30 are compressed into their unstretched shape, and 20 the sheet 12 is rolled to provide a coiled-sheet stent 10.

Preferably, the sheet is formed from Nitinol which, when heat treated, is converted substantially to its austenitic phase, i.e., set to assume its stretched shape. As it is cooled, the Nitinol material preferably undergoes 25 martensitic transformation. When the stretchable elements 30 are compressed into their unstretched shape, the material is plastically deformed substantially as martensite. More preferably, a Nitinol alloy is selected such that transformation back to austenite occurs by the time the 30 material reaches body temperature, e.g., about 37 degrees Celsius. Thus, the stretchable elements 30 may automatically become biased to assume the stretched shape upon reaching body temperature, as explained further below.

In another preferred method, the stretchable elements 35 30 may be formed in their unstretched shape, and then

plastically deformed to their stretched shape, e.g., while the Nitinol material is in its martensitic phase. The sheet 12 may then be heat treated, e.g., to transform the material to its austenitic phase, thereby storing the stretched shape 5 in the material's shape memory. Upon cooling, the material will transform back to martensite, thereby returning to the unstretched shape. The sheet 12 may then be rolled into its contracted condition for placement on a delivery device (not shown).

10 For example, the coiled-sheet stent 10, in its contracted condition, may be placed over the distal end of a delivery catheter (not shown) having a size adapted for percutaneous introduction into a patient's vasculature. A retractable sheath (not shown) may be advanced over the 15 distal end, thereby protecting the stent 10, preventing shifting and/or preventing premature deployment. The distal end of the catheter-sheath assembly may then be percutaneously introduced into a patient's vasculature, and advanced to a target treatment location, such as a stenosis 20 within the carotid or coronary arteries.

As the stent 10 reaches body temperature, the temperature-activated shape memory of the material is preferably activated such that the stretchable elements 30 become biased to assume their stretched shape, e.g., when 25 the Nitinol completes transformation back to austenite. Thus, the sheath constrains the stent 10 from at least partially expanding because of the stretching of the stretchable elements 30. Once the stent 10 is properly positioned at the treatment location, the sheath may be 30 retracted, thereby exposing the stent 10, which may then at least partially expand radially as the stretchable elements 30 assume their stretched shape.

The catheter-sheath assembly may be withdrawn, and a balloon catheter (not shown) may be introduced into the 35 interior of the partially expanded stent 10. Alternatively,

a balloon or other expandable member (not shown) may be provided on the delivery catheter adjacent to the stent 10.

The balloon may be inflated, thereby further radially expanding the stent 10. Once a desired enlarged condition

5 is achieved, the balloon is deflated and withdrawn.

Preferably, the teeth 24 on the inner longitudinal edge 20 engage a set of the openings 32 in the sheet 12, thereby substantially locking the stent 10 in its enlarged

condition. Thus, the teeth 24 allow the stent 10 to be

10 ratcheted to a number of enlarged conditions as long as the inner and outer longitudinal sections 26, 28 overlap and allow the teeth 24 to engage corresponding openings 32, as will be appreciated by those skilled in the art.

Turning to FIGS. 2A and 2B, a second preferred

15 embodiment of a coiled-sheet stent 110 is shown that includes a longitudinal stretchable anti-buckling region 134. The stent 110 is formed from a sheet 112 including a plurality of stretchable elements 130, similar to the previous embodiment, that are arranged substantially 20 parallel to the longitudinal axis 118, thereby defining the longitudinal stretchable region 134.

In addition, however, the sheet 112 includes substantially nonstretchable regions 136, 138, which preferably define a lattice-like structure formed from 25 substantially nondeformable elements 140. For example, the thickness of the elements forming the lattice in the nonstretchable regions 136, 138 may be substantially thicker than the stretchable elements 130 in the stretchable region 134. Alternatively, the shape of the stretchable elements 30 130 may facilitate expansion and/or contraction perpendicular to the longitudinal axis 118. For example, in a preferred form, the lattice of the nonstretchable regions 136, 138 may be substantially rectangular, and more preferably square, to provide enhanced rigidity both 35 parallel and perpendicular to the longitudinal axis 118.

As best seen in FIG. 2A, the sheet 12 may be rolled into the coiled-sheet stent 110, thereby providing overlapping inner and outer longitudinal sections 126, 128 such that the stretchable region 134 extends axially, i.e., substantially parallel to the longitudinal axis 118.

Similar to the previous embodiment, the sheet 112 may be formed from a shape memory material, such as Nitinol, which may be stretched and heat treated, and then cooled and unstretched, or otherwise have a shape memory programmed 10 into the material.

The longitudinal-oriented stretchable region 134 may facilitate the stent 110 partially recoiling when subjected to radially compressive forces. Once the stent 110 has been expanded and locked in an enlarged condition, the 15 nondeformable elements 140 remain substantially rigid and will not recoil. The stretchable elements 130, however, may be compressed about the diameter of the stent 110, i.e., may be elastically or plastically deformed towards their unstretched shape when the stent 110 is subjected to 20 radially compressive forces. Thus, the stent 110 may combine the benefits of both a coiled-sheet stent, which is generally incompressible about its diameter, and a stretchable stent structure.

Turning to FIGS. 3A and 3B, a third preferred 25 embodiment of a coiled-sheet stent 210 is shown that is formed from a sheet 212 including a stretchable region or "crowning end" 234 extending from one end 215 of a nondeformable region 236. Both regions 234, 236 may include teeth 224a, 224b extending from a longitudinal side edge 220 thereof, and may be rolled to define a longitudinal axis 218. The sheet 212 preferably has a shape memory, e.g., may be polished, heat treated into its stretched shape, cooled and unstretched, and then is preferably rolled into its contracted condition. When the shape memory is programmed 30 into the sheet material, the stretchable region 234 may be 35

shaped to assume a radially outwardly flared shape (not shown) that may facilitate anchoring of the end of the stent 210.

After the stent 210 has been implanted, the stent 210 5 may be subjected to radially compressive forces due to the elasticity of the vessel wall, which may cause the stretchable elements 230 in the stretchable region 234 to become compressed, similar to the embodiments described above, thereby allowing the ends of the stent 210 to 10 partially recoil while still substantially anchoring the stent 210 in position. Alternatively, the end 216 of the stretchable region 234 may be flared outward to thereby partially recoil under radially compressive forces such that the stent adopts a substantially uniform size upon 15 implantation within a blood vessel.

In alternative configurations, the coiled-sheet stents described herein may also include outwardly-oriented hooks or barbs (not shown) for enhancing anchoring of the stent within a body passage. Pro-thrombotic material (not shown) 20 may be provided on the exterior surfaces of the coiled-sheet stent to enhance sealing against the wall of the body passage. Additional information on coiled-sheet stents may be found, for example, in U.S. Patent Nos. 4,577,631 issued March 25, 1986 in the name of Kreamer, 5,007,926 issued 25 April 16, 1991 in the name of Derbyshire, 5,158,548 issued October 28, 1992 in the name of Lau et al., Re 34,327 reissued July 27, 1993 in the name of Kreamer, 5,423,885 issued June 13, 1995 in the name of Williams, 5,441,515 issued August 15, 1995 in the name of Khosravi et al., and 30 5,443,500 issued August 22, 1995 in the name of Sigwart. The disclosures of these references and any others cited therein are expressly incorporated herein by reference.

The stretchable elements included in the coiled-sheet stents described herein may take on a number of different 35 forms. Generally, a plurality of stretchable elements are

provided in a predetermined arrangement, such as the longitudinal or radial configurations described above, although a variety of arrangements providing a desired recoil or flexibility characteristic may be provided. Thus, 5 each stretchable element generally comprises an individual cell, thereby providing a multi-cellular structure when the individual cells are duplicated in a predetermined pattern, as in the preferred embodiments described below. In describing these several preferred embodiments for the 10 stretchable elements, a suffix "a" after reference numbers is used to refer to the unstretched shape, a suffix "b" is used to refer to the stretched shape, and no suffix is used when simply describing elements generally. Further, the terms "longitudinal" and "longitudinally" refer to those 15 elements in each individual cell oriented towards the ends of the stent, i.e., arranged generally along the longitudinal axis, while the terms "peripheral" and "peripherally" refer to those elements oriented about the diameter of the stent, i.e., arranged generally 20 perpendicular to the longitudinal axis.

Returning to the drawings, FIGS. 4A, 4B, 5A and 5B show a first preferred embodiment of a plurality of stretchable elements 330 defining a multi-cellular stretchable region 332 which may be incorporated into a coiled-sheet stent, 25 such as those described above. Each stretchable element 330 has a generally diamond shape defined by four substantially straight segments 334 defining longitudinal apices 336 and peripheral apices 338. The straight segments 334 are generally arranged such that each stretchable element 330 30 has a longer longitudinal dimension or length 340 and a shorter peripheral dimension or width 342.

Preferably, the peripheral ends of the straight segments 334 include peripherally extending regions 344, defining a nipple-shaped region 346 at which adjacent 35 stretchable elements 330 are connected. As best seen in

FIGS. 5A and 5B, the nipple-shaped regions 346 may extend longitudinally as the stretchable elements 330 expand from their unstretched shape (FIG. 5A) to their stretched shape (FIG. 5B), thereby reducing axial foreshortening of the

5 stretchable region 332.

Because the width 342 of each stretchable element 330 is substantially smaller than the length 340, when the stretchable elements 330 expand from their unstretched shape to their stretched shape, a substantial increase in the

10 peripheral dimension may be achieved with minimized longitudinal foreshortening. For example, in the embodiment shown, about three hundred percent peripheral expansion may be achieved with only about twelve percent foreshortening. Minimizing foreshortening may be desirable to minimize the

15 risk of shearing along a vessel wall, which may dislodge plaque, and/or to ensure that the stent does not migrate or otherwise shift with respect to a target treatment location.

Turning to FIGS. 6A and 6B, a second preferred embodiment of a plurality of stretchable elements 430 defining a stretchable region 432 is shown. Similar to the previous embodiment, each stretchable element 430b has a generally diamond shape in its stretched shape (FIG. 6A), although, unlike the previous embodiment, each stretchable element 430a has a generally triangular or arrowhead shape in its unstretched shape (FIG. 6B). This is due to each stretchable element 430 having doubled or thicker substantially straight segments 434 on one side of the stretchable element 430 and single substantially straight segments 435 on the other side.

30 The shape memory is programmed into the material such that the single straight segments 435 "invert," i.e., change their orientation from being oriented generally towards the opposing double straight elements 434 in the unstretched shape to being oriented generally away from the opposing double straight elements 434 in the stretched shape. The

35

inversion of the single straight elements 435 allows the stretchable elements 430 to expand peripherally with substantially no longitudinal foreshortening or growth. Stated differently, the width 442 of the stretchable 5 elements 430 may increase substantially, while the length 440 of the stretchable elements 430 remains substantially constant before and after expansion.

Turning to FIGS. 7A and 7B, a third preferred embodiment of a plurality of stretchable elements 530 is 10 shown that define a stretchable region 532. The stretchable elements 530 define a generally parallelogram shape. Opposing straight segments 534 in each stretchable element 530 remain generally parallel to one another as the stretchable elements 530 are expanded from their unstretched 15 shape (FIG. 7A) to the stretched shape (FIG. 7B). The parallelogram shape may be desirable because of its simplicity to form. If the unstretched and stretched shapes are properly selected, i.e., the length and width of the parallelogram shapes are provided in a predetermined ratio, 20 the stretchable elements 530 may experience substantial growth in width 542 with minimal net change in length 540.

Turning to FIGS. 8A and 8B, a fourth preferred form of a stretchable region 632 is shown that is defined by a plurality of stretchable elements 630. A plurality of 25 generally zigzag or sinusoidal segments 636 extend generally perpendicular to the longitudinal axis 618, and a plurality of longitudinal segments 634 extend generally parallel to a longitudinal axis 618 to connect the zigzag segments 636. The longitudinal segments 634 are preferably located at the 30 peaks and valleys of the zigzag elements 636. Thus, each stretchable element 630 is symmetrical and is defined by opposing portions of longitudinal segments 634 and opposing portions of zigzag segments 636 with a portion of a longitudinal segment 634 extending axially therethrough at 35 an intermediate location.

Preferably, in their unstretched shape, as shown in FIG. 8A, the zigzag segments 636a have a curved or bent configuration that minimizes the peripheral dimension or width 642a of the stretchable elements 630a. In their 5 stretched shape, as shown in FIG. 8B, the zigzag segments 636b may substantially straighten and/or assume a more peripherally-oriented configuration, thereby substantially increasing the width 642b of the stretchable elements 630b. Thus, a desired peripheral expansion may be stored in the 10 zigzag segments 636, while a minimal longitudinal foreshortening is encountered during expansion because of the fixed longitudinal segments 634. The change in the overall longitudinal dimension or length of the stretchable region 632 during expansion is constant no matter the length 15 of the stretchable region, which may be desirable for relatively long stents. It occurs from the relative axial movement of adjacent longitudinal segments 634 as the stretchable elements 630 are expanded peripherally.

Turning to FIGS. 9, 10A and 10B, a fifth preferred 20 embodiment of a plurality of stretchable segments 730 defining a stretchable region 732 is shown. The stretchable segments 730 are arranged in peripherally-oriented cells 734, wherein adjacent stretchable segments 730 are connected by peripheral connector elements 736. In their unstretched 25 shape, each stretchable element 730a is made up of a pair of longitudinal-oriented "wings" 738a. Each wing 738a includes first and second longitudinal elements 740, 742 that extend longitudinally from adjacent peripheral connector elements 736 to a looped end 744. The longitudinal elements 740, 742 30 preferably extend generally parallel to one another, for example, in an undulated pattern along the longitudinal axis, although alternatively, the longitudinal elements 740, 742 may be substantially straight. Stretchable elements 730 adjacent to one another in adjacent cells along the

longitudinal axis 718 are preferably connected by their looped ends 744, as shown.

As shown in FIG. 10B, when the stretchable elements 730b are expanded to their stretched shape, the wings 738b 5 open peripherally, i.e., the adjacent peripheral connectors 736 and the longitudinal elements 740, 742 are directed peripherally away from one another. Because of the undulated pattern in the longitudinal elements 740, 742, longitudinal foreshortening of the stretchable elements 730 10 may be minimized by at least partial straightening of the longitudinal elements 740b, 742b.

Turning to FIG. 11, a sixth preferred embodiment of a stretchable region 832 is shown that is defined by a plurality of stretchable elements 830 that are connected together in a predetermined pattern. Each stretchable element 830 is formed from a generally octagonal-shaped segment 834 having a pair of substantially straight cross segments 836 extending across from opposite corners. 15 Connector elements 838, 840 connect adjacent octagonal-shaped segments 834 at the corners not connected by the crossing segments 836.

Turning to FIG. 12, a seventh preferred embodiment of a plurality of stretchable elements 930 formed into flat sheet 932 is shown. Each stretchable element 930 has a generally honeycomb shape, thereby defining openings 926 for receiving corresponding teeth 924 therein. The stretchable elements 930 are arranged in peripherally-oriented cells 934, with adjacent cells 934 being connected together by generally "O" shaped segments. The honeycomb structure of the stretchable elements 930 may facilitate the stretchable region 932 25 partially recoiling when subjected to radial forces, as will be appreciated by those skilled in the art.

Turning to FIG. 13, another preferred embodiment of a flat sheet 1012 for a coiled-sheet stent is shown that 30 includes a substantially nondeformable section 1036 and a

stretchable section 1034. The nondeformable section 1036 is formed from a plurality of diamond-shaped elements 1030 defining openings 1032 for receiving teeth 1024 therein. The stretchable section 1034 provides a flared crowning end 5 on the flat sheet 1012, which is formed from a plurality of diamond-shaped elements 1038. The diamond-shaped elements 1038 in the stretchable section 1034 are substantially larger and less dense than the elements 1030 in the nondeformable section 1036, thereby providing less 10 resistance to peripheral deformation and facilitating partial recoiling of the stretchable section 1034.

Turning to FIG. 14A, another preferred embodiment of a stretchable region 1132 is shown that is formed from a plurality of interwoven sinusoidal elements 1134. The 15 sinusoidal elements 1134 are arranged generally parallel to the longitudinal axis 1118 and are spaced apart along the longitudinal axis from one another, thereby providing a generally diamond-shaped lattice structure. The lattice structure may facilitate partial recoil of the stretchable 20 region 1132 when a coiled-sheet stent (not shown) formed therefrom is subjected to radial compressive forces, as previously described.

In accordance with another aspect of the present invention, a generally tubular stent is provided that 25 includes an inverted strut structure. Generally, tubular stents have a set of struts or beams formed therein which provide the structural support for the stent. The configuration of the struts, e.g., multi-cellular, helical, etc., and the construction of the stent itself may provide a 30 variety of different features. For example, a coiled-sheet stent may be desirable because of the ability to precisely control the expansion of the stent to ensure secure engagement with a vessel lumen. Plastically deformable and elastically expandable tubular stent structures are also

available, which have their own advantages and disadvantages.

Generally, stents are formed from a flat or tubular sheet into which the strut structure is formed by a variety of known methods, although alternatively round or flat wires may be used to form the stent. The resulting stent is a generally tubular body expandable between a contracted condition for facilitating introduction into a body lumen, and an enlarged condition for engaging the body lumen. The tubular body has open ends defining a longitudinal axis therebetween. Struts formed in the tubular body have a width dimension extending along a periphery of the tubular body, and a thickness dimension extending radially outward substantially perpendicular to the longitudinal axis.

For reference, FIGS. 15A and 15B show a detail of a segment of a conventional stent strut structure 1210 that includes a pair of struts 1212a, b. For conventional stents, the thickness dimension "t" of individual struts 1212 is generally substantially smaller than the width dimension "w." This ratio may be considered important, for example, to minimize profile of the resulting stent to facilitate delivery and/or to minimize the protrusion of the stent, after implantation, into the lumen of the vessel, which may obstruct flow or become a source for thrombosis development.

Turning to FIGS. 16A and 16B, a detail of a segment of stent strut structure 1310 in accordance with the present invention is shown. The strut structure 1310 includes a plurality of struts 1312a, extending peripherally and/or longitudinally along all or a portion of the stent (not shown). The resulting stent may have a number of possible configurations, such as the coiled-sheet stents described above. Alternatively, tubular plastically deformable stents or stents elastically biased to expand may be provided with

the features of the present invention, as will be appreciated by those skilled in the art.

The struts 1312 have a thickness dimension "t" that extends radially outward substantially perpendicular to a longitudinal axis of the stent (not shown), and a width dimension "w" that extends peripherally and/or longitudinally along the stent wall. As may be seen, the thickness dimension "t" is substantially greater than the width dimension "w." Stated differently, the ratio of width to thickness dimensions is less than one.

The "inverted" strut structure, i.e., a strut structure having a greater thickness dimension "t" than width dimension "w", has several advantages. For example, because the width dimension "w" is smaller than the thickness dimension "t," the strut structure may be more easily deformed along the periphery in order to facilitate substantially even expansion of the resulting stent. This is illustrated by reviewing the moment of inertia "I" of the strut 1312a about flexural axis A-A, which for a rectangular cross-section is defined as:

$$I_{A-A} = 1/12 w^3 t. \quad (1)$$

The moment of inertia "I_{A-A}" about this axis is predominated by the narrower dimension "w." The moment of inertia about the axis A-A is important because the deflection of the struts 1212 in a plane defined by the axis A-A is generally the mechanism that allows the stent to expand radially outward, as the struts deflect peripherally away from one another. Thus, the struts 1212 may provide increased flexibility as compared to conventional stent struts, which have a larger width dimension "w" than thickness dimension "t."

In contrast, the moment of inertia "I" of the strut 1312a about flexural axis B-B may be substantially higher, as given by the following equation:

5 $I_{B-B} = 1/12 t^3 w.$ (2)

Because the moment of inertia "I_{B-B}" is predominated by the thickness dimension "t," the struts 1312 may be substantially more resistant to radial bending. Stated 10 differently, because the moment of inertia "I_{B-B}" is relatively higher than conventional stent struts having the thickness dimension "t" substantially smaller than the width dimension "w," the struts 1312 minimize the likelihood of out-of-plane bending which will also ensure more even 15 expansion of the stent within a body lumen. The increased resistance to radial deflection may also reduce recoil and/or the risk of the stent buckling under compressive forces imposed by the vessel wall after implantation.

Because of the increased thickness "t" of the struts 20 1312, the resulting profile of the stent, after implantation, may not be appropriate for smaller vessels, such as the coronary arteries or cerebrovascular sites. More preferably, the inverted strut structure 1310 may be used for applications within the carotid, iliac, renal 25 and/or femoral arteries.

While the invention is susceptible to various modifications, and alternative forms, specific examples thereof have been shown in the drawings and are herein described in detail. It should be understood, however, that 30 the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A stretchable stent, comprising:
a coiled-up sheet having overlapping inner and outer
longitudinal sections extending generally parallel to a
5 longitudinal axis thereof, the coiled-up sheet being
expandable between a contracted condition and one or more
enlarged conditions; and

10 a plurality of stretchable elements formed in the
coiled-up sheet, the stretchable elements being expandable
between an unstretched condition and a stretched condition.

2. The stretchable stent of claim 1, wherein the
coiled-up sheet is at least partially biased to expand from
the contracted condition towards the one or more enlarged
15 conditions.

3. The stretchable stent of claim 1, wherein the
stretchable elements are biased to assume the stretched
condition, thereby at least partially biasing the coiled-up
20 sheet to radially expand from the contracted condition
towards the one or more enlarged conditions.

4. The stretchable stent of claim 1, wherein the
coiled-up sheet defines a periphery substantially
25 perpendicular to the longitudinal axis, and wherein the
stretchable elements are expandable about the periphery of
the coiled-up sheet.

5. The stretchable stent of claim 1, wherein the
30 coiled-up sheet comprises a material having a temperature-
based shape memory, whereby the stretchable elements are
biased towards the unstretched condition when exposed to a
first temperature and towards the stretched condition when
exposed to a second temperature.

6. The stretchable stent of claim 5, wherein the second temperature is at or above body temperature.

7. The stretchable stent of claim 5, wherein the 5 first temperature is at or below about 25 degrees Celsius.

8. The stretchable stent of claim 5, wherein the coiled-up sheet comprises Nitinol.

10 9. The stretchable stent of claim 8, wherein the Nitinol is substantially in its martensitic phase at the first temperature and substantially in its austenitic phase at the second temperature.

15 10. The stretchable stent of claim 1, wherein the entire coiled-up sheet has stretchable elements formed therein.

20 11. The stretchable stent of claim 1, wherein the stretchable elements define a longitudinal stretchable region extending between first and second ends of the coiled-up sheet.

25 12. The stretchable stent of claim 1, wherein the stretchable elements define a stretchable crowning end on one end of the coiled-up sheet.

30 13. The stretchable stent of claim 1, wherein the coiled-up sheet further comprises a substantially nondeformable region.

14. The stretchable stent of claim 13, wherein the nondeformable region comprises a substantially rigid lattice-like structure.

15. The stretchable stent of claim 1, further comprising a plurality of locking elements extending from the inner longitudinal section for engaging openings in the outer longitudinal section to selectively secure the coiled-up sheet in the one or more enlarged conditions.

16. A stretchable stent, comprising:

10 a coiled-up sheet having overlapping inner and outer longitudinal sections, the coiled-up sheet being expandable between a contracted condition and one or more enlarged conditions, the coiled-up sheet defining a periphery in a plane substantially perpendicular to a longitudinal axis thereof;

15 a plurality of locking elements extending from the inner longitudinal section for engaging openings in the outer longitudinal section to selectively secure the coiled-up sheet in the one or more enlarged conditions; and

20 a plurality of stretchable elements formed in the coiled-up sheet, the stretchable elements having a shape memory defining an unstretched condition and a stretched condition.

25 17. The stretchable stent of claim 16, wherein the stretchable elements are biased to assume the stretched condition when exposed to a temperature at or above body temperature.

30 18. The stretchable stent of claim 16, wherein the stretchable elements define a longitudinal stretchable region extending between first and second ends of the coiled-up sheet.

35 19. The stretchable stent of claim 16, wherein the stretchable elements define a stretchable crowning end on an end of the coiled-up sheet.

20. The stretchable stent of claim 16, wherein the coiled-up sheet comprises Nitinol.

5 21. The stretchable stent of claim 20, wherein the stretchable elements comprise austenite at or above body temperature.

10 22. The stretchable stent of claim 20, wherein the stretchable elements comprise martensite at or below about 25 degrees Celsius.

15 23. The stretchable stent of claim 1, wherein the coiled-up sheet comprises a nondeformable region that is generally incompressible about the periphery.

20 24. The stretchable stent of claim 23, wherein the nondeformable region comprises a lattice-like structure including the openings for receiving the locking elements.

25 25. The stretchable stent of claim 16, wherein the stretchable elements comprise a multi-cellular structure of diamond-shaped elements capable of assuming unstretched and stretched conditions.

25 26. The stretchable stent of claim 25, wherein the diamond-shaped elements comprise peripheral apices extending generally along the peripheral dimension, the peripheral apices having peripherally extending nipples for reducing 30 longitudinal foreshortening when the diamond-shaped elements are directed from the unstretched condition to the stretched condition.

27. The stretchable stent of claim 25, wherein the diamond-shaped elements are partially invertable to assume the unstretched condition.

5 28. The stretchable stent of claim 16, wherein the stretchable elements define a multi-cellular structure comprising a plurality of zigzag elements extending about the periphery of the coiled-up sheet, and a plurality of longitudinal elements intersecting the zigzag elements.

10

29. The stretchable stent of claim 16, wherein each stretchable element comprises a pair of peripherally expandable wing-like elements extending generally parallel to the longitudinal axis.

15

30. The stretchable stent of claim 29, wherein the stretchable elements define a multi-cellular structure with peripherally adjacent stretchable elements being connected at a point intermediate the pair of wing-like elements.

20

31. A method for making a coiled-sheet stent, the method comprising the steps of:

providing a substantially flat sheet defining a length and a width;

25 forming a plurality of stretchable elements in the sheet, the stretchable elements being expandable along the width of the sheet between an unstretched condition and a stretched condition; and

30 rolling the flat sheet about the width into a coiled-up sheet having overlapping inner and outer longitudinal sections.

35 32. The method of claim 31, wherein the sheet comprises a shape memory material, and wherein at least one of the unstretched and stretched shapes is programmed into

the shape memory material during the step of forming the stretchable elements.

33. The method of claim 32, wherein the step of
5 forming the stretchable elements comprises the steps of:
 forming the stretchable elements in the sheet in the
 stretched shape; and
 heat treating the sheet to program the stretched shape
 into the shape memory material.

10

34. The method of claim 33, comprising the additional
step of constraining the stretchable elements in the
unstretched shape after the heat treating step.

15 35. The method of claim 33, wherein the shape memory
material comprises Nitinol, and wherein the Nitinol
comprises austenite during the heat treating step.

36. The method of claim 35, wherein the sheet is
20 heated to a temperature of at least about body temperature,
the temperature being sufficiently high such that the
Nitinol substantially completes austenitic transformation.

37. The method of claim 35, comprising the additional
25 step of cooling the sheet after the heat treating step, the
Nitinol comprising martensite after the cooling step.

38. The method of claim 37, wherein the sheet is
cooled to a temperature of about 25 degrees Celsius or less,
30 the temperature being sufficiently low such that the Nitinol
substantially completes martensitic transformation.

39. The method of claim 37, comprising the additional
step of plastically deforming the stretchable elements to
35 their unstretched shape after the cooling step.

40. The method of claim 32, wherein the step of forming the stretchable elements comprises the steps of:
5 forming the stretchable elements in the sheet in their unstretched shape;
plastically deforming the stretchable elements to their stretched shape; and
heat treating the sheet to program the stretched shape into the shape memory material.

10

41. The method of claim 40, comprising the additional step of cooling the sheet after the heat treating step, thereby causing the stretchable elements to return to their unstretched shape.

15

42. The method of claim 31, wherein the stretchable elements are formed in the sheet by chemical etching, laser cutting or punching.

20

43. The method of claim 31, comprising the additional step of forming a plurality of locking elements along an edge of the sheet extending along the length thereof.

25

44. A method for deploying a coiled-sheet stent at a target treatment location within a patient's body, the method comprising the steps of:

30 providing a coiled-sheet stent comprising a temperature-activated shape memory material, the coiled-sheet stent comprising a plurality of stretchable elements having a shape memory defining an unstretched condition and a stretched condition, the stretchable elements being biased to assume the stretched condition when exposed to a temperature at or above body temperature;

providing the coiled-sheet stent in a contracted condition within a distal end of a tubular sheath at a temperature substantially below body temperature;

5 percutaneously introducing the distal end of the sheath into a blood vessel of a patient;

advancing the distal end of the sheath to a target treatment location, the coiled-sheet stent becoming exposed to a temperature within the patient of at least about body temperature during advancement, whereby the stretchable 10 elements become biased to assume the stretched shape; and

15 deploying the coiled-sheet stent at the target treatment location, the coiled-sheet stent at least partially expanding towards an enlarged condition due to the bias of the stretchable elements towards the stretched shape.

45. The method of claim 44, comprising the additional step of further expanding the coiled-sheet to an enlarged condition at which the coiled-sheet substantially engages 20 the vessel wall at the target treatment location.

46. A stent for implantation within a body lumen of a patient, comprising:

25 a generally tubular body expandable between a contracted condition for facilitating introduction into a body lumen, and an enlarged condition for engaging the body lumen, the tubular body having open ends defining a longitudinal axis therebetween; and

30 having a width dimension extending along a wall of the tubular body, and a thickness dimension extending radially outward substantially perpendicular to the longitudinal axis;

35 wherein the ratio of the thickness dimension to the width dimension is greater than one.

47. The stent of claim 46, wherein the tubular body comprises a coiled-up sheet having overlapping inner and outer longitudinal sections extending generally parallel to 5 a longitudinal axis thereof.

48. The stent of claim 46, wherein the tubular body comprises a substantially enclosed tubular structure.

10 49. The stent of claim 48, wherein the tubular structure is biased to assume the enlarged condition.

15 50. The stent of claim 48, wherein the tubular structure is plastically deformable from the contracted condition to the enlarged condition.

1/11

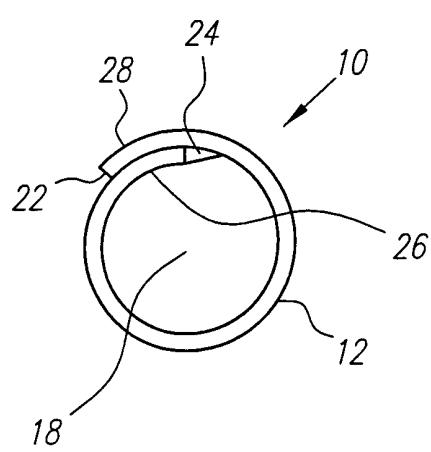


FIG. 1B

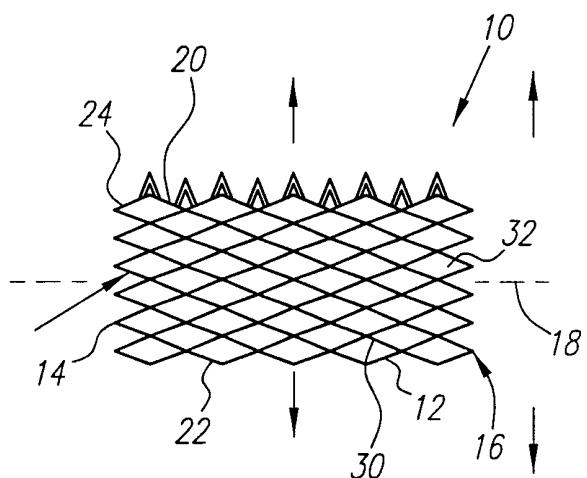


FIG. 1A

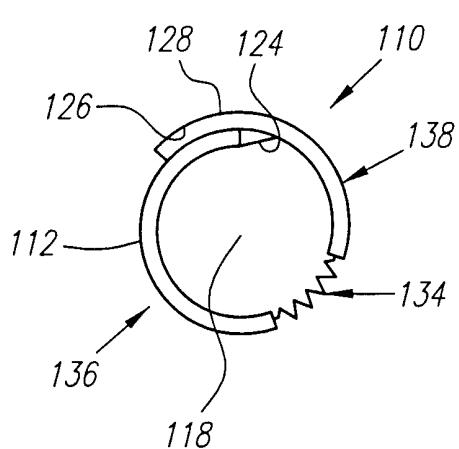


FIG. 2A

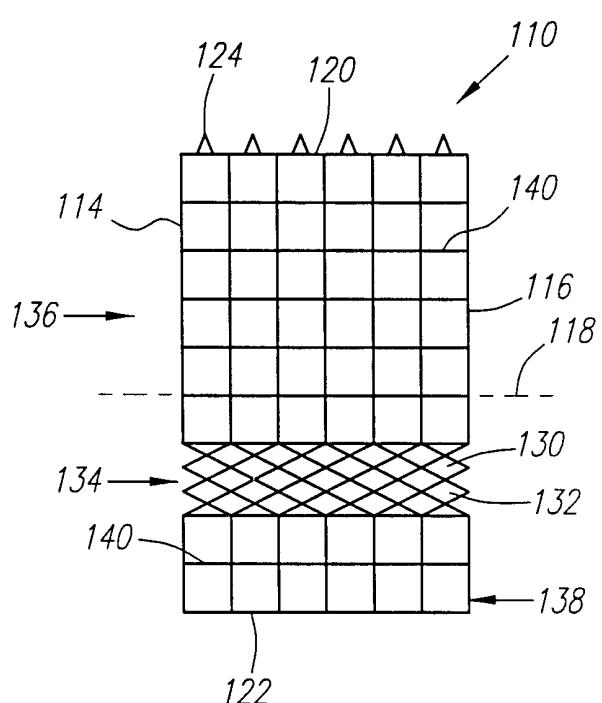


FIG. 2B

SUBSTITUTE SHEET (RULE 26)

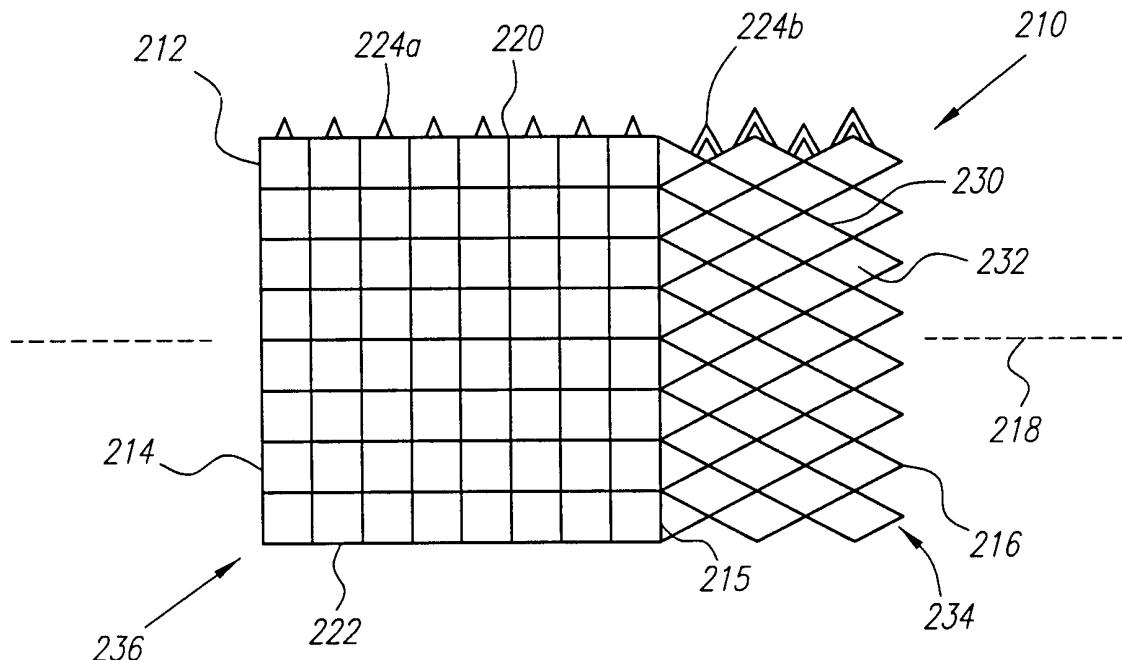


FIG. 3A

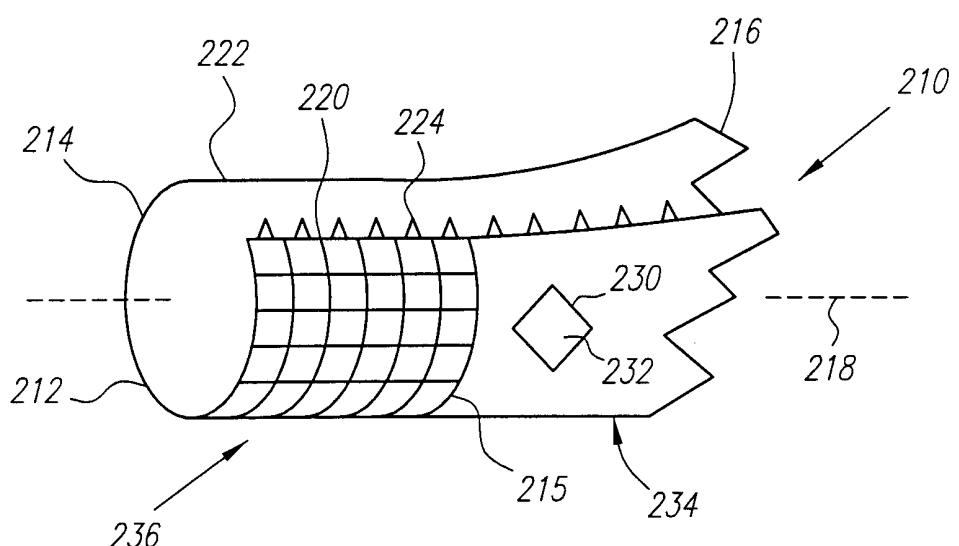


FIG. 3B

SUBSTITUTE SHEET (RULE 26)

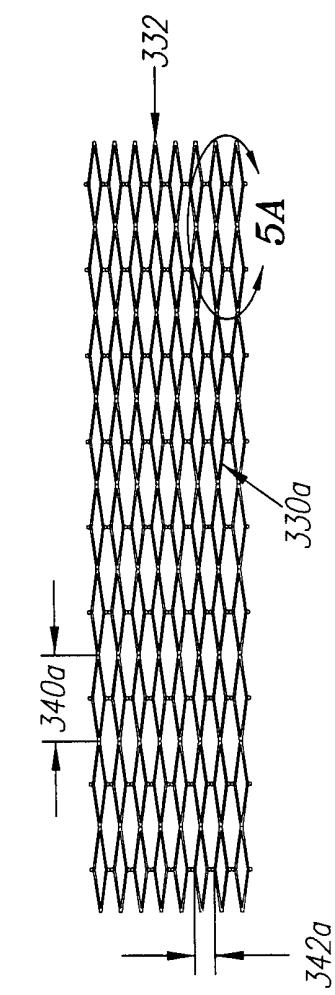


FIG. 4A

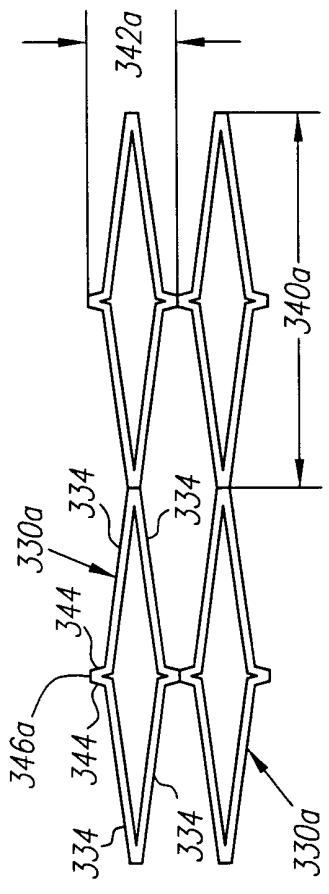


FIG. 5A

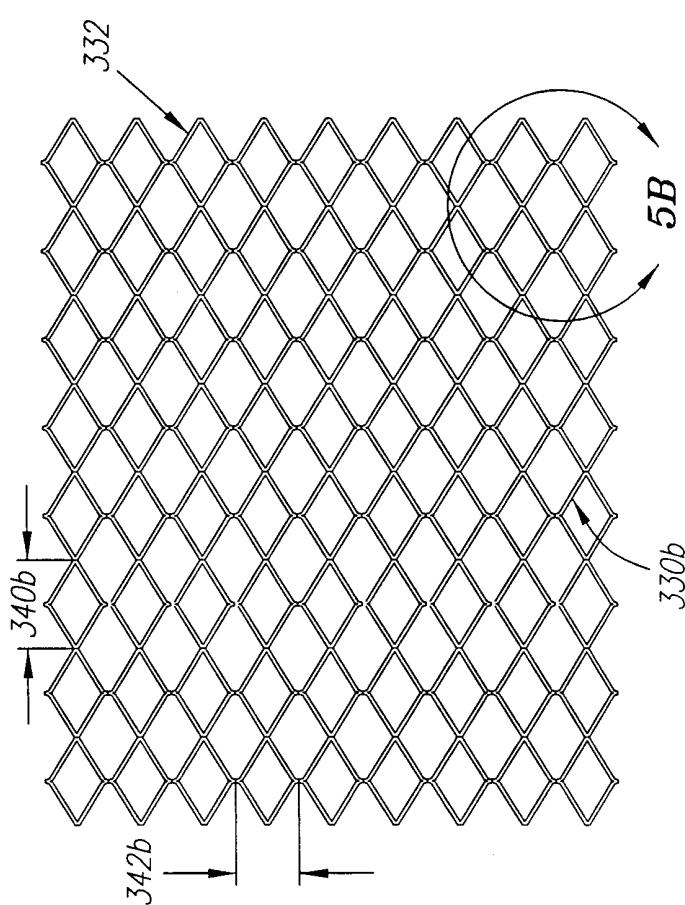


FIG. 4B



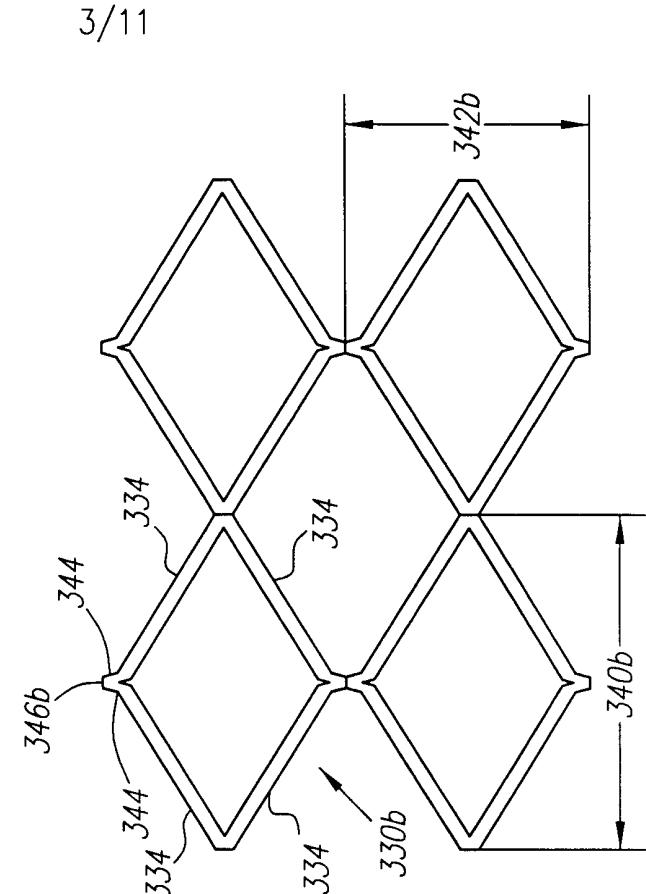


FIG. 5B

4/11

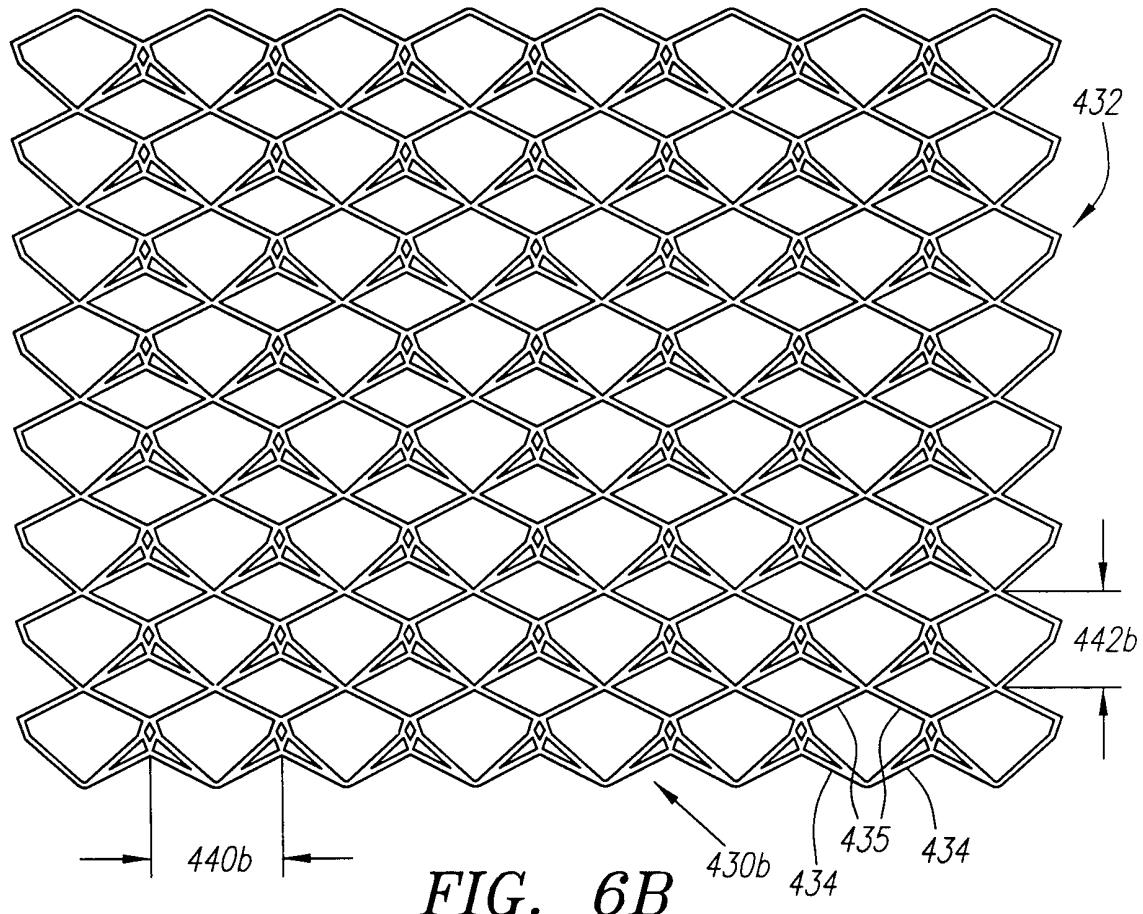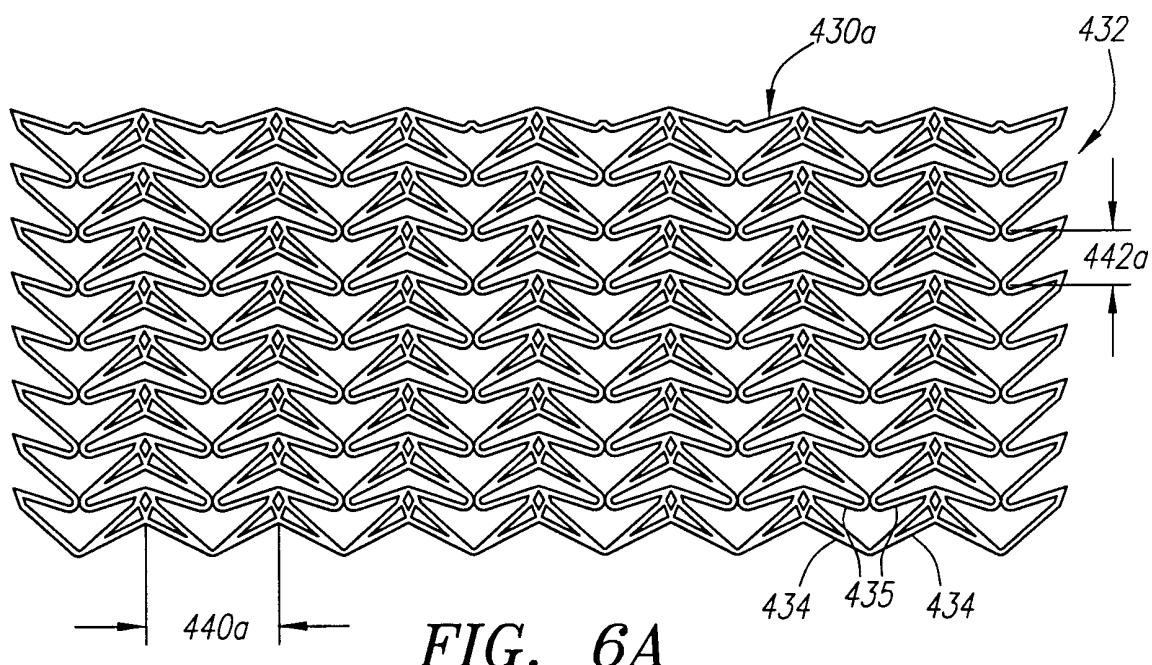

SUBSTITUTE SHEET (RULE 26)

5/11

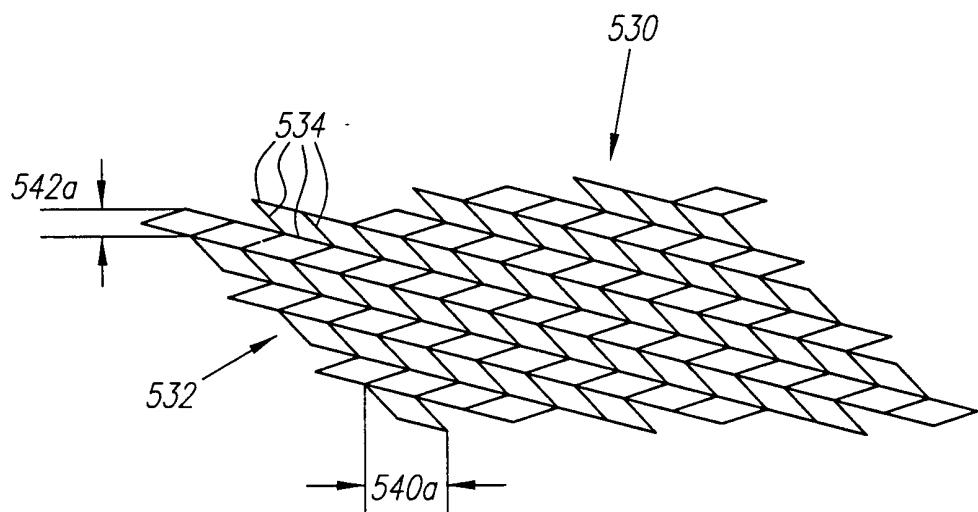


FIG. 7A

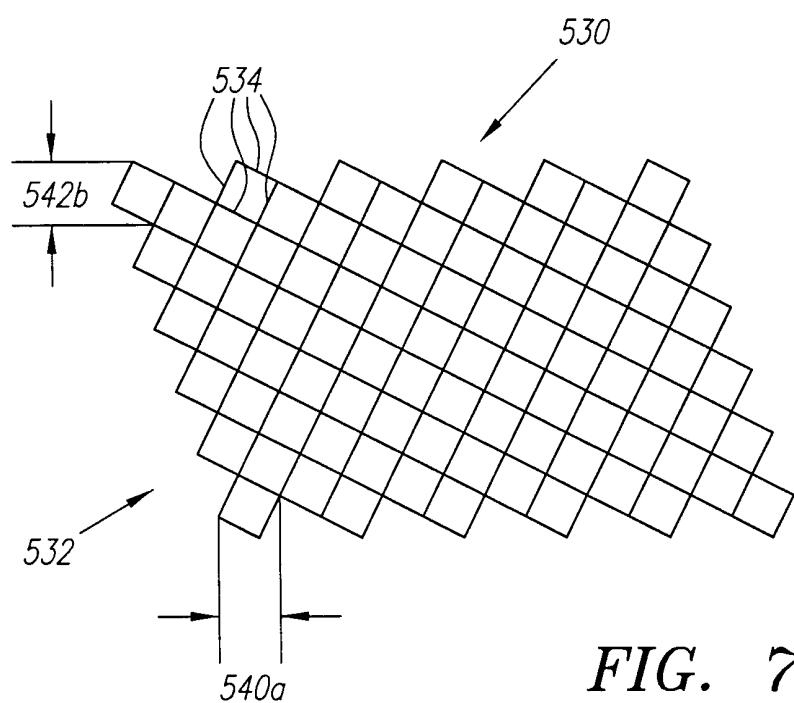


FIG. 7B

SUBSTITUTE SHEET (RULE 26)

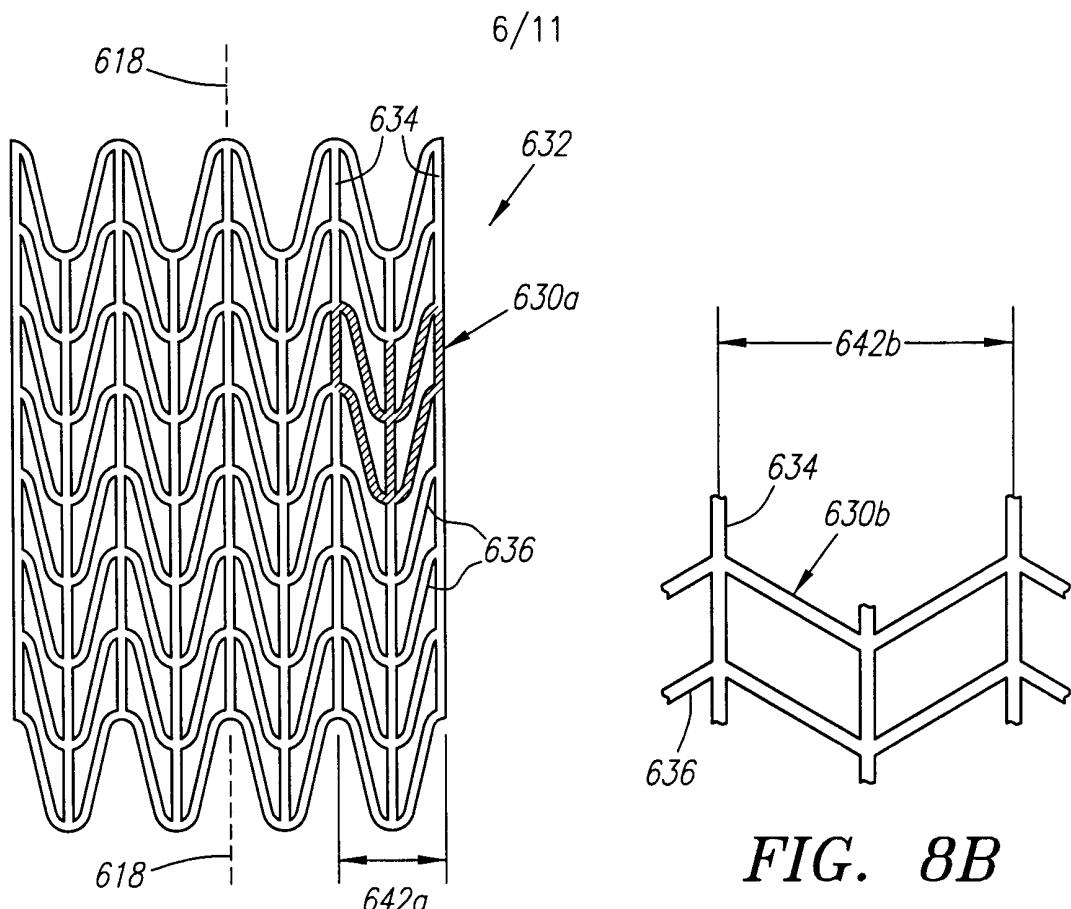


FIG. 8A

FIG. 8B

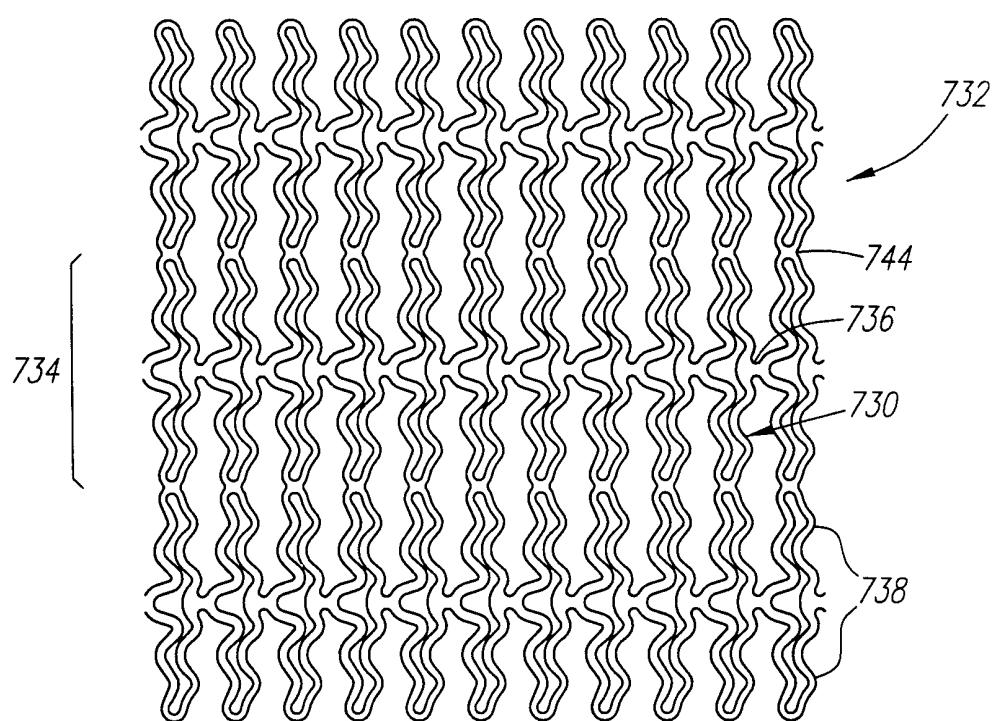


FIG. 9
SUBSTITUTE SHEET (RULE 26)

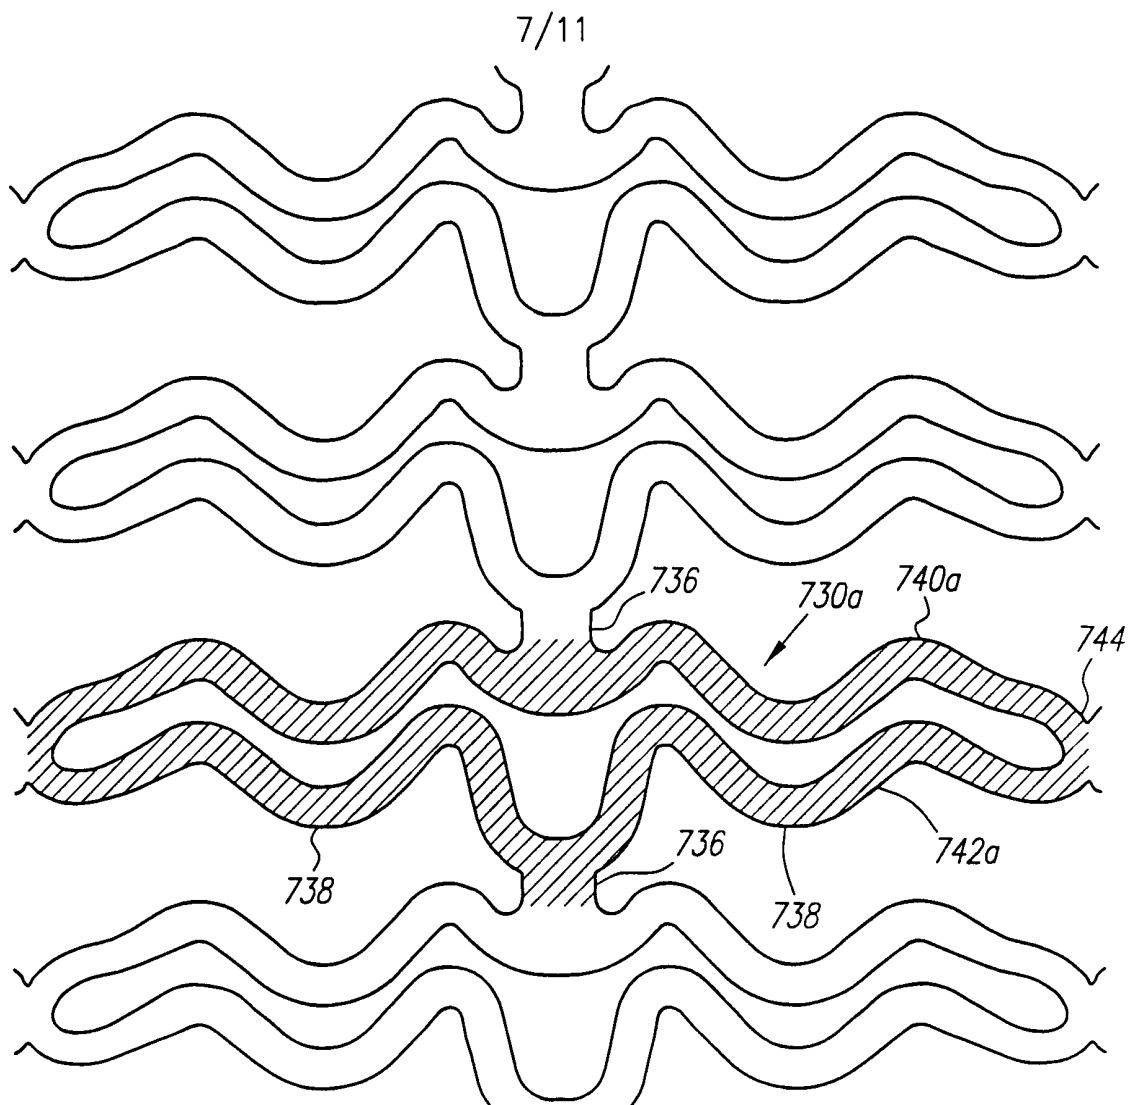


FIG. 10A

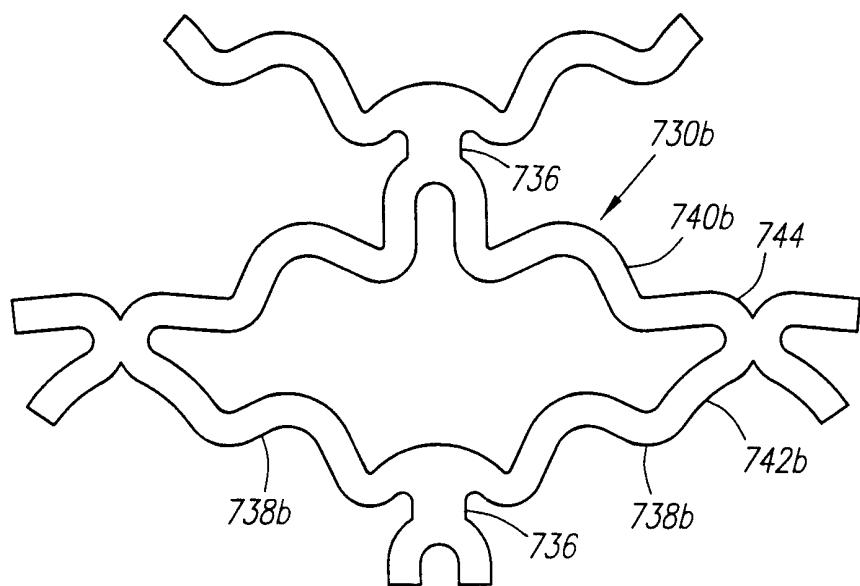


FIG. 10B

SUBSTITUTE SHEET (RULE 26)

8/11

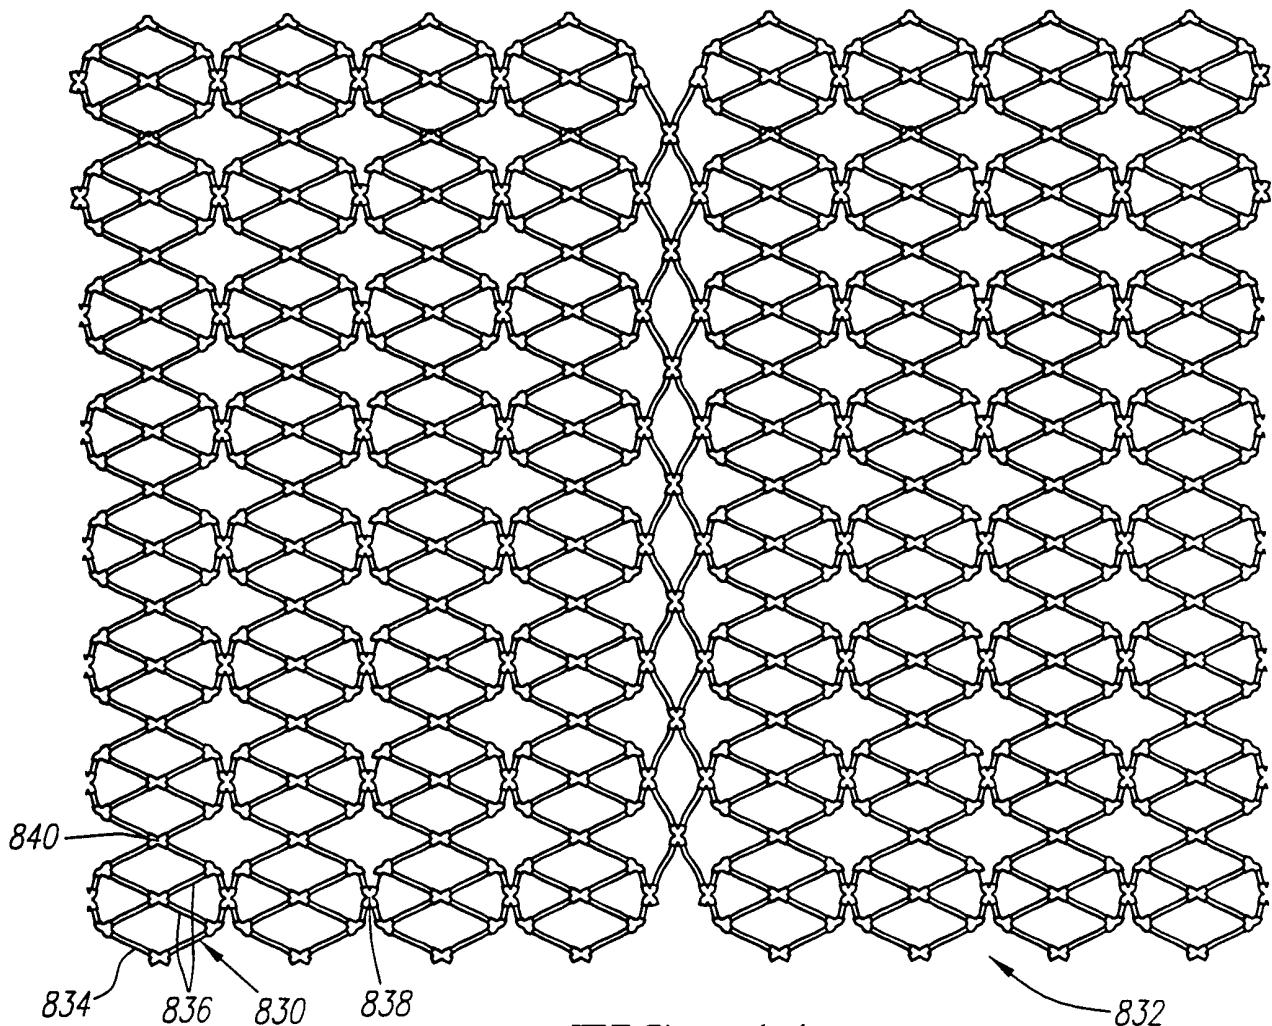


FIG. 11

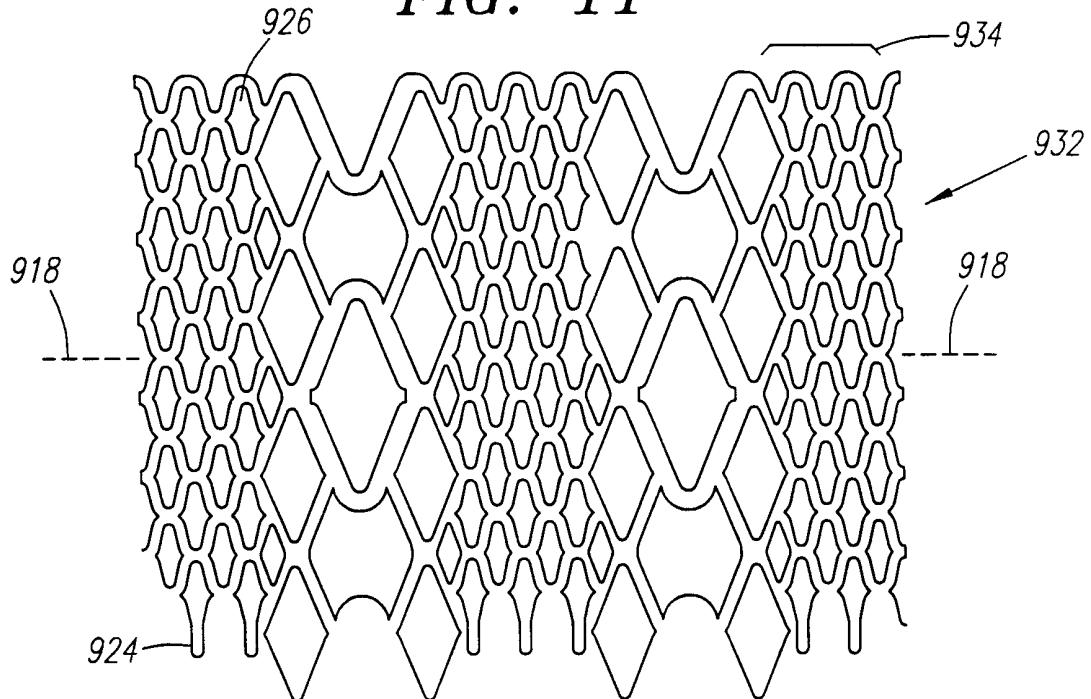


FIG. 12

SUBSTITUTE SHEET (RULE 26)

9/11

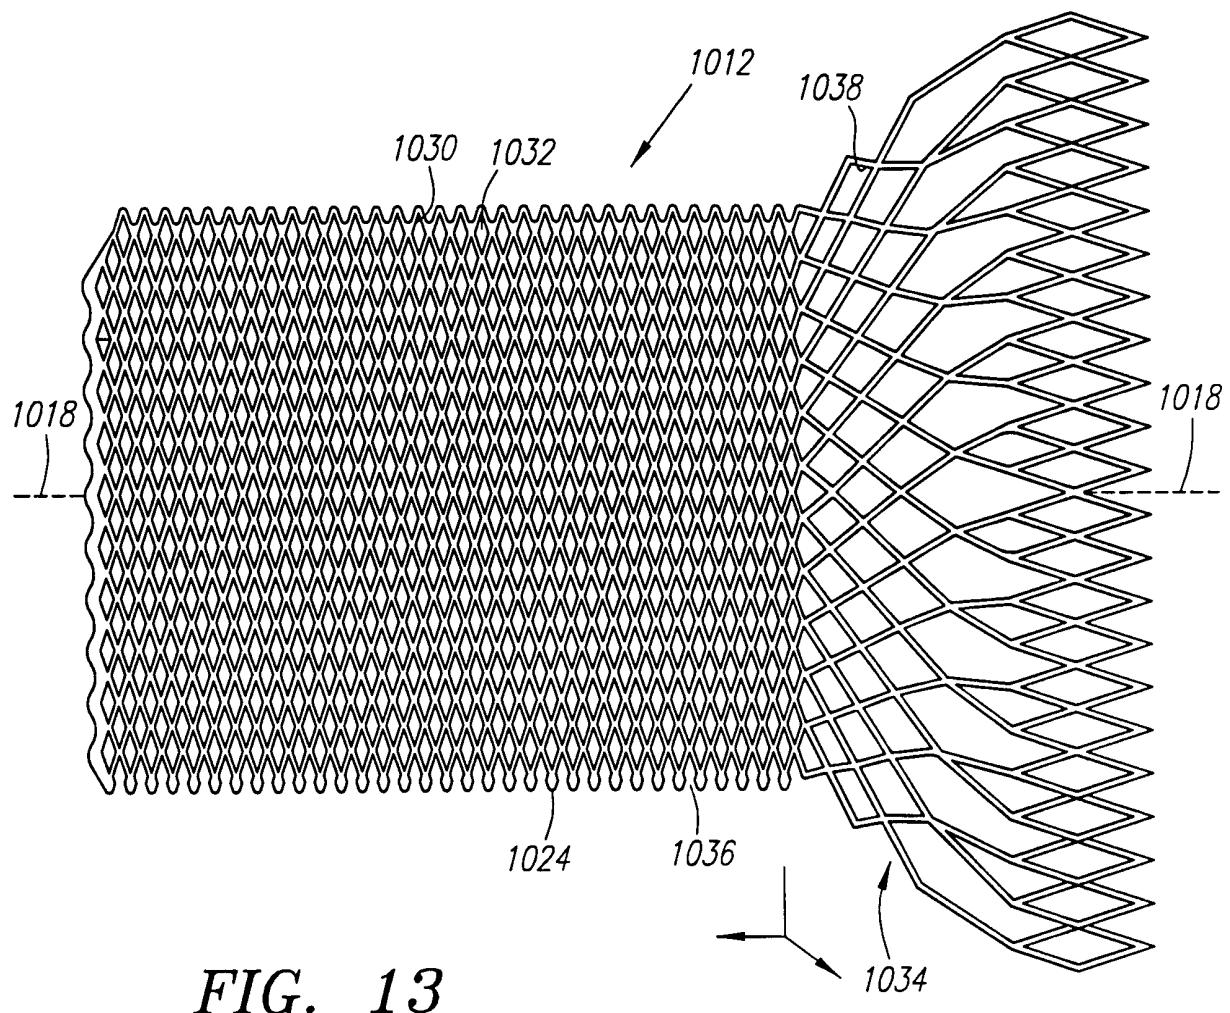


FIG. 13

10/11

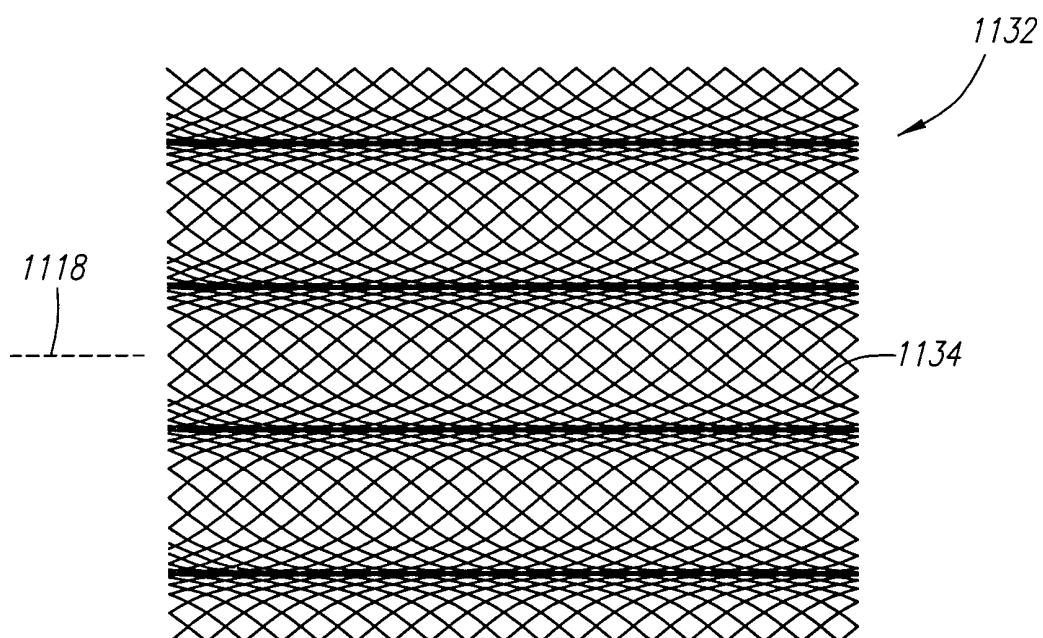


FIG. 14A

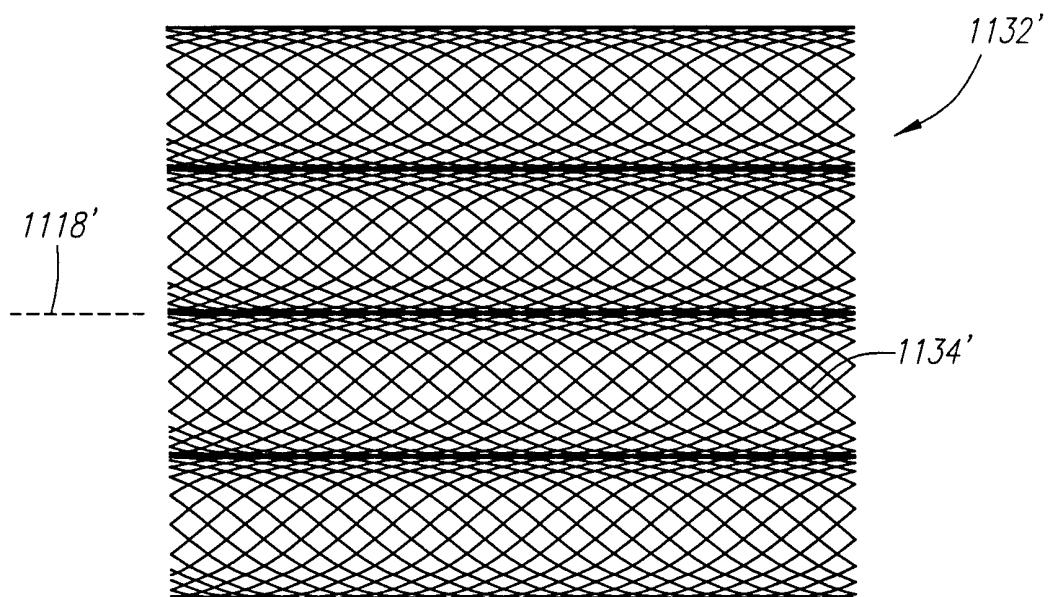


FIG. 14B

SUBSTITUTE SHEET (RULE 26)

11/11

FIG. 15A

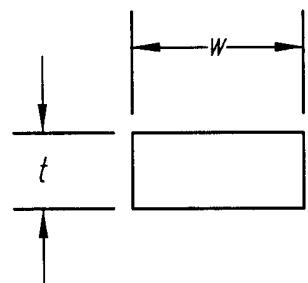
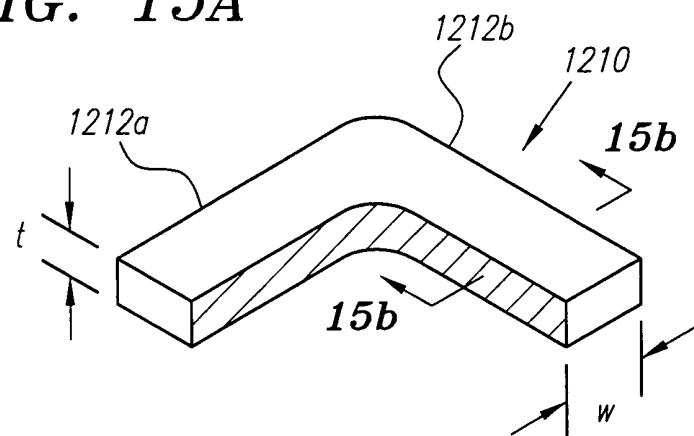


FIG. 15B

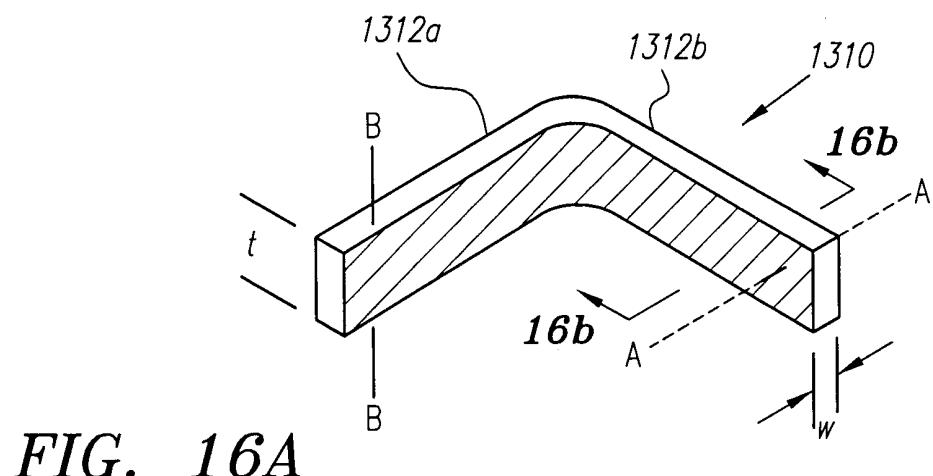


FIG. 16A

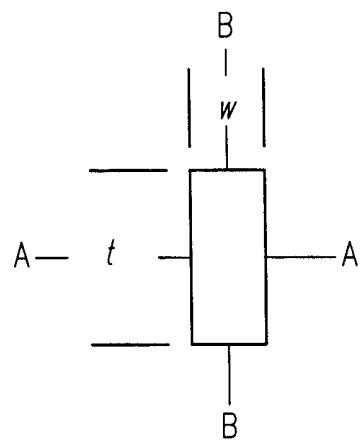


FIG. 16B

SUBSTITUTE SHEET (RULE 26)