



(11) **EP 2 949 364 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.04.2019 Bulletin 2019/17

(51) Int Cl.:
A63B 21/00 (2006.01)

(21) Application number: **15166775.5**

(22) Date of filing: **13.07.2011**

(54) **REFORMER EXERCISE APPARATUS**
REFORMER-TRAININGSVORRICHTUNG
APPAREIL D'EXERCICE DE REMISE EN FORME

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
02.12.2015 Bulletin 2015/49

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
11869281.3 / 2 731 684

(73) Proprietor: **Balanced Body Inc.**
Sacramento, CA 95828-1111 (US)

(72) Inventors:
• **Endelman, Ken**
Sacramento, CA 95828-1111 (US)
• **Savarino, Chrostopher J.**
Sacramento, CA 95841 (US)
• **Masterson, Brian**
Placerville, CA 95667 (US)
• **Oberwelz, Elger**
San Francisco, CA 94107 (US)
• **Yurchenko, James R.**
Palo Alto, CA 94303 (US)
• **Patron, Anthony**
Mountain View, CA 94941 (US)

- **Overthun, Thomas Dieter Christian**
San Francisco, CA 94117 (US)
- **Student, Joerg**
San Francisco, CA 94110 (US)
- **Webster, David**
San Mateo, CA 94402 (US)
- **Davis-Wilson, Jennifer Ellen**
Mountain View, CA 94040 (US)

(74) Representative: **CMS Cameron McKenna Nabarro
Olswang LLP**
Cannon Place
78 Cannon Street
London EC4N 6AF (GB)

(56) References cited:
CN-Y- 2 394 663 DE-U1-202006 018 317
US-A- 339 638 US-A- 2 977 120
US-A- 4 657 246 US-A- 5 066 005
US-A- 5 080 353 US-B1- 7 163 498

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 949 364 B1

Description

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

[0001] The present disclosure relates to an exercise apparatus. In particular, it relates to a reformer exercise apparatus of a new and contemporary design that has a number of unique innovations.

State of the Art

[0002] Exercise machines utilized in the performance of physical exercises originated by Joseph Pilates typically are performed on a stationary apparatus called a reformer. A traditional reformer has a rectangular wood or metal frame supporting two parallel rails or tracks. A wheeled carriage rides on these tracks and is resiliently biased toward a foot end of the frame by one or more elastic members, typically coil springs. A user sits or lies on the carriage and pushes against a foot support bar at the foot end to move the carriage away from and toward the foot end. Alternatively, the user may grasp ends of a pair of ropes or straps that pass through pulleys at the head end of the frame and are attached to the carriage to similarly pull the carriage away from and toward the foot end of the frame.

[0003] One emphasis in Pilates training is on core musculature stabilization. The exercises being performed on the reformer ideally are conducted carefully by the user concentrating on body symmetry and symmetrical body movement and proper torso alignment during exercise. It is often somewhat difficult for a user to sense when he or she is properly centered on the reformer, and exerting equal forces with both arms or both legs during movements required. Also, either the user must get off of the reformer or an assistant must change positions of the foot support bar as may be required for different exercises. This, is at least an inconvenience to the user. Furthermore, the user must then reposition his or her body on the carriage to regain proper alignment.

[0004] The ends of the arm cords are typically stuffed through holes in the carriage platform to get them out of the way of the user or draped over the sides of the carriage. Thus they can drag on the floor beneath the carriage. The user also has difficulty in adjusting arm cord length while reclining on the reformer carriage. The user generally has to sit upright, adjust the arm cord length in the stop cleats, and then reposition herself on the carriage surface.

[0005] The rails upon which the carriage rides typically are horizontal surfaces which collect dust and dirt over time and thus the rollers and tracks must often be cleaned. Furthermore, the user must be careful not to let his or her clothing drape onto the rails to prevent such clothing interfering with operation of the carriage rollers.

[0006] There is therefore a need for a reformer appa-

ratus that is simple and straightforward to use, easy for the user to adjust without getting off of the reformer carriage, and overcomes the drawbacks mentioned above.

[0007] CN 2394663 Y describes a spring resistance source of a tubular chest developer of a sports body-building apparatus. A tension spring is arranged in a pipe body of the tubular chest developer. One end of the tension spring is fixed, and the other end is provided with a movable pulley wheel. The movable pulley is provided with a nylon rope. Simultaneously, a pulley wheel is additionally arranged at the opening position at one end provided with the pulley wheel of the pipe body so that both ends of the nylon rope are guided outside the pipe body by the two pulley wheels.

[0008] US 7,163,498 B1 describes an exercise device including two tubes which act as guides for tension cords with handles. The tubes are pivotably mounted to a frame. Three pulleys are provided in relation to the tubes, all three of which rotate about a horizontal axis. Two of these pulleys are placed above, and outside the tube so as to limit the retraction of the handle end of the tension cord. The other pulley is mounted outside and beneath the tube inside the frame of the exercise device

SUMMARY OF THE DISCLOSURE

[0009] According to an aspect of the invention there is provided an arm cord support riser for use on a reformer exercise apparatus having a generally rectangular frame supporting a carriage for movement between a head end and a foot end of the frame on parallel spaced side rail portions of the frame, and a foot bar supported by the frame near the foot end. The arm cord support riser comprises: a hollow elongated cylindrical tube having a central axis and adapted to be mounted upright at the head end of the frame, the tube carrying a first pulley wheel disposed therein near an upper end of the tube adjacent an exit opening from the tube, the first pulley wheel rotating about a horizontal axle carried in the tube; and a guide in the tube on each side of the exit opening adjacent the first pulley wheel for directing an arm cord out of the tube, wherein each guide rotates about an axis within the tube parallel to the central axis.

[0010] According to another aspect of the invention a reformer exercise apparatus has a generally rectangular frame supporting a carriage for movement between a head end and a foot end of the frame on parallel spaced side rail portions of the frame, and a foot bar supported by the frame, wherein the head end of the frame has a pair of spaced vertical bores formed therein, and an arm cord support riser disposed in each bore. Each arm cord support riser comprises: a tube having a central axis; a first pulley wheel rotatably supported within an upper end of the tube; a second pulley wheel within the tube near a bottom end of the tube; and a guide adjacent the first roller for directing an arm cord around the first pulley wheel, wherein the guide rotates within the tube about an axis parallel to the central axis.

[0011] According to another aspect of the invention there is provided a reformer exercise apparatus comprising: a generally rectangular frame supporting a carriage for movement between a head end and a foot end of the frame on parallel spaced side rail portions of the frame; a bias member between the carriage and the foot end for urging the carriage toward the foot end of the frame; wherein the head end of the frame has a pair of spaced vertical bores each supporting a cord support riser comprising: a hollow cylindrical tube having a central axis and carrying a first pulley wheel disposed therein near an upper end of the tube, the first pulley wheel rotating about a horizontal axle carried in the tube; and a guide in the tube on each side of an exit opening adjacent the first pulley wheel for directing an arm cord out of the tube, wherein each guide rotates within the tube about an axis parallel to the central axis.

[0012] A selection of optional features is set out in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The disclosure will be better understood and objects, other than those set forth above, will become apparent when consideration is given to the following detailed description. Such description makes reference to the accompanying drawings wherein:

Fig. 1 is a perspective view of a reformer exercise apparatus in accordance with one embodiment of the present disclosure.

Fig. 2 is a separate perspective view of the frame of the reformer shown in Fig. 1 in accordance with the present disclosure.

Fig. 3 is a cross sectional view of one side rail member of the frame taken along the line 3-3 in Fig. 2.

Fig. 4 is a partial perspective view of the foot end of a reformer in accordance with the present disclosure.

Fig. 5 is a separate perspective view of a foot bar utilized in the reformer exercise apparatus shown in Fig. 1.

Fig. 6 is an outer perspective view of a right side rail member foot bar support assembly in accordance with the present disclosure.

Fig. 7 is an inner perspective view of the right side rail member foot bar support assembly shown in Fig. 6.

Fig. 8 is cross sectional view of a left rail member taken along the line 3-3 in Fig. 2 showing the arrangement of the foot bar support assembly carried therein.

Fig. 9 is a cross sectional view of the reformer exercise apparatus shown in Fig. 1 taken along the line 9-9 in Fig. 1.

Fig. 10 is a partial perspective view of the head end of the reformer apparatus shown in Fig. 1.

Fig. 11 is a separate perspective view of the lower pulley wheel assembly for the riser in the head end of the apparatus shown in Fig. 10.

Fig. 12 is a separate exploded perspective view of the carriage in the reformer exercise apparatus shown in Fig. 1 in accordance with the present disclosure.

Fig. 13 is a bottom plan view of the head end portion of the carriage shown in Fig. 1 in accordance with the present disclosure showing the cord retraction mechanism latch members engaged with the cord retraction reels.

Fig. 14 is a bottom plan view of the head end portion of the carriage as in Fig. 13 with the latch members disengaged with the cord retraction reels.

Fig. 15 is a section al view through the carriage taken along the line 15-15 in Fig. 14.

Fig. 16 is an underside perspective view of a carriage having a cord retraction system in accordance with an alternative embodiment of the present disclosure.

Fig. 17 is an underside view as in Fig. 17 showing the cord retraction system in a released position.

Fig. 18 is an underside perspective view of the head end of an alternative carriage in accordance with the present disclosure.

Fig. 19 is a side view of the head end of the carriage shown in Fig. 18.

Fig. 20 is a side view of the head end of the carriage shown in Fig. 18 with the headrest in a first raised position.

Fig. 21 is a side view of the head end of the carriage shown in Fig. 18 with the headrest in a second raised position.

Fig. 22 is head end perspective view of an alternative reformer in accordance with the present disclosure.

Fig. 23 is an inside separate exploded view of the head end assembly of the alternative reformer shown in Fig. 22.

Fig. 24 is an inside separate exploded perspective view of the foot end assembly of the alternative reformer shown in Fig. 22.

Fig. 25 is a cross sectional view of one of the two frame side rails in the alternative reformer shown in Fig. 22.

Fig. 26 is a separate assembled perspective view of a riser utilized in the reformer shown in Fig. 22.

Fig. 27 is an exploded perspective view of the riser shown in Fig. 26.

Fig. 28 is a partial sectional view of the riser shown in Fig. 26 installed in the head end socket of the reformer shown in Fig. 22.

Fig. 29 is a separate inside perspective view of the foot bar support assembly utilized in the reformer shown in Fig. 22.

Fig. 30 is an outside perspective view of the foot bar support assembly shown in Fig. 29.

Fig. 31 is a separate underside perspective view of the carriage frame assembly of the carriage shown in Fig. 22.

Fig. 32 is an underside perspective view of the support pad removed from the carriage shown in Fig. 22.

Fig. 33 is a separate perspective view of a shoulder rest utilized in the reformer shown in Fig. 22.

Fig. 34 is an upper partial exploded view of the carriage of the reformer shown in Fig. 22.

Fig. 35 is an inverted view of the carriage removed from the reformer shown in Fig. 22 showing the cord retraction system in accordance with this alternative embodiment.

Fig. 36 is an underside plan view of the head end of the carriage shown in Fig. 35 with the cord retraction system in a cord locked position.

Fig. 37 is a view as in Fig. 36 with the cord retraction system in a cord unlocked position.

Fig. 38 is a perspective view of the head end of the carriage with the headrest in a lowered position.

Fig. 39 is a perspective view a pair of reformers shown in Fig. 22 in a stacked configuration for storage.

Fig. 40 is a perspective view of the underside of the

head end of the carriage showing the risers and shoulder stops ready for installation in the storage position as shown in Fig. 39.

Fig. 41 is a perspective view of the reformer shown in Fig. 22 including an optional vertical trapeze tower and mat conversion in accordance with the present disclosure.

Fig. 42 is a perspective view of a trapeze tower socket aligned against the end of one side rail of the reformer shown in Fig. 41 for connection to the head end extrusion.

Fig. 43 is a sectional view through the trapeze tower socket of the tower shown in Fig. 41.

Fig. 44 is a partial cutaway view through one of the riser bosses at the head end of the reformer shown in Fig. 41 showing an alternative lower pulley mount installed therein.

Fig. 45 is a perspective view of a reformer as in Fig. 22 with an alternative vertical trapeze tower and matt conversion in accordance with the present disclosure.

FIG. 46 is a perspective view of the hand grip end portion of an arm cord for use with a reformer in accordance with the present disclosure.

FIG. 47 is a perspective view as in FIG. 46 with a handle attached to the arm cord in accordance with the present disclosure.

FIG. 48 is a perspective view of the reformer shown in FIG. 22 with a jump board installed at the foot end of the reformer frame.

FIG. 49 is an enlarged vertical partial sectional view through one of two posts supporting the jump board installed at the foot end of the reformer frame.

DETAILED DESCRIPTION

[0014] In the following description, numerous specific details are set forth in order to provide a more thorough disclosure. It will be apparent, however, to one skilled in the art, that the art disclosed may be practiced without these specific details. In some instances, well-known features may have not been described in detail so as not to obscure the art disclosed.

[0015] A perspective view of one embodiment of a reformer exercise apparatus 100 is shown in Fig. 1. The apparatus 100 has a generally rectangular frame 102 with a head end 104 and a foot end 106. The ends 104 and 106 are spaced apart by a pair of rail members 108. A carriage 110 is movably supported on the rail members

108 for movement back and forth between the ends **104** and **106** of the frame **102**.

[0016] A foot bar **111** is positioned near the foot end **106** of the frame **102**. This foot bar **111** is carried by the rail members **108** as will be described in detail below. The head end **104** of the frame **102** preferably supports a removable pair of spaced upright arm cord support risers **112**. These risers **112** direct arm cords **114** from the carriage **110** to cord end loops **116** or grips for a user's hands for use in various exercises. When not in use, the end loops **116** may be conveniently positioned on the shoulder stops **118** as shown in Fig. 1. The carriage **110** is resiliently biased toward the foot end **116** of the frame **102** by one or more elastic members such as springs **120**.

[0017] A separate perspective view of the frame **102** is shown in Fig. 2. Each of the head end **104**, the foot end **106** and the side rail members **108** has a similar outer surface shape that smoothly merge together. This shape includes an outer upright wall **122** merging with a horizontal top wall **124** which merges with a downwardly and inwardly slanted inner wall **126**. The inner wall **126** merges into a vertical skirt portion **128**. Thus the entire frame **102** includes an upright outer wall **122**, a downwardly and inwardly slanted inner wall **126** and a vertical skirt portion **128**.

[0018] The head and foot ends **104** and **106** have curved outer ends **107** that curve into and merge smoothly with the side rail members **108**. The head end **104** further includes bosses for receiving the risers **112**. The foot end **106** has an anchor support plate **121** spanning between the curved ends **107** for supporting ends of the bias members or springs **120** to bias the carriage **110** as mentioned above.

[0019] Extending downward from each curved end **107** is a complementary shaped upright support leg **129**. These support legs **129** may be removed to place the ends **104** and **106** of the frame **102** on a planar surface such as a floor. The support legs **129** may be interchanged with longer or shorter support legs to change the height of the apparatus **100** above such a floor support surface.

[0020] A sectional view of a side rail member **108** is shown in Fig. 3. Each rail member **108** is preferably an aluminum extrusion having an identical cross sectional shape. The rail member **108**, as mentioned above, has an outer upright wall **122** that merges into a horizontal top wall **124** and then into a downwardly slanted inner wall **126** and then into a vertical skirt portion **128**. The end members **104** and **106** have the same exterior shape, but differ internally from the side rail members **108**.

[0021] As is shown in Fig. 3, each side rail member **108** has a vertical mid wall **130** between the slanted inner wall **126** and the upright outer wall **122**. The mid wall **130** has an outwardly facing upper longitudinally extending boss **132** and a lower outwardly facing longitudinally extending boss **134** parallel to the upper boss **132**. Together the mid wall **130**, the upper boss **132** and lower boss **134** form an outwardly open slot **136** therebetween. This slot

136 receives and carries one of the foot bar support assemblies therein as will be described in detail below. Between the mid wall **130** and the slanted inner wall **126** is an upper horizontal support wall **138**. The support wall **138** extends the length of the rail member **108** and provides torsional rigidity to the structure of the rail member **108**. A horizontal bottom portion **140** of the mid wall **130** acts as a support for one set of wheels supporting the carriage **110**. The upper wall **138** serves also as an upper guide for the carriage support wheels on the rail members **108**. Furthermore, the mid wall **130** between upper and lower walls **138** and **140** and the skirt portion **128** serves as a lateral guide for the carriage **110**.

[0022] The upper boss **132** preferably has a vertical portion **142** that extends downward parallel to the mid wall **130**. This vertical portion **142** is used to provide lateral support for the foot support assembly described more fully below. Furthermore, the lower boss **134** may include a downwardly extending index rail **144**. Alternatively, the indexing rail **144** may be installed along the length of the rail member **108** by a separate, replaceable metal indexing rail carried in the boss **134**.

[0023] Fig. 4 is a perspective view of a foot end **106** of the frame **102**. The foot end **106** carries the anchor plate **121** for receiving free ends of one or more of the springs **120**. A plurality of spaced hourglass spool shaped pins **148** are each positioned to receive a loop on a spring **120** in order to fasten the spring **120** to the foot end **106** of the frame **102**. Each of these pins **148** preferably tapers upward and inward from its base to a waist at a first angle from the pin's central axis and then outward at a second angle greater than the first angle so that the free end of a spring placed on the pin **148**, when under tension, is securely held at the waist of the pin **148**.

[0024] Each corner of the frame **102**, formed by the ends **104** and **106**, includes curved outer upright wall **122**, top wall **124** and inwardly slanted inner wall **126**. Preferably inner wall **126** terminates in an upright lower skirt portion **128**. The foot end **106** also includes two spaced apart tubular foot support bosses **146** formed therein. These foot support bosses **146** are used to support a flat, generally rectangular foot platform (not shown) often called a "jump board". This jump board is a rectangular plate that has two spaced parallel support posts that removably fit into the foot support bosses **146**.

[0025] The foot bar **111** shown in Fig. 1 will now be described specifically with reference to Figs. 5, 6, 7, 8, and 9. The foot bar **111** is part of a foot support assembly that cannot be seen in Fig. 1. This foot bar **111** is separately shown in Fig. 5. The foot bar **111** has a central horizontal foot support portion **150** between two parallel leg portions **152**. Each leg portion **152** terminates in a connection portion **154** that is fastened to one of two foot bar support assemblies **170**.

[0026] Referring now to Figs. 6 and 7, the connection portion **154** is bolted or otherwise fastened to a bottom end **156** of an elongated foot bar support arm **158**. The arm **158**, best shown in Fig. 6, is an elongated flat plate

member that has an engaging pin **161** projecting outward from the upper end **160** of the arm **158**. The arm **158** further has a closed pivot slot **162** radially extending parallel to the leg portion **152** of the foot bar **111** and spaced from where the connection portion **154** of the foot bar **111** is attached to the arm **158**.

[0027] The foot support assembly of reformer **100** shown in Fig. **1** includes a left foot bar support assembly **170**, the foot bar **111**, and a right foot bar support assembly **170**. Figs **6** and **7** are reverse perspective views of a right one of the foot bar support assemblies **170** in accordance with one embodiment of the present disclosure. Each leg **152** of the foot bar **111** is supported by one of the foot bar support assemblies **170**. As is best shown in Fig. **6**, the assembly **170** includes the foot bar support arm **158** to which the foot bar **111** is attached, a slide portion **172** that rides in the slot **136** in the side rail member **108**, and a hook plate **174** which is rigidly fastened to the slide portion **172**. This hook plate **174** has a series of features, preferably slots or notches **176**, **178**, **180**, **182** and **184** spaced along the upper edge of the hook plate **174**. The pin **161** projecting outward from the upper end **160** of the foot bar support arm **158** fits within one of these notches **176-184** to position the foot bar **111** at a particular desired angular position with respect to the frame **102** of the reformer **100**.

[0028] The foot bar support arm **158** is slidably and pivotally attached to the hook plate **174** by a bolt **186** and square bushing **188**. The bushing **188** rides between and along the parallel sides of a recess **190** in the arm **158** around the pivot slot **162**. Since the foot bar **111** is fastened to the arm **158**, when a user lifts the foot bar **111**, the support arm **158** rides up or down along the slot **162**. In turn, the pin **161** projecting outward from the upper end **160** of the support arm **158** is raised out of one of the slots along the upper edge of the hook plate **174**. When lifted in this manner, a user can then rotate the foot bar **111** about the pivot bolt **186** to a different one of the slots **176**, **178**, **180**, **182** or **184** to reposition the foot bar **111**. When the foot bar **111** is lowered, the pin **161** slides down within one of the slots to fix the foot bar **111** in position.

[0029] The end slots or notches **176** and **184** have special significance in this embodiment **100**. When the foot bar **111** has both its pins **161** positioned in slots **176**, the foot bar **111** is rotationally positioned below the upper surface of the frame **102** and beyond the foot end of the frame **102**. In this position, the foot bar **111** may be used as a handle to lift the foot end of the reformer **100**. To ensure that the foot bar **111** does not disengage from the slot **176**, the terminal end of the slot **176** is hooked upward, as can be seen in Fig. **6**, to firmly engage with the pin **161** at the closed end of the slot **176**. To disengage the foot bar **111** from this slot **176**, the foot bar **111** must be pushed down and pulled rearward (away from the foot end) to align the pin **161** with the widened slot entrance. The foot bar **111** may then be rotated up and lifted out of the slot **176** and repositioned in a different one of the

slots **178**, **180**, **182** and **184**.

[0030] The forward most slot **184** in the hook plate **174** is used to position the foot support assembly comprising each of the assemblies **170** and the foot bar **111** together for translation along the rail members **108**. As the foot bar **111** is raised and is rotated clockwise, as seen in Fig. **6**, the arm **158** is rotated about the bolt **186** clockwise until the pin **161** engages a protruding surface **192** at the forward end (toward head end **104**) of the hook plate **174**. In this position, a shoulder **194** on the support arm **158** engages with a latch pin **196** that projects through a slot **198** in the hook plate **174**. The latch pin **196** projects through the hook plate **174** from a latch arm **200** best seen in Fig. **7**. When the foot bar **111** is then lowered, the shoulder **194** of the arm **158** pushes the latch pin **196** down.

[0031] Latch arm **200** is an elongated bar that has one end rotatably fastened to the inside face of the hook plate **174**. The latch arm **200** can rotate in a plane parallel to the inside surface of the hook plate **174**. The other end of the latch arm **200** has a latch portion **202** that engages a complementary shaped indexing feature in the rail member **108** in order to latch the assembly **170** at a selected position along the rail member **108**. The latch arm **200** is spring biased upward via spring member **201** to maintain the latch portion **202** of the latch arm **200** engaged with the indexing feature of the index rail **144** in the rail member **108**.

[0032] When the foot bar **111** is positioned with pins **161** in the slots **184**, and the foot bar **111** is pushed downward to fully seat the pins **161** at the bottom of slots **184**, the latch pins **196** are also pushed downward, rotating the latch arm **200** and moving latch portion **202** out of engagement with the indexing feature of the index rail **144** in the rail member **108**. With the latch portions **202** disengaged with the rail members **108**, the foot bar **111** may be moved toward or away from the foot end **106** of the frame **102** via the rollers **206**. In fact, the foot bar **111** may be moved fully to the opposite end of the rail members **108** if desired.

[0033] The slide assembly **172** is best seen in the view of Fig. **7** which is a perspective inside view of the foot bar support assembly **170** shown in Fig. **6** that is carried in the right side rail member **108**. The slide assembly **172** includes an elongated slide plate **204** that is preferably bolted or otherwise fixed to the hook plate **174**. This slide plate **204** rides in the slot **136** in the rail member **108** with the hook plate **174** and adjacent foot bar support arm **158** disposed within the free/open space between the outer wall **122** and mid wall **130** of the rail member **108**. It is to be understood that another, mirror image foot support assembly **170** is disposed in the other (left) rail member **108**.

[0034] A sectional view of a left rail member **108** as in Fig. **3** is shown in Fig. **8** with the left foot bar support assembly **170** riding in the slot **136**. All of the component parts of the assembly **170** are disposed between the outer wall **122** and mid wall **130** of the rail **108**. Thus the

complete foot bar support assembly **170** is hidden from view by a user sitting on the carriage **110**. It is to be understood that the right foot bar support assembly **170** in the right rail member **108** is constructed similarly. Thus the component parts of the assemblies **170** are either interchangeable or are mirror images. For example, the foot bar support arms **158** and hook plates **174** are mirrored. The remainder of the component parts of the assembly **170** may be interchangeable.

[0035] Turning back now to Fig. 7, the slide plate **204** is supported in the slot **136** by front and rear support rollers **206** that roll along the bottom surface of the slot **136**. A guide roller **208** that rotates about a vertical axis through the slide plate **204** is mounted preferably adjacent to each support roller **206**. The guide rollers **208** roll along inner side surfaces of the slot **136** in the rail member **108** to guide the support assembly **170**, and thus the foot bar **111**, as it is translated (i.e., rolled) fore and aft along the rail members **108**.

[0036] The support rollers **206** are preferably bearing supported polymer wheels rotatably supported on horizontal axles. The polymer wheels are sized to fit and smoothly roll within the slot **136**. The guide rollers **208** may be nylon or other polymer rollers supported by a vertical axle in the slide plate **204**.

[0037] A further sectional view through the left rail member **108** of the apparatus **100** as in Fig. 1 is shown in Fig. 9 taken along the line 9-9 of Fig. 1. This view shows the foot support assembly **170** carried within the rail member **108** as well as the wheeled support arrangement for the carriage **110**. Specifically, the generally rectangular carriage **110** has four support wheels **210**, one adjacent each corner, and at least two carriage guide wheels **212** positioned preferably along one side of the carriage **110** that also ride in the space between the mid wall **130**, the inner slanted wall **126**, the skirt portion **128** and the bottom portion **140** of the mid wall **130** of the rail member **108**. The support wheels **210** roll on the bottom portion **140**.

[0038] The guide wheels **212** roll between the mid wall **130** and the skirt portion **128** of the inner wall **126** to maintain tracking of the carriage **110** as it moves between the foot end **106** and head end **104** of the frame **102**. Because of the guide configuration of the rail member **108**, only two guide wheels **212**, both along only one side, are necessary to guide movement of the carriage **110**. The guide wheels **212** are arranged in only one of the rail members **108**. However, three or four guide wheels **212** may be provided in alternative configurations of the carriage **110**.

[0039] Thus in the reformer **100** shown in Fig. 1, both support for the carriage **110** and the support for the foot bar **111** is provided by structures beneath and carried within the side rail members **108** and are thus hidden from external view. This arrangement presents a clean, uncluttered, appearance to the reformer apparatus **100** and minimizes the surface areas that can collect dust over time. Furthermore, in order to provide a direct foot

bar position feedback to the user of the exercise apparatus **100**, a "J" shaped indicator member **214** is fastened to one or both of the slide plates **172**. A distal tip **216** of the indicator **214** extends around a bottom edge and upward outside of the wall **122** of the side rail member **108** to provide a user of the reformer **100** with an indication of the foot support assembly position. Corresponding markings (not illustrated) may be provided along the outer wall **122** for a user to utilize in positioning the foot bar **111** at preselected positions along the frame **102**.

[0040] The notch **178** in the hook plate **174** is used to locate the foot bar **111** at a lowest position above the frame **102**. The notch **180** places the foot bar **111** at a middle height position above the frame **102**. The notch **182** corresponds to the foot bar **111** being substantially vertical, and thus its highest position above the frame **102**. Additional notches may alternatively be provided to facilitate additional foot bar positions. However, a low, moderate, and high position are believed to be sufficient for most users of the apparatus **100**.

[0041] A low friction layer **218** of polymer sheet material (shown in Fig. 6) is affixed to the outer surface of the hook plate **174** between the hook plate **174** and the support arm **158**. This layer reduces any friction between the arm and the plate during rotation of the foot bar **111** between the notches **176**, **178**, **180** **182** and **184**. Alternatively, the low friction layer **218** may be applied to the inner surface of the arm **158**. Further, a low friction layer **218** may optionally be applied to both of these facing surfaces.

[0042] The structure of the foot support assembly may be other than has been specifically illustrated and described. For example, the rollers **206** and **208** could be replaced by sheets of low friction material to permit the slide plate **204** to easily slide along the slot **136**. The configuration of the support arm **158**, the hook plate **174** and slide plate **172** may be different than that of the exemplary embodiment shown. Further other mechanisms may be used to engage and disengage the assembly **170** with features in the rail members **108** of the frame **102**.

[0043] Referring back to Fig. 1, at the head end **104** of the reformer apparatus **100** there are two spaced apart risers **112** for directing arm cords **114** from the carriage **110** to the head end **104** and then to the arm cord end loops **116**. Referring now to the close perspective view of one of the risers **112** at the head end **104** shown in Fig. 10, each of these risers **112** includes a lower pulley wheel assembly **220** fastened into a tubular riser boss **222** formed adjacent each curved end **107** of the head end **104**. Each riser **112** also includes a hollow tubular body **224** having its bottom end fitted within the tubular riser boss **222**. The upper end **228** of the riser tubular body **224** carries a cylindrical roller head **230**. This roller head **230** includes a tubular body **232** that fits into or is integrally formed with the body **224**. The tubular body **232** has an elongated aperture **234** through its side. A pair of vertically aligned guide rollers **236** are mounted to the head **230** on both sides of the aperture **234**. Mount-

ed within and transversely across the tubular body 232 behind the aperture 234 is a horizontal cord pulley wheel or roller 238.

[0044] The lower pulley wheel assembly 220 is separately shown in perspective view in Fig. 11. The lower pulley wheel assembly 220 has a flanged cylindrical body 240 that is fastened to the bottom of the boss 222. Carried within the body 240 is a horizontally journaled pulley wheel 242 and an angled cord guide disc 244. The guide disc 244 is positioned in the body 240 above the wheel 242 at an angle of about 45 degrees. An aperture 246 is provided in the disc 244 along its lower edge. This aperture 246 is oriented directly above the periphery of the pulley wheel 242 such that a free end of an arm cord 114 that is lowered into the riser 112 through the aperture 234 in the head assembly 230 is directed over the roller 238 and down through the tubular body 224 and through the aperture 246 and past the pulley wheel 242. A user can then grasp the free end of the cord 114 and fasten the cord to the carriage 110 as described in detail below.

[0045] The head assembly 230 may be fixed to the tubular body 224 or optionally may be bearing supported thereon such that it can rotate freely about a vertical axis through the riser 112. Each of the guide rollers adjacent the aperture 234 may be mounted on stationary vertical pins or otherwise bearing supported such that the cord 114 can be pulled through the aperture 234 with minimal resistance or friction. The bottom or lower pulley wheel 242 is oriented with its axis normal to the rail members 108 since movement of the carriage 110 is always either toward or away from the head end 104 of the frame 102.

[0046] An exploded perspective view of the carriage 110 is separately shown in Fig. 12. The carriage 110 includes a generally rectangular frame 250, a rectangular support platform 252, a padded upper platform 254, and a pair of shoulder stops 118. The frame 250 has upright side support plates 258, a vertical head end plate 260 and a vertical spring support plate 262, both of which are fastened to the side support plates 258. All of these plates 258, 260 and 262 are also fastened to the underside of the support platform 252 to provide a rigid carriage structure. The spring support plate 262 carries one end of each of the biasing springs 120. The other end of each spring 120 may be removably fastened to the anchor pins 148 in order to vary the resilient bias, i.e. spring tension between the carriage 110 and the foot end 106 of the frame 102. The side support plates 258 each support the platforms 252 and 254 and provide mounting flanges for support wheels 210 and guide wheels 212. The head end plate 260 has a pair of spaced openings 264 therethrough which act as guides for the arm cords (not shown in Fig. 12).

[0047] The support platform 252 has a pair of shoulder stop supports 266 fastened to its upper surface. Each of these supports 266 has a vertical bore 268 therethrough and each supports a cross pin 270 (shown in Fig. 15) therein that fastens the stem 272 of the shoulder stop 118 to the carriage 110. The bore 268 extends through

the support 266 and through the support platform 252.

[0048] Fig. 15 is a partial vertical sectional view through the carriage 110 with the padded upper platform 254 not shown. As can be seen in this view, the cross pin 270 acts as a pivot for the shoulder stop stem 272. A bias device 274 such as a flexible rubber tube positioned against the stem 272 provides a spring force against the stem 272 to maintain the stem 272 oriented vertical and flush with the left side of the bore 268. However, when a user pulls on the top of a shoulder stop 118 toward the foot end of the frame 102, (as is shown) the stop rotates about the cross pin 270, compressing the bias device 274, and pushing a bottom end 276 of the stem 272 toward the head end of the frame 102 (to the right in Fig. 15).

[0049] A bottom plan view of a head end portion of the carriage 110 is shown in Figs. 13 and 14. These two views illustrate the configuration of the cord retraction mechanism 280 in accordance with an embodiment of the present disclosure. The arm cords 114 are not shown in this view for clarity. The cord retraction mechanism 280 includes, for each cord 114, a spring biased reel housing 282 fastened to the support plate 252, a spring biased cord reel 284 rotatably carried in the housing 282, and a toothed plate latch arm 286 rotatably fastened to the underside surface of the support plate 252 adjacent to the reel housing 282.

[0050] As is shown in Figs. 13 and 14, the two housings 282 of the cord retraction mechanism 280 are mounted side by side against the underside surface of the platform 252. The two latch arms 286 are preferably plate members fastened for rotation about pivot pins 288 adjacent the reel housings 282 so that they can rotate in the plane of the underside surface of support platform 252. Each latch arm 286 is preferably an elongated plate shaped body having a toothed end 290 and an opposite linkage end 292. The latch arms 286 are preferably mirror images of each other such that the opposite linkage ends 292 of each latch arm plate 286 movably engage each other to link the latch arms 286 together under the support platform 252.

[0051] The toothed end 290 of each latch arm 286 engages corresponding notches of features in a rim of the adjacent cord reel 284 in the adjacent reel housing 282. The toothed end 290 of each latch arm 286 also has a hook 294 that engages with the bottom end 276 of the stem 272 of the shoulder stop 118. Fig. 13 shows the shoulder stops 118 in a normal position, and thus the bottom ends 276 of the stems 272 are not engaged with the hooks 294 of either latch arm 286. One or more springs (not shown) are used to bias both latch arms 286 into engagement with the reels 284. With the arms 286 in this position, the arm cords 114 cannot be retracted or extended from the reels 284. They are locked.

[0052] Fig. 14 shows the configuration when the left bottom end 276 of stem 272 of the right shoulder stop 118 is engaged with the hook 294 on the left latch arm 286. This causes the latch arm 286 to rotate clockwise about pin 288, pulling the toothed end 290 out of engage-

ment with the left reel **284** in Fig. **14**. At the same time, clockwise rotation of the left latch arm **286** caused counterclockwise rotation of the right latch arm **286** through the linked linkage ends **292**. This rotation similarly causes the toothed end **290** of the right latch arm **286** to rotate out of engagement with its adjacent reel **284**. Thus a user pulling either shoulder stop **118** toward the foot end **106** of the frame **102** will cause both of the latch arms **286** to disengage from the reels **284**, permitting a user to adjust either or both arm cord lengths as desired. Upon release of the shoulder stop **118**, the latch arms **286** re-engage the reels **284** to lock the reels and thus the arm cords **114** to the carriage **110**.

[0053] A retrofit arm cord retraction mechanism kit for a conventional reformer is also envisioned in accordance with the present disclosure. Such a kit would include appropriate installation instructions, two reel housings **282** with enclosed arm cord reels **284**, a pair of latch arms **286**, replacement shoulder stops **118**, two shoulder stop supports **266**, and a pair of pivot pins **288** for fastening the latch arms **286** to the carriage.

[0054] Figs. **16** and **17** illustrate an alternative cord retraction mechanism **300** mounted beneath the carriage **110** in accordance with the present disclosure. The arm cords **114** again are not shown in this view for clarity. The cord retraction mechanism **300** includes, for each cord **114**, a spring biased cord reel **302** that is mounted beneath the support plate **252** for rotation, in this embodiment, about a horizontal axle **304** supported from the support plate **252** between a bracket **306** and the carriage frame side support plate **258**. The cord reel **302** has a band brake portion **308** and a cord support portion **310**. One end of the cord **114** (not shown) is fastened to and wrapped around the cord support portion **310** of the reel **302**. As is shown in Figs. **16** and **17**, the two reels **302** of the cord retraction mechanism **300** are rotatably mounted side by side beneath the underside surface of the platform **252**.

[0055] Around the band brake portion **308** of each reel **302** is wrapped a cable **312** that has one end fastened to the support plate **252** and the other end fastened to one end **318** of a pair of crossed lever arms **314**. The other end **320** of each lever arm **314** is positioned to engage the bottom end **276** of the stem **272** of one of the shoulder stops **118** as in the previously described embodiment.

[0056] Similar to the previously described embodiment of the retraction mechanism **280**, the two lever arms **314** are preferably separate members each fastened for rotation about a separate pivot pin **322** and are crossed and rotatably fastened together in scissor fashion at a common pin **324** so that they can rotate about the pins **322** and **324** in a plane parallel to the underside surface of support platform **252**.

[0057] During normal reformer operation the end **318** of each lever arm **314** is under tension by as spring **326**. This spring **326** pulls the lever arm **314** toward the head end of the carriage **110** and thus pulls the cable **312** so

as to tighten the cable **312** around the band brake portion **308** of its reel **302** to prevent rotation of the reel **302**. When a user on the reformer **100** pulls (tilts) one of the shoulder stops **118** toward the foot end **106** of the reformer frame **102**, both of the lever arms **314** rotate in opposite directions about the pivot pins **322** and **324** so as to release tension on the brake cables **312** as is shown in Fig. **17**. When the brakes are thus released, a user can withdraw more cord **114** or permit an internal spring in the reel **302** to rotate the reel **302** and take up slack in the cord **114**. When the user releases the shoulder stop **118**, the springs **326** again pull on the cables **312** to stop rotation of the reels **302** and thus secure the cords **114** to the carriage **110**.

[0058] Again, a retrofit arm cord retraction mechanism kit for a conventional reformer is also envisioned in accordance with the present disclosure for this alternative retraction system **300**. Such a kit would include two retraction reels **302**, axles **304** and brackets **306**, band brake cables **312**, a pair of crossed lever arms **314**, springs **326**, replacement shoulder stops **118**, two shoulder stop supports **266**, and a pair of pivot pins **322** for fastening the lever arms **314** to the carriage **110**, and appropriate installation instructions.

[0059] In an optional configuration of the reformer carriage **110** in accordance with the present disclosure, an adjustable headrest may be integrated into the structure. A partial bottom view of the head end of this alternative embodiment of the carriage **110** is shown in Fig. **18**, **19**, **20** and **21**. In this embodiment, on top of the carriage frame **250**, the support plate **252** has a trapezoidal shaped extension portion **350** that extends toward the head end of the frame **102**. The padded upper plate **254** has the same overall shape as in the first embodiment shown in Fig. **12**, but is separated into a rectangular portion **352** and a head rest portion **354** by a transverse hinge **356** beneath the padding near the shoulder stops **118**.

[0060] An adjustable headrest support plate **358** is fastened to the support plate **252** under the head rest portion **354**. The extension portion **350** has an elongated vertical slot **357** therethrough preferably centered between the sides of the extension portion **350**. The support plate **358** has a transverse channel **360** therein that carries an L shaped headrest adjustment rod **362** sandwiched between the channel **360** and the extension portion **350**. Attached to the rod **362** is a cam block **364** that extends through the slot **357**. Rotation of handle portion of the rod **362** forces the cam block **364** to rotate against the hinged head rest portion **354**. As the cam block **364** is rotated by rotation of the rod **362**, the head rest portion **354** is moved between the positions shown in Figs. **19-21**. In particular, Fig. **19** shows the headrest portion **354** in a down position. Fig. **20** shows the headrest portion **354** in a first raised position, with the rod **362** rotated about 90 degrees counterclockwise. Fig. **21** shows the headrest portion in a second raised position with the rod **362** rotated an additional 90 degrees counterclockwise. In

this embodiment, cam block **364** provides three stable positions. Also, note that in Figs. **16** and **17**, the head rest adjustment rod (not numbered) is shown with two handle ends rather than only one as in Figs. **18-21**. Other configurations also are well within the scope of this disclosure. For example, the cam block **364** may be smoothly curved without flat portions for specific headrest elevations and the rod **362** may be configured to provide a frictional hold such that the headrest portion **354** may be held at any desired elevation. Alternatively, the cam block may be configured with four or more flat regions, each corresponding to a different raised height.

[0061] A perspective view of another embodiment of a reformer exercise apparatus **400** in accordance with the present disclosure is shown in Fig. **22**. The apparatus **400** has a generally rectangular frame **402** with a head end **404** and a foot end **406**. The ends **404** and **406** are spaced apart by a pair of rail members **408**. A carriage **410** is movably supported on the rail members **408** for movement back and forth between the ends **404** and **406** of the frame **402**.

[0062] A foot bar **411** is positioned near the foot end **406** of the frame **402**. This foot bar **411** is carried by the rail members **408** as will be described in detail below. The head end **404** of the frame **402** preferably supports a removable pair of spaced upright arm cord support risers **412**. These risers **412** direct arm cords **414** from the carriage **410** to cord end loops **416** or grips for a user's hands for use in various exercises. When not in use, the end loops **416** may be conveniently positioned on the shoulder stops **418** as shown in Fig. **22**. The carriage **410** is resiliently biased toward the foot end **416** of the frame **402** by one or more elastic members such as springs **420** (see Fig. **35**).

[0063] The exterior of the frame **402** has the same shape as frame **102** shown in Fig. **2**. Each of the head end **404**, the foot end **406** and the side rail members **408** has a similar outer surface shape that smoothly merge together.

[0064] A separate inside perspective view of the head end assembly **404** is shown in Fig. **23**. The head end assembly includes an end extrusion **500** that has leg portions **502** and a horizontal stepped support plate **421**. The external shape of the extrusion **500**, as in the first embodiment, includes an outer upright wall **422** merging with a horizontal top wall **424** which merges with a downwardly and inwardly slanted inner wall **426**. The inner wall **426** merges into a vertical skirt portion **428**. The vertical skirt portion **428** joins with the horizontal stepped support plate **421**.

[0065] Both the head and foot ends **404** and **406** have outer end plates **407** that mate with and are attached to the side rail members **408** via alignment pins **409** and threaded connections (not shown). The head end **404** extrusion **500** further includes vertical tubular bosses **506** adjacent the curved corners for receiving the risers **412**. A pair of threaded hand bolts **413** inserted from beneath secure the risers **412** into the bosses **506**. A standing

platform **415** is fastened over and onto the stepped support plate **421**.

[0066] Extending downward from each curved end of the extrusion **500** is a complementary shaped upright support leg **429**. These support legs **429** are used to place the ends **404** and **406** of the frame **402** on a planar surface such as a floor. The support legs **429** may be interchanged with longer or shorter support legs to change the height of the apparatus **400** above a floor support surface. A grip strip **417** is fastened to the outer lower edge of the outer wall **407** of the extrusion **500** to provide a rounded hand gripping edge for ease of carrying the head end of the reformer **400**.

[0067] Fig. **24** is a perspective view of a foot end assembly **406** of the frame **402**. The foot end assembly **406** is another extrusion **500** that has leg portions **502**, bosses **506** and a horizontal stepped support plate **421**. Two rows of spool shaped anchor pins **448** are fastened to the plate **421**. These pins **448** each can receive and hold a loop on one end of a spring **420** in order to fasten the spring **420** to the foot end **406** of the frame **402** while the other end of the spring **420** is fastened to the carriage **410**. Each of these pins **448** preferably tapers upward and inward from its base to a waist at a first angle from the pin's central axis and then outward at a second angle greater than the first angle so that the free end of a spring placed on the pin **448**, when under tension, is securely held at the waist of the pin **448**. This second angle is preferably at least twice that of the first angle.

[0068] The foot support bosses **506** are vertical tubes formed in the extrusion **500**. Each boss **506** receives a yoke **508** that fits on the top of the boss **506**. A rectangular standing platform plate **423** is pinned onto the yokes **508**. Finally a tubular receiver **510** fits through holes in the plate **423** and fits into the bosses **506** to secure the plate **423** to the extrusion **500**. A set of bolts **512** fasten each receiver **510**, plate **423**, and yoke **508** to the boss **506**. The receivers **510** receive legs of a removable flat jump board platform (not shown).

[0069] A sectional view of a side rail member **408** is shown in Fig. **25**. Each rail member **408** is preferably an aluminum extrusion assembly having an identical cross sectional shape. In this particular reformer embodiment **400** the rail member **408** is a composite extrusion formed by two separate extrusion portions: inner portion **417** and outer portion **419** that are joined together by rivets **514**. This construction of the side rail member **408** is particularly advantageous for at least two reasons. First, such a configuration is easier to extrude as two separate extrusions that are later joined. Second, the outer portion **419** may be finished differently than the inner portion **417**. Thus one version of the outer portion **419** may be either powder coated for durability and/or painted in selectable colors while the inner portion **417** is powder coated or otherwise finished for durability, since it is not in view. Furthermore, the inner portion **417** since it also contains the rolling surfaces and index rail feature for the foot bar **411**, may be separated and replaced if required due to

wear. The rail member **408**, as mentioned above, has an outer upright wall **422** that merges into a horizontal top wall **424** and then into a downwardly slanted inner wall **426** and then into a vertical skirt portion **428**. The end members **404** and **406** have the same exterior shape, but differ internally from the side rail members **408**.

[0070] As is shown in Fig. 25, each side rail member **408** has a vertical mid wall **430** between the slanted inner wall **426** and the upright outer wall **422**. The mid wall **430** has an outwardly facing upper longitudinally extending boss **432** and a lower outwardly facing longitudinally extending boss **434** parallel to the upper boss **432**. Together the mid wall **430**, the upper boss **432** and lower boss **434** form an outwardly open slot **436** therebetween. This slot **436** receives and carries one of the foot bar support assemblies therein as will be described in detail below. Between the mid wall **430** and the slanted inner wall **426** is an upper horizontal support wall **438**. The support wall **438** extends the length of the rail member **408** and provides torsional rigidity to the structure of the rail member **408**. Furthermore, this support wall **438** facilitates joiner between the inner and outer extrusion portions **417** and **419**. A horizontal bottom portion **440** of the mid wall **430** acts as a support for one set of wheels supporting the carriage **410**. The upper wall **438** serves also as an upper guide for the carriage support wheels on the rail members **408**. Furthermore, the mid wall **430** between upper and lower walls **438** and **440** and the skirt portion **428** serves as a lateral guide for the carriage **410**.

[0071] The upper boss **432** preferably has a vertical portion **442** that extends downward parallel to the mid wall **430**. This vertical portion **442** is used to provide lateral support for the foot support assembly described more fully below. Furthermore, the lower boss **434** may include a downwardly extending index rail **444**. Alternatively, the indexing rail **444** may be installed along the length of the rail member **408** by a separate, replaceable metal indexing rail carried in the boss **434**.

[0072] Finally, the inside of the outer portion **419** of the rail **408** includes three locating bosses **516**, **518** and **520**. These three locating bosses align with and receive the locating pins **409** projecting from the head and foot end assemblies **406** and **408**, shown in Figs. 23 and 24. These bosses help to ensure exact alignment between the rails **408** and ends **406** and **406** such that a smooth exterior frame surface is presented to a user of the apparatus **400**.

[0073] The foot bar **411** shown in Fig. 22 is the same as that shown in Fig. 5. The foot bar support assembly **470** is similar to but differs slightly from that shown and described above specifically with reference to Figs. 6, 7, 8, and 9. The foot bar **411** is part of a foot support assembly **470** that cannot be seen in Fig. 22. Referring now to inner and outer views of the foot support assembly **470** shown in Figs. 29 and 30, the connection portion **154** of the foot bar **411** is bolted or otherwise fastened to a bottom end **456** of an elongated foot bar support arm **458**. The arm **458**, best shown in Fig. 29, is an elongated flat

plate member that has an engaging pin **461** projecting outward from the upper end **460** of the arm **458**. The arm **458** further has a closed pivot slot **462** radially extending parallel to the leg portion **152** of the foot bar **411** and spaced from where the connection portion **154** of the foot bar **411** is attached to the arm **458**.

[0074] The foot support assembly of reformer **400** shown in Fig. 22 includes a left foot bar support assembly **470**, the foot bar **411**, and a right foot bar support assembly **470**. Figs. 29 and 30 are reverse perspective views of a right one of the foot bar support assemblies **470** in accordance with one embodiment of the present disclosure. Each leg **152** of the foot bar **411** is supported by one of the foot bar support assemblies **470**. As is best shown in Fig. 29, the assembly **470** includes the foot bar support arm **458** to which the foot bar **411** (not shown in Figs. 29 and 30) is attached, a slide portion **472** that rides in the slot **436** in the side rail member **408**, and a hook plate **474** which is rigidly fastened to the slide portion **472**. This hook plate **474** has a series of features, preferably slots or notches **476**, **478**, **480**, **482** and **484** spaced along the upper edge of the hook plate **474**. The pin **461** projecting outward from the upper end **460** of the foot bar support arm **458** fits within one of these notches **476-484** to position the foot bar **411** at a particular desired angular position with respect to the frame **402** of the reformer **400**.

[0075] The foot bar support arm **458** is slidably and pivotally attached to the hook plate **474** by a bolt **486** and square bushing **488**. A flat washer **489** on the bolt **486** holds the support arm **458** on the bushing **488**. The bushing **488** rides in the pivot slot **462**. Since the foot bar **411** is fastened to the arm **458**, when a user lifts the foot bar **411**, the support arm **458** rides up or down along the slot **462**. In turn, the pin **461** projecting outward from the upper end **460** of the support arm **458** is raised out of one of the slots along the upper edge of the hook plate **474**. When lifted out of its slot in this manner, a user can then rotate the foot bar **411** about the pivot bolt **486** to a different one of the slots **476**, **478**, **480**, **482** or **484** to reposition the foot bar **411**. When the foot bar **411** is lowered into a slot, the pin **461** slides down within one of the slots to fix the foot bar **411** in position.

[0076] The end slots or notches **476** and **484** have special significance in this embodiment **400** as in the first embodiment **100**. When the foot bar **411** has both its pins **461** positioned in slots **476**, the foot bar **411** is rotationally positioned slightly above, the upper surface of the frame **402** and beyond the foot end of the frame **402** as is shown in Fig. 39. In this position, the foot bar **411** may be used as a handle to lift the foot end of the reformer **400**. To ensure that the foot bar **411** does not disengage from this slot **476**, the terminal end of the slot **476** is hooked upward, as can be seen in Fig. 29, so as to firmly engage with the pin **461** at the closed end of the slot **476**. To disengage the foot bar **411** from this slot **476**, the foot bar **411** must be pushed down and pulled rearward (away from the foot end) to align the pin **461** with the widened

slot entrance. The foot bar **411** may then be rotated up and lifted out of the slot **476** and repositioned in a different one of the slots **478**, **480**, **482** and **484**.

[0077] The forward most slot **484** in the hook plate **474** is used to position the foot support assembly comprising each of the assemblies **470** and the foot bar **411** together for translation along the rail members **408**. As the foot bar **411** is raised and is rotated clockwise, as seen in Fig. **29**, the arm **458** is rotated about the bolt **486** clockwise until the pin **461** engages a protruding surface **492** at the forward end (toward head end **404**) of the hook plate **474**. In this position, a shoulder **494** on the support arm **458** engages with a latch pin **496** that projects through a slot **498** in the hook plate **474**. The latch pin **496** projects through the hook plate **474** from a latch arm **530** best seen in Fig. **30**. When the foot bar **411** is then lowered, the shoulder **494** of the arm **458** pushes the latch pin **496** down.

[0078] Latch arm **530** is an elongated bar that has one end rotatably fastened to the inside face of the hook plate **474**. The latch arm **530** can rotate in a plane parallel to the inside surface of the hook plate **474**. The other end of the latch arm **530** has an upwardly hooked latch portion **532** that engages a complementary shaped indexing feature in the rail member **408** in order to latch the assembly **470** at a selected position along the rail member **408**. The latch arm **530** is spring biased upward via flat spring member **534** to maintain the latch portion **532** of the latch arm **530** engaged with the indexing feature of the index rail **444** in the rail member **408**.

[0079] When the foot bar **411** is positioned with pins **461** in the slots **484**, and the foot bar **411** is pushed downward to fully seat the pins **461** at the bottom of slots **484**, the latch pins **496** are also pushed downward, rotating the latch arm **530** and moving latch portion **532** out of engagement with the indexing feature of the index rail **444** in the rail member **408**. With the latch portions **532** disengaged with the rail members **408**, the foot bar **411** may be moved toward or away from the foot end **406** of the frame **402** via the rollers **536**. In fact, the foot bar **411** may be moved fully to the opposite end of the rail members **408** if desired.

[0080] The slide assembly **472** is best seen in the view of Fig. **30** which is an opposite perspective view of the foot bar support assembly **470** shown in Fig. **29** that is carried in the right side rail member **408**. The slide assembly **472** includes an elongated slide plate **538** that is preferably bolted or otherwise fixed to the hook plate **474**. This slide plate **538** rides in the slot **436** in the rail member **408** with the hook plate **474** and adjacent foot bar support arm **458** disposed within the free/open space between the outer wall **422** and mid wall **430** of the rail member **408**. It is to be understood that another, mirror image foot support assembly **470** is disposed in the other (left) rail member **408**.

[0081] Turning back now to Fig. **30**, the slide plate **538** is supported in the slot **436** by front and rear support rollers **536** that roll along the bottom surface of the slot

436. A guide roller **540** that rotates about a vertical axis through the slide plate **538** is mounted preferably adjacent to each support roller **536**. The guide rollers **540** roll along inner side surfaces of the slot **436** in the rail member **408** to guide the support assembly **470**, and thus the foot bar **411**, as it is translated (i.e., rolled) fore and aft along the rail members **408**.

[0082] The support rollers **536** are preferably bearing supported polymer wheels rotatably supported on horizontal axles. The polymer wheels are sized to fit and smoothly roll within the slot **436**. The guide rollers **540** may be nylon or other polymer rollers supported by a vertical axle in the slide plate **538**. In this embodiment **400**, the guide rollers **540** may be roller bearings mounted in recesses along the upper edge of the slide plate **538**.

[0083] The slide plate **538** also has a spring loaded locating ball **542** mounted in a recess behind the j shaped indexing member **544** utilized as described above with reference to the first embodiment. The spring loaded locating ball **542** provides a user with tactile feedback when moving the foot bar **411** back and forth along the rails **408** between various predetermined positions, by projecting into corresponding depressions that optionally may be provided along the rail **408**.

[0084] A low friction layer **546** of polymer sheet material (shown in Fig. **29**) is affixed to the outer surface of the hook plate **474** between the hook plate **474** and the support arm **458**. This layer, as in the first embodiment **100**, reduces any friction between the arm **458** and the plate during rotation of the foot bar **411** between the notches **476**, **478**, **480** **482** and **484**. Alternatively, the low friction layer **546** may be applied to the facing surface of the arm **458**. To further reduce friction, a low friction layer **546** may optionally be applied to both of these facing surfaces.

[0085] A removable pull pin **548** may optionally be inserted through aligned bores in the arm **458** and the plate **474** when the foot bar **411** is in the high position, i.e., slot **480**. Insertion of pull pin **548** will lock the foot bar **411** in place and prevent it from being repositioned. The purpose of this is so that the foot bar **411** can act as a support brace when the reformer **400** is vertically positioned on its foot end **406**. This facilitates vertical storage of a number of reformers **400** in a relatively confined space.

[0086] When the foot bar **411** is securely positioned with pins **461** seated in slots **484**, the whole foot bar assembly **411** can slide/roll back and forth along the side rails **408**. The plate **474** is preferably also provided with a hole **549**. This hole **549** can be used to store the pull pin **548** when not being used. In addition, this hole **549** may be used to attach an elastic or spring resistance member (not shown) between the carriage **410** and the foot bar **411** support plate **474** or between the foot end **404** and the support plate **474**. Such a resistance member can provide a resistance to translational movement of the foot bar **411** support assembly **470** by a user when the foot support arm **458** is engaged in slot **484**. In this configuration the foot bar **411** may be used to provide

additional resistances experienced by a user during performance of various movements while being supported on the carriage **410**. Such a spring or other resistance member, such as an elastic cord, may be attached for this purpose between the carriage **410** and a suitable feature at a different location on the assembly **470** or to the foot bar **411** itself. For example, such a resistance member may be attached to the connection portion **154** of the foot bar leg portion **152**.

[0087] Referring back to Fig. 22, at the head end **404** of the reformer apparatus **400** there are two spaced apart arm cord risers **412** for directing arm cords **414** from the carriage **410** to the head end **404** and then to the arm cord end loops **416**. A separate perspective view of a riser **412** is shown in Fig. 26 and an exploded assembly view is shown in Fig. 27. In this embodiment **400**, the riser **412** has no bottom pulley configuration as is utilized in riser **112**. Instead, preferably a pulley and roller assembly **550** is inserted into the upper end of the riser tube **552**. This pulley and roller assembly includes a support housing **554** that supports laterally spaced apart vertical rollers **556** that rotate about parallel vertical axes fastened into the housing **554**, and a pulley **558** mounted between and below the rollers **556** on a horizontal axle **560**. Each of the rollers and the pulley **558** is supported on its respective axle between pairs of ball bearings mounted in the support housing **554**.

[0088] Each of these riser tubes **552**, preferably includes two vertically aligned elongated openings **562** and **564** adjacent its upper end through which the arm cord **414** is passed. The pulley and roller assembly **550** slides into upper end of the riser tube **552** and is fastened in place with two screws **566**. When properly positioned in the tube **552**, the vertical rollers **556** are alongside the upper opening **562**. The pulley wheel **558** is centered between the two openings. The arm cord **414** is threaded through the upper opening and down around the pulley wheel **558**, and out through the lower opening **564** to the carriage **410** as is shown in Fig. 26.

[0089] An annular collar **568** is fastened around the lower end portion of the tube **552** via screws **570**. This collar **568** is sized to snugly fit within the open upper end of the boss **506** of the head end extrusion **500** as is shown in the cutaway view in Fig. 28. A threaded expansion plug **572** is press fit into the bottom end of the riser tube **552**. This threaded expansion plug **572** engages with the threaded hand bolt **413** (Figs. 23, 28). When the hand bolt **413** is tightened, the riser **412** is pulled down into the boss **506** to secure the riser **412** in place. The riser tube **552** may alternately be made of different lengths such that different length risers **412** may be selected for different users. Finally, the lower opening **564** in the riser tube **552**, besides passing the cord **414** therethrough, is used to receive part of a bracket **700** (an example of which is shown in Fig. 31) to removably hold the riser **412** beneath the head end of the carriage **410** during storage as is shown in Fig. 39.

[0090] The carriage **410** is separately shown in Figs.

31 and **32**. An underside separate perspective view of part of the carriage **410** is separately shown in Fig. 31. An underside view of the upholstered upper platform **574** is separately shown in Fig. 32. The carriage **410** includes a generally rectangular frame **576**, a rectangular support platform **578**, the upholstered upper platform **574**, and a pair of shoulder stops **418**. The frame **576** has upright side support plates **580**, a vertical head end plate **582** and a vertical spring support plate **584**, both of which are fastened to the side support plates **580**. All of these plates **580**, **582** and **584** are also fastened to the underside of the support platform **578** to provide a rigid carriage structure. The upper side of the platform **578** includes shoulder stop supports **594** (See Fig. 34) as in the first embodiment of the carriage **110** shown in Fig. 12.

[0091] The spring support plate **584** carries one end of each of the biasing springs **420**. The other end of each spring **420** may be removably fastened to the anchor pins **448** in order to vary the resilient bias, i.e. spring tension between the carriage **410** and the foot end **406** of the frame **402**. The side support plates **580** support the platforms **574** and **578** and provide mounting flanges for support wheels **586** and guide wheels **588**. The head end plate **582** has a pair of spaced openings **590** therethrough which act as guides for the arm cords **414** (not shown in Fig. 31). A pair of elongated slots **592** are also formed in the head end plate **582**. These slots **592** are shaped to receive the stems of the shoulder stops **418** when the shoulder stops **418** are removed and attached to the carriage **410** for storage as is shown in Fig. 39.

[0092] The support platform **578** has a pair of shoulder stop supports **594** fastened to its upper surface (as is shown in Fig. 34). Each of these supports **594** has a pair of vertical bores **596** and **598** therethrough. Vertical bore **596** has an oval cross section supports a cross pin **600** on the stem **602** of the shoulder stop **418**. Operation of the shoulder stop **418** is identical to that of the shoulder stop **118** of the first embodiment **100**, as shown in Fig. 15.

[0093] Fig. 33 is a perspective view of the shoulder stop **418**. Note that the stem **600** is offset from the axial centerline through the shoulder stop **418**. Referring now to Fig. 34, a partial upper view of the upper platform of the carriage **410** is shown. Each of the shoulder stop supports projects through and is flush with the top of the upper platform **574**. The inboard bores **598** are circular in cross section. Thus, when the stems **600** of the shoulder stops **418** are placed in these bores **598** the shoulder stops **418** cannot rotate as was the case in the first embodiment **100** described above and shown with reference to Fig. 15. However, when one, or both, shoulder stops **418** are located in the outboard bores **596**, they can be tilted toward the foot end **406** just as described with reference to Fig. 15 in the first embodiment **100**.

[0094] In this embodiment of the reformer **400**, not only does a user have an option of rotating the shoulder stops **418** when inserting them into the bores **596** to accommodate different shoulder widths, one or both shoulder stops **418** may be inserted in the inner bores **598** to pro-

vide further width adjustment. If both shoulder stops **418** are located in the inner bores **598**, then no adjustment of the arm cords **414** can be made. This is called the lockout position. However, if either one or both shoulder stops **418** are placed in the outer bores **596**, then adjustment of the arm cords **414** may be made with that shoulder stop in an outer bore **596**.

[0095] A partial perspective view of the bottom of the carriage **410**, removed from the reformer **400**, is shown in Fig. **35**. In this view the springs **420** are shown attached to the spring support plate **584**. An exemplary arm cord **414** is shown threaded through the guide hole **590** and into the cord retraction mechanism **610**.

[0096] A bottom plan view of a head end portion of the carriage **410** is shown in Figs. **36** and **37**. These two views illustrate the configuration and operation of the cord retraction mechanism **610** in accordance with this embodiment of the present disclosure. The arm cords **414** are not shown in this view for clarity. The cord retraction mechanism **610** includes, for each cord **414**, a spring biased cord reel **612** that is mounted beneath the support plate **578** for rotation about a horizontal axis and is supported from the carriage frame side support plate **580**. The cord reel **612** has a coil spring portion **614** and a cord support portion **616**. One end of the cord **414** (not shown) is fastened to and wrapped around the cord support portion **616** of the reel **612**. As is shown in Figs. **35**, **36** and **37**, the two reels **612** of the cord retraction mechanism **610** are rotatably mounted side by side beneath the underside surface of the platform **578**.

[0097] The coil spring portion **614** is bolted to or integral with the cord support portion **616** and preferably carries within it a coil spring (not shown) that provides a takeup preload tension on the cord **414** when its end is fastened to the cord support portion **616** of the reel **612**. The retraction assembly **610** also includes a unique spring loaded cord clamp assembly **618** fastened to the support platform **578** that is operably coupled to an actuator linkage **620**, which is, in turn, actuated by either one of the shoulder stops **418** when installed in the appropriate bore **596**.

[0098] The actuator linkage **620** is carried on an elongated flat plate **622** that is fastened to the support plate **578** via fasteners **624** and spans between the two side support plates **580** directly beneath the shoulder stops **418** and over the bores **596** and **598**. Each end of the flat plate **622** has an elongated opening **626** aligned with a bore **596** and a circular opening **628** aligned with the bore **598**. Pivotaly carried side by side on the linkage plate **622** are a pair of T shaped links **630**. Each T shaped link **630** pivots in the plane of the support plate **578** about the center of the head **632** of the link **630** on a pin **634** fastening the link **630** to the plate **622**. One end **636** of the head **632** of each of the links **630** is positioned to engage a stem **600** of the shoulder stop **418** inserted into bore **596**. The other end **638** of the head **632** of the T shaped link **630** couples with a corresponding end **638** of the other link **630**. The ends **638** of the two links **630** are preferably also coupled together by a coil spring **640**.

Each T shaped link **630** includes an elongated leg **642**. The end of this elongated leg **642** resides adjacent one of the clamp assemblies **618**.

[0099] The clamp assembly **618** comprises a pair of clamp members **650**, the outer one of which is fixed to the support plate **578** by two fasteners **652** and **654**. The inner clamp member **650** is rotatably fixed to the support plate **578** by a fastener **652** in a laterally spaced relation to the fixed member **650**. Each clamp member has a cord grip portion **656** and an opposite elongated arm portion **658**. The arm portion **658** of the inner clamp member **650** is positioned adjacent the leg **642** of the link **630**. A coil spring **660** fastens the grip portion **656** of the inner clamp member **650** to the fixed outer clamp member **650** such that the grip portion of the inner clamp member **650** is biased toward the grip portion of the fixed outer clamp member. A flat plate **662** is optionally fastened over the clamp members **650** in each assembly **618** between the fastener **652** and the clamp member **650**. Finally, a pair of cord guides **664** is preferably fastened to the support plate **578** and positioned between the link assembly **620** and the reel **612** such that the cord **414** must pass through the hole **590** in the head end plate **582**, through a cord guide **664**, between the clamp members **650**, through another cord guide **664**, to the cord retraction reel **612** as is shown in Fig. **35**.

[0100] The retraction assembly **610** is shown in a cord locked condition in Fig. **36**. In Fig. **37**, the assembly **610** is shown in an unlocked condition wherein one of the shoulder stops **418**, (the left one in Fig. **37**) has been tilted toward the foot end of the reformer frame **402**. In this view of Fig. **37**, the stem **600** of the left shoulder stop **418** pushes up on the end **636** of the link **630**. This movement causes the opposite end **638** of the link **630** to rotate downward clockwise. At the same time, the leg **642** must also rotate clockwise, rotating the arm portion **658** of the inner clamp member **650** counterclockwise. This action releases the arm cord **414** from the clamp members **650** and permits the tension in the left cord reel to be felt on the cord **414**.

[0101] At the same time, the other link **630** is caused to rotate counterclockwise about its pin **632**, which, in turn, causes its leg **642** to push against the arm portion **658** of the inner clamp member **650** of the other clamp assembly **618**, thus rotating the inner clamp member **650** clockwise. This clockwise rotation of the inner clamp member **650** disengages the clamp member **650** from the other arm cord **414** such that the tension in the right cord reel **612** pulls on the other cord **414**. It can readily be seen, therefore, that tilting either one of the shoulder stops **418** that is in an outside bore **596** will cause the same result, a release of both clamp assemblies **618** on both of the arm cords **414**, allowing a user to independently adjust the length of each cord.

[0102] Again, a retrofit arm cord retraction mechanism kit for a conventional reformer is also envisioned in accordance with the present disclosure for this alternative retraction system **610**. Such a kit would include two re-

traction reels **612** and mounting hardware, two clamp assemblies **618**, link assembly **630**, replacement shoulder stops **418**, two shoulder stop supports **594**, and appropriate installation instructions.

[0103] In the reformer carriage **410** in accordance with the present disclosure, an adjustable headrest may be integrated into the structure. A bottom view of the upholstered upper support platform **574** is shown in Fig. **32**. The rigid base of the upper support plate has two separate sections **672** and **674** spaced apart and joined by a hinge **676**. Each section **672** and **674** may be made of plastic, composite material or wood. The section **672** also has apertures **678** for receiving the shoulder stop supports **594** therethrough as above described. The sections **672** and **674** are spaced apart by about $\frac{1}{4}$ inch so as to give clearance for bending the head end portion of the upholstered platform **574** as is shown with reference to the first embodiment in Figs. **19-21**. However, in this reformer **400**, there is no cam block **364**. Instead, as shown in Fig. **32**, an elongated adjustment lever **680** is fastened to the underside of the head end section **674**. This lever **680** rotates about a fastener **682** secured to the underside of the head end section **674**. The lever **680** has one end **684** bent at 90 degrees from the plane of the platform **574**. This bent end **684** projects through a slot **686** in the support plate **578** as shown in Fig. **38**. The bent end **684** has a series of notches **688** for adjusting the height of the head end section **674**. The opposite end of the lever **680** may have a knob **690** fastened thereto for rotating the lever **680** out of and into engagement of the notches **688** with a corresponding flange of the head end support plate **582**.

[0104] The reformer **400** of this present disclosure may be configured so as to be easily stacked for stacked storage. Each of the feet **429** include recessed portions designed to fit onto the outer corner rim of an underlying reformer **400**. The bottom of each foot **429** that facilitates stacking of one apparatus on top of another has a recessed portion. Stacking is facilitated through engagement of the outer corners of the head end of the reformer and outer corners of the standing platform at the foot end of the reformer into the recessed portions in each foot as is shown in Fig. **39**. When two or more reformers **400** are so stacked they are securely held laterally in place by these feet **429**.

[0105] Furthermore, the risers **412** are removed from the head end **404** and fastened to one of the brackets **700** (see Fig. **31** and Fig. **40** below). Each of the shoulder stops **418** is removed and the stems **600** passed through the shoulder stop slot openings **592**, turned 90 degrees so that the pins **602** engage the head end support plate **582**.

[0106] An underside perspective view of the head end of the carriage **410** is shown in Fig. **40** showing the risers **412** and shoulder stops **418** spaced from these holding features. These holding features are slots **592** in the head end plate **582** and spring brackets **700**. The spring brackets **700** resiliently snap within the lower openings **564** to

hold and retain the riser **412** in place without marring or otherwise damaging the exterior finish of the riser **412**.

[0107] When the risers **412** and shoulder stops **418** are mounted beneath the carriage **410** as shown in Figs. **39** and **40**, the carriage **410** may be positioned fully at the head end of the frame **402**, and an optional mat conversion pad **702** may be placed between the carriage **410** and the standing platform **423** to provide a fully flat mat surface. This mat conversion places the carriage **410** in a stationary position at the head end **404**, and presents to the user a full flat surface.

[0108] The reformer **400** may optionally also be configured with a trapeze tower assembly **800** as is shown in Fig. **41**. The tower assembly **800** basically comprises a U shaped tower **802**, a trapeze swing **804**, and a pair of tower sockets **806**. The tower sockets **806** are fastened between the rail members **408** and the head end extrusion **500** of the head end **404** and become an integral part of the frame **402**. The bottom ends of the tower **802** fit within the sockets **806** and are drawn into the sockets **806** as is shown in more detail in Fig. **43**.

[0109] The tower **802** is preferably a tubular metal body such as aluminum or steel and may either be bent to the shape as shown in Fig. **41**, or may be formed from straight sections joined by conventional 90 degree elbows. The tower **802** has a plurality of spaced eyebolts **808** for attaching springs, straps, or pulleys **810** as may be needed for particular exercises. Alternatively the vertical legs of the tower **802** may have a vertical slot and adjustable clamp fittings provided therein for anchoring the springs, pulleys **810**, or eyebolts **808** thereto.

[0110] In addition, the risers **412** may be utilized or replaced with a U shaped connector assembly **818** so that a pulley **810** may be fastened thereto. This U shaped connector assembly **818** fits within the boss **506** in the head end extrusion **500**, and is bolted in place as shown in Fig. **44**, or alternatively may be configured to be fastened with the same hand bolt **413** as is used to secure the riser **412** in place as is shown in Fig. **28**. When the connector assembly **818** is utilized in place of the riser **412**, then a second pulley **810** (not shown) could be fastened to the assembly **818** and used as a lower arm cord guide directing the arm cord from the carriage **410** to the lower pulley and through the upper pulley **810** to the hand loop as in the embodiments **100** and **400** shown in Figs **1** and **22**.

[0111] A tower socket **806** is shown mounted on the head end of one of the side rail members **408** in Fig. **42**. The tower socket **806** is a metal extrusion, preferably aluminum, that has a tube portion **820** and an axially extending radial flange portion **822**. The flange portion **822** has a thickened edge **824** and a plate portion **826** that is identically shaped to fit against end plate **407** of the head end extrusion **500** and against the end of the side rail member **408**. Locating pins **409** orient the flange portion **822** with respect to the rail member **408** and the end plate **407**, and nuts (not shown) are used on bolts **828** to fasten the head end **404** and the socket **806** securely to the side

rail member **408**.

[0112] Fig. **43** is a cutaway view of an assembled tower **802** fastened in a socket **806**. In a fashion similar to that described above with reference to risers **412** being fastened into the bosses **506**, the bottom end of the tower **802** is fitted with a threaded expansion plug **830**. A hand bolt **832** extending into the bottom of the tube portion **820** threads into the plug **830**. When tightened, the expansion plug **830** draws the bottom end of the tower **802** down tightly into the socket **806** to complete the assembly of the tower **800** to the frame **402**.

[0113] Alternatively, the bottom ends **850** of a tower **820** may be narrowed and shaped so as to telescopically fit within the bosses **506** in the head end extrusion **500** as is shown in the perspective view of this alternative in Fig. **45**. This construction would preclude the need for tower sockets **806**. In such an alternative, shown in Fig. **45**, a hand bolt **832** would be again used to draw the bottom ends **850** of the tower **820** tightly into the bosses **506** just as the risers **412** were fastened into the bosses **506** above described. In such an alternative configuration, of course, the risers **412** are not used. Instead, the arm cords **414** would each be attached to a pulley **810**.

[0114] Turning now to FIG. **46**, an exemplary handle end portion **880** of an arm cord **114**, **414** is shown attached to a hand strap **900**. End portion **880** is turned back on itself to form a flexible eye **882**. The free end **884** of the end portion **880** is sewn or otherwise permanently secured to the end portion **880** to form the eye **882**. This eye **882** replaces the need for a conventional metal or plastic snap clip for connection to a conventional hand grip.

[0115] The hand strap **900** has a looped strap portion **902** sewn to ends of a short length of arm cord material to form a flexible cord ring **904** attached to the strap portion **902**. The flexible cord ring **904** is attached to the eye **882** by passing the ring **904** over the eye **882** and then threading the strap portion **902** through the ring **904**. The result is the hand strap **900** fastened to the arm cord **114**, **414** essentially in a square not configuration as is shown in FIG. **46**. The arm cords **114**, **414** with hand strap **900** attached in this manner can be utilized with any conventional reformer or other exercise apparatus utilizing arm/foot cords as well as with the reformer **100**, **400** of the present disclosure.

[0116] A hand grip **910** is shown in FIG. **47** that has a tubular handle **912**. This grip **910** may be utilized in place of hand strap **900**. Again, the hand grip **910** preferably has a flexible cord ring **904** as described above to fasten the hand grip **910** to the end portion **880**. Alternatively, a standard hand grip may be used that includes a metal D ring fastened to the hand grip **910** in place of the cord ring **904**.

[0117] The reformer **100** or **400** may be configured with a jump board **950** as is shown in FIG. **48**. This jump board **950** is a generally rectangular plate structure with two parallel posts **952** that fit down into the inserts **510** in the bosses **506** in the foot end **106**, **406**. These posts **952**

each have a rectangular or square cross sectional shape as is shown in the sectional partial view of FIG. **49**.

[0118] Each post **952** includes a pair of spaced leaf springs **954** that bias the post **952** counterclockwise in the insert **510** so that there is a preload on the jump board **950** effectively away from the carriage **110**, **410**. This preload prevents rattle and rotational movement of the jump board in response to a user's applied force on the jump board during an exercise. This configuration presents a firm, solid feel to the user of the jump board as it is installed and used.

[0119] In FIG. **48**, note that the foot bar **411** is shown positioned adjacent the head end **404** of the frame **402**. Furthermore the foot bar **411** support assemblies **470** are shown in the free rotational position in which pins **461** are engaged in slots **484** as described with reference to FIGS. **29** and **30**. When the foot bar **411** is thus positioned to be movable between the head and foot ends **404** and **406** of the frame **402**, an elastic resistance member **956** may be fastened to the connection portions **154** of the leg portions **156** of foot bar **411** and stretched around the head end **404** of the frame **402** as is shown in FIG. **48**. With the foot bar **411** configured in this manner, a user can sit or lay on the carriage **410**, grasp the leg portions **156** of the foot bar **411** and pull the foot bar **411** toward the carriage **410** against the resistance provided by resistance member **956**.

[0120] Alternatively, the user can rotate the foot bar **411** to the vertical position, lower the foot bar **411** to engage pins **461** in notches **482**, which locks each support assembly **470** in place on the rail members **408**. Then the user can pull the carriage **410** toward the head end **404** with his or her arms. It is to be understood that the resistance member **956** may be two separate members each separately connected to the head end **404**, or may be a single resistance member as is illustrated in FIG. **48**. Furthermore, the above description applies equally well to the first embodiment, reformer apparatus **100** described above with reference to FIGS. **1-21**.

[0121] These are only exemplary embodiments and variations. A reformer exercise apparatus in accordance with the present disclosure may incorporate one or more or any of the features described herein. Other modifications will be readily apparent to one skilled in the art. For a simple example, any of the coil springs shown in the drawing figures may be replaced by stretchable elastic members and vice versa. For another, the holding features for accommodating the risers **412** and shoulder stops in storage positions beneath the upper surface of the reformer carriage **410** may differ from clips **700** and slots **592**. The risers **412** may fit within corresponding openings (not shown) in plate **582** or on pins projecting from plate **582**. The reformers **100**, **400** may be configured with short legs as shown in FIG. **48**, or longer legs as shown in at least FIGS. **1** and **22**. Accordingly, all such alternatives, variations and modifications are intended to be encompassed within the scope of and as defined by the following claims.

Claims

1. An arm cord support riser (112) for use on a reformer exercise apparatus having a generally rectangular frame supporting a carriage for movement between a head end and a foot end of the frame on parallel spaced side rail portions of the frame, and a foot bar supported by the frame near the foot end, the arm cord support riser comprising:

a hollow elongated cylindrical tube (224) having a central axis and adapted to be mounted upright at the head end of the frame, the tube carrying a first pulley wheel (238) disposed therein near an upper end of the tube adjacent an exit opening from the tube, the first pulley wheel rotating about a horizontal axle carried in the tube;

characterised in that it further comprises

a guide (236) in the tube on each side of the exit opening adjacent the first pulley wheel for directing an arm cord out of the tube, wherein each guide rotates about an axis within the tube parallel to the central axis.
2. The arm cord support riser according to claim 1 wherein each guide is a roller rotatable about a vertical axis.
3. The arm cord support riser according to claim 1 wherein the exit opening is elongated to accommodate the arm cord passing around the first pulley wheel and out of the tube.
4. The arm cord support riser according to claim 3 further comprising a second pulley wheel disposed in the tube near a bottom end of the tube, for routing an arm cord into the tube, through the tube, around the first pulley wheel and out through the opening.
5. The arm cord support riser according to claim 1 further comprising another elongated opening aligned below the exit opening for entry of an arm cord therein.
6. A reformer exercise apparatus (100) comprising:

a generally rectangular frame (122) supporting a carriage for movement between a head end and a foot end of the frame on parallel spaced side rail portions of the frame;

a bias member (120) between the carriage and the foot end for urging the carriage toward the foot end of the frame;

 wherein the head end of the frame has a pair of spaced vertical bores each supporting a cord support riser (112) comprising:

a hollow cylindrical tube having a central axis and carrying a first pulley wheel (238) disposed therein near an upper end of the tube, the first

pulley wheel rotating about a horizontal axle carried in the tube;

characterised in that the riser further comprises

a guide (236) in the tube on each side of an exit opening adjacent the first pulley wheel for directing an arm cord out of the tube, wherein each guide rotates within the tube about an axis parallel to the central axis, wherein the cord support riser (112) is according to claim 1.

7. The apparatus according to claim 6 wherein each guide is an elongated cylindrical roller rotatable about the axis parallel to the central axis.
8. The apparatus according to claim 6 wherein the exit opening is elongated to accommodate the arm cord passing around the first pulley wheel and out of the tube.
9. The apparatus according to claim 8 further comprising a second pulley wheel disposed in the tube near a bottom end of the tube, for routing an arm cord into the tube, through the tube, around the first pulley wheel and out through the opening.
10. The apparatus according to claim 6 further comprising another elongated opening aligned below the exit opening for entry of an arm cord therein.

Patentansprüche

1. Armseilstützsteiger (112) zur Verwendung auf einem Reformer-Übungsgerät mit einem im Allgemeinen rechteckigen Rahmen, der einen Schlitten für die Bewegung zwischen einem Kopfende und einem Fußende des Rahmens auf parallel beabstandeten Holmentellen des Rahmens stützt, und mit einer Fußleiste, die durch den Rahmen in der Nähe des Fußendes gestützt wird, wobei der Armseilstützsteiger umfasst:

ein zylinderförmiges längliches Hohlrohr (224), das eine Mittelachse aufweist und eingerichtet ist, um am Kopfende des Rahmens aufrecht montiert zu werden, wobei das Rohr ein erstes Scheibenrad (238) trägt, das darin in der Nähe eines oberen Endes des Rohrs benachbart zu einer Ausgangsöffnung aus dem Rohr angeordnet ist, wobei sich das erste Scheibenrad um eine horizontale Achse dreht, die in dem Rohr getragen wird;

dadurch gekennzeichnet, dass er ferner umfasst:

eine Führung (236) in dem Rohr beiderseits der Ausgangsöffnung benachbart zu dem ersten

Scheibenrad, um ein Armseil aus dem Rohr zu lenken, wobei sich jede Führung innerhalb des Rohrs um eine Achse parallel zur Mittelachse dreht.

2. Armseilstützsteiger nach Anspruch 1, wobei jede Führung eine Rolle ist, die um eine vertikale Achse drehbar ist.
3. Armseilstützsteiger nach Anspruch 1, wobei die Ausgangsöffnung länglich ist, um das Armseil aufzunehmen, das um das erste Scheibenrad herum und aus dem Rohr geleitet wird.
4. Armseilstützsteiger nach Anspruch 3, ferner umfassend ein zweites Scheibenrad, das in dem Rohr in der Nähe eines unteren Endes des Rohrs angeordnet ist, um ein Armseil in das Rohr, durch das Rohr, um das erste Scheibenrad und durch die Öffnung hinaus zu führen.
5. Armseilstützsteiger nach Anspruch 1, ferner umfassend eine andere längliche Öffnung, die unter der Ausgangsöffnung ausgerichtet ist, damit durch diese ein Armseil eingeführt werden kann.
6. Reformer-Übungsgerät (100), umfassend:

einen im Allgemeinen rechteckigen Rahmen (122), der einen Schlitten zur Bewegung zwischen einem Kopfende und einem Fußende des Rahmens auf parallel beabstandeten Holmentellen des Rahmens stützt;
ein Ausrichtungselement (120) zwischen dem Schlitten und dem Fußende, um den Schlitten zum Fußende des Rahmens zu drängen;
wobei das Kopfende des Rahmens ein Paar von beabstandeten vertikalen Bohrungen aufweist, die jeweilseinen Seilstützsteiger (112) stützen, umfassend:

ein zylinderförmiges Hohlrohr, das eine Mittelachse aufweist und ein erstes Scheibenrad (238) trägt, das darin in der Nähe eines oberen Endes des Rohrs angeordnet ist, wobei sich das erste Scheibenrad um eine horizontale Achse dreht, die in dem Rohr getragen wird;

dadurch gekennzeichnet, dass der Steiger ferner umfasst:

eine Führung (236) in dem Rohr beiderseits einer Ausgangsöffnung benachbart zu dem ersten Scheibenrad, um ein Armseil aus dem Rohr zu lenken, wobei sich jede Führung innerhalb des Rohrs um eine Achse parallel zur Mittelachse dreht,

wobei der Seilstützsteiger (112) gemäß Anspruch 1 ist.

7. Vorrichtung nach Anspruch 6, wobei jede Führung eine längliche zylinderförmige Rolle ist, die um eine Achse parallel zur Mittelachse drehbar ist.
8. Vorrichtung nach Anspruch 6, wobei die Ausgangsöffnung länglich ist, um das Armseil aufzunehmen, das um das erste Scheibenrad herum und aus dem Rohr geleitet wird.
9. Vorrichtung nach Anspruch 8, ferner umfassend ein zweites Scheibenrad, das in dem Rohr in der Nähe eines unteren Endes des Rohrs angeordnet ist, um ein Armseil in das Rohr, durch das Rohr, um das erste Scheibenrad und durch die Öffnung hinaus zu führen.
10. Vorrichtung nach Anspruch 6, ferner umfassend eine andere längliche Öffnung, die unter der Ausgangsöffnung ausgerichtet ist, damit ein Armseil durch diese eingeführt werden kann.

Revendications

1. Montant de support de corde de bras (112) pour une utilisation sur un appareil d'exercice de remise en forme comprenant un cadre généralement rectangulaire supportant un chariot pour un mouvement entre une extrémité de tête et une extrémité de pied du cadre sur des parties de rail latérales espacées parallèlement du cadre, et une barre de pied supportée par le cadre près de l'extrémité de pied, le montant de support de corde de bras comprenant :

un tube cylindrique allongé creux (224) présentant un axe central et adapté pour être monté verticalement sur l'extrémité de tête du cadre, le tube portant une première roue de poulie (238) disposée dans celui-ci près d'une extrémité supérieure du tube adjacent à une ouverture de sortie du tube, la première roue de poulie tournant autour d'un essieu horizontal porté dans le tube ;

caractérisé en ce qu'il comprend en outre un guide (236) dans le tube sur chaque côté de l'ouverture de sortie adjacente à la première roue de poulie pour diriger une corde de bras hors du tube, dans lequel chaque guide tourne autour d'un axe dans le tube parallèlement à l'axe central.

2. Montant de support de corde de bras selon la revendication 1, dans lequel chaque guide est un rouleau rotatif autour d'un axe vertical.

3. Montant de support de corde de bras selon la revendication 1, dans lequel l'ouverture de sortie est allongée pour loger la corde de bras passant autour de la première roue de poulie et hors du tube.
4. Montant de support de corde de bras selon la revendication 3, comprenant en outre une seconde roue de poulie disposée dans le tube près d'une extrémité inférieure du tube, pour acheminer une corde de bras dans le tube, au travers du tube, autour de la première roue de poulie et hors du tube au travers de l'ouverture.
5. Montant de support de corde de bras selon la revendication 1, comprenant en outre une autre ouverture allongée alignée sous l'ouverture de sortie pour une entrée d'une corde de bras dans celle-ci.
6. Appareil d'exercice de remise en forme (100) comprenant :
- un cadre généralement rectangulaire (122) supportant un chariot pour un mouvement entre une extrémité de tête et une extrémité de pied du cadre sur des parties de rail latérales espacées parallèlement du cadre ;
- un élément d'inclinaison (120) entre le chariot et l'extrémité de pied pour pousser le chariot vers l'extrémité de pied du cadre ;
- dans lequel l'extrémité de tête du cadre présente une paire de trous verticaux espacés supportant chacun un montant de support de corde (112) comprenant :
- un tube cylindrique creux présentant un axe central et portant une première roue de poulie (238) disposée dans celui-ci près d'une extrémité supérieure du tube, la première roue de poulie tournant autour d'un essieu horizontal porté dans le tube ;
- caractérisé en ce que** le montant comprend en outre
- un guide (236) dans le tube sur chaque côté d'une ouverture de sortie adjacente à la première roue de poulie pour diriger une corde de bras hors du tube, dans lequel chaque guide tourne dans le tube autour d'un axe parallèlement à l'axe central,
- dans lequel le montant de support de corde (112) est selon la revendication 1.
7. Appareil selon la revendication 6, dans lequel chaque guide est un rouleau cylindrique allongé rotatif autour de l'axe parallèle à l'axe central.
8. Appareil selon la revendication 6, dans lequel l'ouverture de sortie est allongée pour loger la corde de bras passant autour de la première roue de poulie
- et hors du tube.
9. Appareil selon la revendication 8, comprenant en outre une seconde roue de poulie disposée dans le tube près d'une extrémité inférieure du tube, pour acheminer une corde de bras dans le tube, au travers du tube, autour de la première roue de poulie et hors du tube au travers de l'ouverture.
10. Appareil selon la revendication 6, comprenant en outre une autre ouverture allongée sous l'ouverture de sortie pour une entrée d'une corde de bras dans celle-ci.

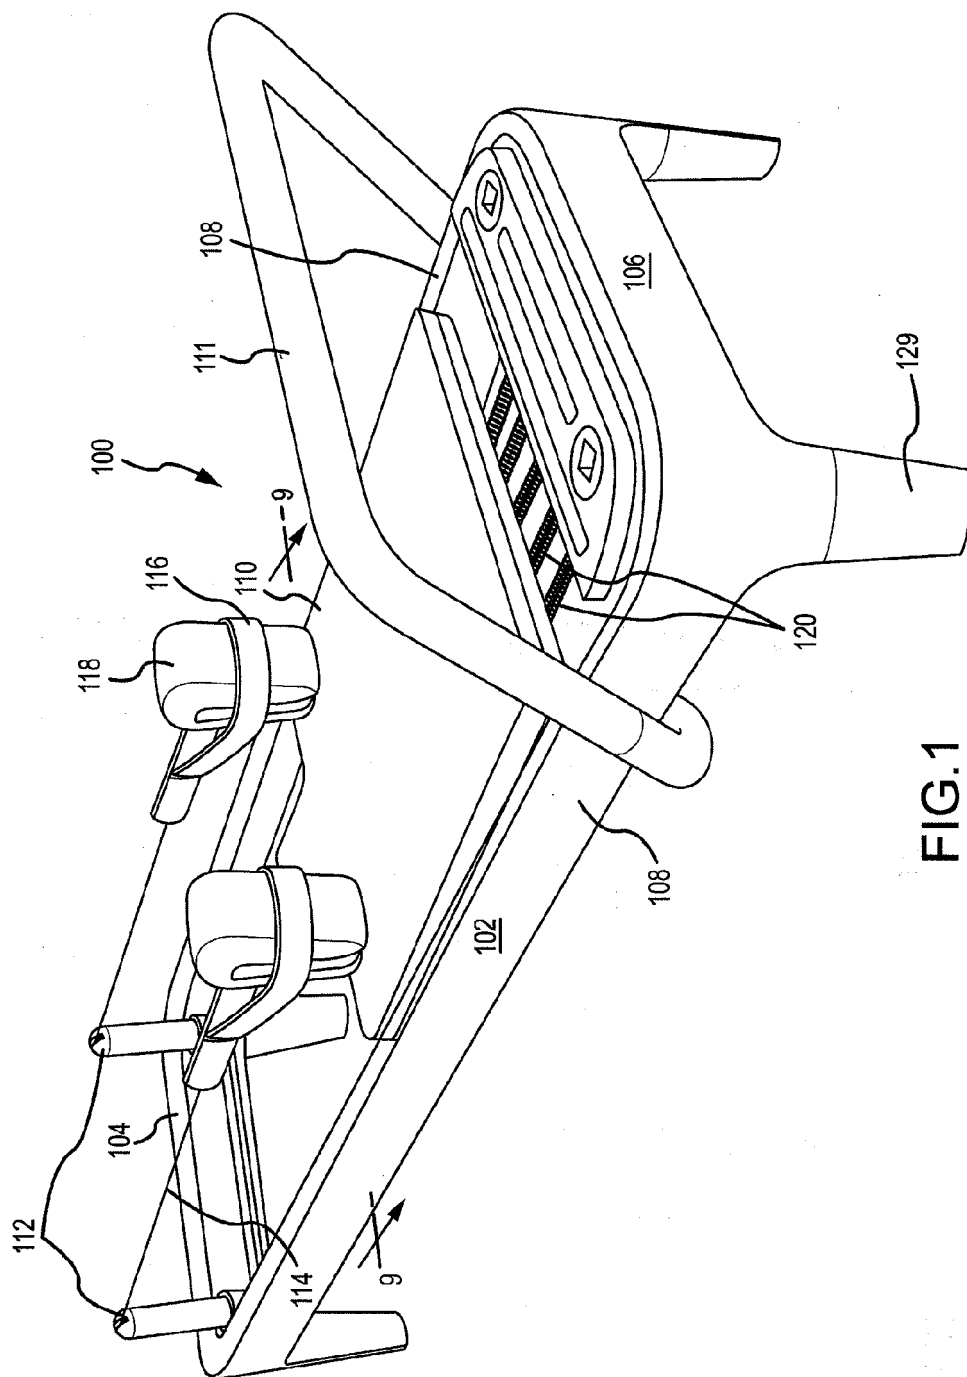


FIG.1

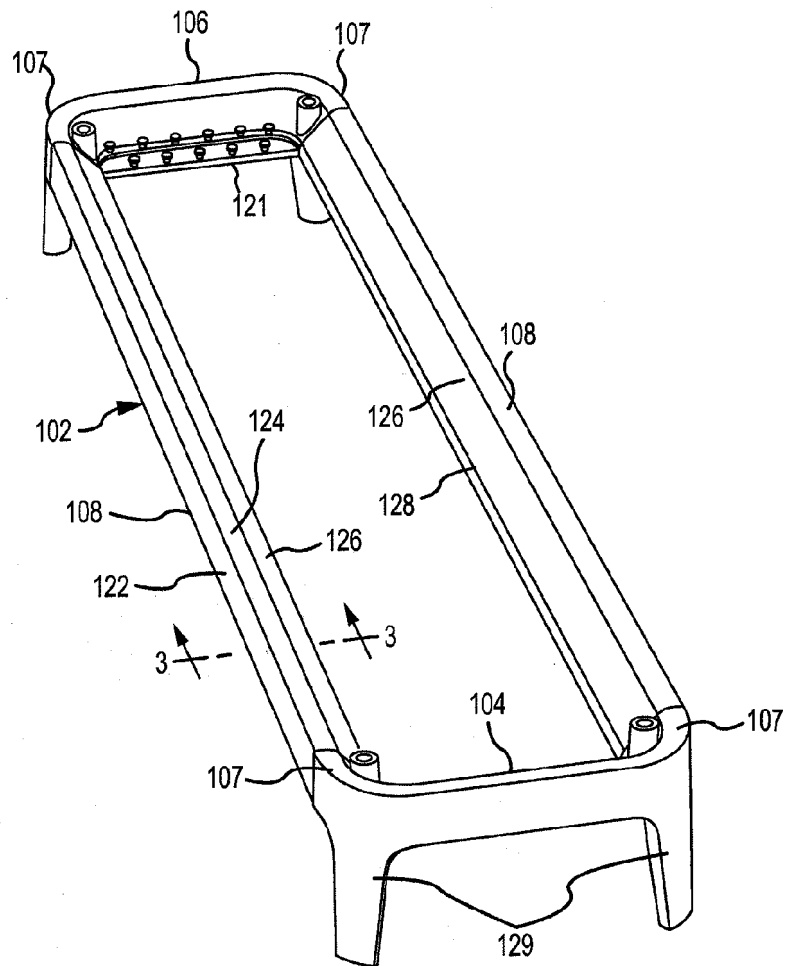


FIG.2

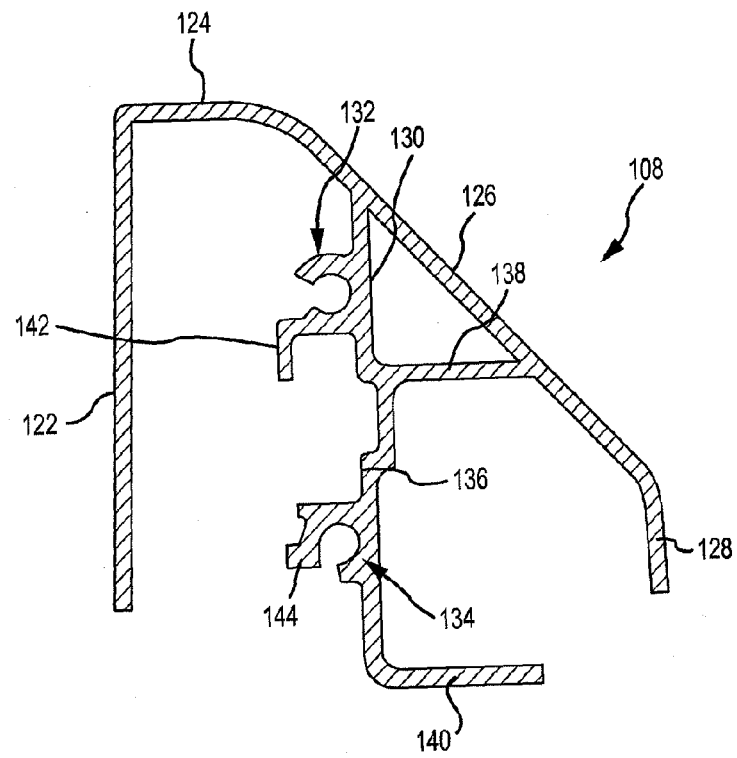


FIG.3

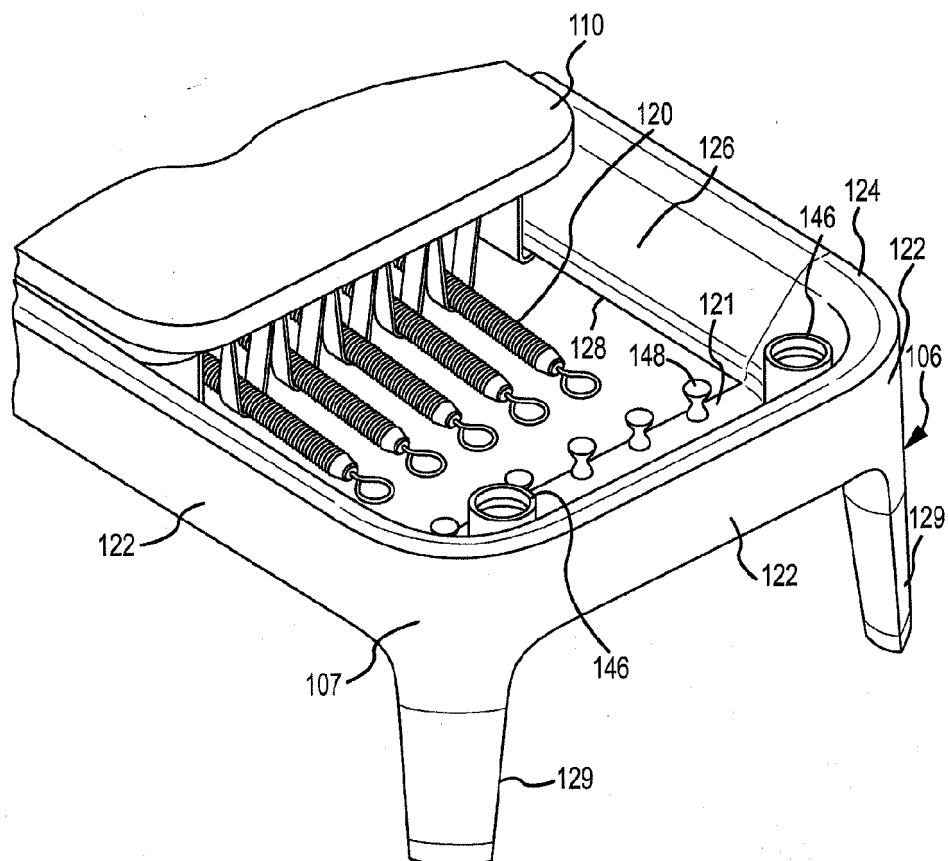


FIG.4

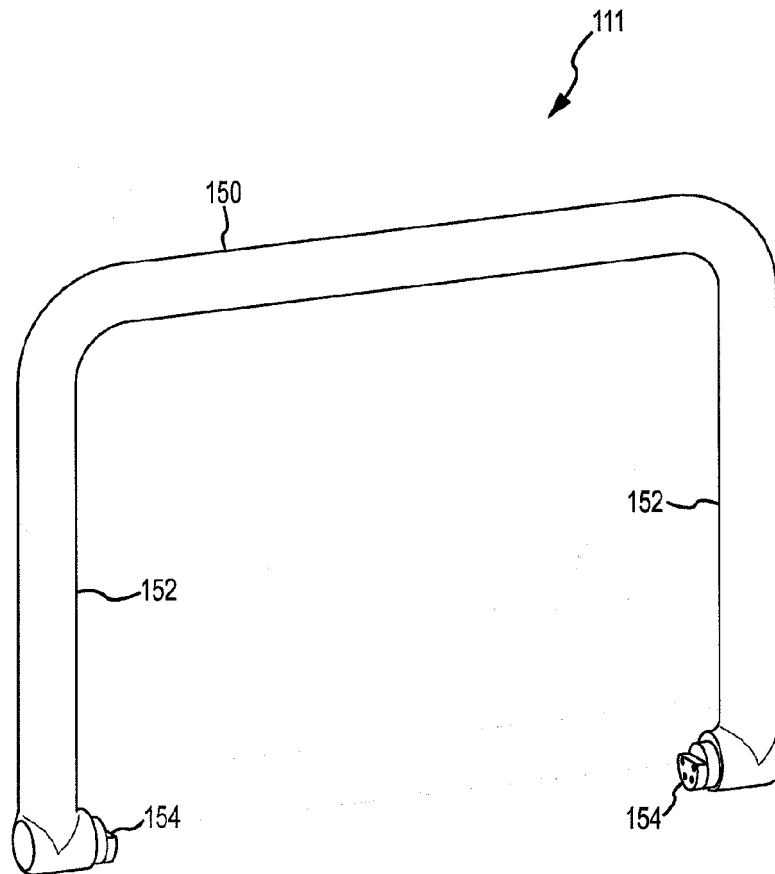
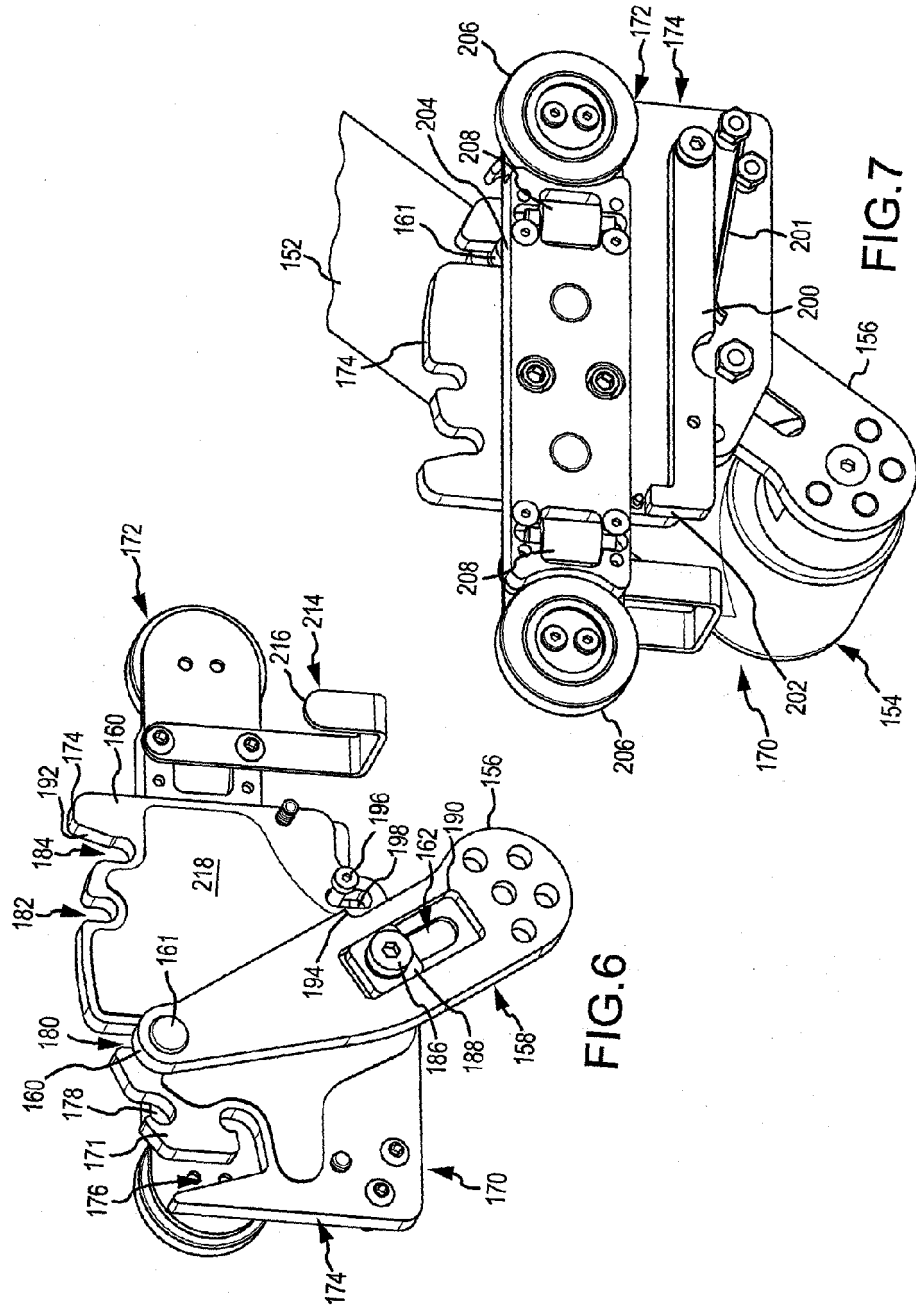


FIG.5



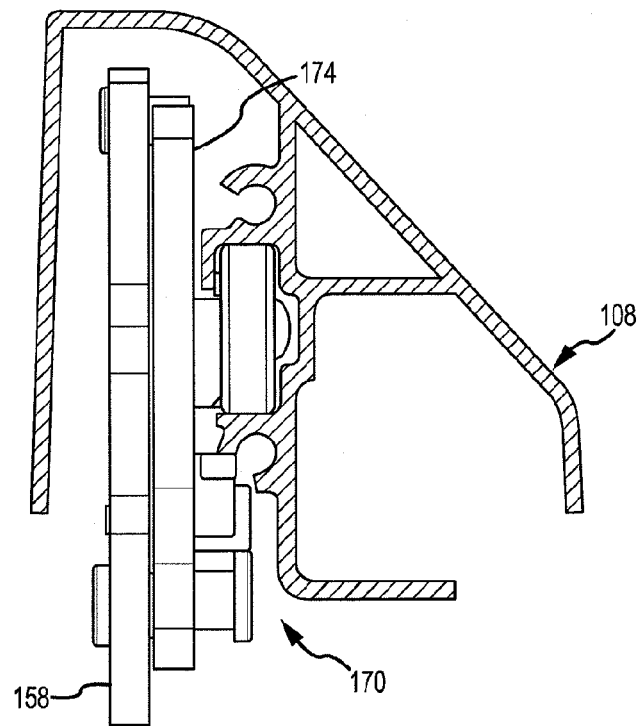


FIG.8

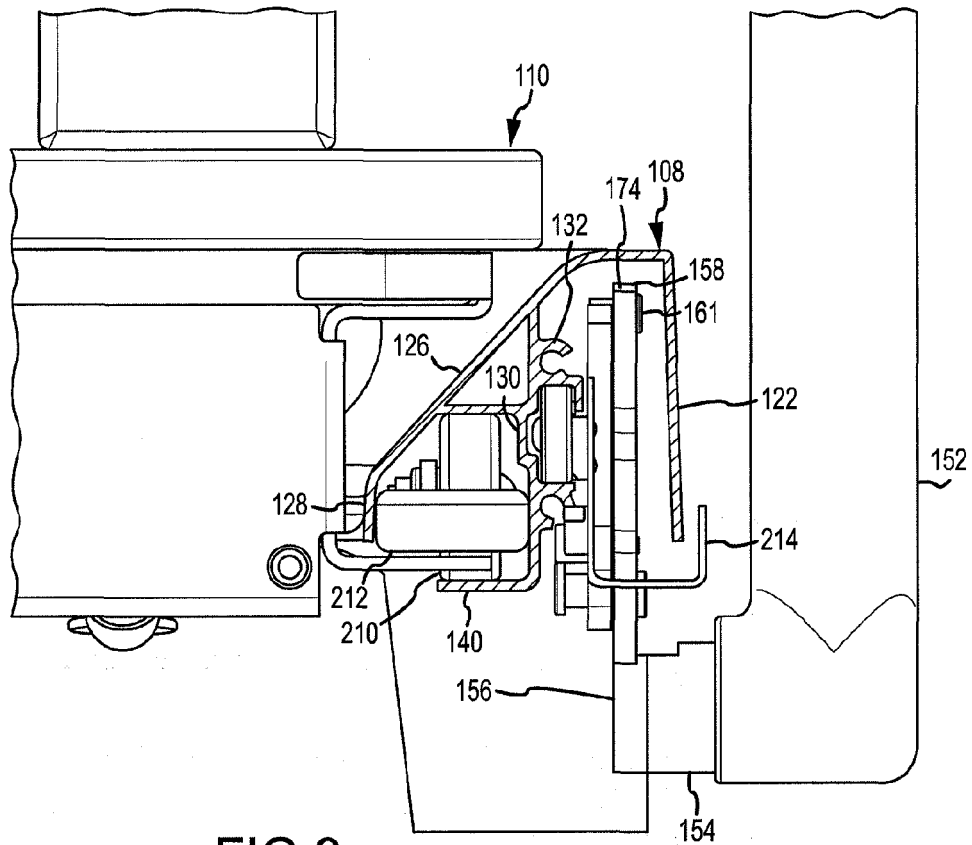
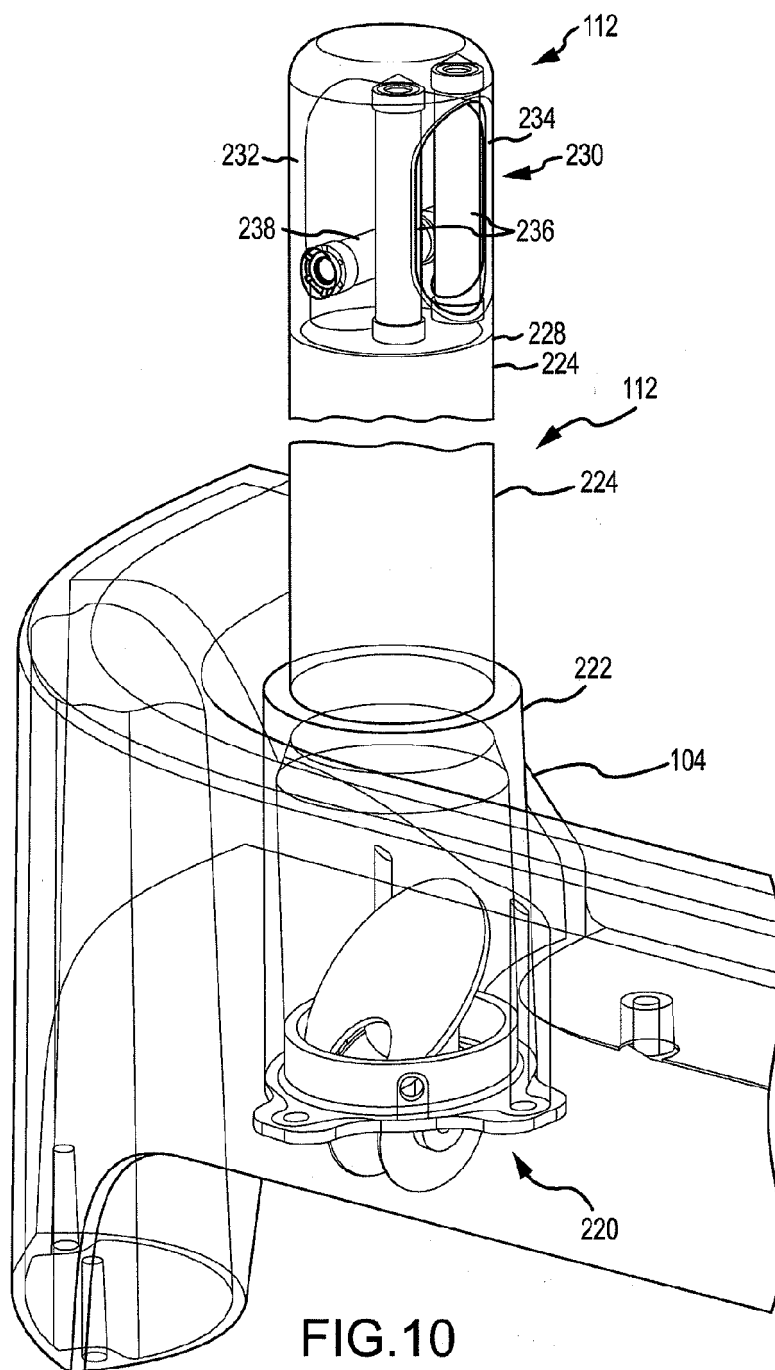


FIG. 9



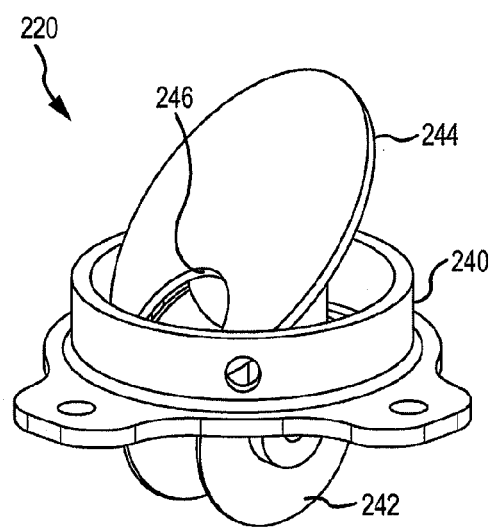


FIG.11

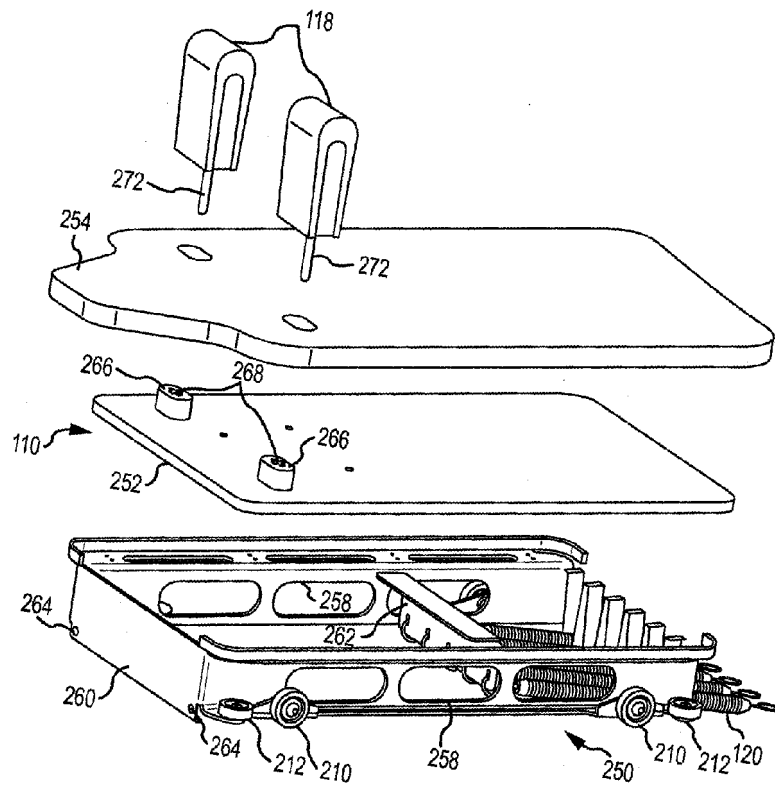


FIG. 12

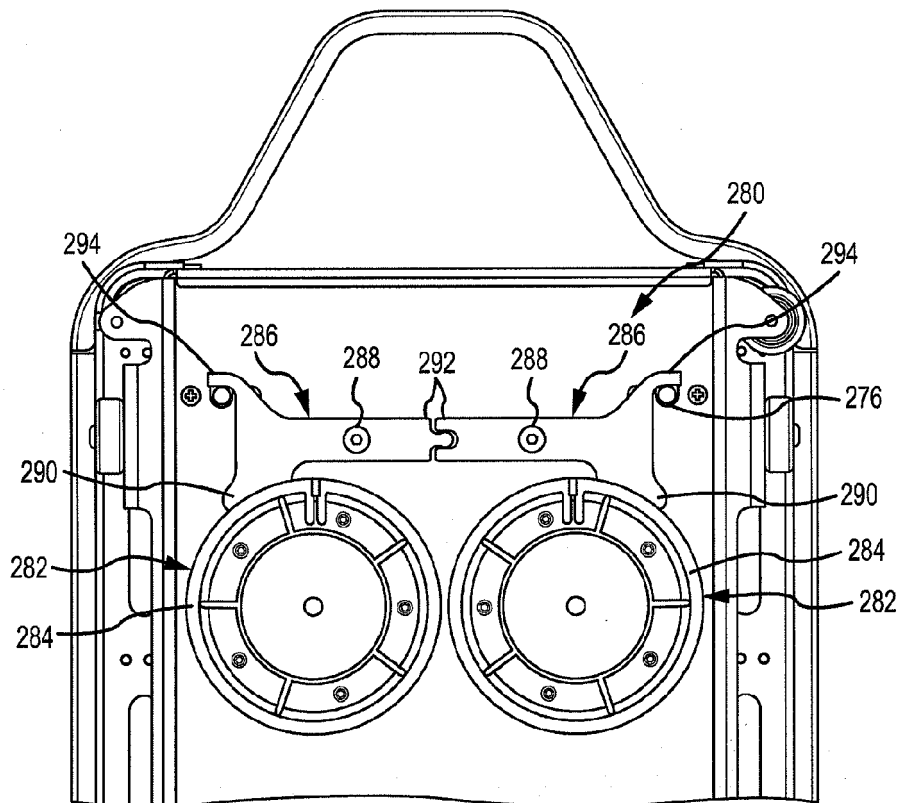


FIG.13

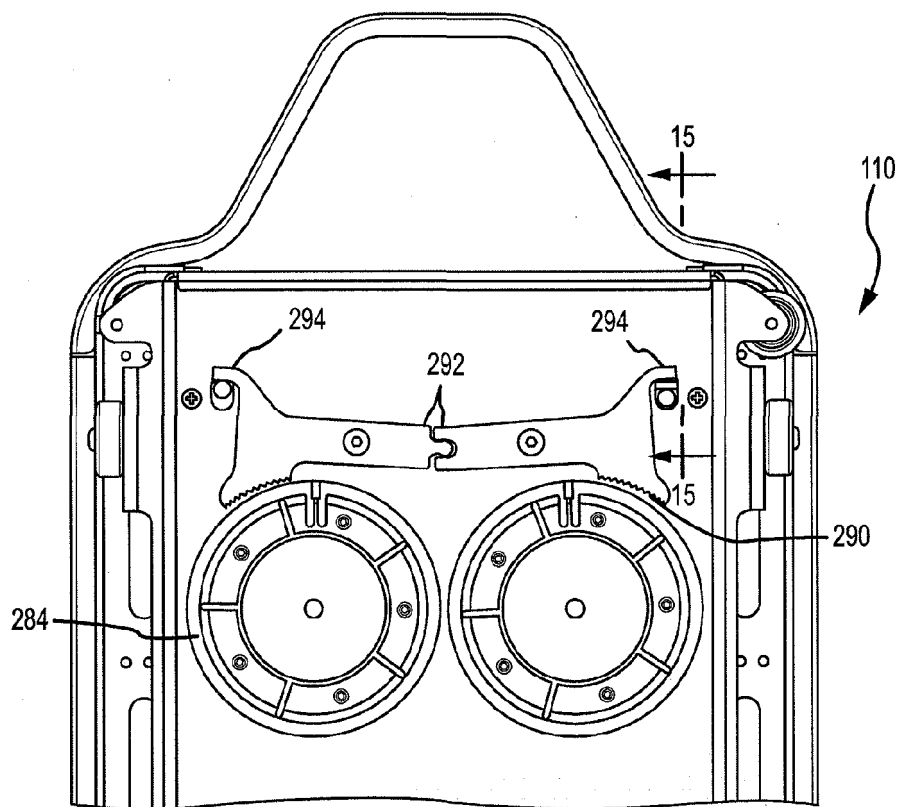


FIG.14

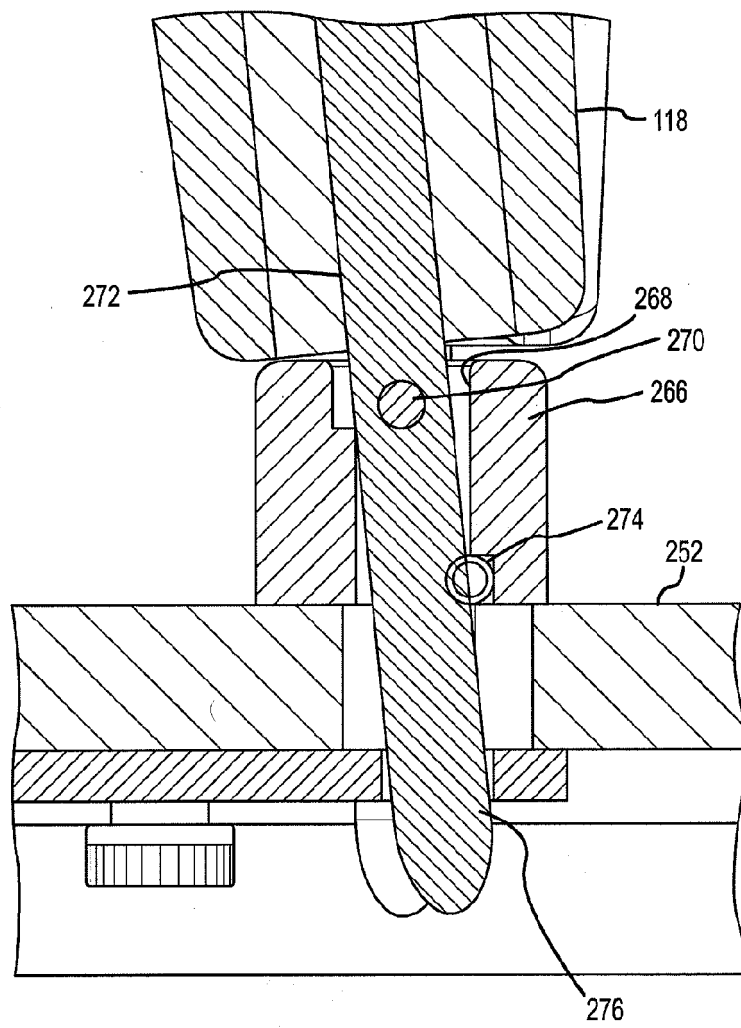


FIG.15

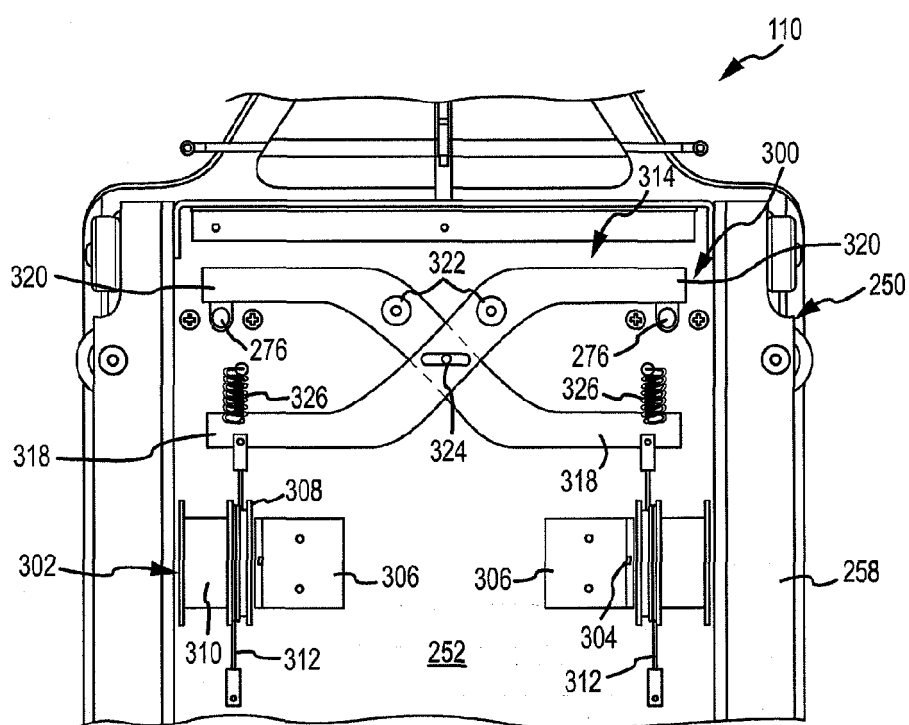


FIG.16

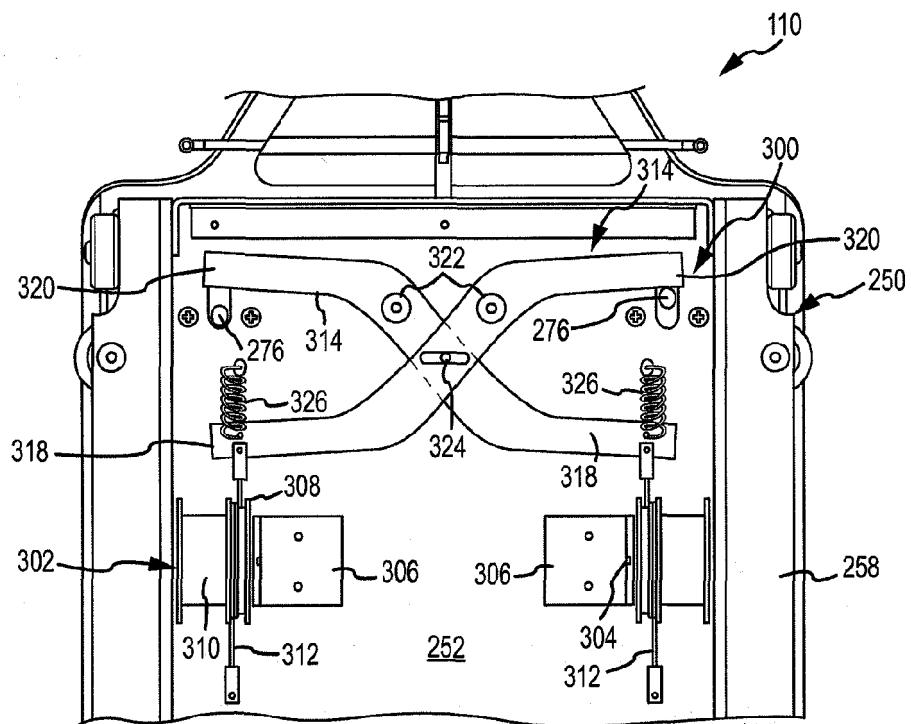


FIG.17

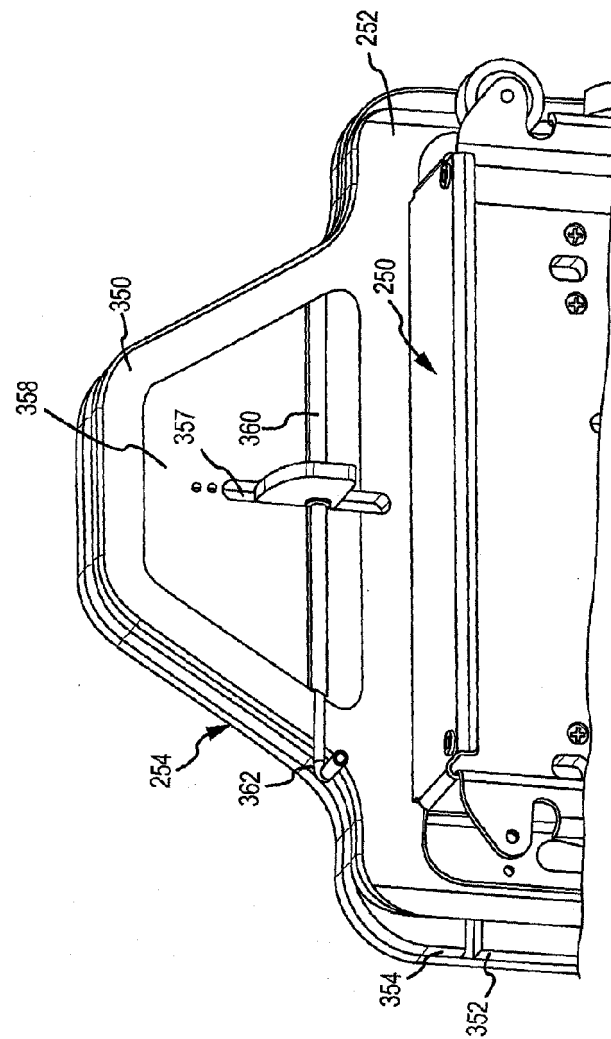


FIG.18

FIG.19

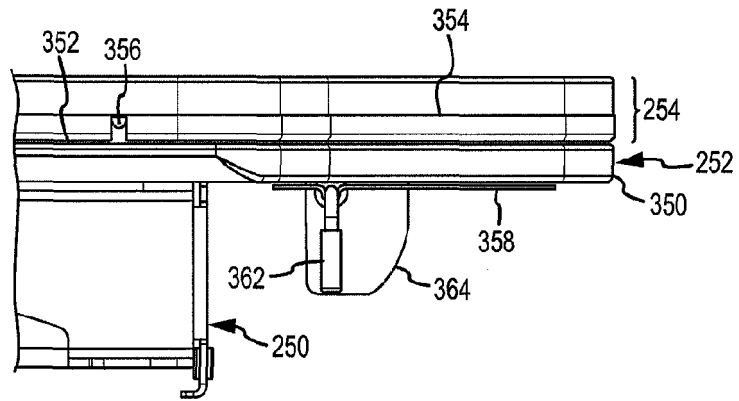


FIG.20

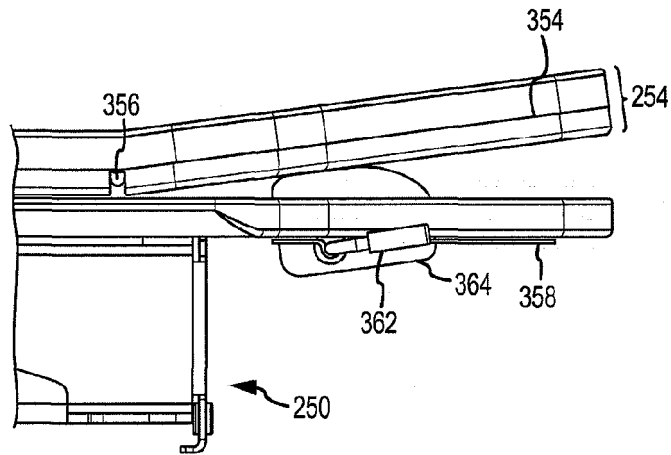
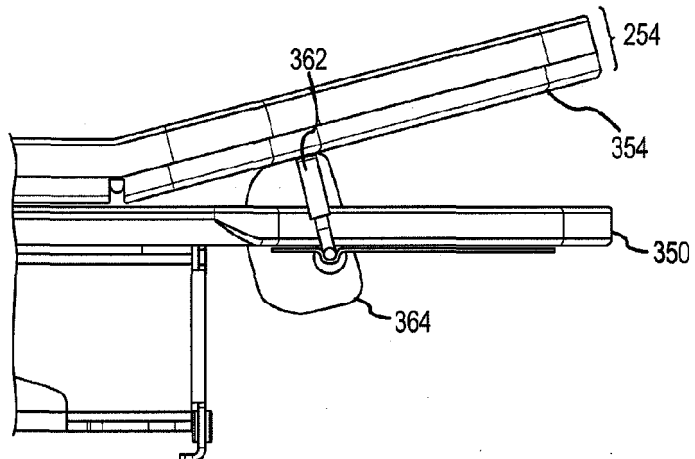


FIG.21



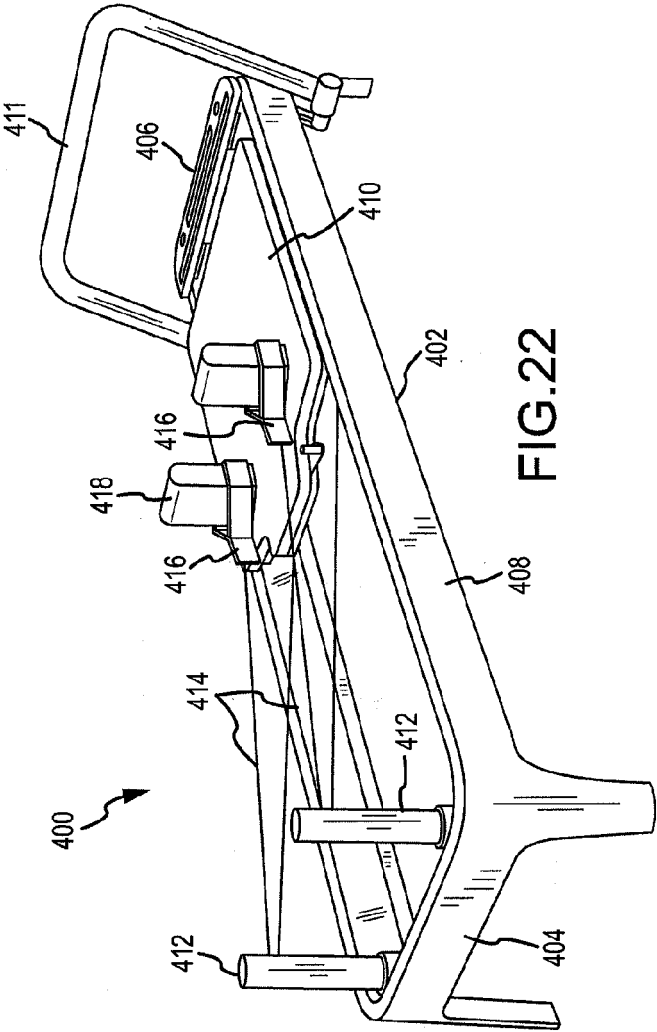


FIG. 22

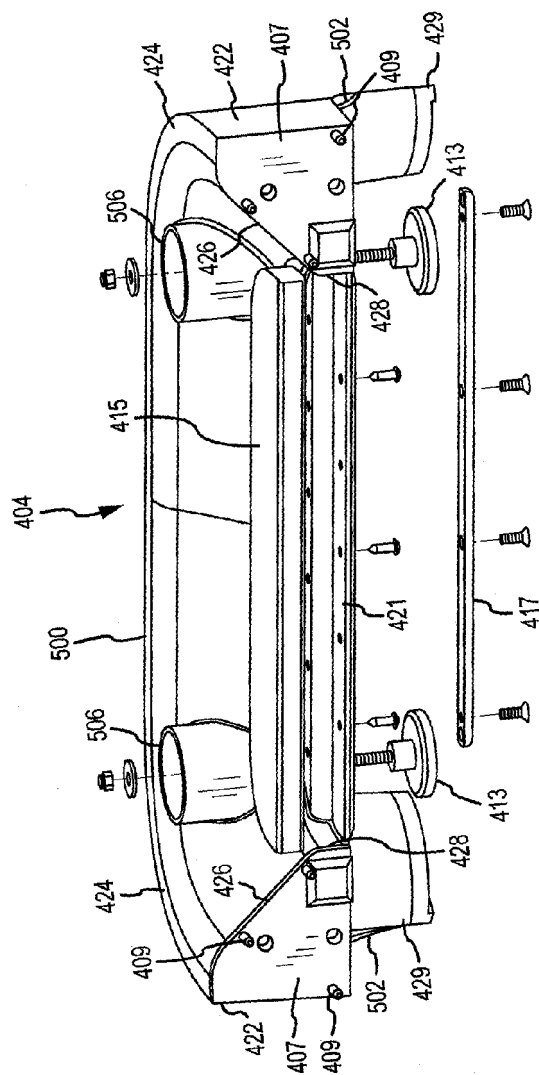


FIG. 23

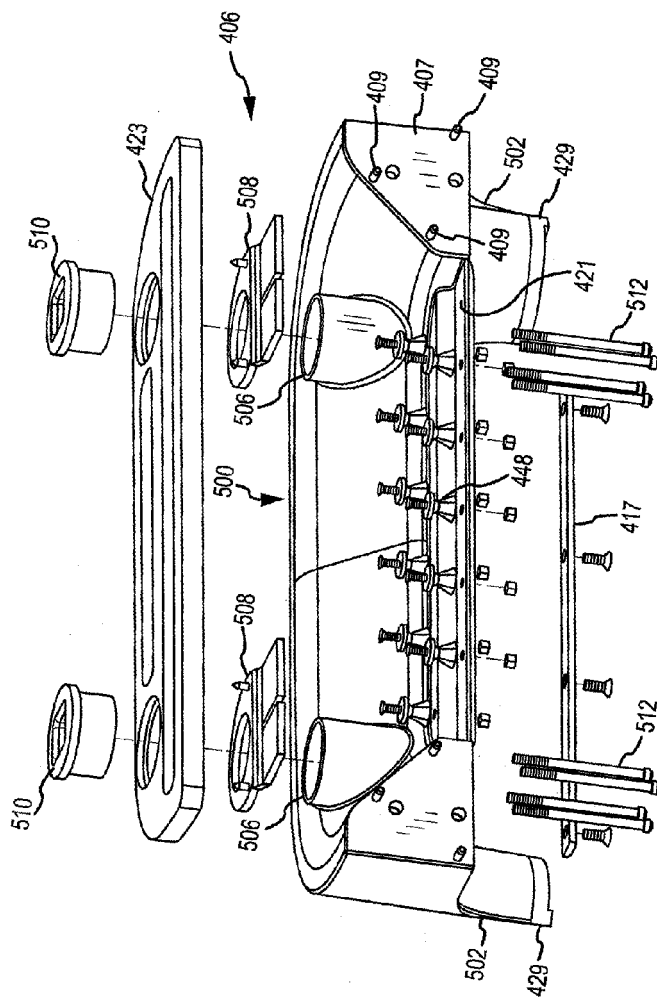


FIG.24

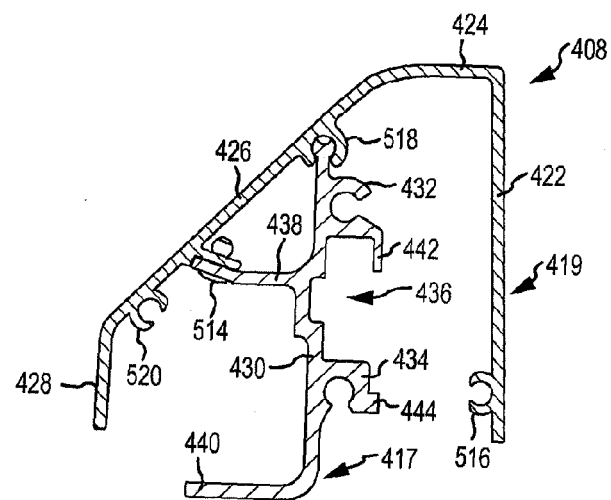


FIG.25

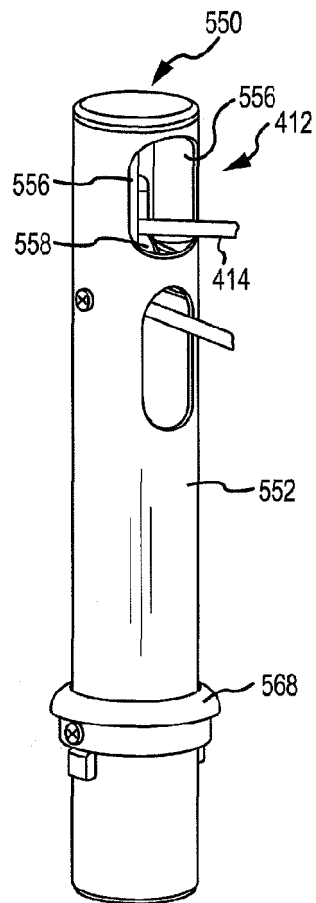


FIG. 26

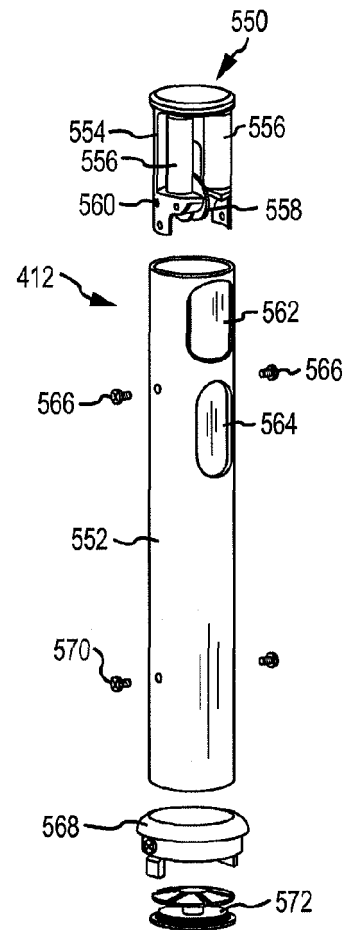


FIG. 27

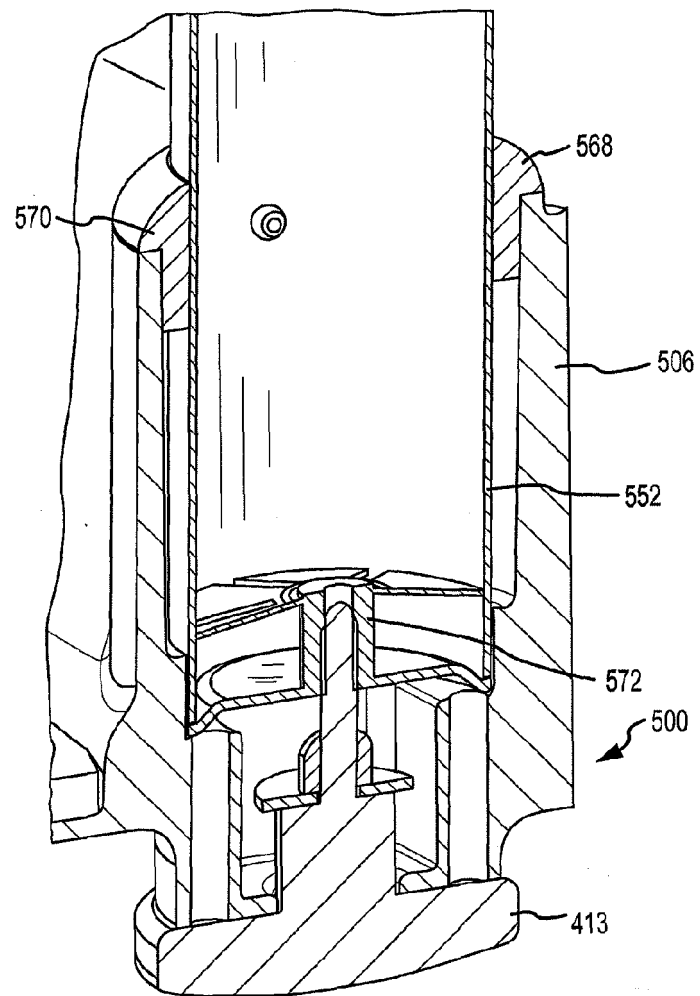


FIG.28

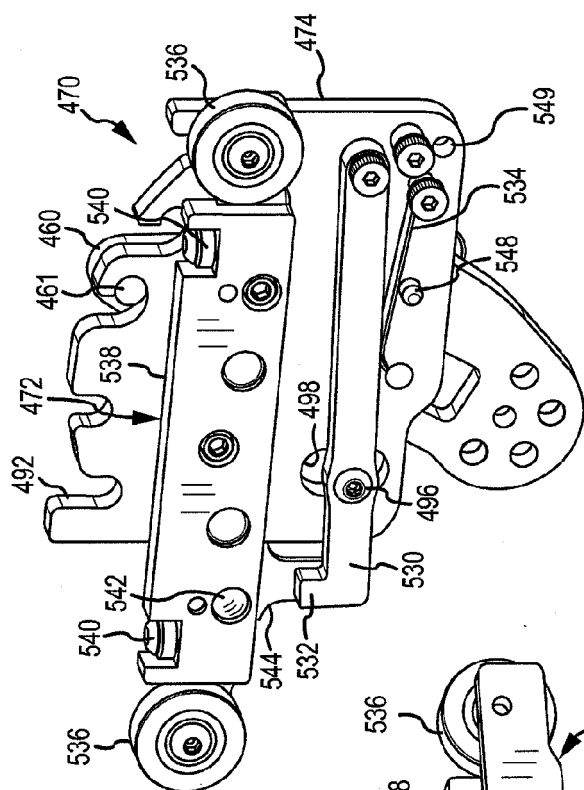


FIG. 29

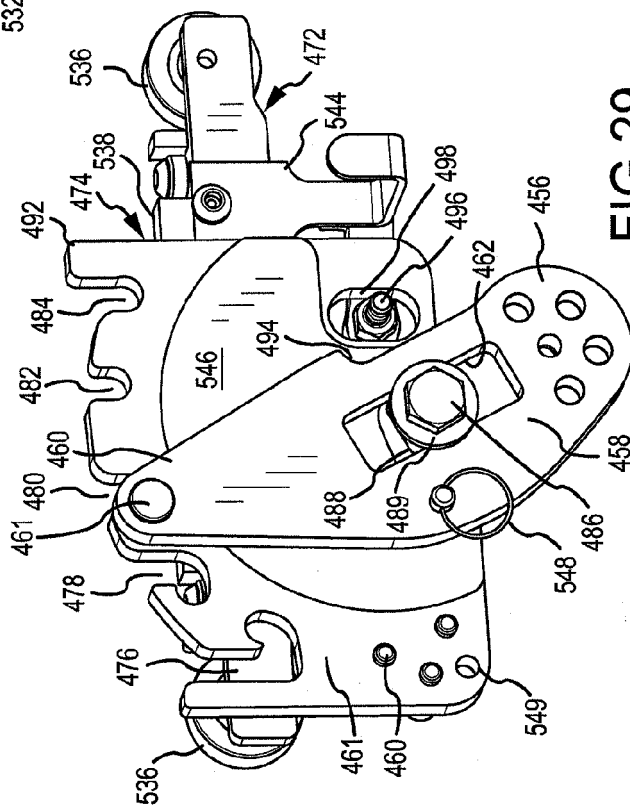


FIG. 30

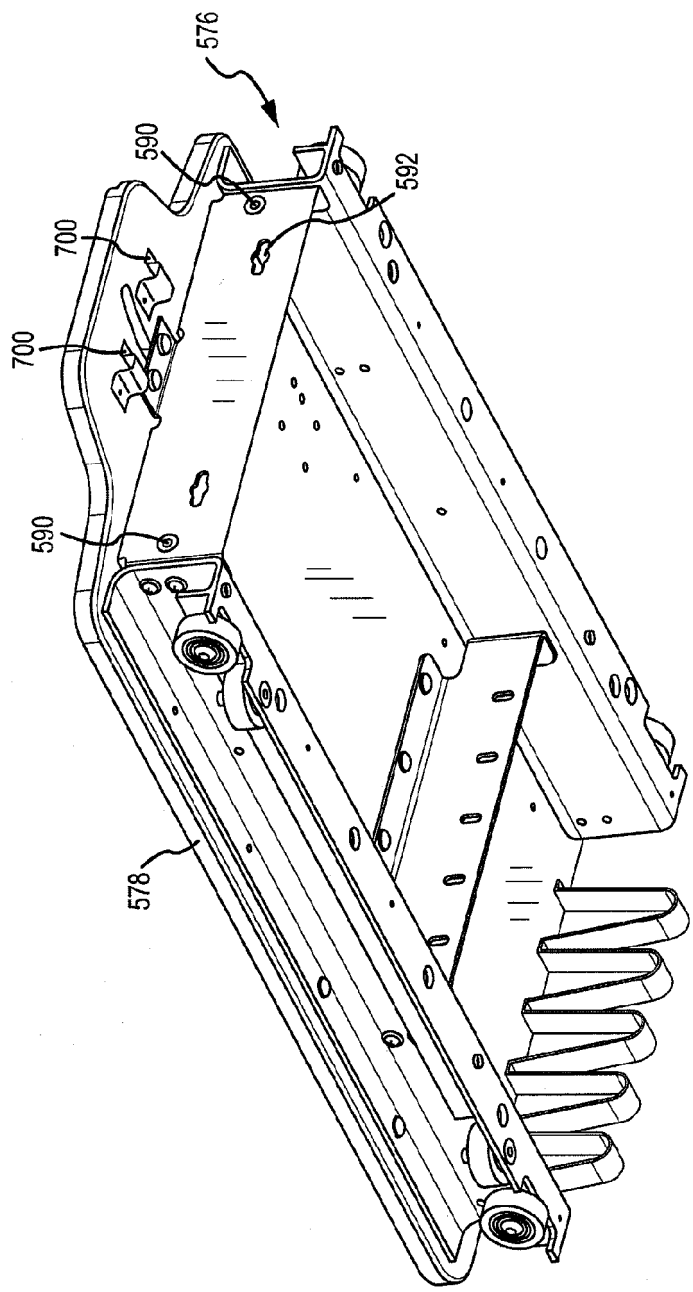


FIG.31

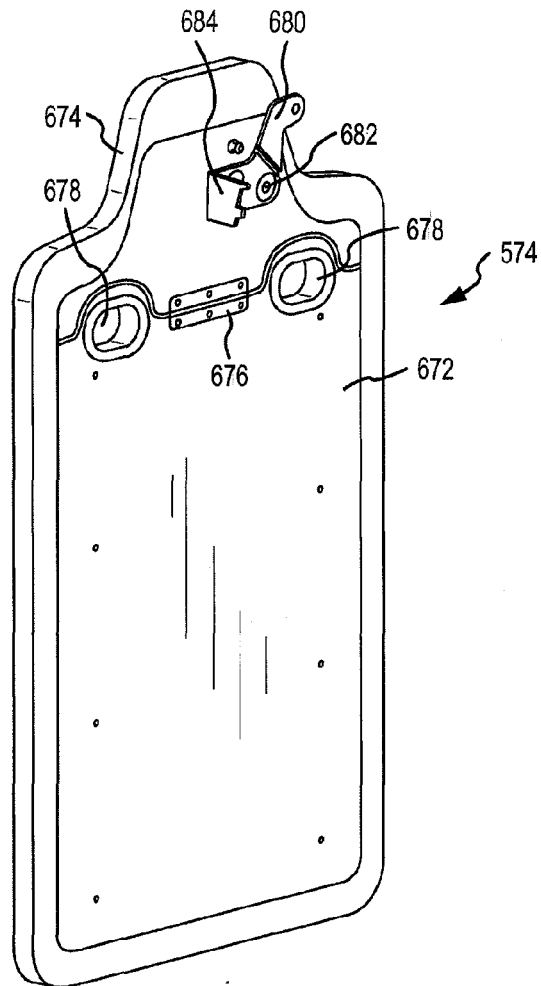


FIG.32

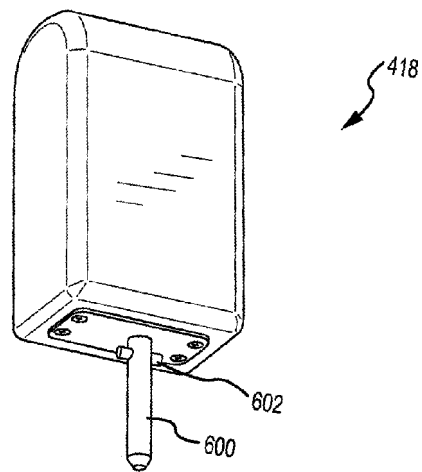


FIG. 33

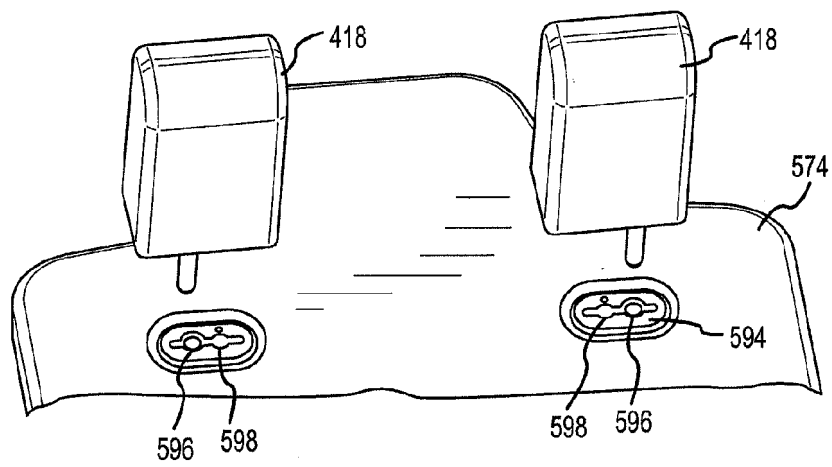


FIG.34

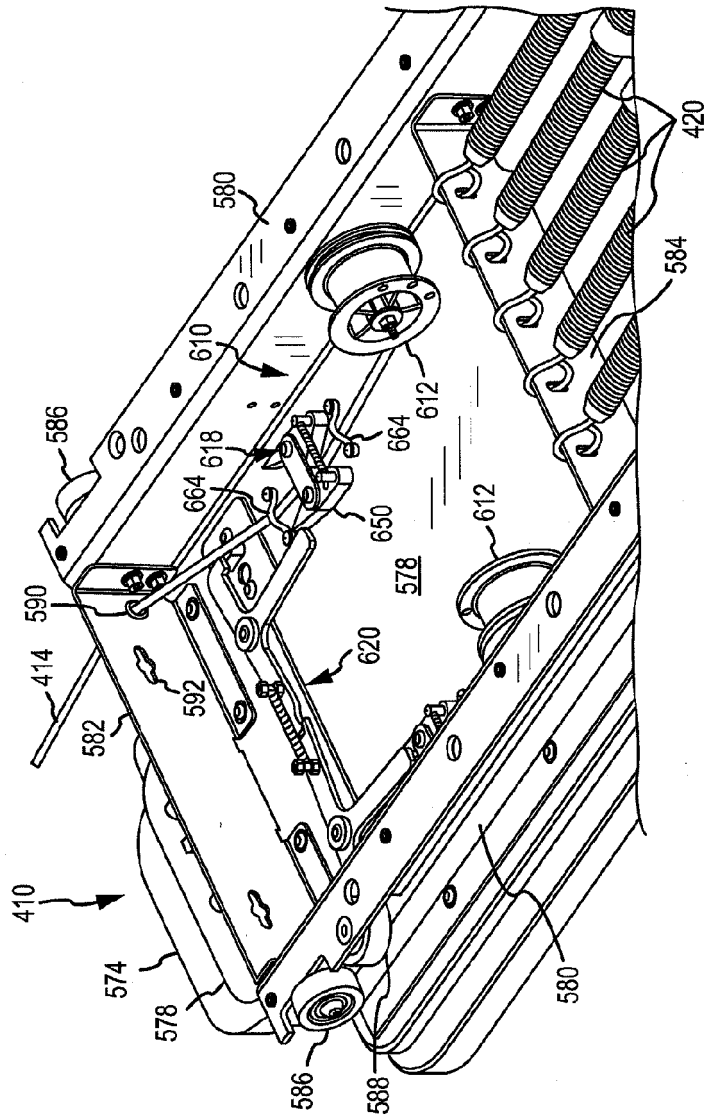
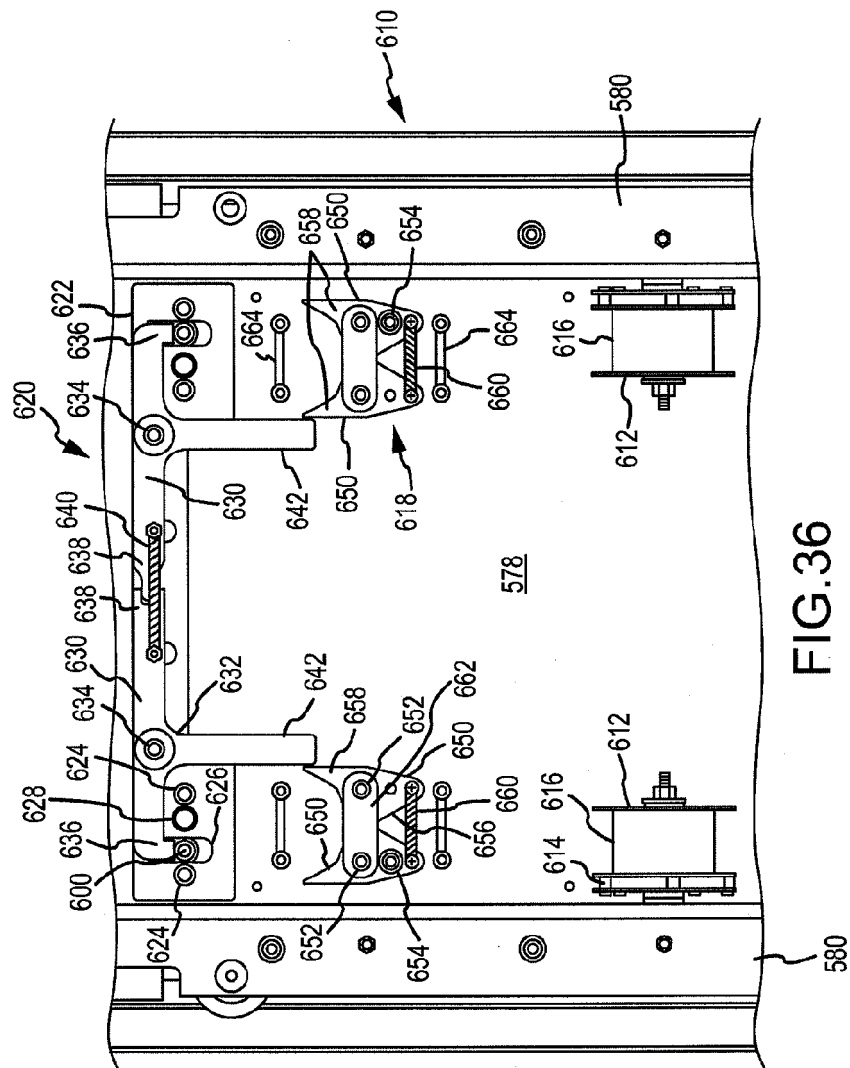


FIG. 35



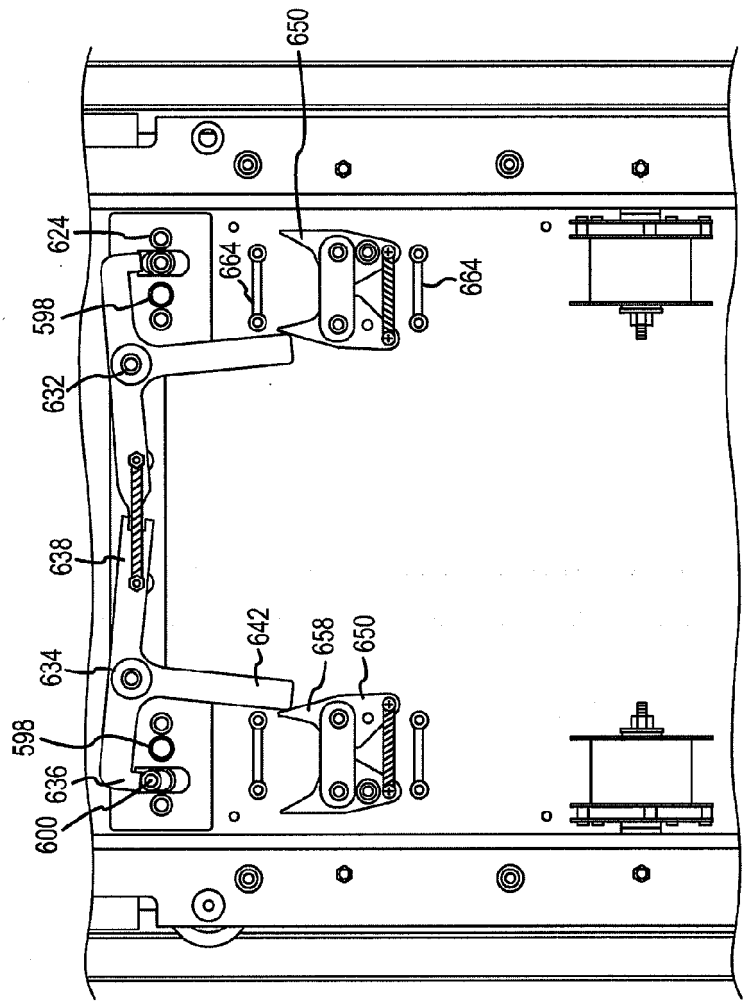


FIG.37

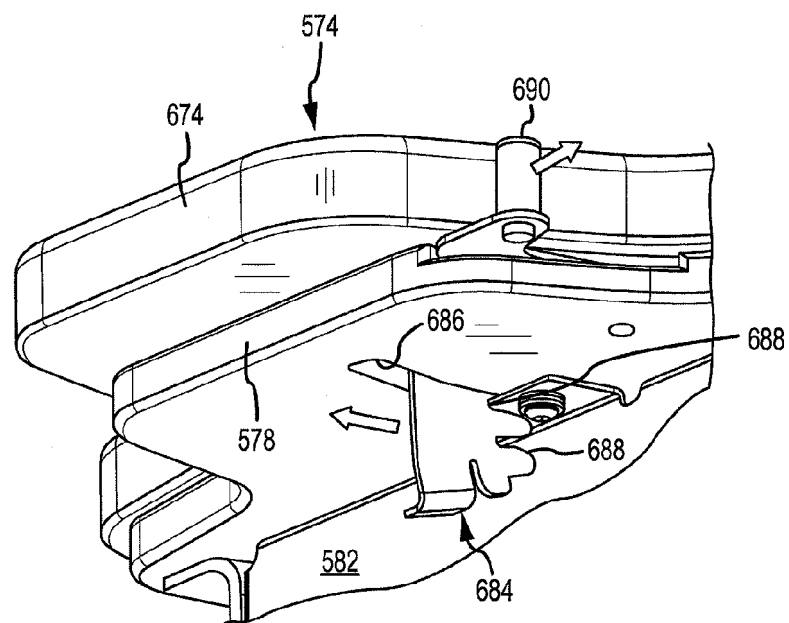
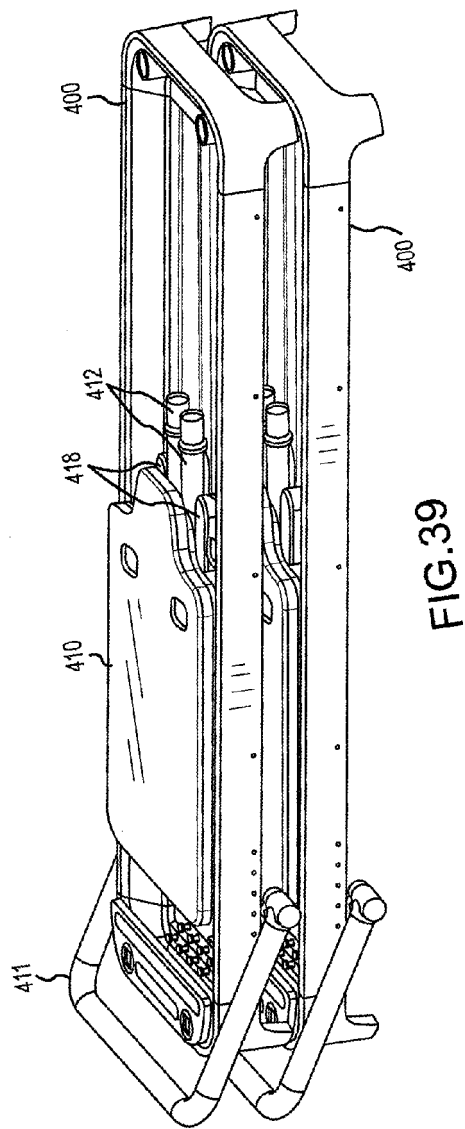


FIG.38



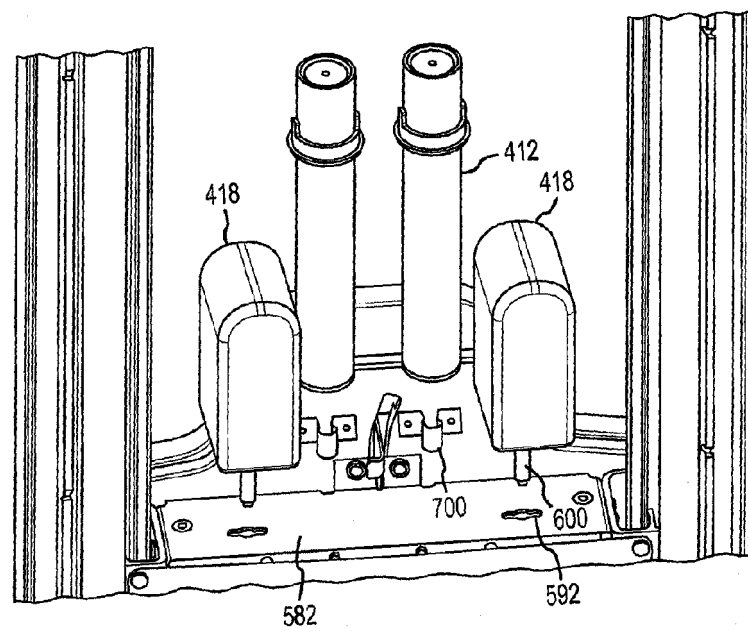
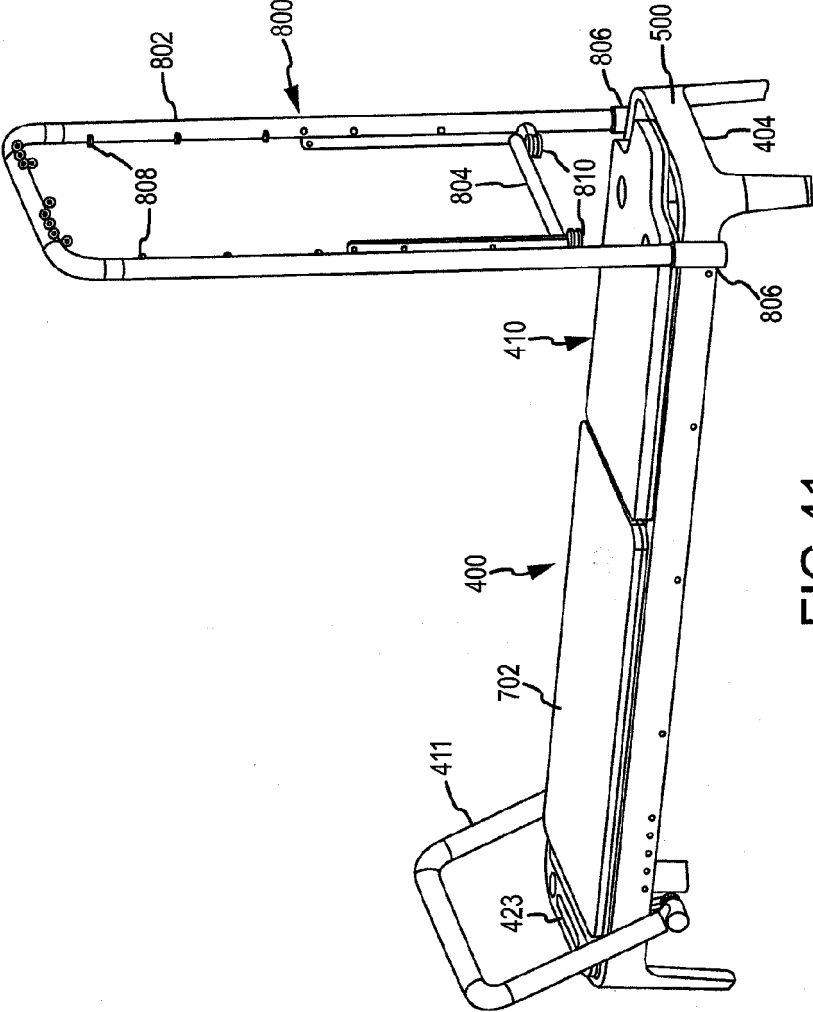


FIG. 40



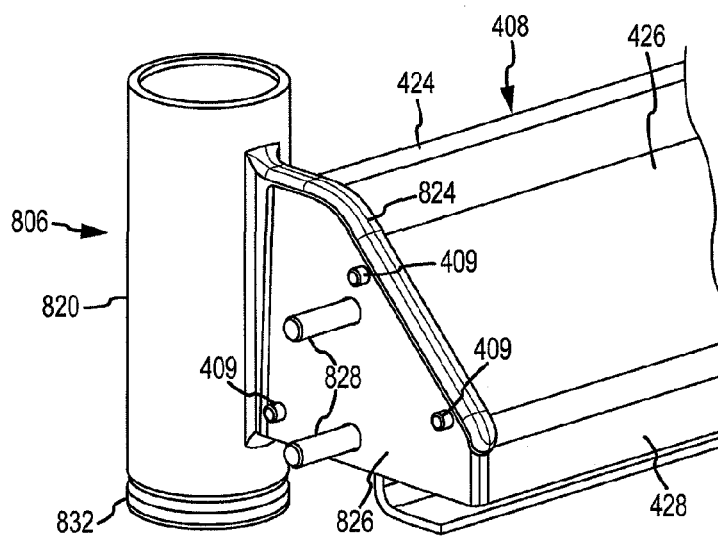


FIG.42

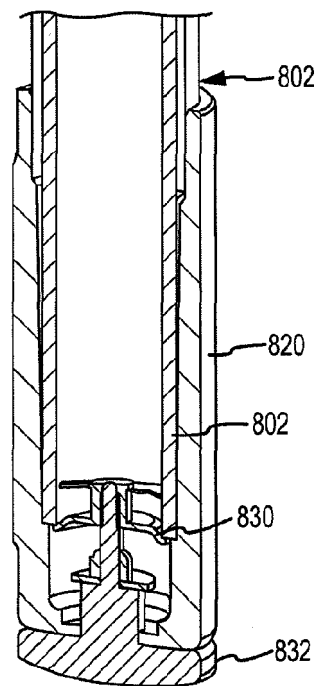


FIG.43

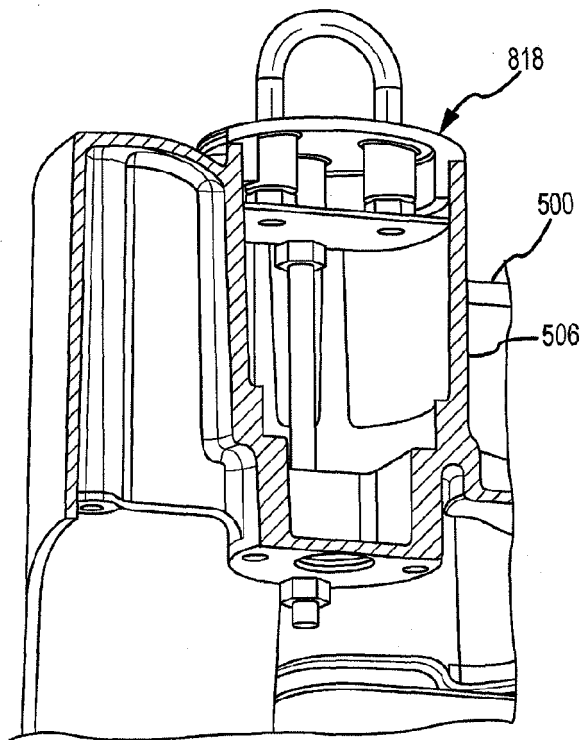
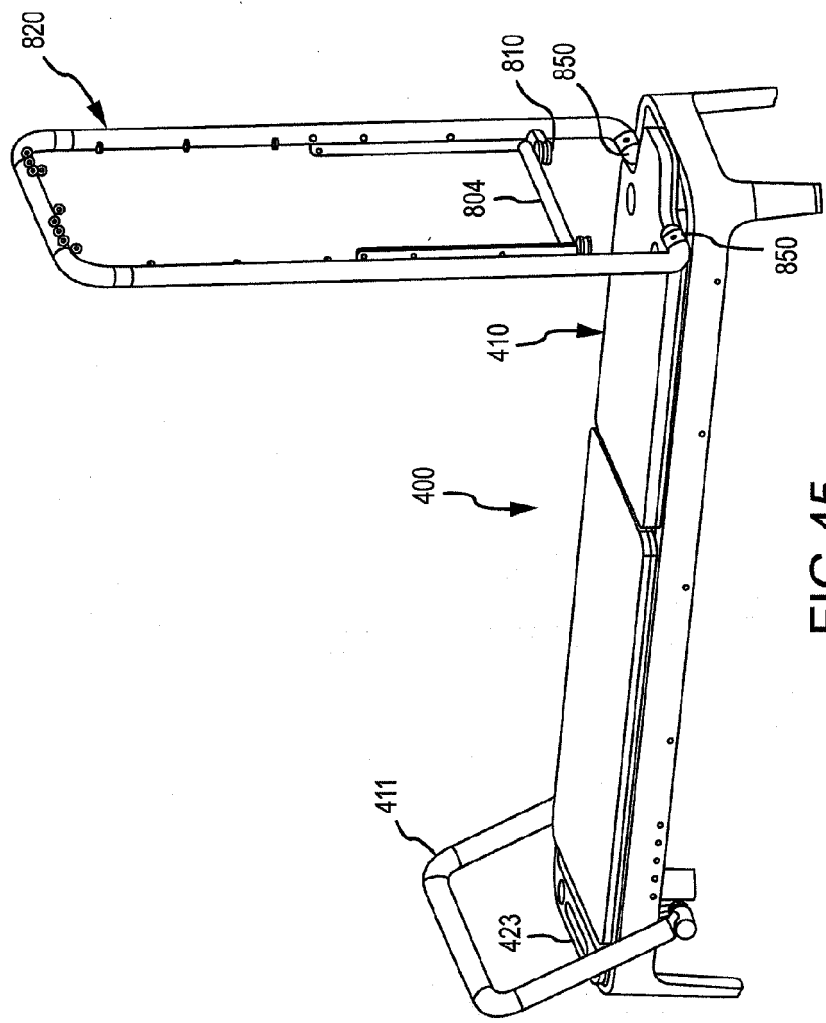


FIG.44



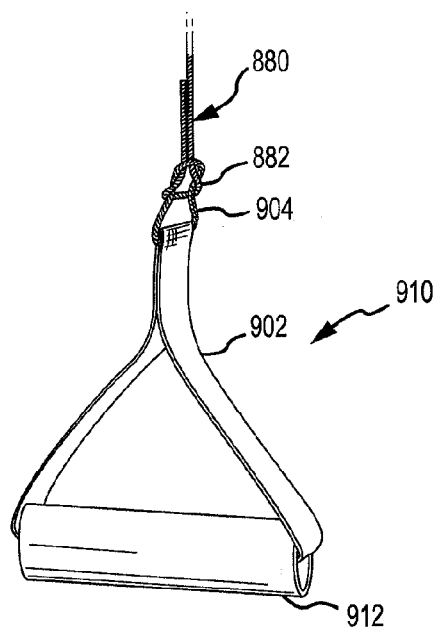
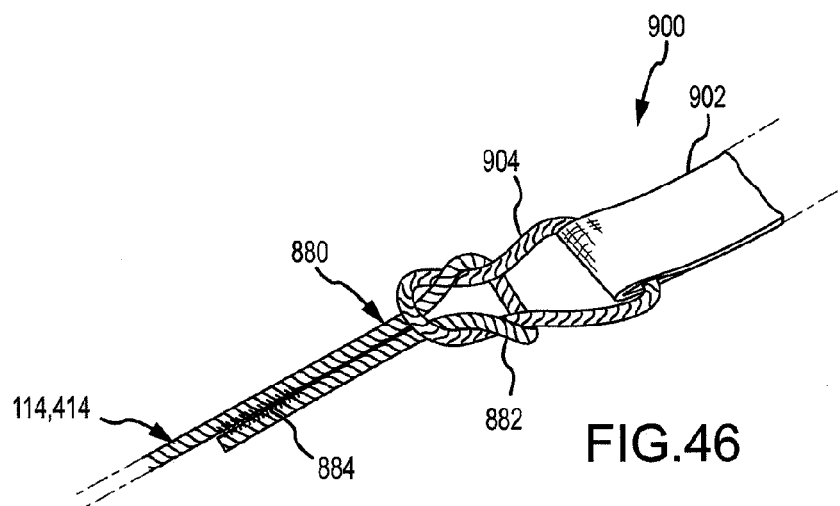


FIG. 47

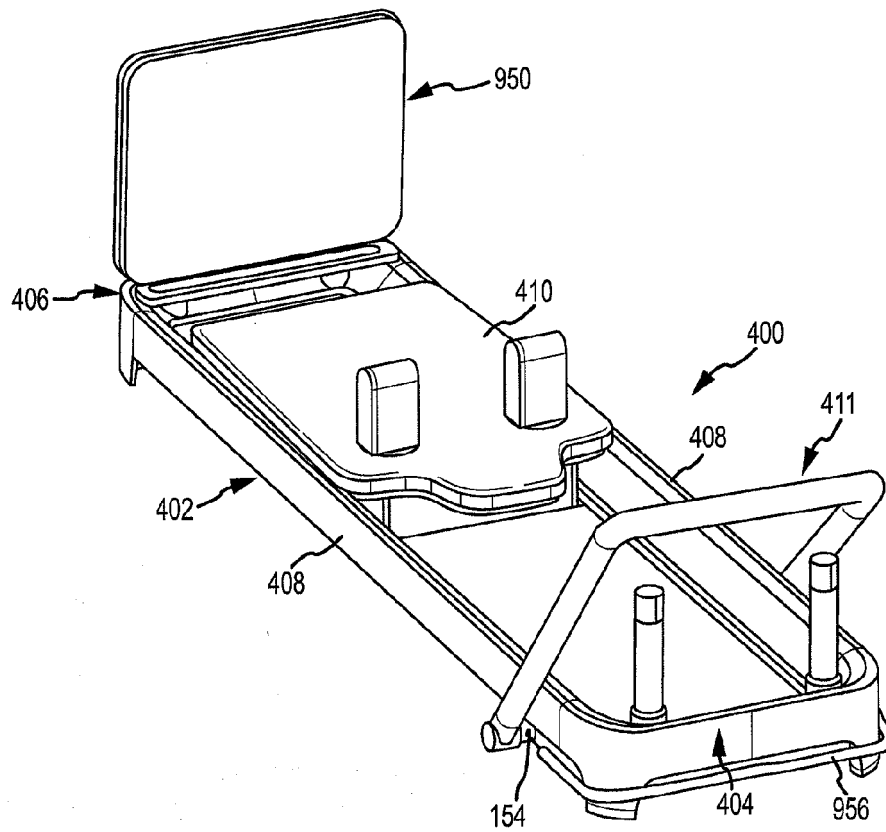


FIG.48

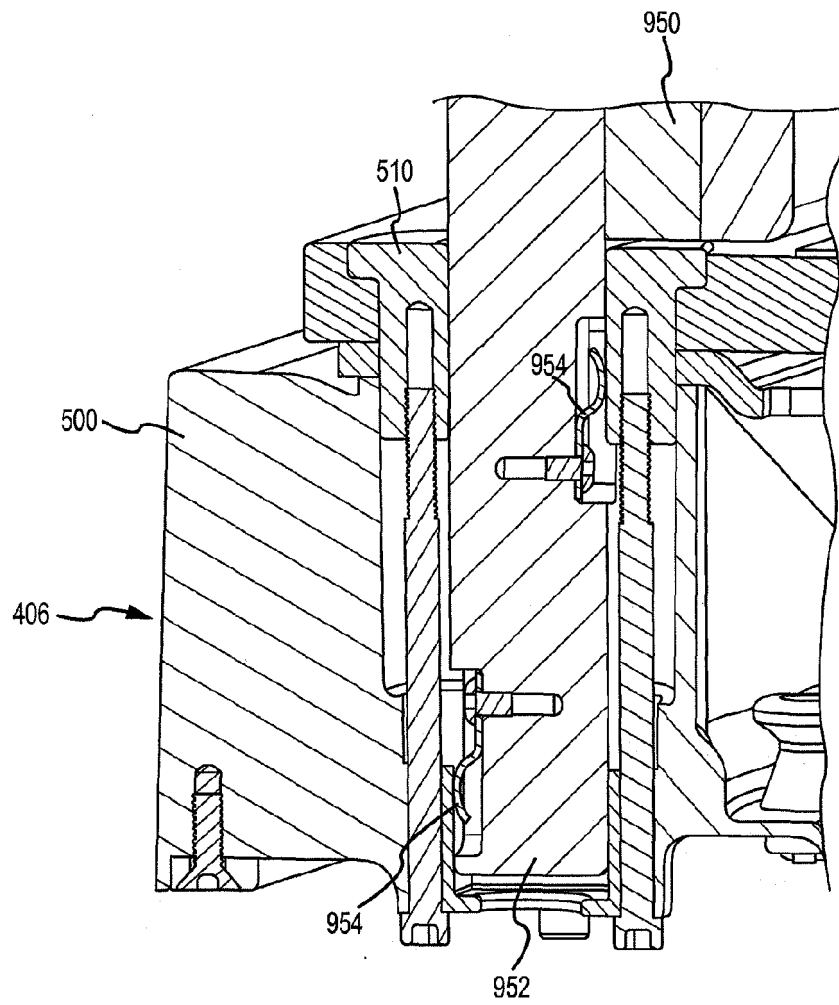


FIG.49

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 2394663 Y [0007]
- US 7163498 B1 [0008]