



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 024 404 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.08.2000 Bulletin 2000/31

(51) Int. Cl.⁷: **G03D 13/00**

(21) Application number: **00200302.8**

(22) Date of filing: **31.01.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **29.01.1999 US 240985**

(71) Applicant: **Agfa Corporation**
Ridgefield Park, NJ 07660-2199 (US)

(72) Inventors:
• **Krupica, Libor**
Nashua, NH 03063 (US)
• **Newton, Arthur R.**
North Reading, MA 01864 (US)

(74) Representative:
Van Ostaeyen, Marc Albert Jozef et al
Agfa-Gevaert N.V.,
RDM/IP 3800 76/01,
Septestraat 27
2640 Mortsel (BE)

(54) **Method and apparatus for buffer transfer of media sheets between components in an imagesetting system**

(57) A system and method for transferring and buffering sheets of media (8) between first and second components of an imagesetting system (1) operates by: rotating a transfer buffer (18) having at least two storage devices (28, 30), to align a first storage device (28) with the first component while concurrently aligning a second storage device (30) with the second component; transferring a first sheet of said media (8) from the first component to the first storage device; rotating the transfer buffer (18) to align the first storage device (28) with the second component while concurrently aligning the second storage device (30) with the first component; and transferring the first sheet of said media (8) from the first storage device (28) to the second component while simultaneously transferring a second sheet of said media from the first component to the second storage device (30). The transfer system includes: a transfer buffer (18); at least two storage devices (28, 30) mounted onto the transfer buffer, each storage device moveable within the transfer buffer and capable of storing one sheet of imaged media; and a controller (3) for automatically controlling operation of the transfer system.

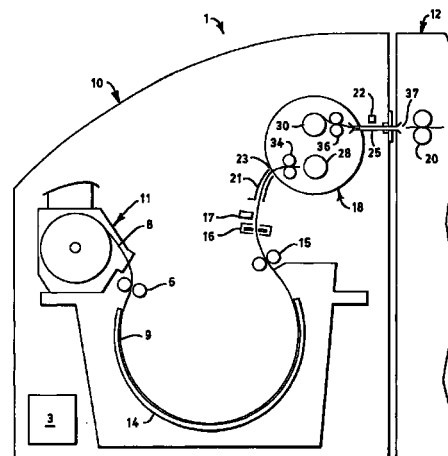


FIG. 1

EP 1 024 404 A1

Description

FIELD OF THE INVENTION

[0001] The invention relates generally to buffering and transferring sheets of cut media between functional components having different processing speeds within an imagesetting system, and more specifically to a method and system for compensating for a speed differential between an imagesetter and an on-line development/finishing processor in an electronic pre-press system.

BACKGROUND OF THE INVENTION

[0002] In existing electronic pre-press systems, images to be printed by offset printing are scanned from photographic sources and digitised. The digitised images are then transmitted to a raster image processor (RIP) for half-tone screening and image rasterisation. The rasterised image is then transmitted to an imagesetter for recording of the image onto a medium. Such recording is referred to as imaging or imagesetting, and may for example be performed by photographic recording of an image onto a photosensitive medium such as paper, film, or printing plates. A medium which has had an image recorded onto it by an imagesetter is referred to as imaged medium.

[0003] Existing pre-press systems typically include independent functional units for recording images and for subsequent processing. A typical photographic imagesetter operates to record a redefined image onto a medium, for example by first mounting the medium onto the internal surface of a drum (i.e. in an internal drum imagesetter), then exposing the medium with a laser beam via a rotatable, optically reflective element mounted along the longitudinal axis of the drum. The medium typically may be supplied as a web or as a cut sheet.

[0004] Subsequent to imaging, the imaged medium is passed to a development/finishing processor, where the medium will undergo chemical processing for photographically developing, fixing and washing. Alternatively, if the image was burned into the media by a laser, then mechanical finishing would occur in the processor. If the media was supplied by a continuous web, each sheet of exposed media is cut prior to entry into the processor.

[0005] Early pre-press systems used off-line development processors. In such early systems, imaged media was collected onto a take up cassette connected to an output of the imagesetter, and then manually transported to the off-line processor. More recent systems have coupled the imagesetter to an on-line processor, which inputs the imaged media directly, automatically from the imagesetter.

[0006] A significant drawback of existing systems using on-line processors results from the different

processing speeds of the imagesetter and the processor. U. S. Patent no. 5,769,301 issued June 23, 1998 to Hebrew et al. discloses a media transport bridge for use in transporting and buffering imaged media between an imagesetter and a processor. When a medium is output from the imagesetter, it is transferred to a bridge mechanism between the imagesetter and the processor. The bridge mechanism holds the medium for a predetermined period of time while waiting for the processor to become available. When the processor's availability is detected, the medium is transferred from the bridge to the processor, and the bridge thereafter becomes available to store a second sheet of media from the imagesetter. However, during the time while the bridge is waiting for the processor to accept the second sheet of media, the imagesetter may have to be stalled, waiting for the bridge to become available. Such stalling of the imagesetter potentially causes an unacceptable reduction in overall media throughput. Moreover, existing bridge mechanisms often have high profiles, resulting in undesirable large form factors for products in which they are included.

OBJECTS OF THE INVENTION

[0007] It is an object of the present invention to provide in an imagesetting system an apparatus and method for transferring and buffering imaged media sheets between two components so as to compensate for any transfer speed differential between the components. It is another object to provide such an apparatus and method for transferring and buffering imaged media sheets between an imagesetter and an image processor in an imagesetting system, so that the apparatus is compact with a low profile which significantly decreases the overall weight and dimensions of the imagesetting system. These and other objects of the present invention will become apparent in view of the following description, drawings and claims.

SUMMARY OF THE INVENTION

[0008] The above mentioned objects realised by a method having the specific features of claim 1 and by a system including the features of claim 8. Specific features for preferred embodiments of the invention are set out in the dependent claims.

[0009] The invention refers to a system and method for transferring and buffering sheets of media between first and second components of an imagesetting system operates by: moving a transfer buffer having at least two storage devices, to align a first storage device with the first component while concurrently aligning a second storage device with the second component; transferring a first sheet of said media from the first component to the first storage device; moving the transfer buffer to align the first storage device with the second component while concurrently aligning the second storage

device with the first component; and transferring the first sheet of the media from the first storage device to the second component while simultaneously transferring a second sheet of the media from the first component to the second storage device. The transfer system includes: a transfer buffer having at least two storage devices mounted thereon, each said storage devices moveable within the transfer buffer and capable of storing one sheet of imaged media; and a controller for automatically controlling operation of the transfer system.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The invention will be more fully understood by reference to the following detailed description of the preferred embodiments in conjunction with the drawings (not necessarily drawn to scale), where like components are labelled with the same reference numerals and where:

Figure 1 is a schematic view of an imagesetting system built in accordance with the principles of the invention and including an internal drum imagesetter, a first preferred embodiment of a transfer buffer therein, and an on-line processor.

Figures 2, 3 and 4 are schematic views of various orientations of components of a second preferred embodiment of a transfer buffer during normal operations;

Figure 5A is a perspective view of a media storage device used with the transfer buffer of Figure 1;

Figure 5B is an end view of the media storage device of Figure 5A just prior to acceptance of a medium for storage;

Figure 5C is an end view of the media storage device of Figure 5A having a medium partially wrapped thereon;

Figure 6 is a perspective view of selected components of the transfer buffer of Figure 1;

Figure 7A illustrates an inside surface of an end plate of the transfer buffer of Figure 1;

Figure 7B illustrates an outside surface of an end plate of the transfer buffer of Figure 1;

Figure 7C is a cross-sectional view along line A-A' of the end plate of Figure 7A; and

Figure 7D illustrates the outside surface of the end plate as shown in Figure 7B, including additional hardware for driving various system components.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0011] Fig. 1 is a schematic view of selected portions of an imagesetting system 1 including an internal drum imagesetter 10 and an on-line development/finishing processor 12. The imagesetter 10 includes: a media supply cassette 11 which supplies a photosensitive

media 8 as a web; drum input rollers 6; an imaging drum 14; drum output rollers 15, web cutters 16; a first sensor 17; a transfer buffer 18; a second sensor 22; and a controller 3. The controller 3 automatically controls and runs a predetermined sequence of operations of the imagesetting system 1. The processor 12 includes a pair of input rollers 20.

[0012] During operation of the system 1 of Figure 1, a portion of the media 8 resident in the media supply cassette 11 is drawn onto the internal drum surface 9 of the drum 14 via drive rollers 6. A laser imaging system (not shown) transfers and records an image onto the media resident within the drum. The laser imaging system typically includes a laser diode located at or near the main central axis of rotation of the drum on a carriage that allows translation along the drum axis. The output beam from the laser diode is scanned by a rotating mirror across the media on surface 9 in successive circumferentially extending bands or paths referred to as scan lines. The laser diode output beam exposes specific pixel locations of the media along those scan lines to form the desired image. Since the imaged media is associated with a single colour component of the image, the laser diode is turned-on or off for those pixel locations that contain that colour component, depending on whether a positive or negative image is being generated.

[0013] After imaging, the media is transferred from the drum 14 to the transfer buffer 18 via drive rollers 15. The media 8 is transferred through a media path from the drum 14 which in this example is defined as the media path traversing from the rollers 15 to the opening 23 between the platens 21. After a predetermined length of the media 8 passes by the sensor 17, the cutters 16 cut the media. The sheet of cut, imaged media entering the transfer buffer 18 continues being drawn into the transfer buffer 18 by drive rollers 34 until the trailing edge (not shown) of the sheet is in the vicinity of the opening 23. A next section of the media 8 is now positioned in the drum 14 and ready for imaging. The operations of the imagesetting system 1 are controlled by a pre-installed software program in the controller 3. Moreover, the web supply roll 11 of Figure 1 may be replaced by a source of precept sheets of media.

[0014] As described above, sheets of cut, imaged media are moved into the transfer buffer 18 after imaging in the drum 14. There they are stored in one of the storage devices 28 or 30, before being transferred to the processor 12. A preferred configuration for the transfer buffer 18 includes two storage devices 28 and 30, although more than two storage devices could be used if desired.

[0015] Figure 2 is a schematic view of a second preferred embodiment of a transfer buffer 18 in a first, i.e. initial, orientation. The nip between the rollers 34 is aligned with the opening 23 of the platens 21 so that the cut, imaged media 8 will pass between the rollers 34 and enter into the first storage device 28. Similarly, the

nip between the rollers 36 is concurrently aligned with the platens 25 which in turn is aligned with the opening 37 of the processor 12. In this embodiment, the first storage device 28 includes a pair of driven rollers 34 which operate to draw the media sheet 8 into the first storage device 28 until the trailing edge of the sheet is in the vicinity of the opening 23. A second storage device 30 includes the drive rollers 36. The storage devices 28 and 30 are preferably rollers which will be described in more detail hereafter. However, any kind of storage devices which can be used for storing media can be used, such as rollers, nip rollers, cassettes, containers of any shape, etc. Moreover, the storage device 28 and 30 (or the whole transfer buffer 18) could optionally be designed to be easily removable by an operator so that they could be stored for future use, or transferred to another system, if desired.

[0016] After the cut sheet of imaged media 8 is completely wound into the first storage device 28, the transfer buffer 18 is rotated as shown in Fig. 3 to a subsequent orientation shown in Fig. 4 where the nip between the rollers 34 is aligned with the opening 37 of the processor 12 and the nip between the rollers 36 is aligned with the opening 23 of the platens 21. Note that during rotation of the storage devices 28 and 30 within the transfer buffer 18 a portion of the medium sheet 8 remains in contact with the drive rollers 34 so that the sheet can be subsequently easily removed from the first storage device via the drive rollers 34.

[0017] In Figure 4, the drive rollers 34 transfer the medium sheet 8 from the first storage device 28 to the processor 12. Another sheet of imaged media 8 is simultaneously transported through the opening 23 of the platens 21, to the nip between the drive rollers 36, and into the second storage device 30 as shown. While the exemplary embodiment of Figs. 1-4 shows a transfer buffer having two media storage devices mounted thereon, three or more media storage devices may be used if desired.

[0018] As the sheet of exposed media 8 exits the transfer buffer 18 and moves towards the processor 12, it is detected by a second sensor 22 (see Figure 1), which operates to generate a media present signal. The media present signal may be used to initiate driving of the input rollers 20 in the processor 12.

[0019] The first preferred embodiment of the transfer buffer 18 and associated hardware is further illustrated by a rotatable transfer buffer 18 in Figures 5A, 5B, 5C, 6 and 7A-7D. Each storage device 28 or 30 is constructed as illustrated in Figure 5A. They each include: a body 100 substantially shaped as a roller and having a surface 104; an axle 110 of the roller 100; two or more leaf springs 90 fastened to the surface 104 via fasteners 106; a retaining rod 102 (Fig. 5A) fastened to the leaf springs 90 via fasteners 108; and wheel bearings 92 at either end of the rod 102. The bearings 92 and axles 110 each extend beyond the end surfaces 114 of the rollers 100.

[0020] The end plates 112 of the transfer buffer 18 are illustrated in Figures 7A-7D. Figure 7A illustrates an inside surface 120 of an end plate 112; Figure 7B illustrates an outside surface 122; Figure 7C is a cross-sectional view along line A-A' with slots 124 drawn in shadow; and Figure 7D is a view of the outside surface 122 of Figure 7B, including additional hardware for driving various system components. The storage devices 28 and 30 are mounted onto the end plates 112, via axles 110 and with bearings 92 engaged into slots 124. Each slot 124 includes an indent 150 (Fig. 7A) which accepts the bearings 92 when initialising the positions of the storage devices 28 and 30 prior to transferring media thereto.

[0021] Figure 7A illustrates an inside surface 120 of an end plate 112 including: a rotating axle 130 around which the whole transfer buffer 18 rotates; axles 110 around which the storage devices 28 and 30 rotate; axles 126 of the drive rollers 34 (Fig. 2) of the storage device 28; axles 132 of the drive rollers 36 of the storage device 30; and slots 124 which engage the wheel bearings 92 (Fig. 5B) of the storage devices 28 and 30. Figure 7C clearly shows that the slots 124 are engageable with the bearings 92 from the inside surfaces 120 of the end plates 112.

[0022] In the preferred embodiments of the buffer 18 illustrated herein, the buffer is rotatable about an axis 130 as shown in Figure 7A. However, the buffer 18 is not limited to being rotatable. For instance, the transfer of storage devices and the media stored within could occur by moving the storage devices within the buffer first along a linear path, and then turning the storage device 180 degrees to return along an adjacent linear path.

[0023] Figure 6 is a perspective view of a partially constructed transfer buffer 18 which includes two storage devices 28 and 30. A motor (not shown) is connected, external to the transfer buffer 18, to a pulley 140 (Fig. 7D) which rotates about an axis 128. A belt 142 connects pulley 140 to pulley 138 which, in turn, is connected to and drives one axle 126 of the rollers 34 (Fig. 2). The two rollers 34 form a tight nip therebetween so that when one roller 34 is driven, the other roller 34 follows. Similarly, rollers 36 are driven via a system containing a motor (not shown), a pulley 144 (Fig. 7D) rotating about an axle 132 and a pulley 146 rotating about an axis 134. The storage devices 28 and 30 are driven via an external motor (not shown) which engages the gears 136 to rotate the axles 110. The motors and associated hardware can be mounted external to, or within the transfer buffer 18, as desired. Moreover, the dimensions of the storage devices 28 and 30 are variable to accommodate different size media sheets.

[0024] The operation of the imagesetting system 1 including the transfer buffer 18 is detailed by the flow chart of Figure 8. The operating sequence is controlled by the controller 3 (Fig. 1) which, in turn is dependent upon software executed therein. At step 60, media 8 is

provided to the imagesetter 10, for example by a supply cassette 11 also referred to as a web supply roll. Media may alternatively be supplied by a number of pre-cut sheets, for example stored in a stack. At step 62, the supply rollers 6 move the media 8 onto the recording support surface 9 of the drum 14. At step 64, the imagesetter 10 records a predetermined image onto the media 8 while it is located over the recording support surface 9. After or during the recording of the image onto the medium 8 and prior to removal of the medium 8 from the recording support surface 9, the transfer buffer 18 is initialised at step 66. The steps of initialisation include (i) aligning the nip between the rollers 34 with the opening 23 of the platens 21, (ii) aligning the nip between the rollers 36 with the opening 37 of the platens 25, and (iii) indexing each of the bearings 92 (Fig. 5B) into indents 150 (Fig. 7A) of slots 124 of the end plates 112 (see Figures 5B and 7A). In the state of initialisation, the leaf springs 90 are each in an open or extended position so that the retaining rod 102 (Fig. 5A) is spaced apart from the body 100 of the storage device 28. Once the initialisation is complete, the imaged medium 8 is removed from the drum via output rollers 15 (Fig. 1) and new media is brought into the drum from the supply cassette 11 via input rollers 6 at step 68. At step 70, the image sensor 17 detects the traversal of the leading edge of the media and initiates power to the drive rollers 34 at the same transfer speed as the rollers 6 and 15. The transfer speed of the various drive rollers indicates to the controller 3 the exact position of the leading edge of the imaged medium 8. Thus, the imaged medium 8 is driven through rollers 34 until it is positioned between the surface 104 (Fig. 5B) and the bearing 92 as shown in Figure 5B. At this point, the body or roller 100 of the storage device 28 is activated to rotate about its axis 110 at the same transfer speed as the other rollers, causing the rods 102 to move out of the indents 150 and to clamp down on the medium 8 as shown in Figure 5C. The imaged medium 8 is thereafter wrapped onto the external surface of the roller 100 as shown in Figure 5C. Note that once the roller 100 begins to turn, the spring 90 is contracted so that the bearing 92 is removed from its initial position in the indent 150 (Figure 7A). The bearing 92 thus pinches the medium 8 onto the surface 104, holding the medium 8 in place as it wraps around the roller 100 as illustrated in Figure 7C.

[0025] When the appropriate length of media 8 has passed by the sensor 17, the cutters 16 cut the medium sheet and the rollers 6 and 15 stop (step 72). The drive rollers 34 and the roller 100 in the storage device 28 continue to operate until the trailing edge of the cut medium is in the vicinity of the opening 23. At this point, the drive rollers 34 and 100 stop and the first cut sheet of media is fully stored in the storage device 28. A next image is transferred onto the media in the drum as previously described. Meanwhile, at step 74 the transfer buffer 18 moves the storage devices therein. For

instance, for the cylindrical shaped transfer buffer 18 shown in Figures 2-4, the buffer is moved so that the nip between the rollers 34 is now aligned with the opening 37 of the platens 25 and the nip between the rollers 36 is aligned with the opening 23 of the platens 21. In this way, the cut medium 8 which is stored on the storage device 28 is ready for transfer into the processor 12, while an empty storage device 30 is available to receive the next sheet of imaged medium 8 from the drum 14. At step 76, the drive rollers 34 and 100 are activated and the medium 8 stored in the storage device 28 is transferred through the platen 25 into the processor 12. When the sensor 22 detects the leading edge of the medium 8, it transmits an electronic signal to the controller 3 which, in turn, activates the processor input rollers 20 at the same transfer rate as the rollers 34 and 100. When the trailing edge of the medium 8 being transferred into the processor 12 is detected by the sensor 22, the rollers 34 and 100 are deactivated.

[0026] The above described process repeats itself for each imaged sheet of media 8. Thus, media sheets are either being input into the drum or imaged, while simultaneously being transferred from the drum into the transfer buffer 18, and transferred from the transfer buffer 18 to the processor 12. In this manner, the imagesetting system 1 operates at a high level of efficiency.

[0027] Although the first and second preferred embodiments of the present invention, as described heretofore with reference to the drawings, include a generally cylindrical shaped transfer buffer 18, the particular shape of the buffer 18 is not critical to the principles of the invention. Hence, the transfer buffer 18 is not limited to a cylindrical shape. In fact, the movement of the storage devices 28 and 30 from one point to another within the buffer 18 can be implemented by any known transfer means, such as via a belt driven or chain driven transfer system. The particular cylindrical shape of the embodiments of the transfer buffer 18 illustrated in the drawings allows an easy manner to transfer the storage devices from one point to another within the buffer 18. In fact rather than rotating, the buffer 18 could cause the devices to move in a linear path or along a combination of linear and angular paths. Any path for transferring the media (via multiple storage devices) from one component to another within the imagesetting system 1 is a viable alternative for implementing the inventive concepts.

[0028] The general principles of the invention are presented in view of the previously described preferred embodiments. However, those principles are applicable in many variants of an imagesetting system. For instance, the transfer buffer could be used with any internal or external drum imagesetting system. In fact the transfer buffer could be more broadly used to transfer and buffer any imaged media between any two stages or components within a system. For instance, in a system which digitally images media, the transfer buffer could be used to transfer media between the

drum and the mechanical finishing unit (which would be necessary in place of the chemical processor described heretofore).

[0029] Having described the preferred embodiments of the invention, other embodiments which incorporate the concepts of the invention will now become apparent to one skilled in the art. Therefore, the invention should not be viewed as limited to the disclosed embodiments but rather should be viewed as limited only by the scope of the appended claims.

Claims

1. A method for transferring sheets of media (8) between a first (10) and second (12) component of an imagesetting system (1), the method characterised by:
 - moving a transfer buffer (18) having at least two storage devices (28, 30), to align a first storage device (28) with the first component (10) while concurrently aligning a second storage device (30) with the second component (12);
 - transferring a first sheet of said media (8) from the first component (10) to the first storage device (28);
 - moving the transfer buffer (18) to align the first storage device (28) with the second component (12) while concurrently aligning the second storage device (30) with the first component (10); and
 - transferring the first sheet of said media (8) from the first storage device (28) to the second component (12) while simultaneously transferring a second sheet of said media (8) from the first component (10) to the second storage device (30).
2. The method of claim 1 wherein the first component is an internal (14) or external drum for imaging.
3. The method of claim 1 or 2 wherein the second component is a chemical processor (12) or mechanical finisher.
4. The method of any one of claims 1 to 3, wherein the first and second storage devices (28, 30) are rollers, nip rollers, cassettes or media containers.
5. The method of any one of claims 1 to 4, wherein the first and second storage devices (28, 30) are removable.
6. The method of any one of claims 1 to 5, wherein the transfer buffer (18) is removable.
7. The method of any one of claims 1 to 6, wherein the transfer buffer (18) is rotatable.
8. A system for transferring sheets of imaged media (8) between components of an imagesetting system (1), the transferring system characterised by:
 - a transfer buffer (18);
 - at least two storage devices (28, 30) mounted onto said transfer buffer (18), each said storage device moveable within said transfer buffer and capable of storing one of the sheets of imaged media (8); and
 - a controller (3) for automatically controlling operation of the transfer system.
9. The system of claim 8 wherein a first component of the imagesetting system (1) is an internal (14) or external drum and a second component of the imagesetting system (1) is a chemical image processor (12) or a mechanical finishing unit.
10. The system of claims 8 or 9 wherein the storage devices (28, 30) are rollers, nip rollers, cassettes or media containers.
11. The system of any one of claims 8 to 10, wherein the transfer buffer (18) further includes drive rollers for transferring the sheets of media (8) into and from each storage device (28, 30).
12. The system of any one of claims 8 to 11, wherein the storage devices (28, 30) are removable.
13. The system of any one of claims 8 to 12, wherein the transfer buffer (18) is removable.

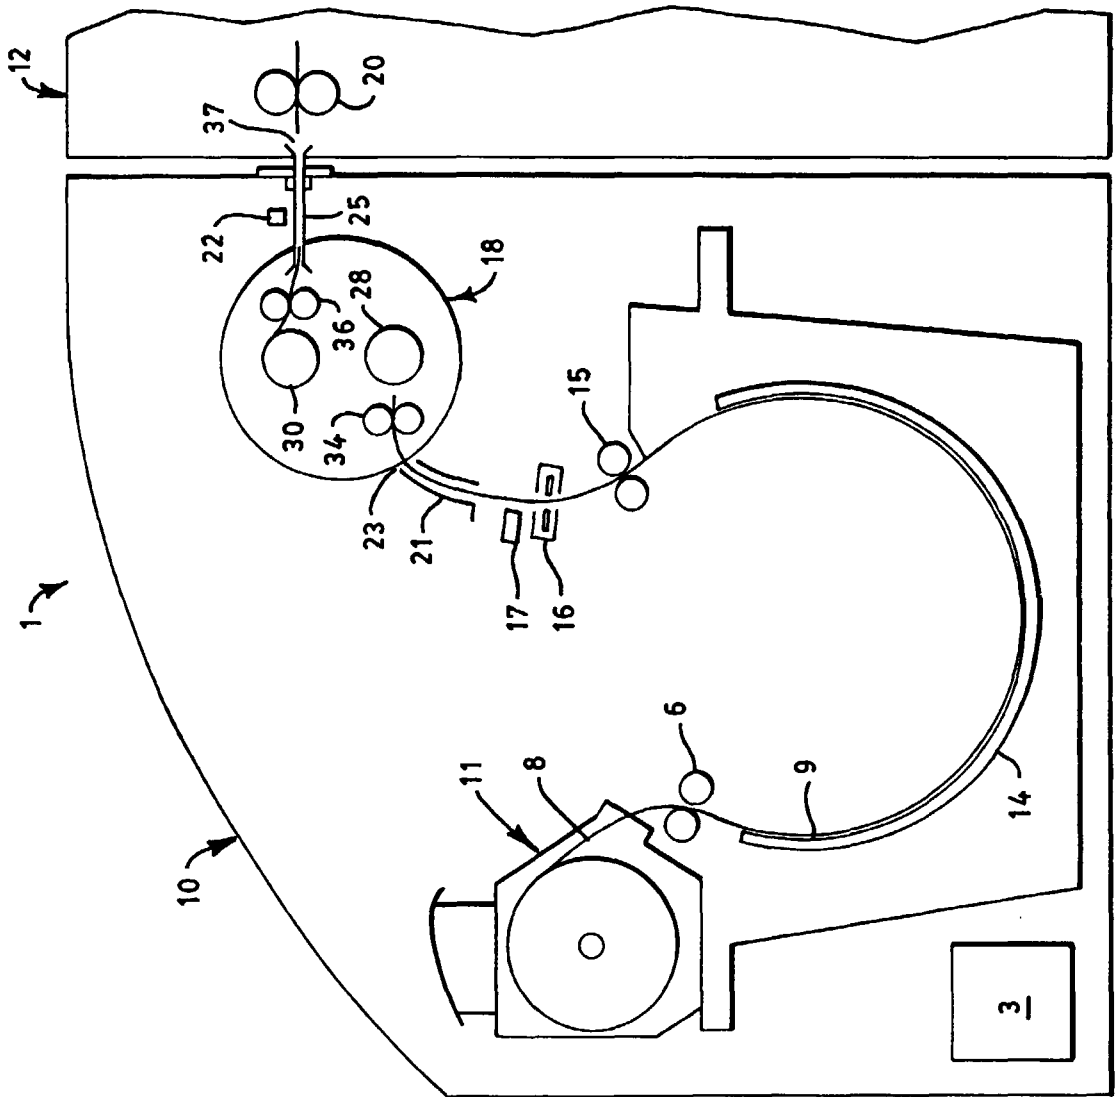


FIG. 1

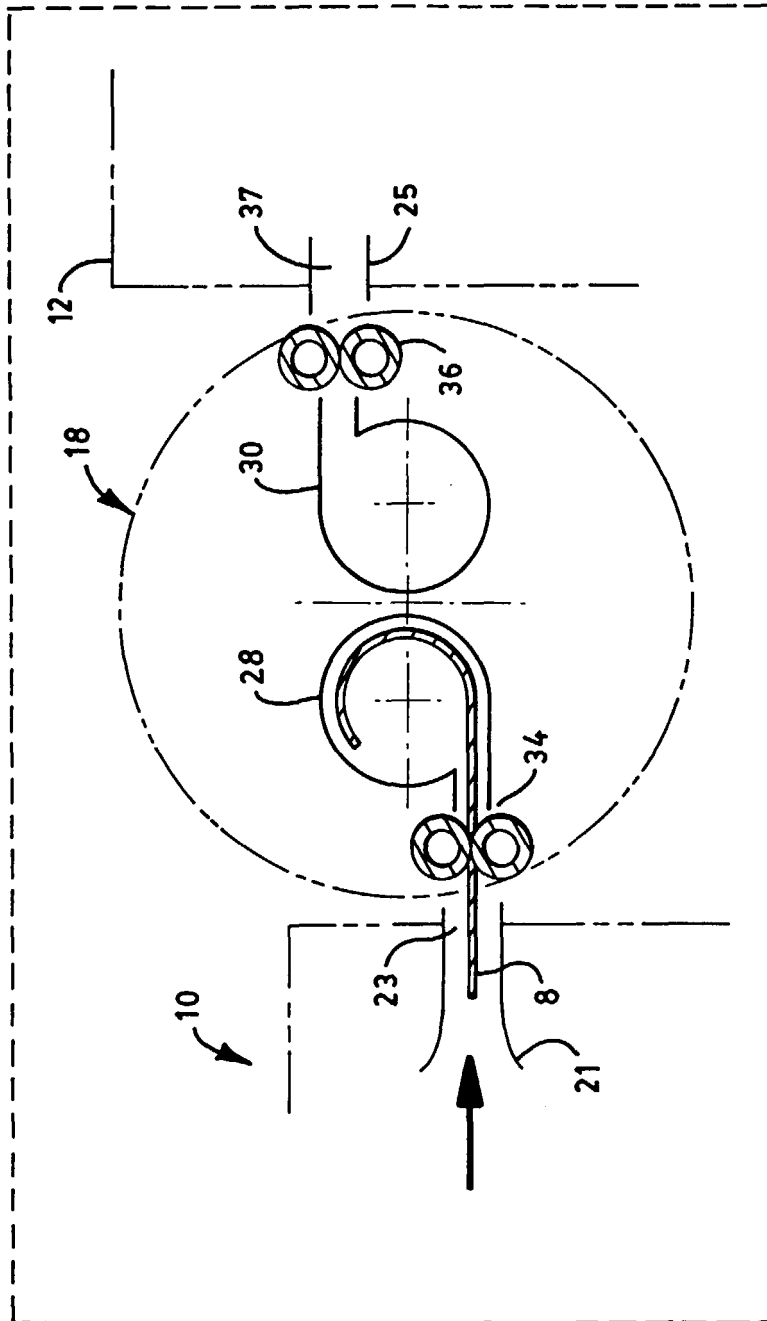


FIG. 2

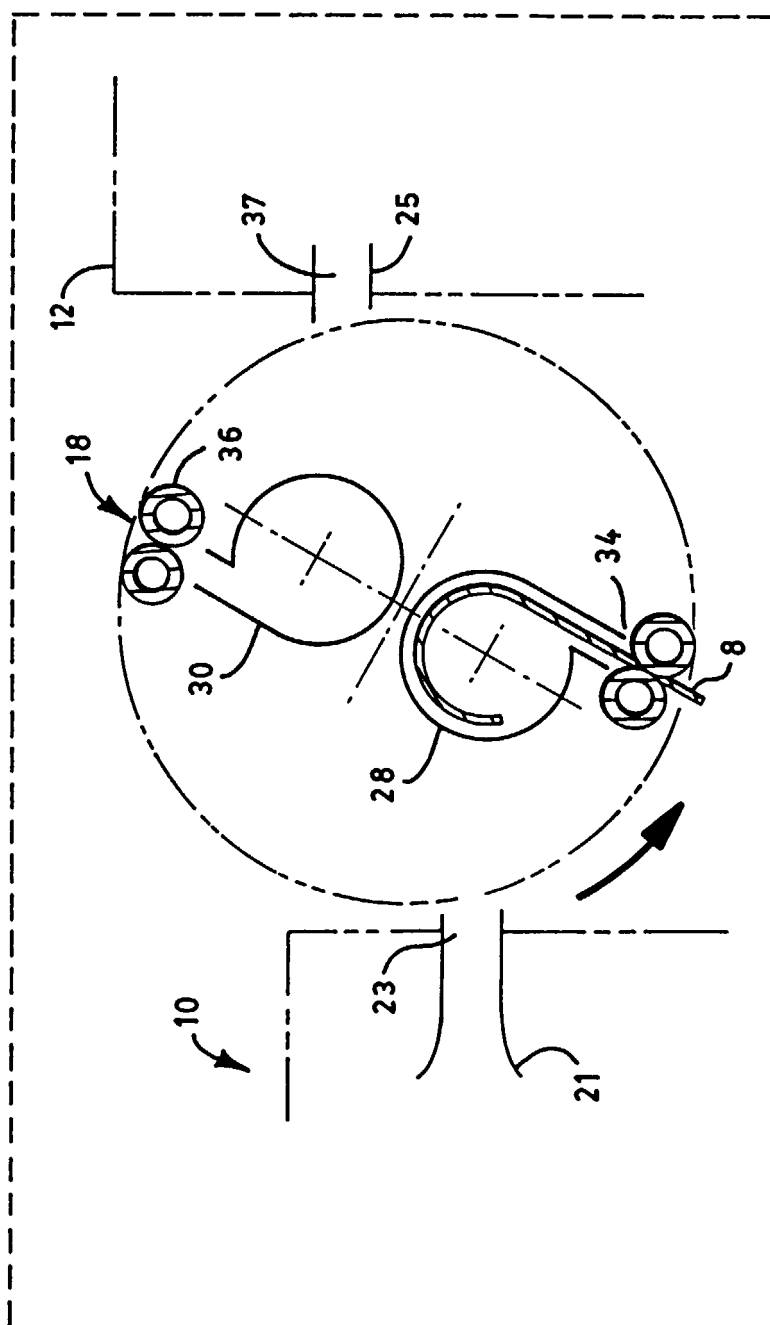


FIG. 3

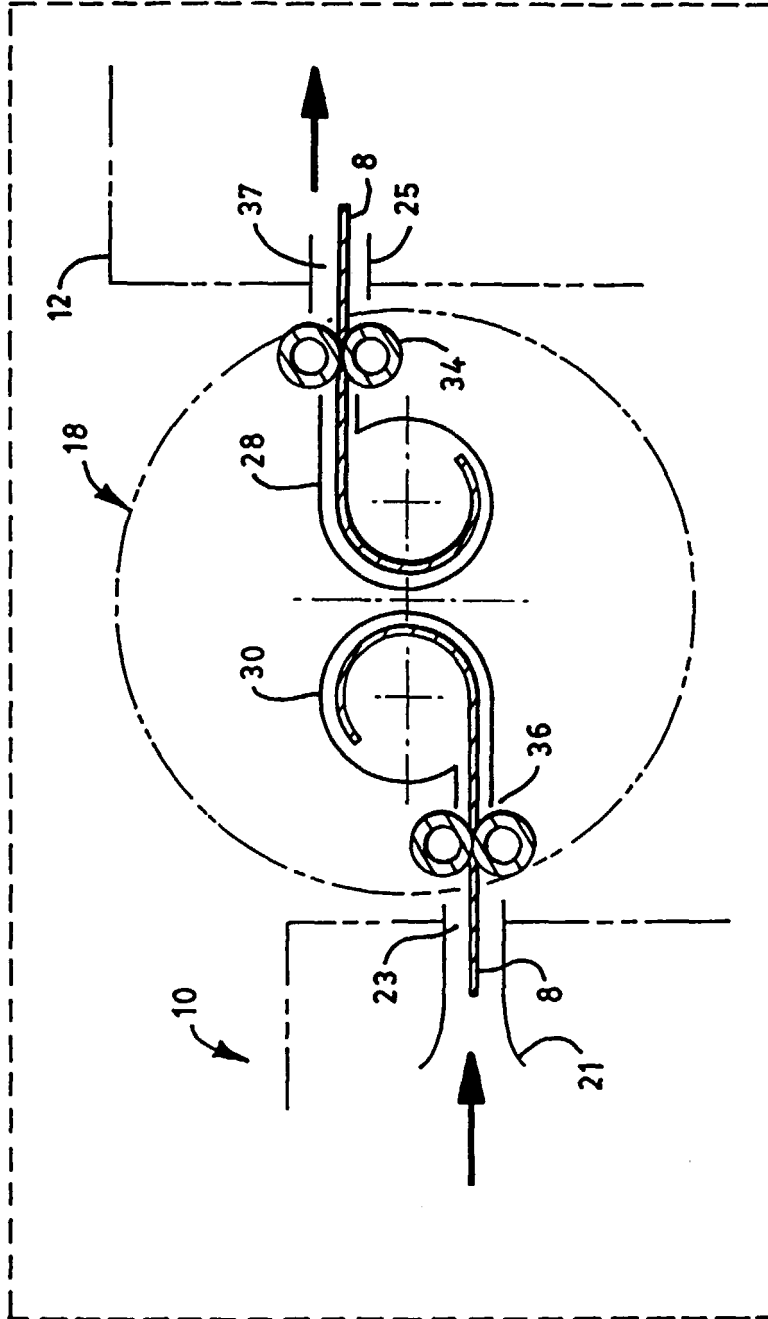


FIG. 4

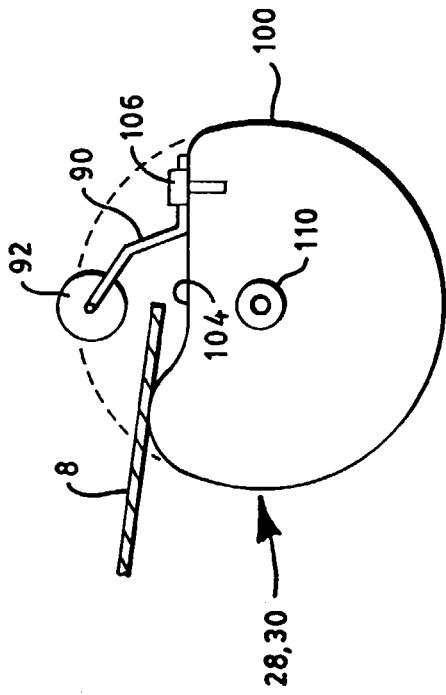


FIG. 5B

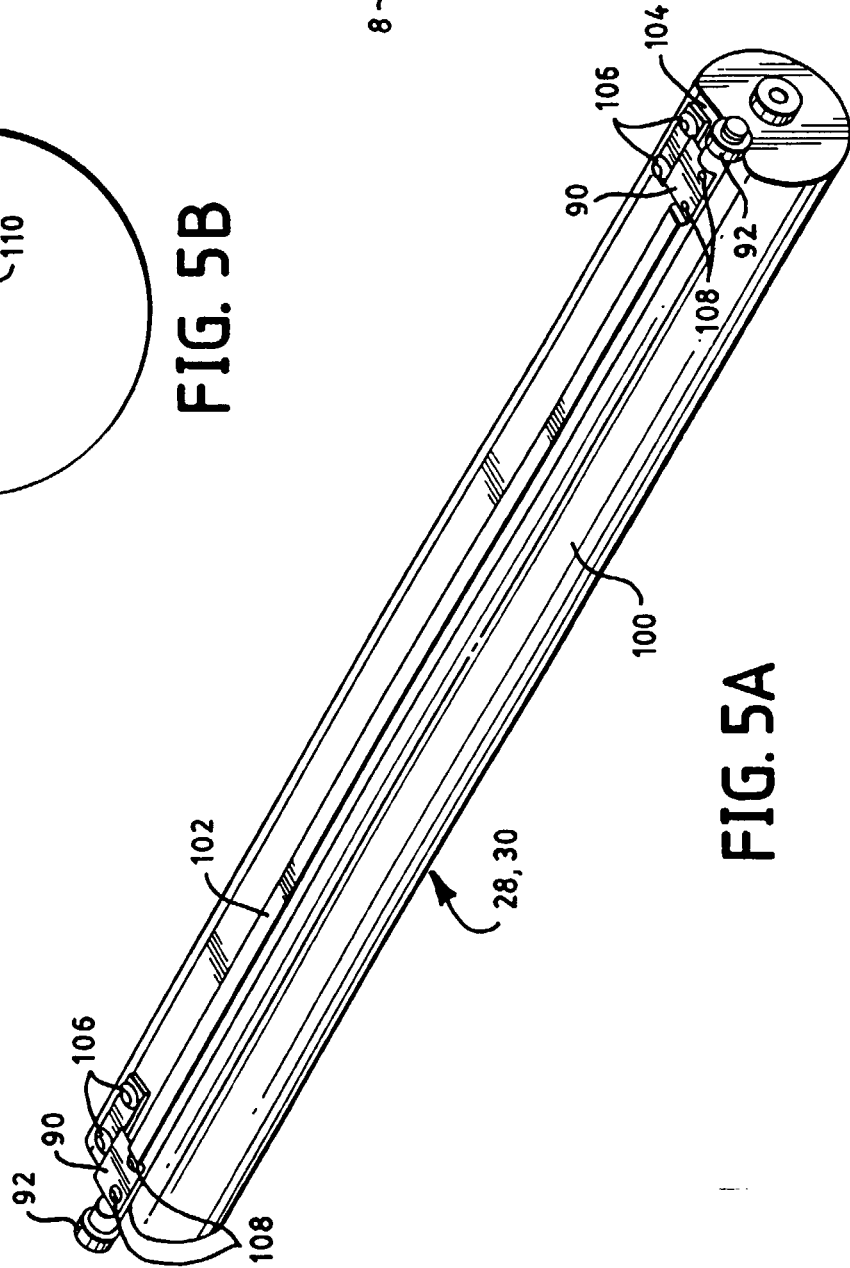


FIG. 5A

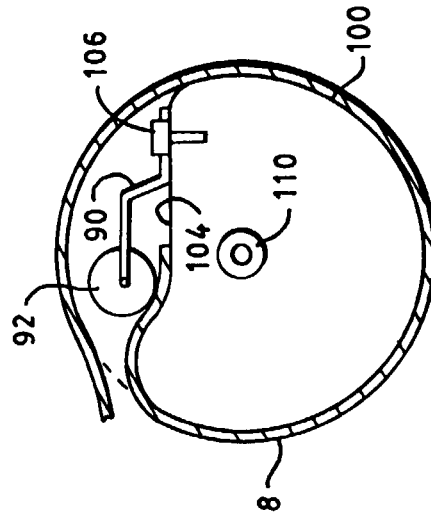
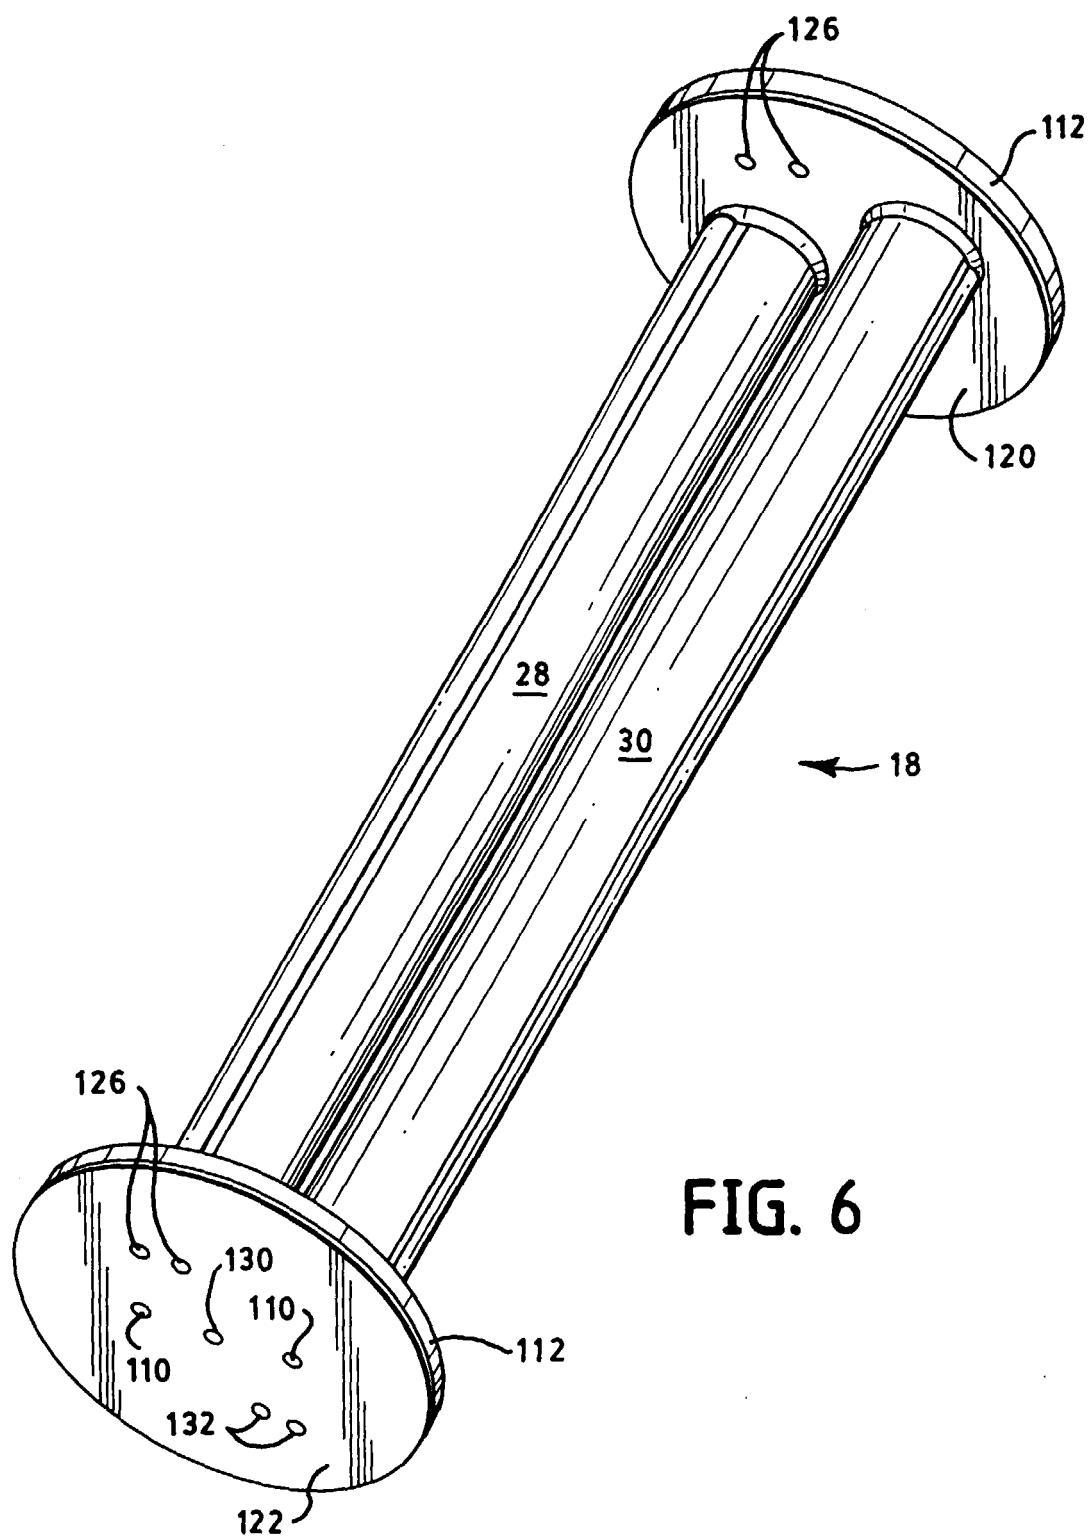


FIG. 5C



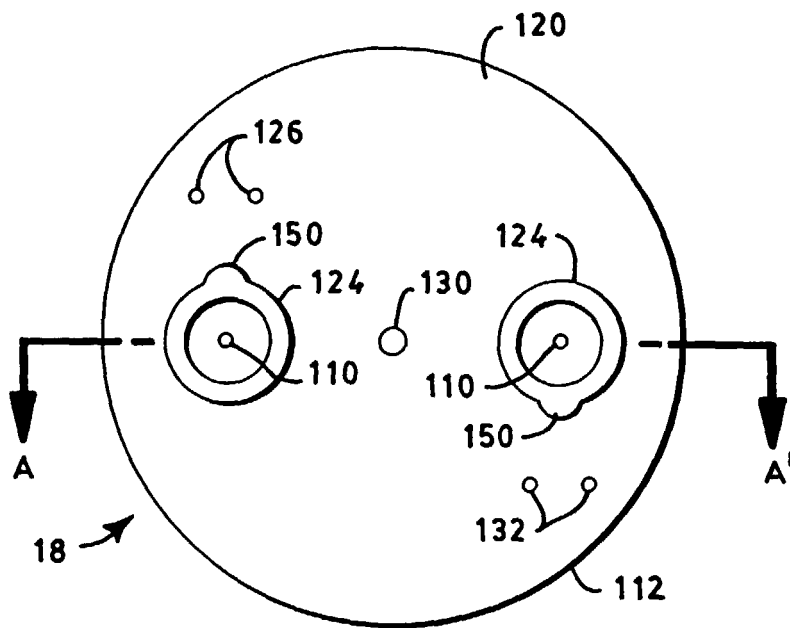


FIG. 7A

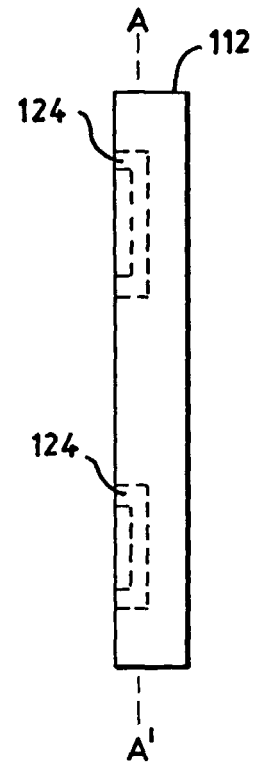


FIG. 7C

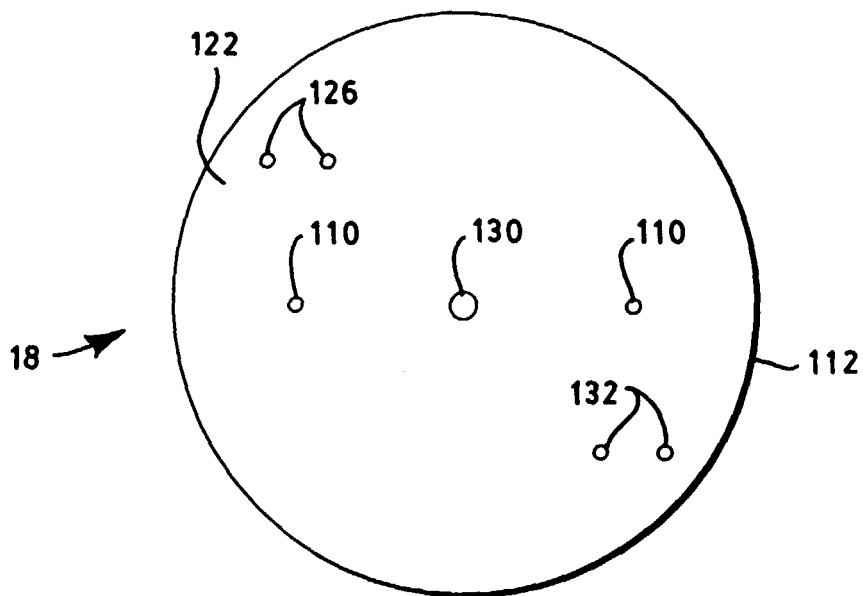


FIG. 7B

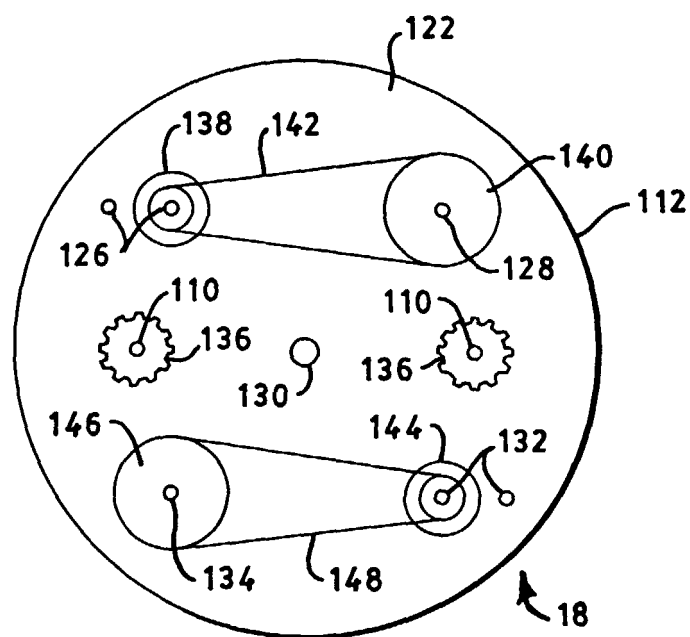


FIG. 7D

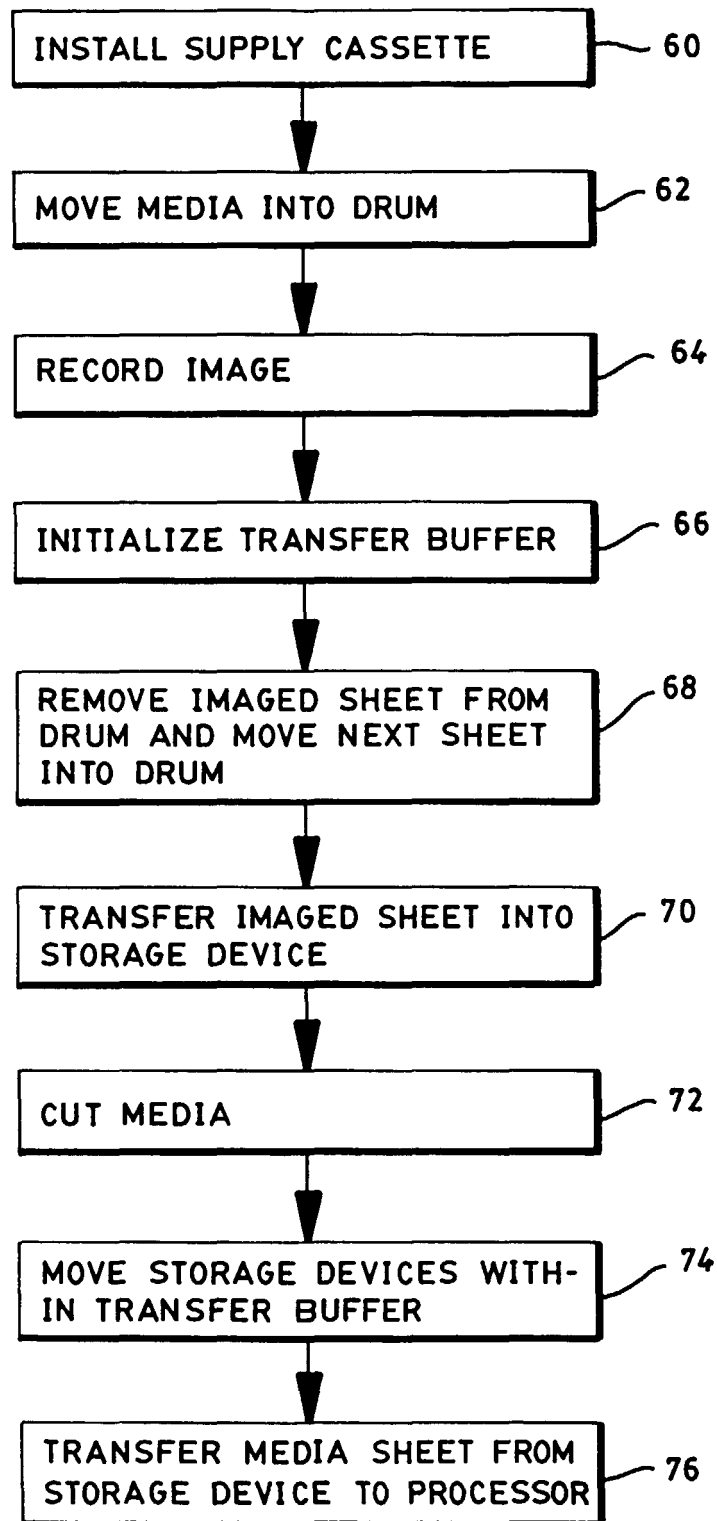


FIG. 8



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 0302

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 128 593 A (J.HADLAND) 2 May 1984 (1984-05-02) * page 1 - page 2; figures 1,2 *	1,3,4,7, 8,10	G03D13/00
X	US 4 511 098 A (Y.KONAYA) 16 April 1985 (1985-04-16) * column 2 - column 5; figures 1-3 *	1,3,4,7, 8,10	
X	US 4 593 867 A (T.YAMASAKI) 10 June 1986 (1986-06-10) * column 2 - column 3; figures 1-3 *	1,3,4,7, 8,10,11	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7) G03D
Place of search THE HAGUE		Date of completion of the search 25 April 2000	Examiner Boeykens, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (F04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 0302

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-04-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2128593	A	02-05-1984	NONE		
US 4511098	A	16-04-1985	JP	1048545 B	19-10-1989
			JP	1566108 C	25-06-1990
			JP	59084243 A	15-05-1984
			JP	1418933 C	14-01-1988
			JP	59102744 A	13-06-1984
			JP	62024335 B	28-05-1987
			DE	3371422 D	11-06-1987
			EP	0113001 A	11-07-1984
US 4593867	A	10-06-1986	JP	1031178 B	23-06-1989
			JP	1546395 C	28-02-1990
			JP	58107540 A	27-06-1983
			DE	3277470 D	19-11-1987
			EP	0082474 A	29-06-1983

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82