



- (51) **International Patent Classification:**
B01D 17/04 (2006.01) *E21B 43/36* (2006.01)
- (21) **International Application Number:**
PCT/US2015/025383
- (22) **International Filing Date:**
10 April 2015 (10.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/985,873 29 April 2014 (29.04.2014) US
62/126,148 27 February 2015 (27.02.2015) US
- (71) **Applicant** (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; CORP-URC-SW359, P.O. Box 2189, Houston, TX 77252-2189 (US).
- (72) **Inventors; and**
- (71) **Applicants** (for US only): **GRAVE, Edward, J.** [US/US]; 18830 Mountain Shade Drive, Spring, TX 77388 (US). **BYMASTER, Adam, S.** [US/US]; 1706 Taylor Bridge Court, Burleson, TX 76028 (US). **OLSON, Michael, D.** [US/US]; 8850 Van Allen Drive, The Woodlands, TX 77381 (US). **LARNHOLM, Per-Reidar** [NO/NO]; Ref-snesstranda 1, 1518 Moss (NO). **WHITNEY, Scott, M.** [US/US]; 27603 Siandra Creek Lane, Spring, TX 77386 (US).
- (74) **Agents:** **JENSEN, Nathan, O.** et al.; ExxonMobil Upstream Research Company, CORP-URC-SW359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** MULTIPHASE SEPARATION SYSTEM

(57) **Abstract:** The current disclosure relates to multiphase fluid separation via a multiphase separation system. The multiphase separation system is configured to feed a multiphase fluid into feed lines within the multiphase separation system, wherein the feed lines consist of an upper line, a middle line, and a lower line. The upper line is configured to flow a first stream substantially including oil into an oil section of a control volume. The middle line is configured to flow a second stream substantially including an oil/water emulsion into an oil/water emulsion section of the control volume. The lower line is configured to flow a third stream substantially including water into a water section of the control volume. The control volume is configured to adjust fluid flow rate at an outlet, wherein the oil section, the water section, and the oil/water emulsion section each commingle at different heights of the control volume.



MULTIPHASE SEPARATION SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

5 [0001] This application is related to both United States patent application number 61/985,873 filed April 29, 2014 entitled MULTIPHASE SEPARATION SYSTEM, and United States patent application number 62/126,148 filed February 27, 2015 entitled MULTIPHASE SEPARATION SYSTEM, the entirety of which is incorporated by reference herein.

FIELD

10 [0002] The present techniques provide for the separation of oil and water feed streams within production fluids. More specifically, the techniques provide for the separation of production fluids into component oil and water phases using a subsea multiphase separation system.

BACKGROUND

15 [0003] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present techniques. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present techniques. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

20 [0004] Any of a number of subsea separation techniques may be used to enhance the amount of oil and gas recovered from subsea wells. However, subsea separation at water depths greater than 1500 meters becomes especially challenging due to the environmental conditions. As water depth increases, the external pressure on a vessel created by the hydrostatic head increases the required wall thickness for vessels used for subsea processing. At water depths greater than 1500 meters, this wall thickness increases to such an extent that typical gravity separation vessels are not practical. In addition, vessels with such a large wall thickness can be a challenge to fabricate, and the added material and weight can impact project economics, as well as the retrievability of the vessel for maintenance. As a result, large diameter separators often cannot be used at such water depths.

30 [0005] Studies have been done concerning liquid and gas separation in subsea systems and methods in U.S. Patent No. 8,282,711B2. These systems and methods describe the separation of liquids and gases from a subsea production fluid, using a pipe system that splits the flows of the liquid and gaseous fluids through separate manifolds.

[0006] Additional studies concerning a pipe separator system for improving separation may be found in U.S. Patent No. 7,490,671. The system describes a pipe separator, which utilizes a cyclone and an electrostatic coalescer as part of the separator body, for separation of oil, gas, and water originating from a subsea well.

- 5 [0007] Additional studies concerning a pipe separator for the separation of fluids may be found in U.S. Patent No. 7,516,794. This system describes a pipe system similar to that in US 7,490,671, and flows fluids into separate pipe manifolds. The pipe system described adds the requirement that the system be "piggable".

- 10 [0008] Additional studies concerning an installation for the separation of fluids may be found in U.S. Application 2005/0006086. The system describes pipe separators that form a part of the transport pipeline, and that utilize an electrostatic coalescer to separate an oil, gas, and water stream.

- 15 [0009] Additional studies concerning a method and apparatus for improving the performance of a separator may be found in U.S. Application 2008/0116072. The method and apparatus describe a gravity settling vessel, and feeding an off-take stream through a compact electrostatic coalescer and back into the settling vessel.

SUMMARY

- 20 [0010] An exemplary embodiment provides a multiphase separation system including a separation line configured to feed a multiphase fluid into vertically oriented feed lines within the separation system, wherein the feed lines consist of an upper line, a middle line, and a lower line. The upper line is configured to flow an oil feed line into an oil section. The middle line is configured to flow an oil/water emulsion feed line into an oil/water emulsion section. The lower line is configured to flow a water feed line into a water section. The multiphase separation system also includes a control volume configured to adjust fluid flow rate at an outlet, wherein the oil section, the water section, and the oil/water emulsion section commingle at different heights of the vertically oriented control volume.

- 30 [0011] Another exemplary embodiment provides a method for separation of oil and water and oil/water emulsion within a multiphase fluid, including flowing a multiphase fluid into a distribution inlet of a multiphase separation system. The method includes separating the multiphase fluid into an oil phase, a water phase, and an oil/water emulsion. The oil phase is separated into a line that is in a plane vertically above a plane of the distribution inlet. The water phase is separated into a line that is in a plane vertically below the plane of the distribution inlet. The oil/water emulsion is separated into a line that is in a plane vertically above the plane of the line with the water phase and vertically below the plane of the line

with the oil phase. The method also includes flowing each line into a vertically oriented control volume, wherein the flow rate from each line is controlled, the oil and water level present in each line is detected, and each line is separated into an outlet from the control volume.

- 5 [0012] Another exemplary embodiment discloses a separation system that includes an inlet line configured to feed a multiphase fluid into side feed lines within the separation system, wherein the side feed lines consist of a plurality of upper lines and a plurality of lower lines. Each upper line of the separation system is configured to feed an oil side feed line into an oil section and further configured to split the inlet line into an oil/water emulsion
10 section, wherein the oil section is in a plane located vertically above the oil/water emulsion section. Each lower line of the separation system is configured to feed a water side feed line into a water section, wherein the water section is in a plane located vertically below the oil/water emulsion section, and the water section is coupled to the oil/water emulsion section by a subsequent water side draw stemming from the oil/water emulsion section. The
15 separation system also includes a control volume and a control system.

DESCRIPTION OF THE DRAWINGS

[0013] The advantages of the present techniques are better understood by referring to the following detailed description and the attached drawings, in which:

- 20 [0014] Fig. 1 is a block diagram of a multiphase separation system for separating production fluids that may be obtained from a subsea well;

[0015] Fig. 2 is a side view schematic diagram of an exemplary multiphase separation system;

[0016] Fig. 3 is a top view schematic diagram of the exemplary multiphase separation system of Fig. 2, illustrating a horizontal divider in the multiphase separation system;

- 25 [0017] Fig. 4 is a side view schematic diagram of another multiphase separation system, as described herein;

[0018] Fig. 5 is a side view schematic diagram of the multiphase separation system of Fig. 4;

- 30 [0019] Figs. 6A and 6B illustrate a process flow diagram showing a method for separating liquids within a multiphase fluid;

[0020] Fig. 7 illustrates a block diagram of an exemplary separation system, and includes a control system;

[0021] Fig. 8 is a schematic view of a multiphase separation system and control system;

- [0022] Fig. 9 is a perspective drawing illustrating the upper, middle and lower lines with injection points for sand jet nozzles and recycle streams;
- [0023] Fig. 10A is a perspective drawing illustrating the water line with a collection area at the bottom of the line for solid particles to accumulate;
- 5 [0024] Fig. 10B is an end-view drawing illustrating the water line with a collection area at the bottom of the line for solid particles to accumulate;
- [0025] Fig. 11 is a perspective drawing illustrating an adjustable weir system;
- [0026] Fig. 12 is a perspective drawing illustrating an adjustable baffle system;
- [0027] Fig. 13 is a side view schematic diagram of another embodiment of a multiphase separation system;
- 10 [0028] Fig. 14 is a perspective diagram of the downcomers/riser apparatuses of the multiphase separation system of Fig. 13;
- [0029] Fig. 15 is a perspective diagram of the weirs of the multiphase separation system of Fig. 13; and
- 15 [0030] Fig. 16 is a side view schematic diagram of another embodiment of a multiphase separation system.

DETAILED DESCRIPTION

- [0031] In the following detailed description section, specific embodiments of the present techniques are described. However, to the extent that the following description is specific to
- 20 a particular embodiment or a particular use of the present techniques, this is intended to be for exemplary purposes only and simply provides a description of the exemplary embodiments. Accordingly, the techniques are not limited to the specific embodiments described below, but rather, include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.
- 25 [0032] As used herein, “substantially”, “predominately” and other words of degree are relative modifiers intended to indicate permissible variation from the characteristic so modified. It is not intended to be limited to the absolute value or characteristic which it modifies, but rather possessing more of the physical or functional characteristic than its opposite, and preferably, approaching or approximating such a physical or functional
- 30 characteristic.
- [0033] A “multiphase fluid” is a fluid that is amenable to flow and that is composed of two phases that are not chemically related (e.g., oil and water) or where more than two phases

are present (e.g., liquid and gas).

[0034] An “emulsion” usually comprises two immiscible phases. The two immiscible phases include a continuous (or external) phase and a discontinuous (or internal) phase. The discontinuous phase comprises the secondary fluid that usually exists in droplets in the continuous phase. Two varieties of emulsions are oil-in-water and water-in-oil. Oil-in-water emulsions usually include a fluid at least partially immiscible in an oleaginous fluid (usually an aqueous-based fluid) as the continuous phase and an oleaginous fluid as the discontinuous phase. Water-in-oil emulsions are the opposite, having the oleaginous fluid as the continuous phase and a fluid at least partially immiscible in the oleaginous fluid (usually an aqueous-based fluid) as the discontinuous phase. Water-in-oil emulsions may be also referred to as invert emulsions.

[0035] A “demulsifier” refers to a surfactant or combination of surfactants that inhibits or prevents dispersion in an emulsion, thereby permitting the immiscible substances to be more readily separated from one another.

[0036] A “weir” refers to a physical barrier that can act as a gravity settling structure, and, as used herein, is meant to separate water from oil flowing in a particular stream. As used herein, the weir may also be extended downwards to force separation of floating fluids from denser fluids, such as oil from water.

[0037] As discussed above, traditional separators, which often have a diameter of about one meter or more, face technical challenges in deep water use, for example, at depths greater than approximately 1500 meters. Thus, embodiments described herein provide an unconventional separation system that is capable of achieving acceptable oil-water separation, while meeting the size and weight restrictions imposed on deep water processing units. Further, the separation system can be designed to pipe code instead of vessel code, which may provide cost and weight savings. In many cases, for a given pressure class, the required wall thickness for a pipe is less than the required wall thickness for a corresponding vessel.

[0038] According to embodiments described herein, a multiphase separation system may be used to enhance production from subsea wells, especially in deep water and Arctic environments. In various embodiments, the separation system is a pipe separator that can be configured to separate production fluids into an oil phase, an aqueous phase, and a solid phase (or slurry). In some embodiments, the separator can be configured to separate gaseous production fluids. In other words, examples of the current separation techniques may be used to create single phase streams. This may allow for the usage of single phase pumps, which are more efficient and can achieve larger pressure differentials compared to

multiphase pumps. For example, one single phase pump may be sufficient to pump a single phase stream. In contrast, a series of multiphase pumps may be needed to achieve the same pressure differential while pumping a multiphase stream, especially for high boosting applications.

- 5 [0039] The separation process described herein may be used to achieve bulk removal of aqueous fluids from production fluids. The removal of aqueous fluids is termed water removal herein, although this may be understood to include water with other contaminants, such as salts or other miscible fluids. Such bulk water removal may mitigate flow assurance concerns, by allowing substantially pure gas and oil streams to be sent to the surface.
- 10 These substantially pure streams will form lower amounts of hydrates, such as methane clathrates, thus lowering the risk of plugging or flow restrictions. Further, corrosion concerns can be reduced or eliminated. The sand and water by-product streams can then be disposed to dedicated disposal zones, to the sea, or may be used for pressure maintenance in production reservoirs.
- 15 [0040] Bulk water removal may also result in a decrease in the hydrostatic head acting on the reservoir, thus increasing both the reservoir drive and production. Bulk water removal may also reduce flow line infrastructure, reduce the number of topside water treating facilities, reduce power and pumping requirements, and de-bottleneck existing facilities that are challenged with declining production rates due to increased water cuts.
- 20 [0041] Fig. 1 is a block diagram showing a multiphase separation system **100** for separating production fluids **102** that may be obtained from a subsea well **104**. The multiphase fluid may be any type of fluid that includes a water phase and an oil phase components that are relatively immiscible. For example, the multiphase fluid may be production fluids **102** from a subsea well **104**. The production fluids **102** may be
- 25 hydrocarbon fluids that include a mixture of natural gas, crude oil, brine, and solid impurities, such as sand. The production fluids **102** may be obtained from the subsea well **104** via any type of subsea production system (not shown) that is configured to produce hydrocarbons from subsea locations. A gas-liquid separation system **106** can optionally be used upstream to separate a gas stream **108** and a liquid stream **110**.
- 30 [0042] In an exemplary embodiment, the production fluids **102** are separated into gas and liquid phases in a gas-liquid separation system **106**. The gas stream **108** can be further processed by downstream equipment **112**. The downstream equipment **112** may include, for example, any type of downstream gas processing equipment, such as a gas compressor, gas treatment facility, gas polishing device, or the like, or a gas pipeline.
- 35 [0043] In embodiments described herein, the liquid stream **110** can be flowed into an

oil/water liquid-liquid separation system **114**. The oil/water separation system **114** is a pipe separator that is configured to achieve bulk separation of the liquid stream **110** into an oil stream **116**, a water stream **118**, and, in some examples, an oil/water emulsion stream **120**.

[0044] Within the multiphase separation system **100**, the liquid stream **110** can be separated into separate streams **116**, **118**, **120**, which can flow through a polishing section until the streams commingle at a control volume **122**. A control volume is used, for example, to achieve final phase separation and to maintain the separate phases of oil and water before flowing substantially oil through an oil outlet **124** and substantially water through a water outlet **126**. Designs for the separation system **100**, as well as the mechanisms by which the multiphase separation system **100** may affect the quality of the separated oil phase, water phase and oil/water emulsion, are described with respect to Figs. 3-8.

[0045] In some embodiments, the oil in the separation system **100** is flowed out of the top of the control volume **122** through the oil outlet **124**. From the oil outlet **124**, a substantially pure oil stream **128**, which may be processed by downstream equipment. The downstream equipment may include, for example, any type of processing equipment, such as an oil treatment facility, or an oil pipeline, among others. A portion of the oil from the oil outlet **124** can be recycled back into the oil stream **116** upstream of the control volume **122** as an oil recycle stream **132**.

[0046] The water in the separation system **100** is flowed out of the bottom of the control volume **122** through the water outlet **126**. A portion of the substantially pure water stream **130** from the water outlet **126** can be recycled back into the water stream **118** as a water recycle stream **134**, for example, upstream of the control volume **122**. This can be useful to flush out sand and other sediments that may have accumulated at the bottom of the pipe separator through which the water stream **118** flows.

[0047] Additional treatment of each of the streams **116**, **118**, and **120** is possible upstream the control volume **122**, and additional treatment to the substantially pure oil stream **128** and the substantially pure water stream **130** is possible downstream of the control volume **122**. For example, oil and water pre-treating or coalescence equipment, such as a heating system, a chemical injection system, an electrostatic coalescer, or the like, or a cyclone for oil-water separation, or liquid export pipelines could each be used in addition to the current separation techniques.

[0048] The block diagram of Fig. 1 is not intended to indicate that the multiphase separation system **100** is to include all of the components shown in Fig. 1. Further, any number of additional components may be included within the multiphase separation system **100**, depending on the details of the specific implementation. For example, the multiphase

separation system **100** can be designed to achieve gas/liquid as well as liquid/liquid separation, with or without pre-treatment, thus delivering substantially pure oil, pure water, and pure gas streams to the downstream equipment. Further, multiphase and liquid desanders (not shown) may be placed upstream and/or downstream of the multiphase separation system **100**. Moreover, the multiphase separation system **100** can be considered a tubular configured to flow a multiphase fluid and achieve phase separation.

[0049] Fig. 2 shows an elevation drawing of an exemplary multiphase separation system **200**. A multiphase fluid flows into the multiphase separation system **200** at a distribution inlet line **202**. The multiphase separation system **200** is split vertically at a first divider **204** into a predominately oil line **206** and predominately water line **208**. The predominately oil line **206** is split vertically at a second divider **210** of the multiphase separation system **200** into a predominately oil line **206** and an oil/water emulsion line **212**. The predominately oil line **206**, predominately water line **208**, and oil/water emulsion line **212** lines may be of equal or lesser diameter than the distribution inlet line **202**. In this example, perforated baffles **214** with a preselected open area can be used to balance the flow between the lines **206**, **208**, and **212**. The locations of the perforated baffles **214** are downstream of the flow dividers **204** and **210**. The perforated baffles **214** also act as flow straightening devices downstream of the flow dividers **204** and **210**. In order to balance the flow and ensure sufficient residence time within each line, a range of open areas may be used for the perforated baffles **214**.

[0050] After the open pipe sections **216** of the multiphase separation system **200**, the lines **206**, **208**, and **212** enter a control volume **220**. A level detector **218** that can determine phase interfaces, such as an oil/water interface, an oil/emulsion interface or an emulsion/water interface, may be installed in the control volume **220**. The level detector **218** can be configured to send, for example, gamma radiation through the fluids in the control volume **220** in order to measure where the interfaces between the oil, water, and emulsion exist. This measurement indicates the quantity of water and quantity of oil that are present within the control volume **220**. The level detector **218** can be configured to send a signal to a controller (not shown) which can adjust control valves or pump speeds (not shown) that are in the oil and water outlet lines. The control valves or pump speeds are configured to effectively control the flow rate of each line leaving the control volume **220**.

[0051] A substantially pure oil stream **128** may be removed from the outlet **222** at the top of the control volume **220**, while a substantially pure water stream **130** may be removed from the outlet **224** at the bottom of the control volume **220**.

[0052] In another embodiment, the control volume **220** can be configured as a spherical

or horizontal cylindrical separator (not shown). Additionally, the multiphase separation system **200** can be considered a tubular configured to flow a multiphase fluid and achieve phase separation.

[0053] Fig. 3 is a top view of the exemplary multiphase separation system **300** illustrating a horizontal divide **304** in the multiphase separation system **300**. The multiphase separation system **200** may include a distribution inlet line **302** configured to feed the multiphase fluid into separate lines **306** and **308**. The distribution inlet line **302** can be coupled to a left line **306** and a right line **308** that are first split horizontally at divide **304**. The left line **306** and the right line **308** can be parallel to the distribution inlet line **302**. The flow in each line can be influenced by perforated baffles **310** installed within the lines. Subsequent lines (not shown) can be divided vertically to achieve greater separation of the oil phase and the water phase, to slow respective flow rates, and to meet at different levels in a control volume **312**. In alternative embodiments, each of the horizontally split lines **306** and **308** may be configured to feed an independent control volume, where each control volume could then be smaller in size than one volume of all the commingled flow lines.

[0054] The multiphase separation system **300**, splits flow into lines **306** and **308**, for the separation of oil, water, and emulsion. Liquid degassing can also be accomplished in the lines **306** and **308** or a previous section, depending on the application. Downstream of the lines **306** and **308** and following bulk separation of the oil and water phases, the multiphase separation system **300** is connected to plurality of vertically-oriented dividers, which can be arranged at right or oblique angles, leading to a predominantly oil line and a predominantly water line. The predominately oil line is above the plane of the distribution inlet line **302**, while the predominately water line is below the plane of the distribution inlet line **302**. An oil/water emulsion line can also be located between the upper and lower lines, and is not shown in Fig. 3. The planes of both lines **306** and **308** are substantially parallel to each other and the distribution inlet line **302**, e.g., they are in horizontal planes. This arrangement can achieve more pure oil and water outlet qualities leaving the multiphase separation system **300**, compared to a single-line horizontal pipe separator. The left **306** and right **308** lines may be of equal or lesser diameter than the distribution inlet line **302**.

[0055] The schematic of Fig. 3 is not intended to indicate that the multiphase separation system **300** is to include all of the components shown in Fig. 3. Further, any number of additional components may be included within the multiphase separation system **300**, depending on the details of the specific implementation.

[0056] Fig. 4 is a perspective view of another multiphase separation system **400**, as described herein. In Fig. 4, a polishing section is located after the first level detector and

before the control volume. The polishing section is discussed in more detail with respect to Fig. 5. In the multiphase separation system, **400**, the distribution inlet line **402** divides into a middle line **404**, in which oil is the predominate phase, and a lower line **406**, in which water is the predominate phase. The middle line **404** may feed the multiphase fluid into an upper line **405** and an oil/water emulsion line **408**. Perforated baffles **410**, or other flow control devices, can be inserted at various positions within each line in order to balance the flow rate of fluid within a particular line. The upper line **405** can be in a second plane that is above and substantially parallel to the plane occupied by the oil/water emulsion line **408**. The lower line **406** can be below and substantially parallel to the plane occupied by the oil/water emulsion line **408**. In addition, the lower line **406** may feed water and sand particles into a downcomer (described with more detail in Fig. 5).

[0057] A level detector **412** is configured to measure the phase interface levels between the oil, water, and emulsion components in each of the lines **405**, **406**, and **408**. The phase interface levels that are measured can be communicated to a controller that is configured to control downstream valves in the upper **405** and lower **406** lines. The valves are used to control the flows entering the control volume **422**. In an exemplary embodiment, the control volume **422** is a vertically-oriented cylindrical structure that is configured to flow substantially oil through an oil outlet **416**, substantially water through a water outlet **418**, and an oil/water emulsion through an optional emulsion outlet **420**. In another exemplary embodiment, the control volume **422** can be spherical in shape, and the multiphase separation system **400** can act as a pre-separator. In yet another embodiment, the control volume **422** can be a horizontal, oil-water separator. Spherical and vessel-based control volumes may be utilized when internal and external pressures are not a significant constraint on the system.

[0058] The schematic of Fig. 4 is not intended to indicate that the multiphase separation system **400** is to include all of the components shown in Fig. 4. Further, any number of additional components may be included within the multiphase separation system **400**, depending on the details of the specific implementation. For example, the length of the lines **405**, **406**, and **408** can be extended, upstream of or within the polishing section **502** of Fig. 5, to increase residence time and improve oil/water separation. This may allow for the enhancement or the elimination of downstream separation steps and equipment. Near the end of the multiphase separation system **400**, the flow will be directed into separate headers through a polishing section **502**.

[0059] Fig. 5 is a side view of the multiphase separation system **500**, e.g., the multiphase separation system **400** of Fig. 4. In Fig. 5, the polishing section **502** is magnified and illustrated in more detail. Like numbered items are as discussed with respect to Fig. 4. Fluid flowing from the upper line **405**, the lower line **406**, and the oil/water emulsion line **408**

pass by a level detector **412** and into the polishing section **502**. Fluid from the upper line **405** enters the polishing section **502** and flows partially over an optional weir **506**. The weir **506** for the upper line is configured to allow the less dense oil phase to flow above the weir **506**. The more dense water and oil/water emulsion phases build-up against the weir **506** and flow through a downcomer **504** and into the oil/water emulsion lines **512** of the polishing section **502**. A control valve **508** is configured to control the flow of the upper line **405** upstream of the control volume **422**.

[0060] Another optional weir system **507** can be utilized in the lower line **406** to allow the more dense water phase to flow below the weir **506**. The less dense oil and oil/water emulsion phases build-up against the weir **507** and flow through a riser **510** and into the oil/water emulsion lines **512** of the polishing section **502**. Another control valve **508** is configured to control the flow of the lower line **406** upstream of the control volume **422**. The downcomers **504** between the emulsion lines **512** are further configured to flow the more dense water component down to the lower emulsion line, and flow the less dense oil component up to the upper emulsion line.

[0061] The polishing section **502** is configured to allow the oil phase to enter at the top of the control volume **422**, and exit through an outlet **416** at the top of the control volume **422**. The polishing section **502** is also configured to allow the water phase to enter at the bottom of the control volume **422**, and exit through an outlet **418** at the bottom of the control volume **422**. The polishing section **502** is also configured to allow the oil/water emulsion phase to enter at the middle of the control volume **422**, and exit through an optional outlet **420** at the middle of the control volume **422**.

[0062] In an exemplary embodiment, the control volume **422** is a vertically-oriented cylindrical structure with inlets from each upper oil **405**, lower water **406**, and middle oil/water emulsion **512** lines, as well as oil **416**, water **418**, and oil/water emulsion **420** outlets. The outlets can connect to downstream polishing separation stages, e.g., deoiling hydrocyclones.

[0063] To enhance the oil/water separation prior to the fluid from each line being flowed through the polishing section **502**, the oil and oil/water emulsion lines can be equipped with optional electrostatic coalescer devices (not shown) for enhanced water droplet coalescence and oil/water separation. The oil, water, and oil/water emulsion lines can be equipped with coalescing and flow distribution internals, e.g., plate packs, perforated baffles, and the like, which enhance droplet coalescence and oil/water separation.

[0064] The level of oil and water in each of the lines **405** and **406** entering the polishing section **502** can be controlled with control valves **508** to maintain the oil/water interface

either above or below the weir **506** height such that an insignificant amount of oil/water emulsion flows downstream through the lines. The oil/water emulsion can be forced to flow into an oil-continuous emulsion line **512**, a water-continuous emulsion line **513**, and an oil/water emulsion line **515**. The emulsion lines **512**, **513**, **515** are allowed to communicate
5 with one another to allow free droplets to migrate to their respective phases via the downcomers **504**, and the risers **510**.

[0065] Additional downcomers can be connected to the lower line **406** as sand traps **514** to capture sand that accumulates in the multiphase separation system **400**. The sand traps **514** can be sealed by a sand boot (not shown). The sand boot can be configured with sand
10 transport internals to allow a preset amount of sand to accumulate before the sand boot is emptied. Upstream of the sand boot, an optional sand jet system may be activated to inject flush water into the lower line **406** from a recycle stream **516** at injection point **518**. The sand jet system may be used to flush the accumulated sand from the lower line **406** into a sand trap **514**. In some embodiments, multiple sand traps **514** can be utilized to capture
15 sand from the lower line **406**.

[0066] Upon entering the control volume **422**, the polishing section **502** will have separated the multiphase fluid into three components, a predominately oil upper line **405**, a predominately water lower line **406**, and multiple middle lines **512** that are an oil/water emulsion. In this exemplary embodiment, the control volume **422** is oriented vertically.

20 [0067] Figs. 6A and 6B are a process flow diagram of a method **600** for separating liquids within a multiphase fluid. In various embodiments, the multiphase separation system **200** and **400** discussed above with respect to Figs. 2 and 4 is used to implement the method **600**.

[0068] An optional gas-liquid separation process (not shown) can be used upstream of
25 the current method. This separation step separates gases from the production fluid. Here, the multiphase fluid is flowed into the distribution inlet of a gas-liquid separation system. The multiphase fluid can be separated into gases and liquids within the gas-liquid separation system. The gas stream can be flowed above the liquid stream into a gas outlet. The gases are substantially separated from the liquid stream, and the liquid stream continues on in the
30 main process described below, starting at block **602**.

[0069] The method **600** begins at block **602**, at which the multiphase fluid is flowed into a distribution inlet of the separation system. The multiphase fluid may be separated in vertically oriented distribution headers, and flow into a predominately oil line at block **604A**, an oil/water emulsion line at block **604B**, and a predominately water line at block **604C**.

[0070] The flow split of each line is controlled at **606A**, **606B**, and **606C** using, for example, perforated baffles. Each line can flow through an open pipe section in the separation system, indicated at blocks **608A**, **608B**, and **608C**. The open pipe sections can be configured to allow for a particular residence time for the fluid in each line. A set
5 residence time can be used that provides the most effective separation in the open pipe sections of the multiphase fluid in the separation system.

[0071] At blocks **610A**, **610B**, and **610C**, level detection is made by a level detector that is configured to sense a phase interface in each line of the separation system. The oil, water, and oil/water emulsion levels that are detected by the level detector can be
10 communicated to a control system. At blocks **612A**, **612B**, and **612C**, communication is made to a controller that is configured to energize an actuated control valve. At blocks **614A**, **614B**, and **614C**, the control valve is subject to the signals from the controller in communication with the level detector. Upon entering the polishing section, the flow of each line is controlled by the control valves based upon the signals from the controller in
15 communication with the level detector at blocks **616A**, **616B**, and **616C**. As levels of oil, water, and oil/water emulsion are detected in each line by the level detector, the controller will receive signals corresponding to those levels and the control valves will be actuated accordingly.

[0072] Further, the predominately water line can be equipped with optional sand boots, which are cylindrical volumes oriented perpendicular to the horizontal water line for the
20 collection and drainage of sand from the produced fluid in the lines. The water line includes predominately water, and to increase flow this water line can be equipped with recycle inlet streams or a sand jet system for fluidizing and flushing sand into the sand boots. At block **618**, the sand that accumulates in the water line can be flowed into downcomers, and
25 effectively separated. Since this occurs in the predominately water line, this can be accomplished without significantly disturbing the bulk oil/water separation in the polishing section. Additionally, downstream sand handling systems, including use of produced water sand cyclones and an accumulation system, can be implemented to flush sand and other solid particles from the multiphase separation system. The sand boots can optionally be
30 equipped with sand transport internals to fluidize and remove sand collected in the bottom of the boots.

[0073] At block **620**, the oil, water, and oil/water emulsion lines of the multiphase separation system are flowed into a control volume, where the oil, water, and emulsion interface levels are controlled. The oil, water, and emulsion are separated in the control
35 volume. At blocks **622A**, **622B**, **622C**, the oil phase, water phase, and oil/water emulsion are separated using the method disclosed herein. The sand that accumulates in the

multiphase separation system is removed at block **624** by techniques described herein.

[0074] The process flow diagram of Fig. 6 is not intended to indicate that the steps of the method **600** are to be executed in any particular order, or that all of the steps of the method **600** are to be included in every case. Further, any number of additional steps not shown in Fig. 6 may be included within the method **600**, depending on the details of the specific implementation.

[0075] Fig. 7 illustrates a block diagram of an exemplary multiphase separation system **700**, and includes a control system. Production fluids **702** are flowed through a main inlet **704**. The fluids are first divided horizontally **706** and further divided vertically **708** to achieve separation, at least to some extent, of oil, water and oil/water emulsion into three separate lines in the vertical plane. The flow can be adjusted in each line **710** using, for example, perforated baffles, weir structures, valves, or pumps that create a marginal pressure drop in each line. The perforated baffles are intended to distribute the liquid flow evenly over a particular cross-section, and to aid in the separation of the multiphase production fluids **702**. The perforated baffles can optionally be raised and lowered when coupled to gate valves that control the exposure of the baffle, or adjust the open area of the baffle.

[0076] After each line extends through an open pipe section, where the length of each open pipe section is configured to achieve optimal separation and residence time of the fluids within the multiphase separation system **700**, the oil, water, and oil/water emulsion phase interface levels are detected by a level detector **712**. The flow of each line is then controlled **714** by communicating the oil, water, and oil/water emulsion levels, as detected by the level detector, to a controller that controls downstream control valves. The control valves can be actuated **714** based on the previous phase level detection made by a level detector, thereby controlling the flow of each line within the polishing section. The aim of the control scheme is to force the oil/water emulsion from each line into a middle section, thus allowing for greater separation of the oil and water phases in the multiphase production fluids **702**.

[0077] After the polishing section, each line can be flowed into the control volume **716**. The oil and water interface levels can be detected by a level detector in the control volume **718**. This level can be communicated to a separate controller and subsequent control valves, or pumps, downstream of the control volume that can be actuated in order to control the outlet of each line **722**, **724**, and **726** from the control volume. Optional steps at **720** include adjusting the height of a weir system that can be used upstream of the control volume to more efficiently separate the components of the multiphase fluid. The weir system can be stationary, or it can be coupled to a gate valve system and the height of the weir can be adjusted. Further, a polishing section with multiple downcomers and risers is an optional

addition to assist in further separation before the fluid in each line flows into the control volume.

[0078] Separation between the water and oil phases is maintained within the control volume at **720**. A level detector within the control volume detects the level of oil and water present within the control volume. The volume of each phase within the control volume may vary depending on the oil/water interface level that is detected. Ultimately, the control volume is configured with a water outlet at the bottom **722**, an oil outlet at the top **726**, and optionally an oil/water emulsion outlet at the middle **724** of the control volume. The optional third outlet of oil/water emulsion can be further processed downstream of the control volume to achieve desired separation of the oil and water phases.

[0079] Fig. 8 is a schematic view of a multiphase separation system **800** and control system **802**. The control system **802** is configured to flow fluid from an oil inlet **804**, a water inlet **806**, and an oil/water emulsion inlet **808** of the multiphase separation system **800** at a preferred rate. The multiphase separation system **800** uses the control system **802** to send control signals **810** and **812** to each of the control valves **814** and **816** controlling the fluid flowing in the multiphase separation system **800**. The control system **802** may be part of a larger control system, such as a distributed control system (DCS), a programmable logic controller (PLC), a direct digital controller (DDC), or any other appropriate control system. Further, the control system **802** may automatically adjust parameters via the controller outputs **810** and **812**, or may provide information about the multiphase separation system **800** to an operator who then manually inputs adjustments.

[0080] The control system **802** sends a signal **810** to control valve **814** to control the oil section flow **818**. Similarly, a control signal **812** is sent to control valve **816**, which can adjust the flow rate of the water section flow **820**. The oil/water emulsion flow **822** can optionally be controlled by a control valve (not shown) to control flow from an oil/water emulsion inlet **808**. Another control signal **824** can be sent from the level detector **826** to the control system **802**, which provides input to the control system **802** to send signals **810** and **812** to control valves **814** and **816**.

[0081] The control valves **814** and **816** are configured to regulate the fluid velocity in the oil section flow **818** and the water section flow **820**, which ultimately lead into a polishing section. The control valves can indirectly control the oil/water emulsion section flow **822** in the polishing section. The interface level, for example, between oil and water phases or between either an oil phase or a water phase and an emulsion phase, can be detected in the sections **818** and **820** at the level detector **826**, and the control signal **824** can be sent to the control system **802** corresponding to the interface levels that are detected. The control

system **802** is configured to control the flow of each section **818**, **820**, and **822** into a polishing section, with the water and oil/water emulsion in the oil section flow **818** being forced through downcomers into a middle section (not shown), and with the oil and oil/water emulsion in the water section flow **820** being forced through risers into a middle section (not shown). The control volume **828** is configured to flow substantially oil from an oil outlet **830** at the top of the control volume, substantially water from a water outlet **832** at the bottom of the control volume, and optionally an oil/water emulsion from an oil/water emulsion outlet **834** at the middle of the control volume.

[0082] It will be understood that multiphase separation system **800** shown in Fig. 8 has been simplified to assist in explaining various embodiments of the present techniques. Accordingly, in embodiments of the present techniques numerous devices not shown or specifically mentioned can further be implemented. Such devices can include flow meters, such as orifice flow meters, mass flow meters, ultrasonic flow meters, venturi flow meters, and the like. Additionally, the flow at each outlet from the control volume **828** can be controlled by subsequent process equipment (including pumps through pump speed control, and control valves) located downstream of the control volume **828**.

[0083] Fig. 9 is a drawing illustrating the upper, middle and lower lines with injection points **900** for sand jet nozzles and recycle streams. Like numbered items are as discussed with respect to Fig. 2. Injection points **902** for sand jet nozzles and recycle streams can be installed in a line of the injection recycle system, which can be a part of the multiphase separation system **200** of Fig. 2. There can be a single nozzle for jetting a fluid stream down a particular line, for instance, recycled water from the control volume outlet can be recirculated to the predominately water line **208** of Fig. 2 to fluidize accumulated sand in the multiphase separation system **200** of Fig. 2 and flush the accumulated sand through downcomers into sand boots. Nozzles (not shown) can also be used for recycled flow to influence the flow of a particular line of the separation system **200** of Fig. 2. To limit the effect on oil/water separation, recycle lines **904**, **906**, and **908** can be configured to be on the exterior of the upper, middle and lower lines.

[0084] Figs. 10A and 10B are drawings illustrating the water line with a collection area at the bottom of the line for solid particles to accumulate. A perspective view Fig. 10A and a side view 10B of the sand accumulating system **1000** are shown. The water line **208** from Fig. 2 has an additional space at the bottom **1002** configured to capture the sand or other solid particulate matter **1004** that may settle from the fluid **1006** flowing in the line.

[0085] A design can be implemented where a portion of the tubular wall is configured outward and follows the length of the line, for example, in the general shape of a horseshoe

or semi-circle. Sand or other solid particulate matter **1004** can accumulate inside the bottom area **1002** while the fluid **1006** flowing within the line remains more or less steady. Downcomers, either sloped or vertical, can be configured downstream of the bottom area **1002** to capture sand or other solid particulate matter **1004** for removal. A sand jet system and other means of fluidization can be installed in the water line **208** to increase flow and assist the jetting and fluidization of the accumulated sand or other solid particulate matter **1004**, thereby facilitating separation via the downcomers.

[0086] Fig. 11 is a drawing illustrating an adjustable weir system **1100**. The adjustable weir system **1100** includes an adjustable weir **1102** that is coupled via a coupling **1104** to a gate valve actuator **1106**. The adjustable weir **1102** is inside a pipe **1108**. The gate valve actuator **1106** can be actuated manually or by a controller (not shown) to adjust the height of the adjustable weir **1102**. The adjustable weir **1102** for an oil line is configured to allow a less dense oil phase to flow above the adjustable weir **1102**, while the more dense water or oil/water emulsion phase builds-up against the adjustable weir **1102** and flows through a downcomer and into the oil/water emulsion lines of the polishing section (not shown).

[0087] Similarly, an adjustable weir **1102** in a water line may be configured to allow the more dense water phase to flow below the adjustable weir **1102**, while the less dense oil or oil/water emulsion phase builds-up against the weir and flows through a riser and into the oil/water emulsion lines of the polishing section (not shown). The adjustable weir **1102** can be actuated manually or based off measurements from the level detectors (not shown) that send signals to a controller. A controller of an exemplary control system (not shown) can control the gate valve actuator **1106**, thereby adjusting the level of the adjustable weir **1102** based on a measured phase interface.

[0088] Fig. 12 is a drawing illustrating an adjustable baffle system **1200**. The adjustable baffle system **1200** includes a perforated baffle **1202** coupled by a coupling **1204** to a gate valve actuator **1206**. The perforated baffle **1202** is configured to be inserted within a pipe **1208**. The perforated baffle **1202** has multiple sections with different open area. At one end of the perforated baffle **1202**, the open area may be low, while at the other end the open area may be high. The section of the perforated baffle **1202** that is inserted into the pipeline **1208** can be adjusted manually or by a controller (not shown) in communication with a flow meter (not shown) and the gate valve actuator **1206**. The gate valve actuator **1206** can be configured to adjust the section of the perforated baffle **1202** that is inserted into the pipeline **1208** based on the measured flow rate of a particular pipeline. Adjusting the perforated baffle **1202** in this way helps ensure more efficient separation between the oil and water phases of production fluids.

[0089] Fig. 13 is a side view of another embodiment of the multiphase separation system **1300**, e.g., the multiphase separation system **200** of Fig. 2 or **400** of Fig. 4. This embodiment of the multiphase separation system **1300** employs the comparatively close proximity of the lines **405**, **406**, and **408**, wherein the lines **405**, **406**, and **408** are located substantially adjacent to one another with no intervening parallel lines, pipes, or other conduits. The comparatively close proximity of the lines **405**, **406**, and **408**, which minimizes amount of recirculation in the multiphase fluid, e.g., at dividers **204** and/or **210** of Fig. 2, may be beneficial to reduce remixing and/or facilitate phase separation in the lines **405**, **406**, and **408**. In Fig. 13, the polishing section **1302** is magnified and illustrated in more detail. Like numbered items may be substantially the same as discussed with respect to Figs. 4 and 5. Fluid from the upper line **405** enters the polishing section **1302**. An oil header **1350** is depicted and may generally receive a stream comprising substantially oil from the upper line **405**.

[0090] A weir **1310**, e.g., as depicted in Fig. 15, may be optionally disposed in the upper flow line **405** to assist or otherwise encourage oil flowing up into the oil header **1350**. As less dense oil builds up against the weir **1310**, an increasing amount of oil may pass into the oil header **1350**. A control valve **508** is configured to control the flow of the oil header **1350** upstream of the control volume **422**. Another optional weir **1312**, e.g., as depicted in Fig. 15, may be utilized in the lower line **406** to assist or otherwise encourage the more dense water phase to flow into the water header **1360**. Another control valve **508** is configured to control the flow of the water header **1360** upstream of the control volume **422**. A third optional weir **1314**, e.g., as depicted in Fig. 15, may be utilized on the middle line **408** in addition to or instead of the weir **1312** to assist or otherwise encourage the more dense water phase to flow into the water header **1360**. While the weirs **1310**, **1312**, and **1314** are depicted as connectible at flange couplings, those of skill will appreciate that other weir connection mechanisms, e.g., welding into place, etc., are well known and may be suitably utilized within the scope of this disclosure.

[0091] A novel system of downcomers/riser apparatuses **1304**, **1306**, and **1308**, e.g., as depicted in and further described under Fig. 14, may be optionally employed to transfer water, oil, and/or emulsion between the parallel lines **405**, **406**, and **408** of the polishing section **1302**. In some embodiments, the adjoining solid plates of the downcomers/riser apparatuses **1304**, **1306**, and **1308** are placed between flanged connections in the multiphase separation system **1300**.

[0092] The polishing section **1302** is configured to allow the oil phase to enter at the top of the control volume **422**, and exit through an oil outlet **416** at the top of the control volume **422**. The polishing section **1302** is also configured to allow the water phase to enter at the

bottom of the control volume **422**, and exit through a water outlet **418** at the bottom of the control volume **422**. The polishing section **1302** may also be configured to allow the oil/water emulsion phase to enter at the middle of the control volume **422** and exit through an optional emulsion outlet **420** at the middle of the control volume **422**.

5 **[0093]** Fig. 14 is a perspective diagram of the downcomers/riser apparatuses **1304**, **1306**, and **1308**, which may hereinafter be referred to individually as a downcomer/riser or a downcomer riser apparatus. The downcomers/riser apparatuses **1304**, **1306**, and **1308** may be useful to minimize remixing in the polishing section, e.g., due to open communication between the oil, emulsion, and water headers (e.g., in the lines **405**, **406**, and **408** in the

10 multiphase separation system **400** of Fig. 4). The downcomer/riser **1304** may permit the passage of oil from the lower line **406** and/or the middle line **408** to the upper line **405** through riser(s) by operatively coupling a portion of the line comprising the oil phase(s) (e.g., a region above the oil/water interface) of the lower line **406** and/or the middle line **408** and that of the upper line **405**. The downcomer/riser **1304** may permit the passage of water from

15 the upper line **405** and/or the middle line **408** to the lower line **406** through downcomer(s) by operatively coupling a portion of the line comprising the water phase(s) (e.g., a region below the oil/water interface) of the upper line **405** and/or the middle line **408** to that of the lower line **406**. The downcomer/riser **1304** is configured to prohibit, or at least substantially inhibit, all other exchanges of fluid between the lines **405**, **406**, and **408** by means of the adjoining

20 solid plates which minimize remixing in the polishing section. The downcomer/riser **1306** may function in substantially the same manner as the downcomer/riser **1304** with the exception of the amount of oil and/or water passable through the downcomer/riser **1306** at the passages operatively coupled to the middle line **408**, which may have a smaller diameter (and thus allow comparatively lesser flow) than the diameter of the downcomer/riser **1304** at

25 the corresponding passages operatively coupled to the middle line **408**. This configuration may accommodate relatively greater quantities of the oil, water, and/or emulsion to be passed from the middle line **408** to the upper line **405** and/or the lower line **406** at a location further upstream in the polishing section (e.g., via the downcomer/riser **1304** as depicted in Fig. 13) and relatively lesser quantities of the oil, water, and/or emulsion to be passed from

30 the middle line **408** to the upper line **405** and/or the lower line **406** at a location further downstream in the polishing section (e.g., via the downcomer/riser **1306** as depicted in Fig. 13). The downcomer/riser **1308** is configured to permit the passage of oil from the lower line **406** to the upper line **405** by operatively coupling a portion of the line comprising the oil phase(s) (e.g., a region above the oil/water interface) of the lower line **406** and that of the

35 upper line **405** and permit the passage of water from the upper line **405** to the lower line **406** by operatively coupling a portion of the line comprising the water phase(s) (e.g., a region

below the oil/water interface) of the upper line **405** to that of the lower line **406**. The downcomer/riser **1308** is configured to prohibit, or at least substantially inhibit, all other exchanges of fluid between the lines **405**, **406**, and **408** by means of the adjoining solid plates. Those of skill in the art will appreciate that alternate embodiments of the multiphase separation system **1300** may optionally utilize any of the downcomers/riser apparatuses **1304**, **1306**, and **1308** at any suitable location(s) in the polishing section **1302** of Fig. 13; other embodiments may omit one or more of the downcomers/riser apparatuses **1304**, **1306**, and/or **1308**, reconfigure the downcomers/riser apparatuses **1304**, **1306**, and **1308**, and/or add multiple downcomer/riser apparatuses of a similar design to obtain the desired operating characteristics within the scope of this disclosure.

[0094] Further, one or more of the downcomers/riser apparatuses **1304**, **1306**, and/or **1308** may be constructed in two separate corresponding, reciprocal, mirrored, and/or duplicate parts (e.g., as one or more vertical passages affixed to a pass-through solid plate) and coupled to form a single unit. When coupled, any such downcomer/riser embodiments need not be welded or otherwise tight-fitted, as to prohibit all exchanges of fluid, but should generally be configured to at least substantially prevent considerable bypass around the downcomer/riser assembly. The downcomers/riser apparatuses **1304**, **1306**, and **1308** of the described embodiment are designed for coupling at a flange location, but other embodiments may utilize unitary or other non-flange based designs to accomplish the equivalent function(s), as described above. Such alternate embodiments are considered within the scope of this disclosure. Additionally, some embodiments of the downcomers may include a dynamic functionality wherein one or more oil, water, and/or emulsion passages is configured to shift to accommodate a changing oil/water interface level. Some such embodiments may be automatically controlled, e.g., by a computer controller coupled to a level detector **412**, other embodiments may include a float mechanism that causes the individual riser and/or downcomer passage(s) to rise and/or fall with the changing oil/water interface level, and still other embodiments include a mechanical assembly permitting operators to manually raise and/or lower the passage(s) based on differences in operating characteristics of the multiphase separation system **1300**.

[0095] Fig. 16 is a side view schematic diagram of another embodiment of a multiphase separation system **1600**. Like numbered components may be substantially the same as those of the multiphase separation system **1300** of Fig. 13 except as otherwise indicated. The multiphase separation system **1600** has a water outlet **1602** isolated from the control volume **422**. The water outlet **1602** may be beneficial at higher water flow rates where the velocity near the bottom of the control volume **422** would otherwise be too high, e.g., causing emulsion to be re-entrained into the water outlet. The multiphase separation system **1600**

also has an optional emulsion outlet **420** on the control volume **422**. In some embodiments, the optional emulsion outlet **420** may avoid water build-up behind a water header weir, e.g., the weir **1312**, due to emulsion layer stagnation and accompanying separation.

[0096] While the present techniques may be susceptible to various modifications and alternative forms, the embodiments discussed above have been shown only by way of example. However, it should again be understood that the techniques is not intended to be limited to the particular embodiments disclosed herein. Indeed, the present techniques include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

10

CLAIMS

What is claimed is:

1. A multiphase separation system, comprising:
 - a distribution line configured to feed a multiphase fluid into feed lines within the
 - 5 separation system, wherein the feed lines consist of an upper line, a middle line, and a lower line;
 - the upper line configured to flow a first stream comprising oil into an oil section of a control volume;
 - the middle line configured to flow a second stream comprising an oil/water emulsion
 - 10 into an oil/water emulsion section of the control volume;
 - the lower line configured to flow a third stream comprising water into a water section of the control volume; and
 - the control volume configured to adjust fluid flow rate at an outlet, wherein the oil section, the water section, and the oil/water emulsion section each commingle at different
 - 15 heights of the control volume.
2. The multiphase separation system of claim 1, wherein the separation system is implemented within a subsea environment, and the multiphase fluid comprises production fluids from a subsea well.
3. The multiphase separation system of claim 1, wherein the upper line, middle line, and
- 20 lower line are parallel to each other, and perpendicular to the control volume.
4. The multiphase separation system of claim 1, wherein flow rate at an inlet at the control volume is adjusted through use of a control valve at the upper line upstream of the control volume and a control valve at the lower line upstream of the control volume.
5. The multiphase separation system of claim 1, wherein the control volume is configured to
- 25 flow fluid at an outlet at the top of the control volume, and wherein the fluid flow out of the outlet at the top of the control volume comprises substantially oil.
6. The multiphase separation system of claim 1, wherein the control volume is configured to flow fluid at an outlet at the bottom of the control volume, and wherein the fluid flow of the outlet at the bottom of the control volume comprises substantially water.
- 30 7. The multiphase separation system of claim 1, wherein the control volume is configured to flow fluid at an outlet at the middle of the control volume, and wherein the fluid flow of the outlet at the middle of the control volume comprises an oil/water emulsion.

8. The multiphase separation system of claim 1, further comprising a flow regulator in the upper line, the middle line, and the lower line, and wherein the flow regulator comprises a perforated baffle, an adjustable perforated baffle, a gate valve, or any combination thereof.
9. The multiphase separation system of claim 8, further comprising:
- 5 a control system configured to adjust open and closed the flow regulator;
- a level detector coupled to the upper line, the middle line, or the lower line, wherein the level detector is adapted to measure a phase interface level of water and oil present in a line.
10. The multiphase separation system of claim 1, wherein the upper line, middle line, lower line, or any combination thereof are further configured for a chemical additive to be injected.
11. The multiphase separation system of claim 10, wherein the chemical additive that is injected comprises defoamers or demulsifiers.
12. The multiphase separation system of claim 1, wherein any of the upper line, middle line, or lower line are coupled to an electrostatic coalescer.
- 15 13. The multiphase separation system of claim 1, wherein any of the upper line, middle line, lower line, or any combination thereof are configured with droplet coalescing internals.
14. The multiphase separation system of claim 1, further comprising:
- a downcomer coupled to the lower line, wherein the downcomer is sealed by a sand boot, and wherein the sand boot is configured with internals to fluidize and remove sand that has accumulated in the sand boot; or
- 20 a recycle line coupled to the lower line, wherein the recycle line is configured to fluidize and remove sand that has accumulated, and wherein the recycle line is configured to be on an exterior of the oil section, the water section, or the oil/water emulsion section.
- 25 15. The multiphase separation system of claim 1, wherein a pre-separator is utilized upstream of the separation system, and wherein the pre-separator is configured to separate gas from the multiphase fluid.
16. The multiphase separation system of claim 1, wherein an outlet from the control volume is configured to recycle upstream into the upper line, middle line, or lower line.
- 30 17. The multiphase separation system of claim 1, further comprising a polishing section, wherein a side draw is coupled from the upper line to the middle line, and a side draw is coupled from the middle line to the lower line.

18. The multiphase separation system of claim 1, further comprising:

a first downcomer/riser apparatus configured to permit the passage of oil from the lower line, the middle line, or both to the upper line, wherein the first downcomer/riser apparatus is further configured to permit the passage of water from the upper line, the middle line, or both to the lower line, and wherein the first downcomer/riser apparatus is further configured to substantially inhibit all other exchanges of fluid between the upper line, the middle line, and the lower line;

a second downcomer/riser apparatus configured to permit the passage of oil from the lower line to the upper line and permit the passage of water from the upper line to the lower line, wherein the second downcomer/riser apparatus is further configured to substantially inhibit all other exchanges of fluid between the upper line, the middle line, and the lower line; or

both the first downcomer/riser apparatus and the second downcomer/riser apparatus.

19. A method for separation of oil and water and oil/water emulsion within a multiphase fluid, comprising:

flowing a multiphase fluid into a distribution inlet of a multiphase separation system;

separating the multiphase fluid into an oil phase, a water phase, and an oil/water emulsion;

separating the oil phase into a line that is in a plane vertically above the plane of the distribution inlet;

separating the water phase into a line that is in a plane vertically below the plane of the distribution inlet;

separating the oil/water emulsion into a line that is in a plane vertically above the plane of the line with the water phase and vertically below the plane of the line with the oil phase;

flowing each line into a vertically oriented control volume, wherein the flow rate from each line is controlled;

detecting an oil level and a water level in each line,

communicating with a controller to open and close control valves based on the oil and water level detected; and

separating each phase by flowing the oil phase, the water phase, and the oil/water emulsion through a different outlet from the control volume.

20. The method of claim 19, comprising regulating the flow rate of the fluid in a line through use of perforated baffles, through adjustment of an adjustable perforated baffle, through use of a gate valve, or any combination thereof.
21. The method of claim 19, further comprising injecting chemical additives into the oil line, water line, and oil/water emulsion line.
22. The method of claim 19, further comprising:
accumulating sand in an additional hollow space of the water line; and
purging sand from the water line.
23. The method of claim 19, further comprising removing dispersed droplets from the bulk phase flowing in an oil line, water line, and oil/water emulsion line in a polishing section upstream of the control volume.
24. The method of claim 19, further comprising recycling fluid from the control volume to upstream in the multiphase separation system.
25. A multiphase separation system, comprising:
an inlet line configured to feed a multiphase fluid into side feed lines within the separation system, wherein the side feed lines consist of an upper line, a lower line, a middle line, or any combination thereof;
the upper line configured to feed an oil side feed line into an oil section, and further configured to split the oil section into an oil/water emulsion section, wherein the oil section is in a plane located vertically above the oil/water emulsion section;
the lower line configured to feed a water side feed line into a water section, wherein the water section is in a plane located vertically below the oil/water emulsion section;
a control volume; and
a control system.
26. The multiphase separation system of claim 25, wherein the control volume is configured as a spherical or horizontal cylindrical multiphase separator.
27. The multiphase separation system of claim 25, further comprising:
measuring a phase interface level in the upper line, the lower line, or both; and
controlling the flow rate at an inlet of the control volume through use of a control valve at the oil section, a control valve at the water section, or both, wherein the flow rate is adjusted at least in part in response to the measured phase interface level.



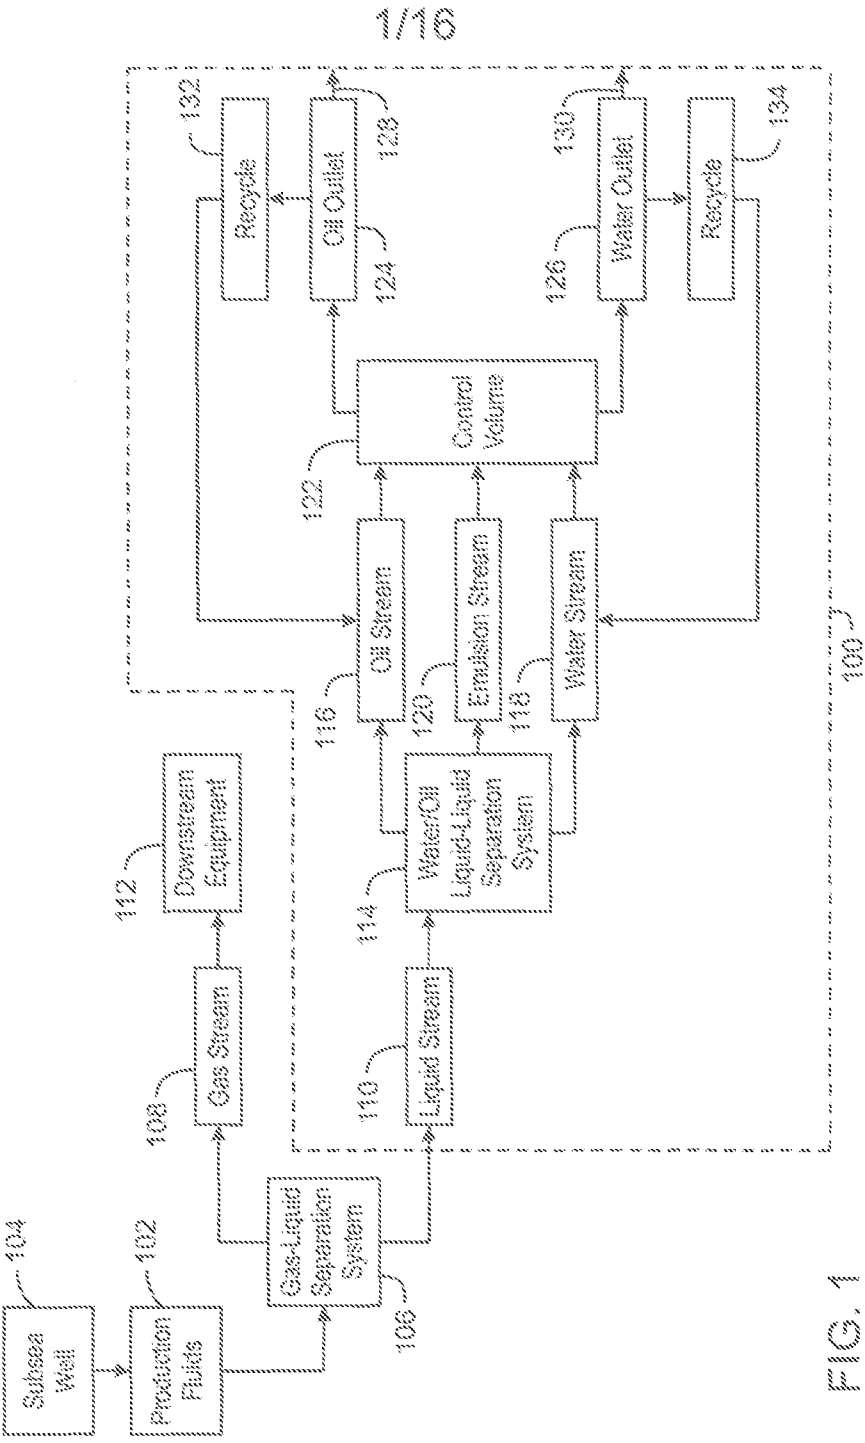



FIG. 1

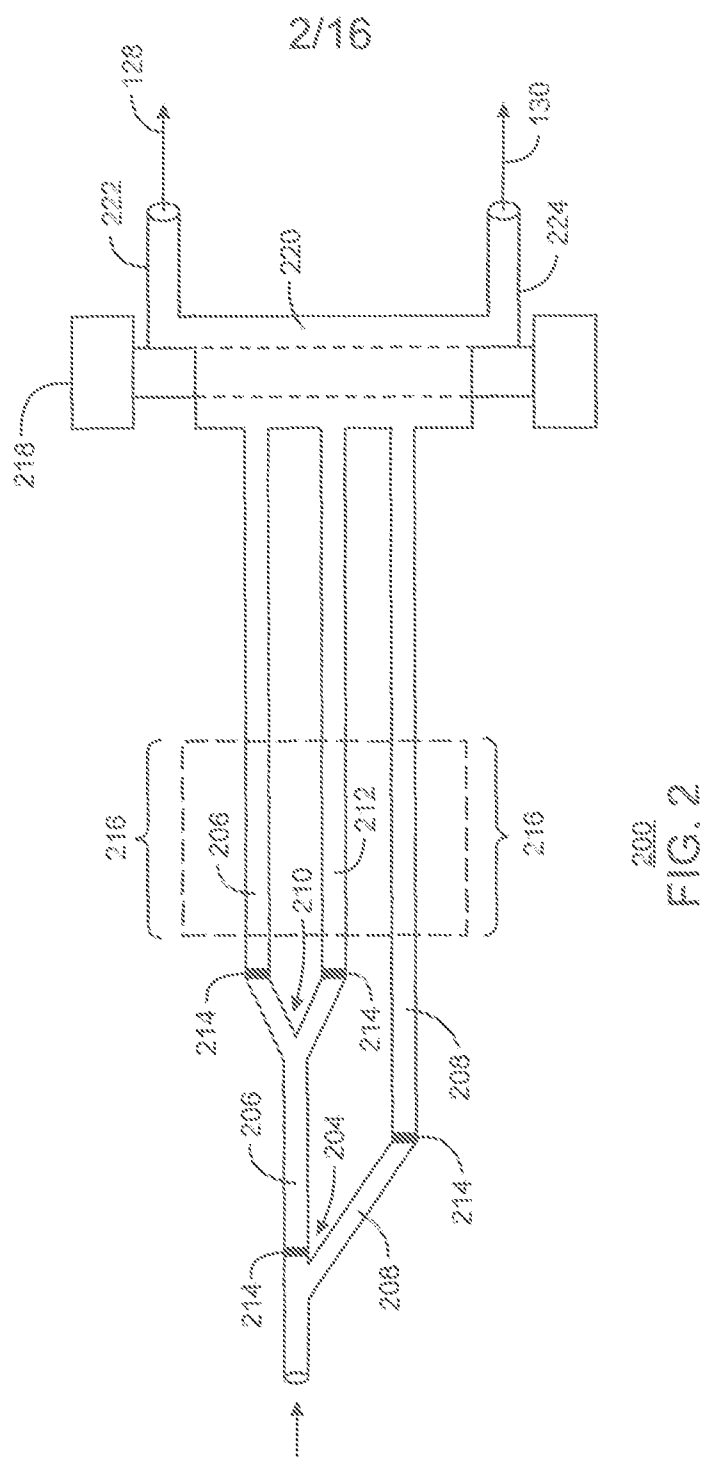

3/16

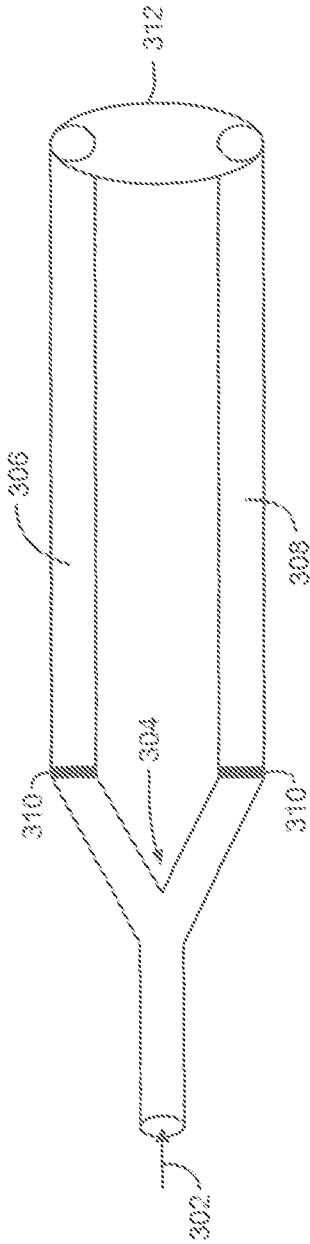



200
FIG. 3

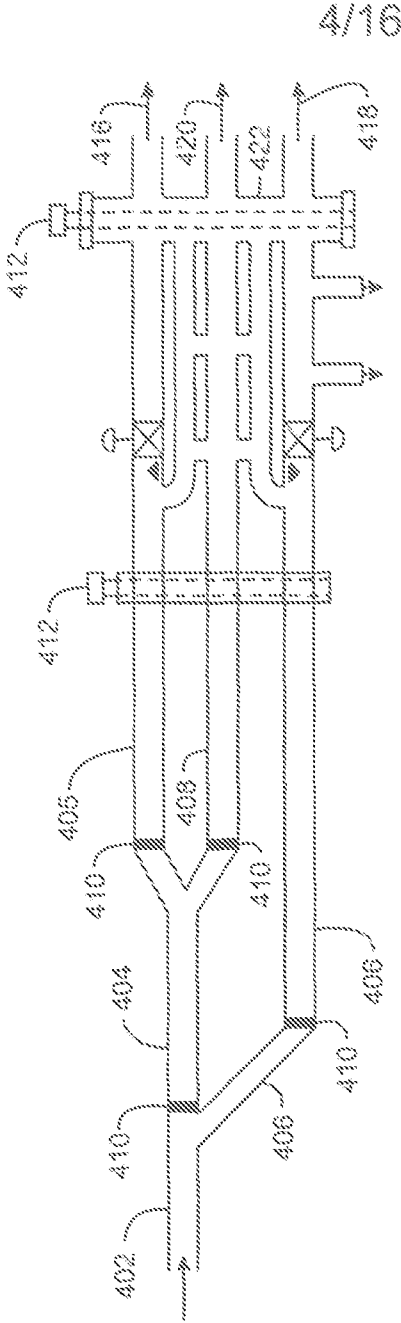


400
FIG. 4

5/16

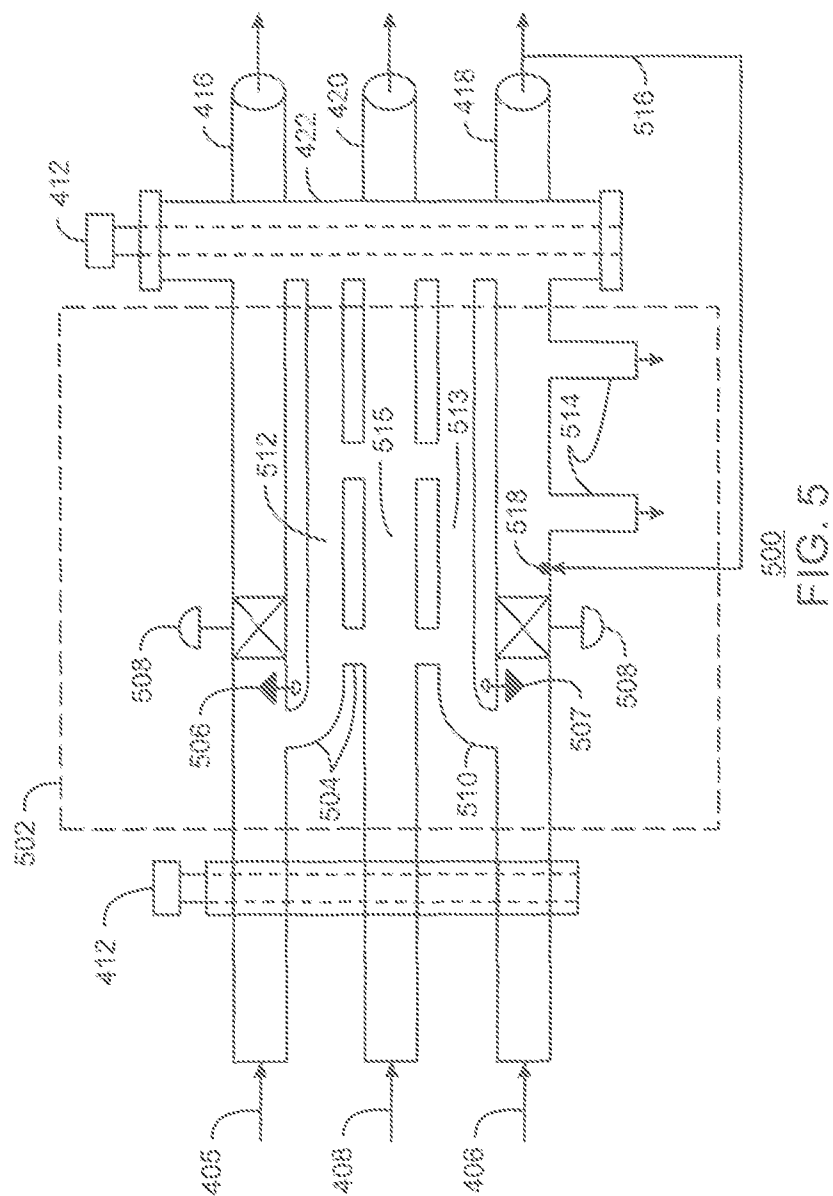

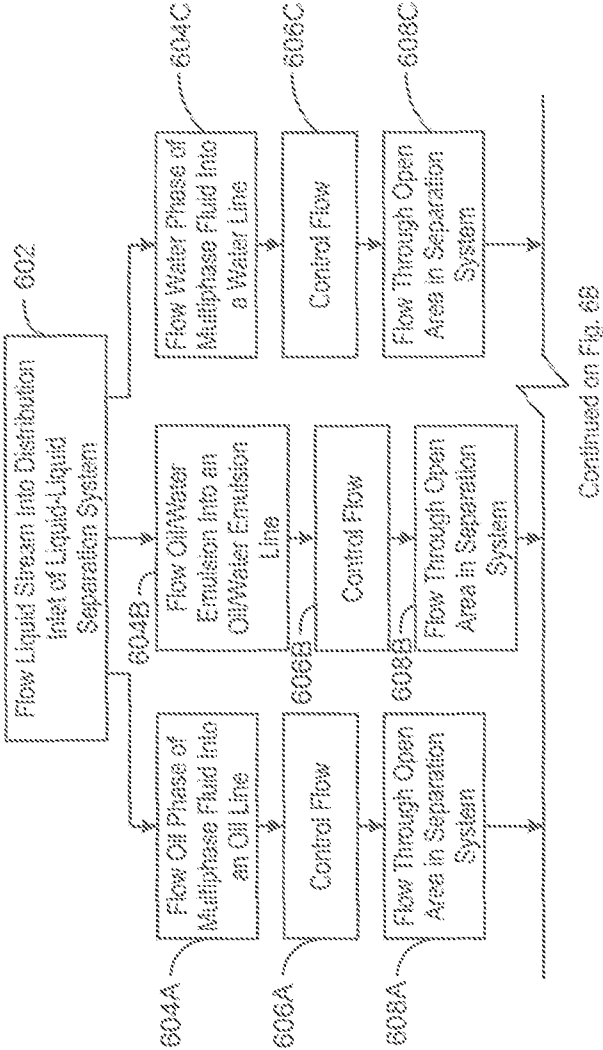

600
FIG. 6A

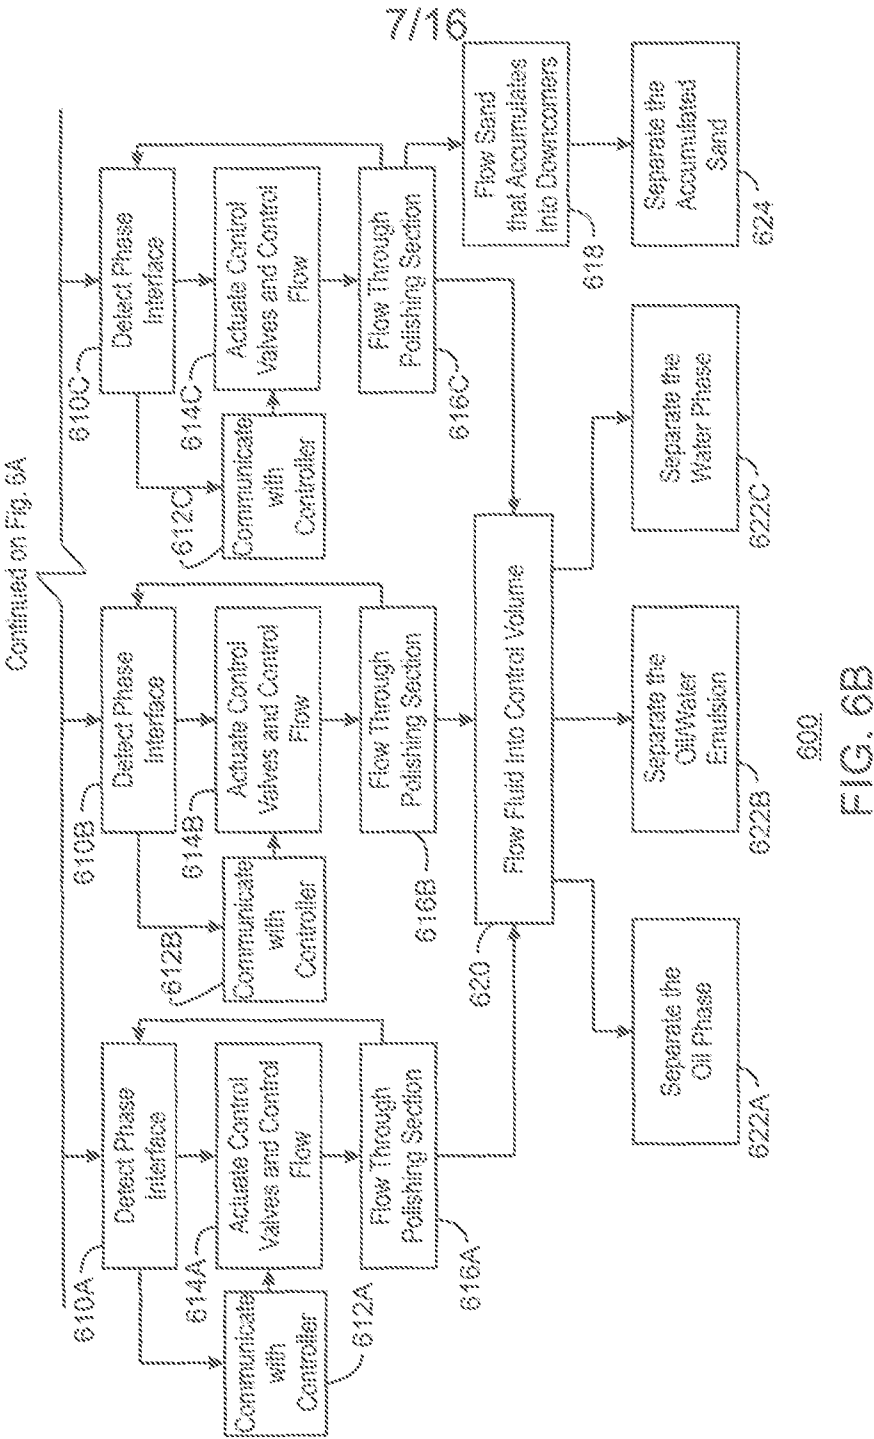

8/16


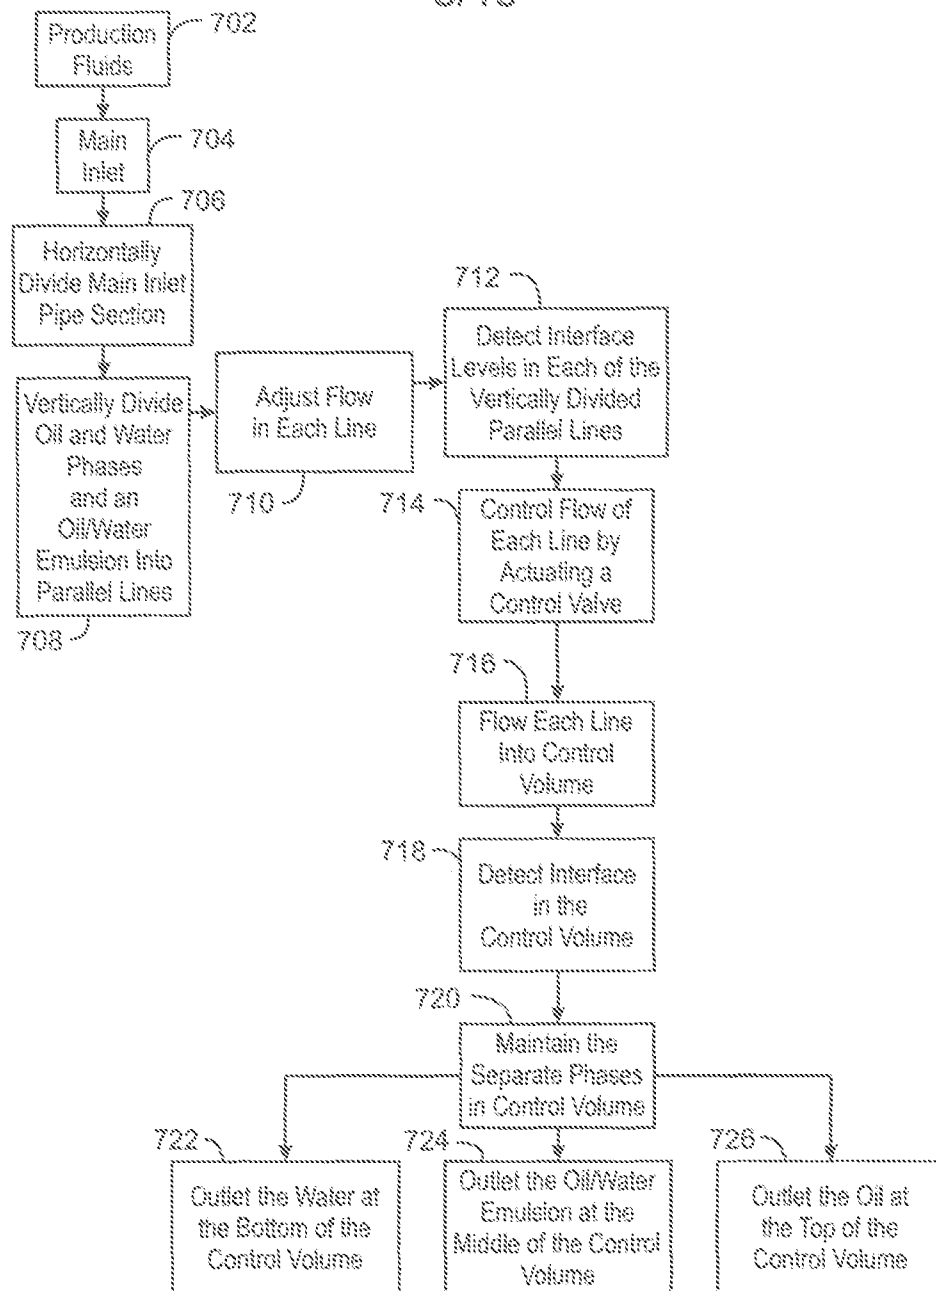


FIG. 7

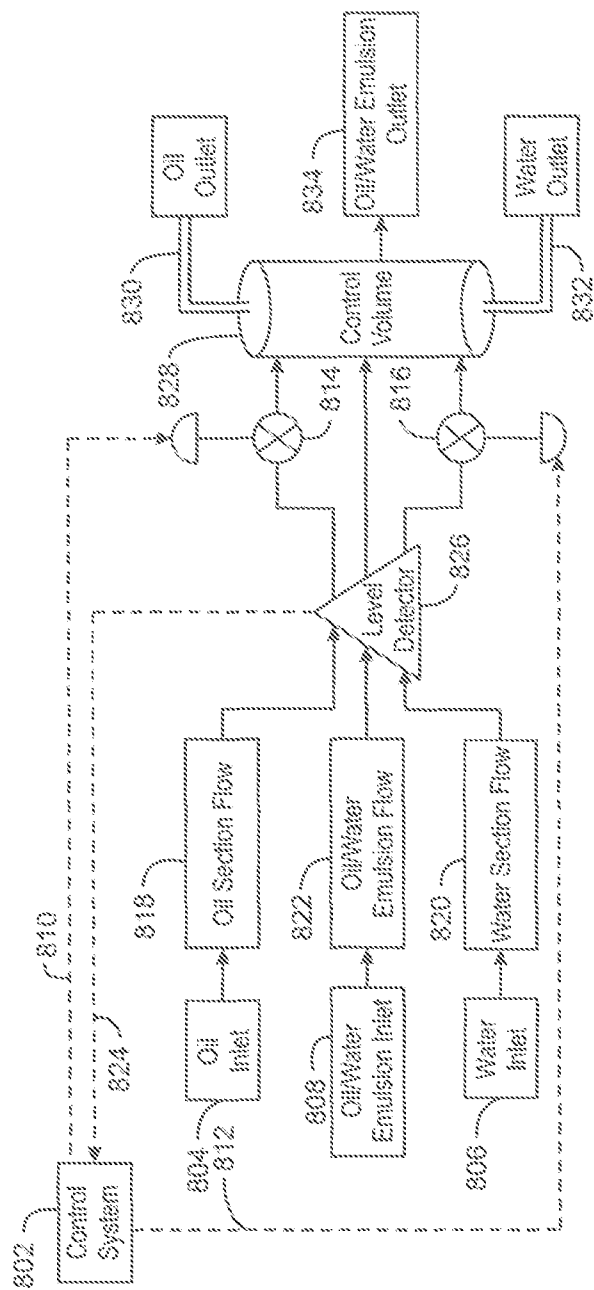

802
FIG. 8

10/16



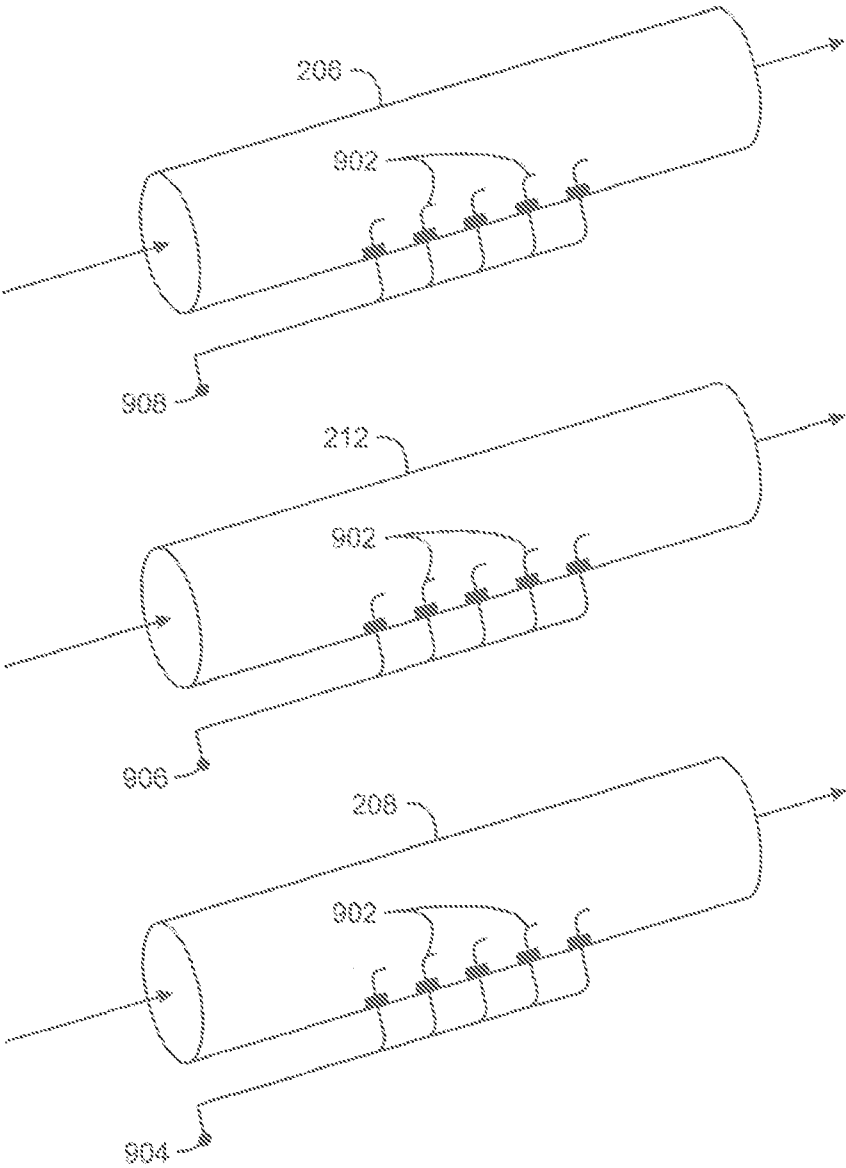



FIG. 9

11/16

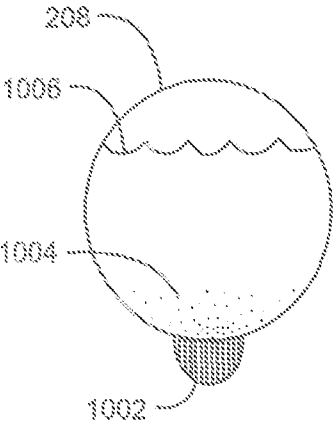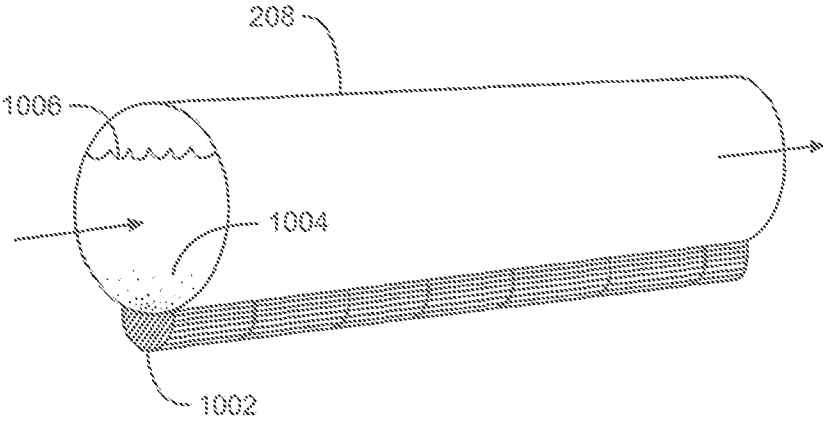


1000
FIG. 10

12/16

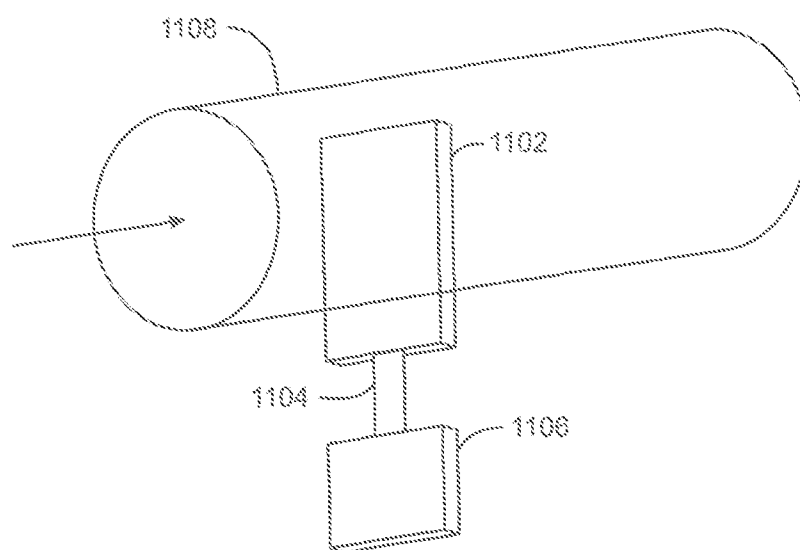


1100
FIG. 11

13/16

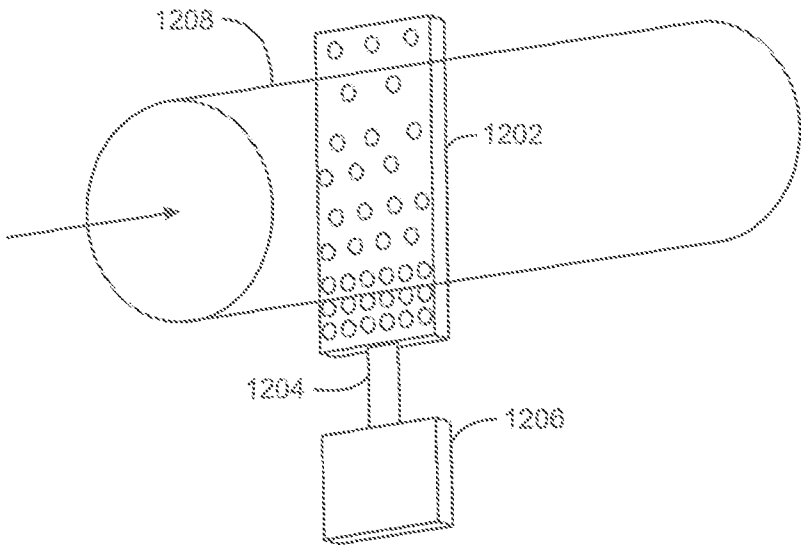

1200
FIG. 12

14/16

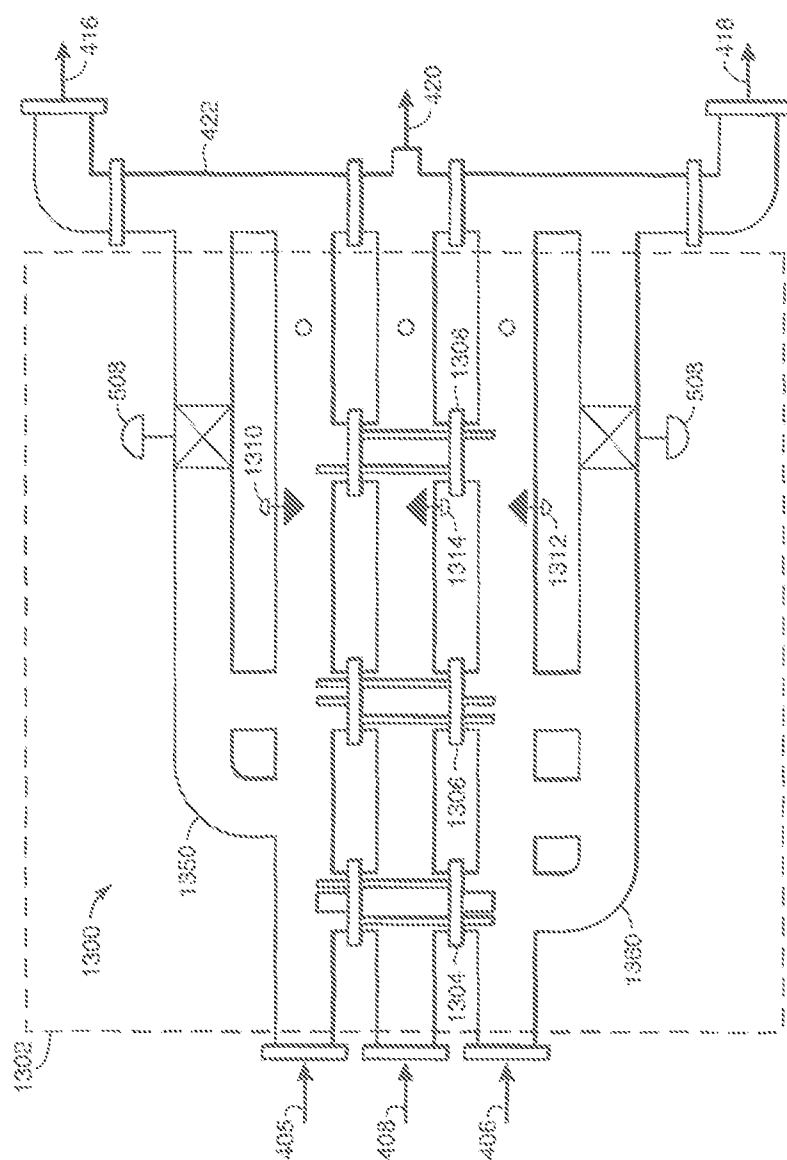


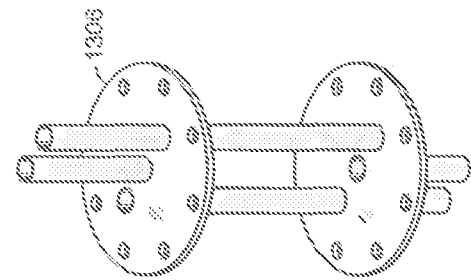

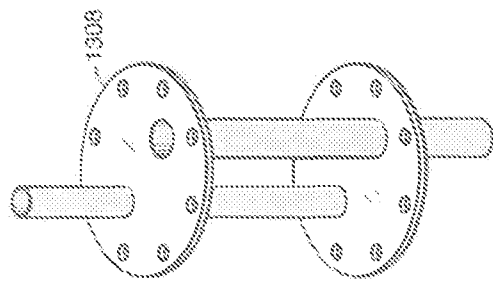

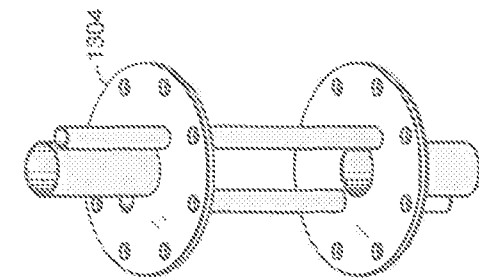


FIG. 14

FIG. 15



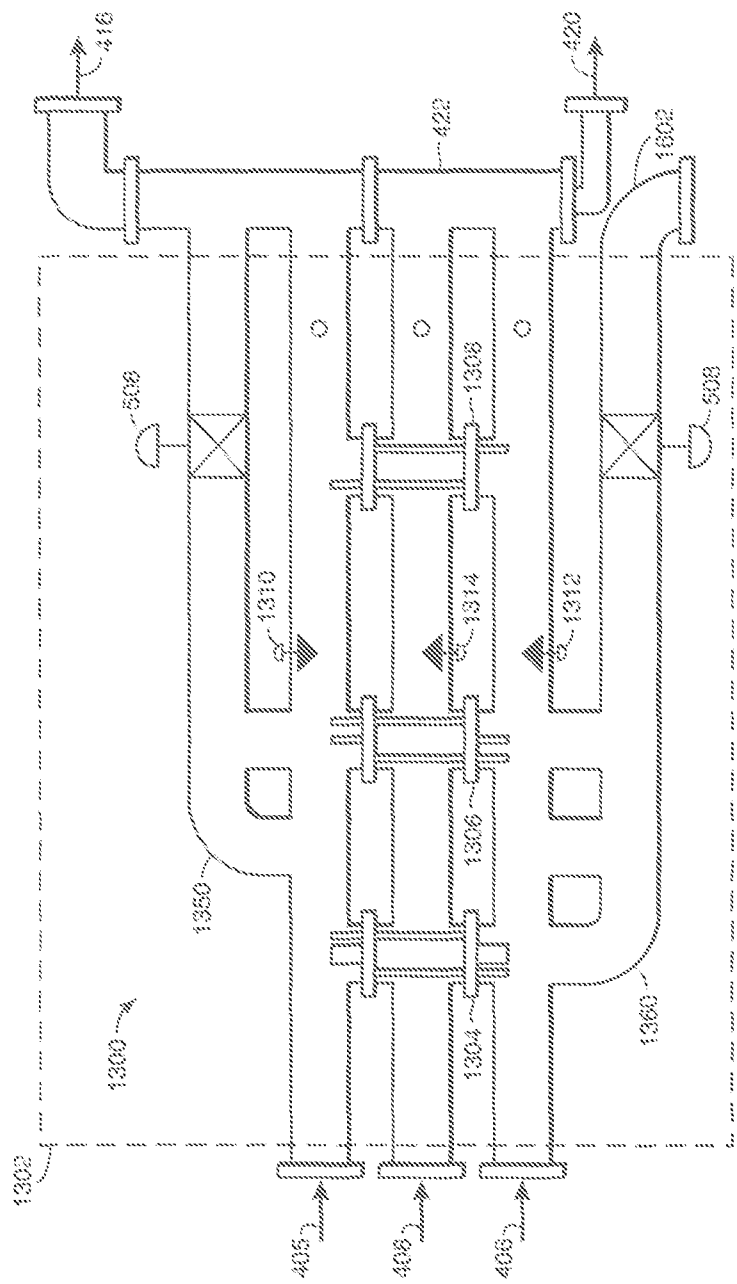


FIG. 16