



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 596 000 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)
INID code(s) 71

(51) Int Cl.:

D21F 1/32 (1968.09) **D21F 5/00** (1968.09)

(48) Corrigendum issued on:

25.10.2006 Bulletin 2006/43

(86) International application number:

PCT/JP2003/016799

(43) Date of publication:

16.11.2005 Bulletin 2005/46

(87) International publication number:

WO 2004/059077 (15.07.2004 Gazette 2004/29)

(21) Application number: **03768279.6**

(22) Date of filing: **25.12.2003**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **26.12.2002 JP 2002376428**

(71) Applicants:

- **Maintech Co., Ltd.**
Tokyo 171-0051 (JP)
- **OJI PAPER CO., LTD.**
Tokyo 104-0061 (JP)

• **SEKIYA, Hiroshi**

Toshima-ku, Tokyo 171-0051 (JP)

• **SHINODA, Kotaro**

Chuo-ku

Tokyo 104-0061 (JP)

• **IMAI, Naoki**

Chuo-ku

Tokyo 104-0061 (JP)

• **SAITO, Hidenori**

Chuo-ku

Tokyo 104-0061 (JP)

(72) Inventors:

- **SEKIYA, Kunio**
Toshima-ku, Tokyo 171-0051 (JP)

(74) Representative: **Goddard, Heinz J. et al**

FORRESTER & BOEHMERT


Pettenkoferstrasse 20-22

80336 München (DE)

(54) **METHOD FOR PROVIDING CANVAS OF PAPER-MAKING MACHINE WITH ANTI-STAINING AGENT THROUGH SPRINKLING, AND SLIDING SPRINKLE DEVICE AND ANTI-STAINING AGENT FOR USE THEREIN**

(57) The present invention provides a method of spraying antipollution agent which can securely apply a proper amount of antipollution agent to a canvas of a paper machine, a spray nozzle and a slidable spray apparatus used in the spraying method, and antipollution agent. In antipollution agent spraying method of applying antipollution agent (T) to a canvas (A) used for drying paper in a paper machine, the method applies the antipollution agent (T) from a spray nozzle (S) toward a contact start position (C) between an outer surface of the canvas (A) and an out roll (B), applies the antipollution agent (T) to said out roll (B), and transfers and applies the antipollution agent (T) to the canvas (A) via said out roll (B).

FIG.3

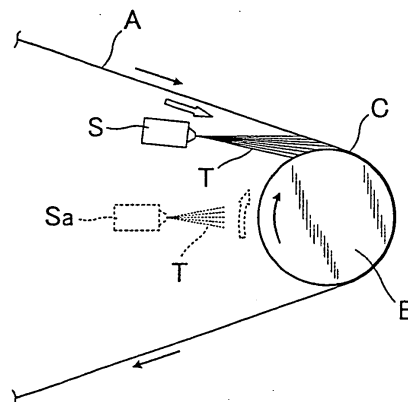

EP 1 596 000 A8