

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 October 2010 (14.10.2010)

PCT

(10) International Publication Number  
**WO 2010/115513 A1**

(51) International Patent Classification:

*E04C 2/04* (2006.01)      *B28B 23/00* (2006.01)  
*B28B 19/00* (2006.01)

(21) International Application Number:

PCT/EP2010/001777

(22) International Filing Date:

22 March 2010 (22.03.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

090 5951.0      6 April 2009 (06.04.2009)      GB

(71) Applicants (for all designated States except US): **UNIVERSITY OF ULSTER** [GB/GB]; Cromore Road, Coleraine, County Londonderry, BT52 1 SA United Kingdom (GB). **MORROW, Ruth, Ellen** [GB/GB]; 1 Cregagh Park, Belfast, Northern Ireland BT6 9LF (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BELFORD, Patricia, Claire** [GB/GB]; 2a Irwin Avenue, Belfast, Northern Ireland BT4 3AF (GB).

(74) Agents: **WALLER, Stephen** et al.; FRKELLY, 4 Mount Charles, Belfast, BT7 1NZ, Northern Ireland (GB).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF MANUFACTURE OF A COMPOSITE CONCRETE ARTICLE



Figure 2

(57) Abstract: A method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.



WO 2010/115513 A1

**Method of manufacture of a Composite concrete article**

This invention relates to a method of manufacture of a composite concrete article, and in particular to a method of manufacture of a concrete article having textile structures integrated into the surface of the concrete to provide a novel aesthetic and/or functional surface finish.

Concrete is commonly utilised as a construction material due to its low cost, ease of prefabrication into desired shapes, and strength. However, concrete structures and elements have a cold, hard and unattractive surface finish with poor acoustic and thermal properties.

An object of the present invention is to improve one or more of the appearance, thermal experience and/or acoustic properties or other surface characteristics of concrete by integrating textile structures into concrete articles such that at least portions of the textile structures define at least a portion of the exposed surfaces of the articles.

Prior art attempts to apply textile materials to the surface of concrete articles have mainly been focussed on applying such materials to the surface of the finished concrete articles. Few attempts have been made to integrate textile materials into concrete articles, mainly due to the harsh environment posed by uncured concrete (highly alkaline) and the difficulty in adhering a textile material to the concrete structure in a manner such that the textile material will not simply peel off the concrete once it has set.

According to the present invention there is provided a method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.

Preferably the voids comprise regions of reduced thread density, such regions having greater porosity to wet concrete. The step of removing material from regions of the textile may comprise forming a particular visual or textural effect in the textile structure.

Preferably said textile structure is formed from a mixture of at least two different materials or fibres, said step of removing material from regions of the textile structure comprising a process for preferentially removing one of said materials or fibres from said regions. Preferably at least one of said at least two different materials is more resistant to said material removal process than the other or others of said at least two different materials from which the textile structure is formed.

In one embodiment said at least one more resistant material comprise a metallic material, such as metallic wires or threads. Alternatively, or additionally, said at least one more resistant material may

comprises a natural or man made yarn selected to have a greater resistance to said removal process than the other or others of said two or more different materials.

The textile structure may comprise a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

The removal process may comprise a mechanical process or a chemical process. Preferably the removal process comprises a chemical etching process, such as a devoré process. Two or more different removal processes may be carried out to remove different materials or fibres from different portions or regions of the textile structure. For example, different devoré mixes or recipes may be used to selectively remove different fibres from different regions of the textile structure to create a specific visual and/or textural effect.

According to a further aspect of the present invention there is provided a composite concrete article comprising a textile structure embedded in the surface of a concrete structure, said textile structure having voids formed therein by means of which the textile structure is embedded into the concrete structure to anchor the textile structure to the concrete structure.

The voids may create a particular visual or textural effect in the textile structure. The voids preferably comprise regions of reduced thread density having greater porosity to wet concrete.

Preferably the textile structure is formed at least two different materials or fibres, wherein at least one of said two materials is more resistant to the removal process used for creating said voids than another of said at least two materials.

In one embodiment said at least one more resistant material comprise a metallic material while the other or others of said two or more materials comprises a non-metallic material, such as a natural or man made yarn. The other or others of said two or more materials may comprise, for example, cotton, linen or a synthetic yarn. In one embodiment said at least one more resistant material comprises steel wires or threads.

In an alternative embodiment said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process than said other or others of said two or more materials.

The textile structure may comprise a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

An embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 shows a fabric material for use in a method of manufacture of a composite concrete article according to an embodiment of the present invention; and

Figure 2 shows a composite concrete article made in accordance with said method.

A method of manufacturing a composite concrete article according to an embodiment of the present invention comprises forming a woven fabric from stainless steel wires and linen. The warp of the fabric is made up of linen only and the weft comprises alternate yarns of linen & stainless steel wire (see Figure 1).

After production of fabric, the next stage is that the woven fabric goes through a devoré process. The fabric is screenprinted with a selected pattern (i.e. certain sections of the surface are exposed ) to a devoré recipe comprising :

400gm Indalca PA3R (13%)  
150gm Aluminium Sulphate  
50gm Glycerine  
400gm Water

The treated fabric is then dried at room temperature before being baked for around 10mins at approximately 180°C. The fabric is then washed in water, optionally containing a mild detergent, to remove the linen that has come into direct contact with the devoré recipe. This results in a textile that has a pattern of solid and void, as shown in Figure 1.

The treated fabric is then placed in the bottom of a mould, with the face intended to form the outer face of the composite concrete article facing downwards, and uncured concrete is poured into the mould. The concrete flows into the voids in the fabric such that the fabric becomes firmly embedded in the concrete, as shown in Figure 2.

While a devoré process is described for forming the pattern and voids within the fabric, any other suitable mechanical or chemical process may be utilised to form suitable voids within the fabric to ensure that the concrete can flow into the fabric to firmly embed the fabric within the concrete.

The steel weft yarns may be shaped or crumpled to give the fabric a three dimensional shape to provide enhanced textural structures with unique acoustic characteristics in the surface of the concrete, with substantial depth. Linen and stainless steel may be used due to their high resistance to the corrosive effects of the highly alkaline environment of the concrete mix. However, other metals and textiles may be used, providing they are sufficiently resistant to such an environment.

In an alternative embodiment, a textile structure comprising a viscous pile formed on a polyester/polyamide backing may be used, wherein a suitable devoré process is used to selectively remove portions of the viscous pile from selected regions of the polyester/polyamide backing to  
5 create voids/regions of reduced thread density into which wet uncured concrete may flow to embed the textile structure into the finished concrete article and to create a desired visual and/or textural effect on the surface of the finished concrete article.

The invention is not limited to the embodiment(s) described herein but can be amended or modified  
10 without departing from the scope of the present invention. The process of selectively removing regions of a particular fibres from a mixed fibre fabric or construction using a removal process, such as a suitable devoré process, can be used to create voids or regions or reduced thread density in numerous different mixed fibre materials to enable such material to be embedded into a concrete  
15 article while creating a selected visual and/or textural affect on the surface of the finished concrete article to achieve a wide range of aesthetic and functional effects to enhance the visual, textural and acoustic characteristics of the article.

## Claims

1. A method of manufacturing a composite concrete article comprising forming a textile structure, removing material from regions of the textile structure to create voids in the textile structure  
5 and incorporating the textile structure into a body of wet uncured concrete such that the concrete flows into the voids created in the textile structure, embedding the textile structure into the concrete, whereby the textile structure defines at least a portion of a surface of the cured concrete article.
2. A method as claimed in claim 1, wherein the voids comprise regions of reduced thread  
10 density, such regions having greater porosity to wet concrete.
3. A method as claimed in claim 1 or claim 2, wherein the step of removing material from regions of the textile comprises forming a particular visual or textural effect in the textile structure.
- 15 4. A method as claimed in any preceding claim, comprising forming said textile structure from a mixture of at least two different materials or fibres, said step of removing material from regions of the textile structure comprising a process for preferentially removing one of said materials or fibres from said regions.
- 20 5. A method as claimed in claim 4, wherein at least one of said at least two different materials is more resistant to said material removal process than the other or others of said at least two different materials from which the textile structure is formed.
6. A method as claimed in claim 5, wherein said at least one more resistant material comprise  
25 a metallic material, such as metallic wires or threads.
7. A method as claimed in claim 6, wherein said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process than the other or others of said two or more different materials.  
30
8. A method as claimed in any of claims 4 to 7, wherein said textile structure comprises a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.
- 35 9. A method as claimed in any of claims 4 to 8, wherein said removal process comprises a mechanical process.
10. A method as claimed in any of claims 4 to 8, wherein said removal process comprises a  
40 chemical process.

11. A method as claimed in claim 10, wherein the removal process comprises a chemical etching process, such as a devoré process.
12. A method as claimed in any of claims 4 to 11, wherein two or more different removal  
5 processes are carried out to remove different materials or fibres from different portions or regions of the textile structure.
13. A composite concrete article comprising a textile structure embedded in the surface of a concrete structure, said textile structure having voids formed therein by means of which the textile  
10 structure is embedded into the concrete structure to anchor the textile structure to the concrete structure.
14. An article as claimed in claim 13, wherein said voids create a particular visual or textural effect in the textile structure.
- 15
15. An article as claimed in claim 13 or claim 14, wherein the voids comprise regions of reduced thread density having greater porosity to wet concrete.
16. An article as claimed in claim 15, wherein textile structure is formed at least two different  
20 materials or fibres, wherein at least one of said two materials is more resistant to the removal process used for creating said voids than another of said at least two materials.
17. An article as claimed in claim 16, wherein said at least one more resistant material comprise a metallic material while the other or others of said two or more materials comprises a non-metallic  
25 material, such as a natural or man made yarn.
18. An article as claimed in claim 17, wherein said other or others of said two or more materials comprise cotton, linen or a synthetic yarn.
- 30
19. An article as claimed in claim 17 or claim 18, wherein said at least one more resistant material comprises steel wires or threads.
20. An article as claimed in claim 16, wherein said at least one more resistant material comprises a natural or man made yarn selected to have a greater resistance to said removal process  
35 than said other or others of said two or more materials.
21. An article as claimed in any of claims 16 to 20, wherein said textile structure comprises a woven textile structure, at least a portion of the warp and/or at least a portion of the weft of the textile structure being formed from said at least one more resistant material.

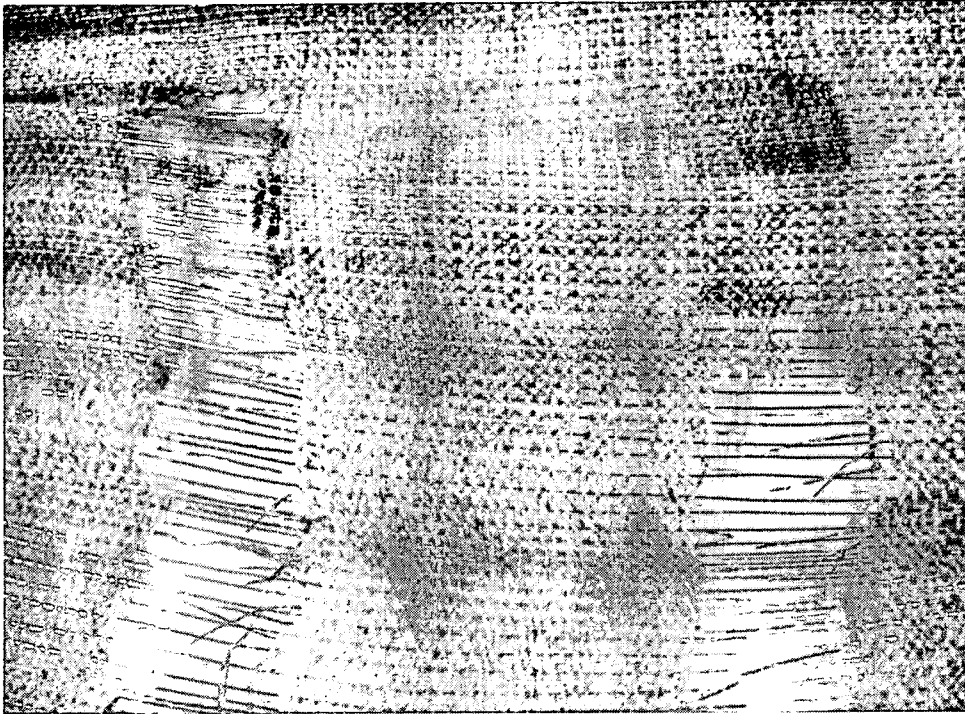


Figure 1



Figure 2



**INTERNATIONAL SEARCH REPORT**

International application No  
**PCT/EP2010/001777**

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. E04C2/04 B28B19/00 B28B23/00  
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
**E04C B28B**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**EPO-Internal**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 818 437 A1 (MILLIKEN EUROP NV [BE]) 15 August 2007 (2007-08-15)	13-21
A	the whole document	1
A	JP 2001 159047 A (YOKOHAMA RUBBER CO LTD) 12 June 2001 (2001-06-12) * abstract; figure 1	17-21
A	US 2005/009428 A1 (PORTER JOHN FREDERICK [CA] ET AL) 13 January 2005 (2005-01-13) paragraphs [0076], [0084]	17-21
A	US 2004/142618 A1 (PORTER JOHN FREDERICK [CA]) 22 July 2004 (2004-07-22) paragraph [0078]	17-21
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

**15 June 2010**

Date of mailing of the international search report

**23/06/2010**

Name and mailing address of the ISA/  
 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040,  
 Fax: (+31-70) 340-3016

Authorized officer

**Vratsanou, Violandi**

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2010/001777

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/084127 A1 (PORTER JOHN FREDERICK [CA]) 6 May 2004 (2004-05-06) * abstract; figure 1 -----	13
A	US 4 378 405 A (PILGRIM THOMAS A [GB]) 29 March 1983 (1983-03-29) * abstract; figure 2 -----	13
A	JP 2002 348749 A (TORAY INDUSTRIES) 4 December 2002 (2002-12-04) * abstract; figure 2 -----	13
A	JP 2003 119641 A (TORAY INDUSTRIES) 23 April 2003 (2003-04-23) * abstract; figures 1-2 -----	13

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/EP2010/001777

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1818437	A1	15-08-2007 WO 2007093377 A1	23-08-2007
JP 2001159047	A	12-06-2001 NONE	
US 2005009428	A1	13-01-2005 CA 2530912 A1 US 2008200086 A1 US 2006013950 A1 WO 2005007988 A2	27-01-2005 21-08-2008 19-01-2006 27-01-2005
US 2004142618	A1	22-07-2004 AU 2004207774 A1 CA 2513508 A1 CN 1754015 A EP 1595012 A2 JP 2006517268 T JP 2009149510 A JP 2009174310 A MX PA05007692 A NZ 541275 A US 2006105653 A1 US 2006065342 A1 WO 2004067271 A2	12-08-2004 12-08-2004 29-03-2006 16-11-2005 20-07-2006 09-07-2009 06-08-2009 25-05-2006 24-12-2008 18-05-2006 30-03-2006 12-08-2004
US 2004084127	A1	06-05-2004 NONE	
US 4378405	A	29-03-1983 AT 385233 B AU 531527 B2 AU 5872880 A BE 883527 A1 CA 1148458 A1 CH 637320 A5 DE 3019917 A1 DK 231180 A ES 8102493 A1 FI 801765 A FR 2457754 A1 GB 2053779 A GR 68472 A1 IE 49483 B1 IT 1131220 B JP 1026845 B JP 1551685 C JP 55162487 A JP 1520405 C JP 63065482 B JP 63172607 A LU 82494 A1	10-03-1988 25-08-1983 04-12-1980 01-12-1980 21-06-1983 29-07-1983 11-12-1980 01-12-1980 16-04-1981 01-12-1980 26-12-1980 11-02-1981 04-01-1982 16-10-1985 18-06-1986 25-05-1989 23-03-1990 17-12-1980 29-09-1989 15-12-1988 16-07-1988 08-10-1980
US 4378405	A	NL 8003121 A NO 801602 A NZ 193792 A PL 224587 A1 SE 441610 B SE 8004007 A SU 1706381 A3 ZA 8003205 A	02-12-1980 01-12-1980 18-11-1983 13-02-1981 21-10-1985 01-12-1980 15-01-1992 27-05-1981
JP 2002348749	A	04-12-2002 NONE	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/001777

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2003119641 A	23-04-2003	JP 3846252 B2	15-11-2006