

⑫

EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of patent specification: **23.12.87**

⑤① Int. Cl.⁴: **D 21 F 1/52**

②① Application number: **83305185.7**

②② Date of filing: **07.09.83**

⑤④ **Improvements in or relating to apparatus for de-watering fibrous suspensions.**

③⑩ Priority: **08.09.82 GB 8225571**

④③ Date of publication of application:
18.04.84 Bulletin 84/16

④⑤ Publication of the grant of the patent:
23.12.87 Bulletin 87/52

③④ Designated Contracting States:
DE FR GB SE

⑤⑧ References cited:
DE-A-2 253 095

⑦③ Proprietor: **BELOIT WALMSLEY LIMITED**
Wood Street
Bury Lancashire BL8 2QT (GB)

⑦② Inventor: **Arav, Ronnie Abraham**
13, Thorneyholme Close
Lostock Bolton, BL6 4BZ (GB)

⑦④ Representative: **Ranson, Arthur Terence et al**
W.P. Thompson & Co. Coopers Building Church
Street
Liverpool L1 3AB (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

The present invention relates to apparatus for de-watering fibrous suspension, and more particularly but not exclusively, to de-watering apparatus on a paper machine of the Inverform type in which water is removed predominantly upwardly by suction boxes located above the travelling top forming wire of a continuously moving sandwich formed by the top and bottom wires and a layer or web of fibrous suspension between them. Still more particularly, the invention relates to an improved cover for a suction box.

In paper forming machines water is removed from the fibrous suspension by suction boxes or foil boxes or augmented vacuum foil boxes. These boxes may be disposed either above or below the layer or web of fibrous suspension formed between top and bottom travelling wires. All boxes of the aforementioned types have a cover, and these covers may comprise a plurality of elongate foils which extend transversely relative to the direction of movement of the web of fibrous suspension. In known designs the covers, formed by the foils or suction box covers, are attached to the suction boxes in such a manner that the suction box has to be removed to replace the foils of the cover when a different design style of cover is required. This requires the paper machine to be stopped for lengthy periods in order to rework the main construction.

In the case of inverted suction boxes, i.e. where the water is removed upwardly, there is a greater tendency for the plugging up of the foils to occur, compared to conventional underwire suction boxes.

In GB—A—1,582,342 the active surface of a suction box de-watering apparatus is defined by a plurality of foils. Each foil is secured directly to the suction box by a respective mounting block. Each individual foil mounting must be machined at a different angle and since this is a large size component the machining of the suction box is complex and expensive. In DE—A—2,253,095 there is disclosed a fibrous suspension de-watering apparatus having a plurality of foil strips carried by the cover of a suction box housing.

It is an aim of the present invention to provide improved de-watering apparatus in which the covers for suction boxes and the like can be changed more easily than known designs and with minimum paper machining down time.

It is a further aim of the present invention to provide de-watering apparatus for an inverted suction box which has a reduced tendency to plug.

In accordance with the present invention then, there is provided apparatus for de-watering fibrous suspensions comprising a suction housing, a cover for the suction housing, and a plurality of foil strips secured to the cover, characterised in that the cover comprises two or more plank members releasably secured to the base of the suction housing and each having a number of

said foil strips attached thereto, at least some of said foil strips being secured to their associated plank member by way of a plurality of spaced apart pins which are carried by, and which project from, the plank member.

By employing planks, the number of mounting blocks carried by the suction box are reduced and accordingly less machining is required. Furthermore, the number of different angles which have to be machined are reduced to the number of planks employed by virtue of the fact that each plank carries several foils. The plank-pin design is also much easier to manufacture and needs only a small amount of machining. The pins are welded to the planks and the machined surfaces are few and are parallel to each other.

The pins are disposed in parallel spaced apart rows and the foil strips, which are elongate members, are secured either directly but preferably indirectly to one or more rows of pins by the free end of each of the pins in the row or rows so that the foils are spaced from the plank member. An elongate mounting bar having a T-shaped cross-section is preferably interposed between the ends of the pins in one row and the foil. In other words, each foil strip is preferably supported by a or a respective mounting bar which is or are carried by and secured to the free end of the pins forming the rows. Preferably the adjacent rows of pins are staggered relative to one another in order to minimise any tendency to plug.

In order to obtain a low deflection and high stiffness in the mounting of the foils, a requirement which is especially important for ceramic foils, it is usual to thicken the foil mounting plates. In known arrangements this increases the depth of the channel between adjacent foils and increases the tendency to plug. By securing the foils to planks using pins the foil mounting plate thickness may be reduced without sacrificing the desired low deflection and high stiffness and thereby the tendency to plug is reduced.

The foil strips define an active surface which in use is in contact with the top forming wire in the case of an inverted suction box or the bottom wire in the case of a conventionally orientated suction box. The active surface defined by the rows of foil strips may be straight or curved. The foil strips extend in a direction which is transverse with respect to the direction of movement of the fibrous suspension through the apparatus. Where the active surface is curved, this may be conveniently achieved by arranging for the plank members to be inclined relative to one another. The pins preferably project perpendicularly from the plank member. Slots are formed between adjacent foil strips and the width of the slots may be varied easily using different width of foil strips.

By virtue of the aforementioned construction, a complete plank member can be easily withdrawn and replaced by another when a different cover design is required, i.e. a cover having, for example, foil strips of different shape or spacing, or when changing foil material from plastic or

ceramic. The flexibility afforded by this arrangement renders the water removal to be tuned more easily to the requirements of a particular grade of paper. Furthermore, the changeover is less time consuming because the invention renders it unnecessary to remove the suction box to change the cover design.

A channel is defined between the plank members and the foil strips, through which channel the water passes after removal from the fibrous suspension. The small pins only cause minimal obstruction to the flow of water therethrough, and it is easy to keep clean. The shallow depth of the channel ensures high water velocities without being too small to be cleaned properly. The arrangement avoids problems with plugging of the open slots in known designs.

In order to increase water speeds in the area above the foil mounting, compressed air may be introduced at low pressure, above the planks and distributed uniformly to the space between the planks and foil mountings by way of drillings in the planks. The introduction of compressed air in conjunction with a weir which is adjustable controls the flow of a thin layer of water above the foil mounting. This water flows at high speed over the foil mounting and thereby contributes to a reduction in plugging by preventing the fibres from depositing over the box intervals.

The present invention will now be described further by way of example only, with reference to the accompanying drawings, in which:—

Figure 1 is a sectional view of one embodiment of apparatus according to the invention,

Figure 2 is a sectional view of a second embodiment of apparatus according to the invention, and

Figure 3 is a fragmentary detailed sectional view of one possible mounting arrangement.

Referring to Figure 1, there is shown a section through part of a de-watering apparatus in accordance with the present invention. The drawing illustrates part of a housing 1 of an inverted suction box 5 and the cover 3 therefor. The suction box 5 is, in use, mounted above the travelling top forming wire of a paper forming machine (not indicated in the drawing). The suction box serves to remove water from a layer or web of fibrous suspension disposed between top and bottom forming wires. A plurality of foil strips 7 define an active surface which, in use is in contact with the top forming wire.

The housing 1 of the suction box 5 has a base 9 to which mounting blocks 11 are secured. These mounting blocks serve to support plank members 13 which are releasably secured thereto by bolts 15. In the illustrated embodiment four plank members 13a, 13b, 13c and 13d are provided. Each plank member 13 carries a number of the foil strips 7 which are secured to the plank member 13 by way of a plurality of spaced apart pins 17. The foil strips 7 are elongate members which extend in a direction transverse to the direction of movement of the fibrous web through the machine. The pins 17 are dis-

posed in parallel rows and project perpendicularly from the plane of the plank member to which they are connected. The pins in adjacent rows are preferably staggered in order to facilitate water flow. The left hand plank member 13 of Figure 1 carries four such rows of pins and each row carries a respective foil strip 7. Similarly the plank member second from left in Figure 1 carries four rows of pins and a foil strip 7 secured to each. Each foil strip 7 is secured to a row of pins by way of an elongated mounting bar 19 which supports the foils strip. The elongate mounting bar is fastened to the free end of each of the pins in the row. The elongate bar may be extruded T-section stainless steel.

Preferably the pins are welded to the plank member. The construction using planks with a number of foils secured to each reduces the amount of machining. The mounting blocks 11 are machined at the appropriate angle required for each plank. Thus, the number of angles to be machined is reduced by four in the case where the plank carries four foils. The guides for receiving the foils are machined parallel to the plank mounting machine, thus further reducing the machining time. The foils may be machined flat, i.e. parallel to the plank mounting faces or to obtain higher accuracy of application half the foil may be machined at a small angle.

Figure 3 shows a detail of a preferred mounting arrangement, from which it will be seen that the mounting block 11 is welded to the base of the suction box 9. The transverse edges of the plank members 13a, 13b are machined to complement the machining on the mounting block 11 to arrive at the desired angle for the plank members 13a, 13b and hence the foils 7 carried thereby. Washers 14 and bolts 15 are employed to secure the plank members to the mounting blocks. As illustrated the pins 17 carry at their free ends an elongate strip member 18 to which the mounting bar 19 is secured by set screws 20.

The plank member 13 disposed on the right of Figure 1 carries four rows of pins 17 but only two foil strips 7. These foil strips are wider than the strips shown on the left of the drawing and each of these wider strips is secured to the plank member by two rows of pins 17. As in the case of the plank members shown on the left, each row of pins carries an elongate mounting bar 19.

The plank member second from the right carries two foil strips. One of these is supported on two rows of pins 17, in the same manner as illustrated for the right hand plank member, whilst the second of these strips 21 is secured to the plank member by way of a bracket 23.

A leading foil strip 25 is carried by a bracket 27, which is releasably secured to the suction box housing and a trailing foil strip 28 is similarly carried by a bracket 29 which is releasably secured to the suction box housing. When designing items 25, 21 and 28 care is taken to avoid any areas that could create any dead flow areas in order to avoid fibre deposits and plugging. A channel 31 is defined between the plank

members 13a, 13b and the foil strips 7, and a channel 33 is defined between the plank members 13c, 13d and the foil strips 7.

The foil strips 7 are spaced apart to define transversely directed slots 35 therebetween. Water passes through these slots and the channels 31, 33 and is removed by way of respective passages 37 and 39.

A weir 41 may be introduced between the channel 31 and the passage 37 and between the channel 33 and passage 39. Where a weir is incorporated, air pressure can be introduced through the cavity 45 formed between the bottom wall of the suction box housing and the plank members 13.

The introduction of air serves to increase the water speed. Compressed air is fed at low pressure into the cavity 45 and distributed to the channel 31 by lines of drillings 46. By way of example these are only illustrated on plank 13b but the other planks may also be provided with corresponding drillings. The drillings are arranged so that uniform air distribution is achieved. The weir 41 is preferably made adjustable and is positioned in such a way that only a thin layer of water flows above the foil mounting while air is filling the space above it. This prevents air from escaping. The thin high speed layer of water rushing over the foil mounting contributes to a reduction in plugging by preventing the fibres from depositing over the box intervals.

The width of the slots may be varied by changing the shape of the foil strips. Where the active surface is required to be substantially horizontal the plank members are preferably mounted in a horizontal position.

It is envisaged that the adjacent rows of pins may be of different lengths in order to achieve the desired curvature of the active surface. Preferably the pins would be of the same length in order to standardise planks for interchangeability.

The embodiment of Figure 2 is essentially the same as that described with reference to Figure 1, and corresponding reference numbers have been used to denote like parts.

In the embodiment, each of the foil strips 7 is supported by a respective rows of pins 17. The shape of the foils 7 is different in this embodiment. Four plank members 13 are shown to the left of the passage 37 and two to the left of the passage 39.

The foils 7 may be either plastics or ceramic. Preferably the parts of Figure 1 are a plastics material such as HDP and the parts of Figure 2 are a ceramic material.

The embodiments described above have the advantages that there are no bridging pieces along the length of the slots 35 and the material on the sides of each slot can be kept to a minimum. In the case of ceramic covers the need for holding bolts in the slots is avoided. The T-bar mounting and pins can be easily electropolished individually and, when using ceramics, the foil surface can be glazed to promote cleanliness. Plastic foil strips can be machined on planers to a

high surface finish on the side of the slots, whereas the present machining process by milling of slots in plastic covers does not lend itself to good surface finish.

The provision of the planks carrying the foils enables plastics foils to be replaced with ceramic foils and vice-versa without changing the suction box design. Naturally, the open area of the active surface can be changed easily by employing foils of different widths. Furthermore, part of the cover mounting can be changed without having to change the complete cover.

The invention reduces the number of spaces required since only four strips and their mounting or only individual strips need to be kept on hand, instead of a complete cover. The invention enables the suction box to be designed and manufactured without compromising any future need for a different cover configuration. The amount of machining of the suction box is minimised. The use of individual foil strips considerably reduces the cost of ceramic and plastic covers.

Claims

1. Apparatus for de-watering fibrous suspensions comprising a suction housing (5), a cover (3) for the suction housing, and a plurality of foil strips (7) secured to the cover, characterised in that the cover (3) comprises two or more plank members (13) releasably secured to the base (9) of the suction housing (5) and each having a number of said foil strips (7) attached thereto, at least some of said foil strips (7) being secured to their associated plank members (13) by way of a plurality of spaced apart pins (17) which are carried by, and which project from, the plank member (13).

2. Apparatus as claimed in claim 1 characterised in that the pins (17) are disposed in parallel spaced apart rows and the foil strips (7), which are elongate members, are secured directly or indirectly to one or more rows of pins (17) at the free ends thereof so that the foil strips (7) are spaced from the plank member (13).

3. Apparatus as claimed in claim 2 characterised in that an elongate mounting bar (19) having a T-shaped cross-section is interposed between the ends of the pins (17) in one row and the foil strips (7).

4. Apparatus as claimed in claim 2 or 3, characterised in that the adjacent rows of pins (17) are staggered relative to one another in order to minimise any tendency to plug.

5. Apparatus as claimed in any of claims 1 to 4 characterised in that the foil strips (17), which extend in a direction which is transverse with respect to the direction of movement of the fibrous suspension through the apparatus, define an active surface which is straight or curved.

6. Apparatus as claimed in claim 5 characterised in that the active surface is arranged to be curved by inclining the plank members (13) relative to one another.

7. Apparatus as claimed in claim 1 characterised in that compressed air is introduced into a cavity (45), above the plank members (13) and distributed to the space between the plank members (13) and the foil strips (7) by way of drillings (46) in the plank members (13), the space defining a channel (31, 33) through which water passes after removal from the fibrous suspension.

8. Apparatus as claimed in claim 7 characterised in that a weir (41) which is adjustably disposed in the channel (31, 33) serves to control the flow of water over the foil mounting.

9. Apparatus as claimed in any of claims 1 to 8 characterised in that the pins (17) are welded to the associated plank member (13).

Patentansprüche

1. Vorrichtung zum Entwässern von Fasersuspensionen mit einem Sauggehäuse (5), einer Abdeckung (3) für das Sauggehäuse und mit einer Vielzahl von Folienstreifen (7), die an der Abdeckung befestigt sind, dadurch gekennzeichnet, daß die Abdeckung (3) zwei oder mehr Plankenelemente (13) aufweist, die lösbar an der Basis (9) des Sauggehäuses (5) befestigt sind und bei welchen an jedem eine Anzahl der erwähnten Folienstreifen (7) festgelegt ist, wobei wenigstens einige der erwähnten Folienstreifen (7) an ihren zugeordneten Plankenelementen (13) durch eine Vielzahl von im Abstand angeordneten Zapfen (17) befestigt sind, die von dem Plankenelement (13) getragen werden und davon vorstehen.

2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Zapfen (17) in parallel im Abstand angeordneten Reihen angeordnet sind und daß die Folienstreifen (7), die langgestreckte Teile sind, direkt oder indirekt an einer oder mehreren Reihen von Zapfen (17) an deren freien Enden so festgelegt sind, daß sie im Abstand von dem Plankenelement (13) angeordnet sind.

3. Vorrichtung nach Anspruch 2, dadurch gekennzeichnet, daß zwischen den Enden der Zapfen (17) in einer Reihe und den Folienstreifen (7) eine langgestreckte Haltestange (19) angeordnet ist, die einen T-förmigen Querschnitt hat.

4. Vorrichtung nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß die benachbarten Reihen von Zapfen (17) zueinander versetzt sind, um jegliche Neigung für ein Zusetzen auf ein Minimum zu reduzieren.

5. Vorrichtung nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß die Folienstreifen (17), die sich in einer Richtung erstrecken, die quer bezüglich der Bewegungsrichtung der Fasersuspension durch die Vorrichtung verläuft, eine aktive Oberfläche bilden, der gerade oder gekrümmt ist.

6. Vorrichtung nach Anspruch 5, dadurch gekennzeichnet, daß die aktive Oberfläche so angeordnet ist, daß sie durch Neigen der Plankenelemente (13) relativ zueinander gekrümmt wird.

7. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß in einen Hohlraum (45) über den Plankenelementen (13) Druckluft eingeführt

und auf den Raum zwischen den Plankenelementen (13) und den Folienstreifen (7) durch Bohrungen (46) in den Plankenelementen (13) verteilt wird, wobei der Raum einen Kanal (31, 33) bildet, durch den das Wasser nach der Entfernung aus der Fasersuspension hindurchgeht.

8. Vorrichtung nach Anspruch 7, dadurch gekennzeichnet, daß ein in dem Kanal (31, 33) einstellbar angeordnetes Wehr (41) zur Steuerung des Wasserstroms über die Folienhalterung dient.

9. Vorrichtung nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die Zapfen (17) an dem zugehörigen Plankenelement (13) angeschweißt sind.

Revendications

1. Appareil pour déshydrater des suspensions fibreuses, comprenant un carter d'aspiration (5), un couvercle (3) pour le carter d'aspiration et une pluralité de lames (7) fixées sur le couvercle, caractérisé en ce que le couvercle (3) comprend deux ou plus de deux panneaux (13) fixés de façon séparable sur la base (9) du carter d'aspiration (5) et comportant chacun un certain nombre desdites lames (7) fixées sur lui, au moins certaines desdites lames (7) étant fixées sur leurs panneaux associés (13) au moyen d'une pluralité de broches (17) espacées l'une de l'autre, qui sont supportées par le panneau (13) et qui font saillie de celui-ci.

2. Appareil tel que revendiqué dans la revendication 1, caractérisé en ce que les broches (17) sont disposées en rangées parallèles et espacées l'une de l'autre et les lames (7), qui sont des éléments allongés, sont fixées directement ou indirectement sur une ou plusieurs rangées de broches (17) à leurs extrémités libres de telle sorte que les lames (7) soient espacées du panneau (13).

3. Appareil tel que revendiqué dans la revendication 2, caractérisé en ce qu'une barre allongée de montage (19) ayant une section droite en forme de T est interposée entre les extrémités des broches (17) d'une rangée et les lames (7).

4. Appareil tel que revendiqué dans la revendication 2 ou 3, caractérisé en ce que les rangées adjacentes de broches (17) sont quinconcées l'une par rapport à l'autre afin de réduire au minimum toute tendance à l'obstruction.

5. Appareil tel que revendiqué dans une quelconque des revendications 1 à 4, caractérisé en ce que les lames (17), qui s'étendent dans une direction qui est transversale par rapport à la direction de déplacement de la suspension fibreuse dans l'appareil, définissent une surface active qui est plane ou incurvée.

6. Appareil tel que revendiqué dans la revendication 5, caractérisé en ce que la surface active est pourvue d'un profil incurvé par inclinaison des panneaux (13) l'un par rapport à l'autre.

7. Appareil tel que revendiqué dans la revendication 1, caractérisé en ce que de l'air comprimé est introduit dans une cavité (45), au-dessus des panneaux (13) et est distribué dans l'espace entre

les panneaux (13) et les lames (7) au moyen de perforations (46) prévues dans les panneaux (13), ledit espace définissant un canal (31, 33) dans lequel l'eau passe après être enlevée de la suspension fibreuse.

8. Appareil tel que revendiqué dans la revendication 7, caractérisé en ce qu'un barrage (41),

qui est disposé de façon réglable dans le canal (31, 33) sert à contrôler l'écoulement de l'eau sur le support de lame.

9. Appareil tel que revendiqué dans une quelconque des revendications 1 à 8, caractérisé en ce que les broches (17) sont soudées sur le panneau associé (13).

5

10

15

20

25

30

35

40

45

50

55

60

65

6

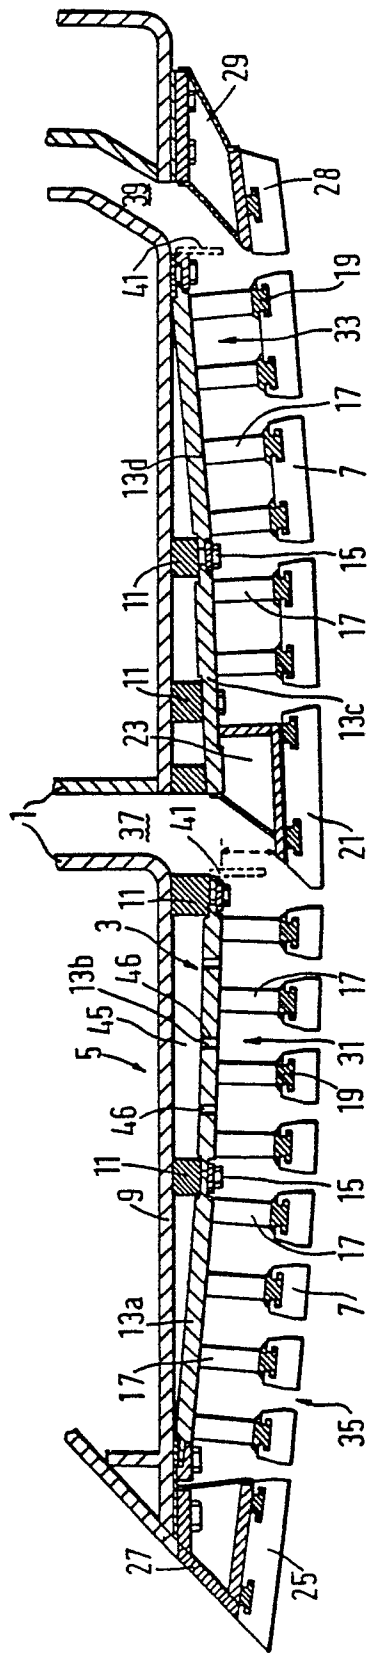


FIG. 1.

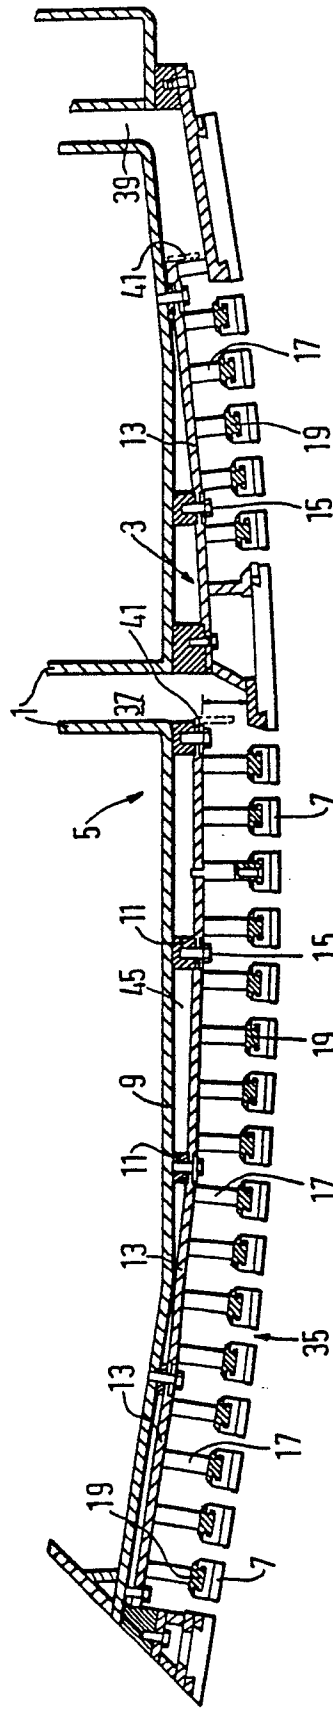


FIG. 2.

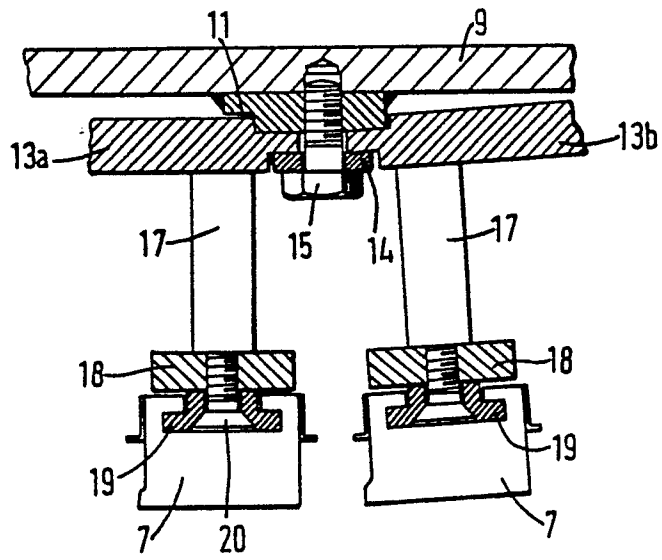


FIG.3.