

(19)



(11)

EP 2 438 302 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
23.09.2015 Bulletin 2015/39

(51) Int Cl.:
F04B 43/04 (2006.01)

(21) Application number: **09785228.9**

(86) International application number:
PCT/GB2009/050615

(22) Date of filing: **03.06.2009**

(87) International publication number:
WO 2010/139918 (09.12.2010 Gazette 2010/49)

(54) PUMP WITH DISC-SHAPED CAVITY

PUMPE MIT SCHEIBENFÖRMIGEM HOHLRAUM

POMPE A CAVITE EN FORME DE DISQUE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR

- **HATFIELD, Stuart Andrew**
Cambridgeshire CB1 3BS (GB)
- **McCRONE, James Edward**
Cambridgeshire CB2 2HU (GB)
- **JANSE VAN RENSBURG, Richard**
Cambridgeshire CB23 6GP (GB)

(43) Date of publication of application:
11.04.2012 Bulletin 2012/15

(74) Representative: **Haley, Stephen et al**
Gill Jennings & Every LLP
The Broadgate Tower
20 Primrose Street
London EC2A 2ES (GB)

(73) Proprietor: **The Technology Partnership PLC**
Melbourn
Royston
Hertfordshire SG8 6EE (GB)

(72) Inventors:
• **BUCKLAND, Justin Rorke**
Cambridgeshire CB1 8NT (GB)

(56) References cited:
WO-A-94/19609 **WO-A-2006/111775**
US-A1- 2001 035 700 **US-A1- 2007 035 213**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 438 302 B1

Description**BACKGROUND OF THE INVENTION****1. Field of the Invention**

[0001] The illustrative embodiments of the invention relate generally to a pump for fluid and, more specifically, to a pump having a substantially disc-shaped cavity with substantially circular end walls and a side wall and a valve for controlling the flow of fluid through the pump.

2. Description of Related Art

[0002] The generation of high amplitude pressure oscillations in closed cavities has received significant attention in the fields of thermo-acoustics and pump type compressors. Recent developments in non-linear acoustics have allowed the generation of pressure waves with higher amplitudes than previously thought possible.

[0003] It is known to use acoustic resonance to achieve fluid pumping from defined inlets and outlets. This can be achieved using a cylindrical cavity with an acoustic driver at one end, which drives an acoustic standing wave. In such a cylindrical cavity, the acoustic pressure wave has limited amplitude. Varying cross-section cavities, such as cone, horn-cone, bulb have been used to achieve high amplitude pressure oscillations thereby significantly increasing the pumping effect. In such high amplitude waves the non-linear mechanisms with energy dissipation have been suppressed. However, high amplitude acoustic resonance has not been employed within disc-shaped cavities in which radial pressure oscillations are excited until recently. International Patent Application No. PCT/GB2006/001487, published as WO 2006/111775 (the '487 Application), discloses a pump having a substantially disc-shaped cavity with a high aspect ratio, i.e., the ratio of the radius of the cavity to the height of the cavity.

[0004] Such a pump has a substantially cylindrical cavity comprising a side wall closed at each end by end walls. The pump also comprises an actuator that drives either one of the end walls to oscillate in a direction substantially perpendicular to the surface of the driven wall. The spatial profile of the motion of the driven end wall is described as being matched to the spatial profile of the fluid pressure oscillations within the cavity, a state described herein as mode-matching. When the pump is mode-matched, work done by the actuator on the fluid in the cavity adds constructively across the driven end wall surface, thereby enhancing the amplitude of the pressure oscillation in the cavity and delivering high pump efficiency. In a pump which is not mode-matched there may be areas of the end wall wherein the work done by the end wall on the fluid reduces rather than enhances the amplitude of the fluid pressure oscillation in the fluid within the cavity. Thus, the useful work done by the actuator on the fluid is reduced and the pump becomes less efficient. The efficiency of a mode-matched pump is dependent upon the interface between the driven end wall and the side wall. It is desirable to maintain the efficiency of such pump by structuring the interface so that it does not decrease or dampen the motion of the driven end wall thereby mitigating any reduction in the amplitude of the fluid pressure oscillations within the cavity.

[0005] Such pumps also require a valve for controlling the flow of fluid through the pump and, more specifically, a valve being capable of operating at high frequencies. Conventional valves typically operate at lower frequencies below 500 Hz for a variety of applications. For example, many conventional compressors typically operate at 50 or 60 Hz. Linear resonance compressors known in the art operate between 150 and 350 Hz. However, many portable electronic devices including medical devices require pumps for delivering a positive pressure or providing a vacuum that are relatively small in size and it is advantageous for such pumps to be inaudible in operation so as to provide discrete operation. To achieve these objectives, such pumps must operate at very high frequencies requiring valves capable of operating at about 20 kHz and higher which are not commonly available. To operate at these high frequencies, the valve must be responsive to a high frequency oscillating pressure that can be rectified to create a net flow of fluid through the pump.

[0006] WO2006/111775 discloses a fluid pump having one or more actuators and a substantially cylindrical cavity, wherein axial oscillations of the end walls of the cavity cause radial oscillations of fluid pressure in the cavity.

[0007] WO94/19609 discloses a displacement pump whose cavity volume changes during a cycle of the pump.

SUMMARY

[0008] According to an the present invention, a pump comprising: a pump body having a substantially cylindrical shape defining a cavity for containing a fluid, the cavity being formed by a side wall closed at both ends by end walls, at least one of the end walls being a driven end wall having a central portion and a peripheral portion extending radially outwardly from the central portion of the driven end wall; an actuator operatively associated with the central portion of the driven end wall to cause an oscillatory motion of the driven end wall, thereby generating displacement oscillations of the driven end wall in a direction substantially perpendicular thereto with an annular node between the centre of the driven end

5 wall and the side wall when in use; a first aperture disposed at any location in the cavity other than at the location of the annular node and extending through the pump body; a second aperture disposed at any location in the pump body other than the location of said first aperture and extending through the pump body; and, a flap valve disposed in at least one of said first aperture and second aperture; whereby the displacement oscillations generate corresponding radial pressure oscillations of the fluid within the cavity of said pump body causing fluid flow through said first and second apertures when in use; characterized by an isolator operatively associated with the peripheral portion of the driven end wall to reduce dampening of the displacement oscillations; and in that said flap valve comprises: a first plate having apertures extending generally perpendicular through said first plate; a second plate having first apertures extending generally perpendicular through said second plate, the first apertures being substantially offset from the apertures of said first plate; a spacer disposed between said first plate and said second plate to form a cavity therebetween in fluid communication with the apertures of said first plate and the first apertures of said second plate; and, a flap disposed and moveable between said first plate and said second plate, said flap having apertures substantially offset from the apertures of said first plate and substantially aligned with the first apertures of said second plate; whereby said flap is motivated between said first and second plates in response to a change in direction of the differential pressure of the fluid across said flap valve.

15 [0009] Other objects, features, and advantages of the illustrative embodiments are described herein and will become apparent with reference to the drawings and detailed description that follow.

20 BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figures 1A to 1C show a schematic cross-section view of a first pump according to an illustrative embodiment of the inventions that provide a positive pressure, a graph of the displacement oscillations of the driven end wall of the pump, and a graph of the pressure oscillations of fluid within the cavity of pump.

25 Figure 2 shows a schematic top view of the first pump of Figure 1A.

Figure 3 shows a schematic cross-section view of a second pump according to an illustrative embodiment of the inventions that provides a negative pressure.

Figure 4 shows a schematic cross-section view of a third pump according to an illustrative embodiment of the inventions having a frusto-conical base.

30 Figure 5 shows a schematic cross-section view of a fourth pump according to another illustrative embodiment of the invention including two actuators.

Figure 6A shows a schematic cross-section view of the pump of Figure 3 and Figure 6B shows a graph of pressure oscillations of fluid within the pump as shown in Figure 1C.

35 Figure 6C shows a schematic cross-sectional view of an illustrative embodiment of a valve utilized in the pump of Figure 3.

Figure 7A shows a schematic cross-section view of an illustrative embodiment of a valve in a closed position, and Figure 7B shows an exploded, sectional view of the valve of Figure 7A taken along line 7B-7B in Figure 7D.

Figure 7C shows a schematic perspective view of the valve of Figure 7B.

Figure 7D shows a schematic top view of the valve of Figure 7B.

40 Figure 8A shows a schematic cross-section view of the valve in Figure 7B in an open position when fluid flows through the valve.

Figure 8B shows a schematic cross-section view of the valve in Figure 7B in transition between the open and closed positions.

45 Figure 9A shows a graph of an oscillating differential pressure applied across the valve of Figure 7B according to an illustrative embodiment.

Figure 9B shows a graph of an operating cycle of the valve of Figure 7B between an open and closed position.

Figure 10 shows a schematic cross-section view of a portion of the valve of Figure 7B in the closed position according to an illustrative embodiment.

50 Figure 11A shows a schematic cross-section view of a modified version of the valve of Figure 7B having release apertures.

Figure 11B shows a schematic cross-section view of a portion of the valve in Figure 11A.

Figure 12A shows a schematic cross-section view of two valves of Figure 7B, one of which is reversed to allow fluid flow in the opposite direction from the other according to an illustrative embodiment.

Figure 12B shows a schematic top view of the valves shown in Figure 12A.

55 Figure 12C shows a graph of the operating cycles of the valves of Figure 12A between an open and closed position.

Figure 13 shows a schematic cross-section view of the a bi-directional valve having two valve portions that allow fluid flow in opposite directions with both valve portions having a normally-closed position according to an illustrative embodiment.

Figure 14 shows a schematic top view of the bi-directional valves of Figure 13.

Figure 15 shows a schematic cross-section view of a bi-directional valve having two valve portions that allow fluid flow in opposite directions with one valve portion having a normally closed position and the other having a normally open position according to an illustrative embodiment.

5

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0011] In the following detailed description of several illustrative embodiments, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is understood that other embodiments may be utilized and that logical structural, mechanical, electrical, and chemical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the embodiments described herein, the description may omit certain information known to those skilled in the art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the illustrative embodiments are defined only by the appended claims.

[0012] Figure 1A is a schematic cross-section view of a pump 10 according to an illustrative embodiment of the invention. Referring also to Figure 1B, pump 10 comprises a pump body having a substantially cylindrical shape including a cylindrical wall 19 closed at one end by a base 18 and closed at the other end by an end plate 17 and a ring-shaped isolator 30 disposed between the end plate 17 and the other end of the cylindrical wall 19 of the pump body. The cylindrical wall 19 and base 18 may be a single component comprising the pump body and may be mounted to other components or systems. The internal surfaces of the cylindrical wall 19, the base 18, the end plate 17, and the isolator 30 form a cavity 11 within the pump 10 wherein the cavity 11 comprises a side wall 14 closed at both ends by end walls 12 and 13. The end wall 13 is the internal surface of the base 18 and the side wall 14 is the inside surface of the cylindrical wall 19. The end wall 12 comprises a central portion corresponding to the inside surface of the end plate 17 and a peripheral portion corresponding to the inside surface of the isolator 30. Although the cavity 11 is substantially circular in shape, the cavity 11 may also be elliptical or other shape. The base 18 and cylindrical wall 19 of the pump body may be formed from any suitable rigid material including, without limitation, metal, ceramic, glass, or plastic including, without limitation, inject-molded plastic.

[0013] The pump 10 also comprises a piezoelectric disc 20 operatively connected to the end plate 17 to form an actuator 40 that is operatively associated with the central portion of the end wall 12 via the end plate 17. The piezoelectric disc 20 is not required to be formed of a piezoelectric material, but may be formed of any electrically active material that vibrates such as, for example, an electrostrictive or magnetostrictive material. The end plate 17 preferably possesses a bending stiffness similar to the piezoelectric disc 20 and may be formed of an electrically inactive material such as a metal or ceramic. When the piezoelectric disc 20 is excited by an electrical current, the actuator 40 expands and contracts in a radial direction relative to the longitudinal axis of the cavity 11 causing the end plate 17 to bend, thereby inducing an axial deflection of the end wall 12 in a direction substantially perpendicular to the end wall 12. The end plate 17 alternatively may also be formed from an electrically active material such as, for example, a piezoelectric, magnetostrictive, or electrostrictive material. In another embodiment, the piezoelectric disc 20 may be replaced by a device in a force-transmitting relation with the end wall 12 such as, for example, a mechanical, magnetic or electrostatic device, wherein the end wall 12 may be formed as an electrically inactive or passive layer of material driven into oscillation by such device (not shown) in the same manner as described above.

[0014] The pump 10 further comprises at least two apertures extending from the cavity 11 to the outside of the pump 10, wherein at least a first one of the apertures may contain a valve to control the flow of fluid through the aperture. Although the aperture containing a valve may be located at any position in the cavity 11 where the actuator 40 generates a pressure differential as described below in more detail, one preferred embodiment of the pump 10 comprises an aperture with a valve located at approximately the centre of either of the end walls 12,13. The pump 10 shown in Figures 1A and 1B comprises a primary aperture 16 extending from the cavity 11 through the base 18 of the pump body at about the centre of the end wall 13 and containing a valve 46. The valve 46 is mounted within the primary aperture 16 and permits the flow of fluid in one direction as indicated by the arrow so that it functions as an outlet for the pump 10. The second aperture 15 may be located at any position within the cavity 11 other than the location of the aperture 16 with a valve 46. In one preferred embodiment of the pump 10, the second aperture is disposed between the centre of either one of the end walls 12,13 and the side wall 14. The embodiment of the pump 10 shown in Figures 1A and 1B comprises two secondary apertures 15 extending from the cavity 11 through the actuator 40 that are disposed between the centre of the end wall 12 and the side wall 14. Although the secondary apertures 15 are not valved in this embodiment of the pump 10, they may also be valved to improve performance if necessary. In this embodiment of the pump 10, the primary aperture 16 is valved so that the fluid is drawn into the cavity 11 of the pump 10 through the secondary apertures 15 and pumped out of the cavity 11 through the primary aperture 16 as indicated by the arrows to provide a positive pressure at the primary aperture 16.

[0015] Referring to Figure 3, the pump 10 of Figure 1 is shown with an alternative configuration of the primary aperture 16. More specifically, the valve 46' in the primary aperture 16' is reversed so that the fluid is drawn into the cavity 11 through the primary aperture 16' and expelled out of the cavity 11 through the secondary apertures 15 as indicated by the arrows, thereby providing suction or a source of reduced pressure at the primary aperture 16'. The term "reduced pressure" as used herein generally refers to a pressure less than the ambient pressure where the pump 10 is located. Although the term "vacuum" and "negative pressure" may be used to describe the reduced pressure, the actual pressure reduction may be significantly less than the pressure reduction normally associated with a complete vacuum. The pressure is "negative" in the sense that it is a gauge pressure, i.e., the pressure is reduced below ambient atmospheric pressure. Unless otherwise indicated, values of pressure stated herein are gauge pressures. References to increases in reduced pressure typically refer to a decrease in absolute pressure, while decreases in reduced pressure typically refer to an increase in absolute pressure.

[0016] Referring now to Figure 4, a pump 70 according to another illustrative embodiment of the invention is shown. The pump 70 is substantially similar to the pump 10 of Figure 1 except that the pump body has a base 18' having an upper surface forming the end wall 13' which is frusto-conical in shape. Consequently, the height of the cavity 11 varies from the height at the side wall 14 to a smaller height between the end walls 12,13' at the centre of the end walls 12,13'. The frusto-conical shape of the end wall 13' intensifies the pressure at the centre of the cavity 11 where the height of the cavity 11 is smaller relative to the pressure at the side wall 14 of the cavity 11 where the height of the cavity 11 is larger. Therefore, comparing cylindrical and frusto-conical cavities 11 having equal central pressure amplitudes, it is apparent that the frusto-conical cavity 11 will generally have a smaller pressure amplitude at positions away from the centre of the cavity 11: the increasing height of the cavity 11 acts to reduce the amplitude of the pressure wave. As the viscous and thermal energy losses experienced during the oscillations of the fluid in the cavity 11 both increase with the amplitude of such oscillations, it is advantageous to the efficiency of the pump 70 to reduce the amplitude of the pressure oscillations away from the centre of the cavity 11 by employing a frusto-conical cavity 11 design. In one illustrative embodiment of the pump 70 where the diameter of the cavity 11 is approximately 20 mm, the height of the cavity 11 at the side wall 14 is approximately 1.0 mm tapering to a height at the centre of the end wall 13' of approximately 0.3 mm. Either one of the end walls 12,13 or both of the end walls 12,13 may have a frusto-conical shape.

[0017] Referring now to Figure 5, a pump 60 according to another illustrative embodiment of the invention is shown. The pump 60 is substantially similar to the pump 10 of Figure 1 except that it includes a second actuator 62 that replaces the base 18 of the pump body. The actuator 62 comprises a second disc 64 and a ring-shaped isolator 66 disposed between the disc 64 and the side wall 14. The pump 60 also comprises a second piezoelectric disc 68 operatively connected to the disc 64 to form the actuator 62. The actuator 62 is operatively associated with the end wall 13 which comprises the inside surfaces of the disc 64 and the isolator 66. The second actuator 62 also generates an oscillatory motion of the end wall 13 in a direction substantially perpendicular to the end wall 13 in a manner similar to the actuator 40 with respect to the end wall 12 as described above. When the actuators 40, 62 are activated, control circuitry (not shown) is provided to coordinate the axial displacement oscillations of the actuators. It is preferable that the actuators are driven at the same frequency and approximately out-of-phase, i.e. such that the centres of the end walls 12, 13 move first towards each other and then apart.

[0018] The dimensions of the pumps described herein should preferably satisfy certain inequalities with respect to the relationship between the height (h) of the cavity 11 and the radius (r) of the cavity which is the distance from the longitudinal axis of the cavity 11 to the side wall 14. These equations are as follows:

$$r/h > 1.2;$$

and

$$h^2/r > 4 \times 10^{-10} \text{ meters.}$$

[0019] In one embodiment of the invention, the ratio of the cavity radius to the cavity height (r/h) is between about 10 and about 50 when the fluid within the cavity 11 is a gas. In this example, the volume of the cavity 11 may be less than about 10 ml. Additionally, the ratio of h^2/r is preferably within a range between about 10^{-3} and about 10^{-6} meters where the working fluid is a gas as opposed to a liquid.

[0020] In one embodiment of the invention the secondary apertures 15 are located where the amplitude of the pressure oscillations within the cavity 11 is close to zero, i.e., the "nodal" points of the pressure oscillations. Where the cavity 11 is cylindrical, the radial dependence of the pressure oscillation may be approximated by a Bessel function of the first

kind and the radial node of the lowest-order pressure oscillation within the cavity 11 occurs at a distance of approximately $0.63r \pm 0.2r$ from the centre of the end wall 12 or the longitudinal axis of the cavity 11. Thus, the secondary apertures 15 are preferably located at a radial distance (a) from the centre of the end walls 12,13, where $(a) \approx 0.63r \pm 0.2r$, i.e., close to the nodal points of the pressure oscillations.

[0021] Additionally, the pumps disclosed herein should preferably satisfy the following inequality relating the cavity radius (r) and operating frequency (f) which is the frequency at which the actuator 40 vibrates to generate the axial displacement of the end wall 12. The inequality equation is as follows:

$$\frac{k_0(c_s)}{2\pi f} \leq r \leq \frac{k_0(c_f)}{2\pi f} \quad \text{[Equation 1]}$$

wherein the speed of sound in the working fluid within the cavity 11 (c) may range between a slow speed (c_s) of about 115 m/s and a fast speed (c_f) equal to about 1,970 m/s as expressed in the equation above, and k_0 is a constant ($k_0 = 3.83$). The frequency of the oscillatory motion of the actuator 40 is preferably about equal to the lowest resonant frequency of radial pressure oscillations in the cavity 11, but may be within 20% therefrom. The lowest resonant frequency of radial pressure oscillations in the cavity 11 is preferably greater than 500Hz.

[0022] Referring now to the pump 10 in operation, the piezoelectric disc 20 is excited to expand and contract in a radial direction against the end plate 17 which causes the actuator 40 to bend, thereby inducing an axial displacement of the driven end wall 12 in a direction substantially perpendicular to the driven end wall 12. The actuator 40 is operatively associated with the central portion of the end wall 12 as described above so that the axial displacement oscillations of the actuator 40 cause axial displacement oscillations along the surface of the end wall 12 with maximum amplitudes of oscillations, i.e., anti-node displacement oscillations, at about the centre of the end wall 12. Referring back to Figure 1A, the displacement oscillations and the resulting pressure oscillations of the pump 10 as generally described above are shown more specifically in Figures 1B and 1C, respectively. The phase relationship between the displacement oscillations and pressure oscillations may vary, and a particular phase relationship should not be implied from any figure.

[0023] Figure 1B shows one possible displacement profile illustrating the axial oscillation of the driven end wall 12 of the cavity 11. The solid curved line and arrows represent the displacement of the driven end wall 12 at one point in time, and the dashed curved line represents the displacement of the driven end wall 12 one half-cycle later. The displacement as shown in this figure and the other figures is exaggerated. Because the actuator 40 is not rigidly mounted at its perimeter, but rather suspended by the isolator 30, the actuator 40 is free to oscillate about its centre of mass in its fundamental mode. In this fundamental mode, the amplitude of the displacement oscillations of the actuator 40 is substantially zero at an annular displacement node 22 located between the centre of the end wall 12 and the side wall 14. The amplitudes of the displacement oscillations at other points on the end wall 12 have an amplitudes greater than zero as represented by the vertical arrows. A central displacement anti-node 21 exists near the centre of the actuator 40 and a peripheral displacement anti-node 21' exists near the perimeter of the actuator 40.

[0024] Figure 1C shows one possible pressure oscillation profile illustrating the pressure oscillation within the cavity 11 resulting from the axial displacement oscillations shown in Figure 1B. The solid curved line and arrows represent the pressure at one point in time, and the dashed curved line represents the pressure one half-cycle later. In this mode and higher-order modes, the amplitude of the pressure oscillations has a central pressure anti-node 23 near the centre of the cavity 11 and a peripheral pressure anti-node 24 near the side wall 14 of the cavity 11. The amplitude of the pressure oscillations is substantially zero at the annular pressure node 25 between the central pressure anti-node 23 and the peripheral pressure anti-node 24. For a cylindrical cavity, the radial dependence of the amplitude of the pressure oscillations in the cavity 11 may be approximated by a Bessel function of the first kind. The pressure oscillations described above result from the radial movement of the fluid in the cavity 11, and so will be referred to as the "radial pressure oscillations" of the fluid within the cavity 11 as distinguished from the axial displacement oscillations of the actuator 40.

[0025] With further reference to Figures 1B and 1C, it can be seen that the radial dependence of the amplitude of the axial displacement oscillations of the actuator 40 (the "mode-shape" of the actuator 40) should approximate a Bessel function of the first kind so as to match more closely the radial dependence of the amplitude of the desired pressure oscillations in the cavity 11 (the "mode-shape" of the pressure oscillation). By not rigidly mounting the actuator 40 at its perimeter and allowing it to vibrate more freely about its centre of mass, the mode-shape of the displacement oscillations substantially matches the mode-shape of the pressure oscillations in the cavity 11, thus achieving mode-shape matching or, more simply, mode-matching. Although the mode-matching may not always be perfect in this respect, the axial displacement oscillations of the actuator 40 and the corresponding pressure oscillations in the cavity 11 have substantially the same relative phase across the full surface of the actuator 40 wherein the radial position of the annular pressure node 25 of the pressure oscillations in the cavity 11 and the radial position of the annular displacement node 22 of the axial displacement oscillations of actuator 40 are substantially coincident.

[0026] As the actuator 40 vibrates about its centre of mass, the radial position of the annular displacement node 22

will necessarily lie inside the radius of the actuator 40 when the actuator 40 vibrates in its fundamental mode as illustrated in Figure 1B. Thus, to ensure that the annular displacement node 22 is coincident with the annular pressure node 25, the radius of the actuator (r_{act}) should preferably be greater than the radius of the annular pressure node 25 to optimize mode-matching. Assuming again that the pressure oscillation in the cavity 11 approximates a Bessel function of the first kind, the radius of the annular pressure node 25 would be approximately 0.63 of the radius from the centre of the end wall 13 to the side wall 14, i.e., the radius of the cavity 11 (r) as shown in Figure 1A. Therefore, the radius of the actuator 40 (r_{act}) should preferably satisfy the following inequality: $r_{act} \geq 0.63r$.

[0027] The isolator 30 may be a flexible membrane which enables the edge of the actuator 40 to move more freely as described above by bending and stretching in response to the vibration of the actuator 40 as shown by the displacement of the peripheral displacement oscillations 21' in Figure 1B. The flexible membrane overcomes the potential dampening effects of the side wall 14 on the actuator 40 by providing a low mechanical impedance support between the actuator 40 and the cylindrical wall 19 of the pump 10 thereby reducing the dampening of the axial oscillations of the peripheral displacement oscillations 21' of the actuator 40. Essentially, flexible membrane 31 minimizes the energy being transferred from the actuator 40 to the side wall 14, which remains substantially stationary. Consequently, the annular displacement node 22 will remain substantially aligned with the annular pressure node 25 so as to maintain the mode-matching condition of the pump 10. Thus, the axial displacement oscillations of the driven end wall 12 continue to efficiently generate oscillations of the pressure within the cavity 11 from the central pressure anti-node 23 to the peripheral pressure anti-node 24 at the side wall 14 as shown in Figure 1C.

[0028] Figure 6A shows a schematic cross-section view of the pump of Figure 3 and Figure 6B a graph of the pressure oscillations of fluid within the pump as shown in Figure 1C. The valve 46' (as well as the valve 46) allows fluid to flow in only one direction as described above. The valve 46' may be a check valve or any other valve that allows fluid to flow in only one direction. Some valve types may regulate fluid flow by switching between an open and closed position. For such valves to operate at the high frequencies generated by the actuator 40, the valves 46 and 46' must have an extremely fast response time such that they are able to open and close on a timescale significantly shorter than the timescale of the pressure variation. One embodiment of the valves 46 and 46' achieve this by employing an extremely light flap valve which has low inertia and consequently is able to move rapidly in response to changes in relative pressure across the valve structure.

[0029] Referring to Figures 7A-D such a flap valve, valve 110 is shown according to an illustrative embodiment. The valve 110 comprises a substantially cylindrical wall 112 that is ring-shaped and closed at one end by a retention plate 114 and at the other end by a sealing plate 116. The inside surface of the wall 112, the retention plate 114, and the sealing plate 116 form a cavity 115 within the valve 110. The valve 110 further comprises a substantially circular flap 117 disposed between the retention plate 114 and the sealing plate 116, but adjacent the sealing plate 116. The flap 117 may be disposed adjacent the retention plate 114 in an alternative embodiment as will be described in more detail below, and in this sense the flap 117 is considered to be "biased" against either one of the sealing plate 116 or the retention plate 114. The peripheral portion of the flap 117 is sandwiched between the sealing plate 116 and the ring-shaped wall 112 so that the motion of the flap 117 is restrained in the plane substantially perpendicular the surface of the flap 117. The motion of the flap 117 in such plane may also be restrained by the peripheral portion of the flap 117 being attached directly to either the sealing plate 116 or the wall 112, or by the flap 117 being a close fit within the ring-shaped wall 112, in an alternative embodiments. The remainder of the flap 117 is sufficiently flexible and movable in a direction substantially perpendicular the surface of the flap 117, so that a force applied to either surface of the flap 117 will motivate the flap 117 between the sealing plate 116 and the retention plate 114.

[0030] The retention plate 114 and the sealing plate 116 both have holes 118 and 120, respectively, which extend through each plate. The flap 117 also has holes 122 that are generally aligned with the holes 118 of the retention plate 114 to provide a passage through which fluid may flow as indicated by the dashed arrows 124 in Figures 6C and 8A. The holes 122 in the flap 117 may also be partially aligned, i.e., having only a partial overlap, with the holes 118 in the retention plate 114. Although the holes 118, 120, 122 are shown to be of substantially uniform size and shape, they may be of different diameters or even different shapes without limiting the scope of the invention. In one embodiment of the invention, the holes 118 and 120 form an alternating pattern across the surface of the plates as shown by the solid and dashed circles, respectively, in Figure 7D. In other embodiments, the holes 118, 120, 122 may be arranged in different patterns without effecting the operation of the valve 110 with respect to the functioning of the individual pairings of holes 118, 120, 122 as illustrated by individual sets of the dashed arrows 124. The pattern of holes 118, 120, 122 may be designed to increase or decrease the number of holes to control the total flow of fluid through the valve 110 as required. For example, the number of holes 118, 120, 122 may be increased to reduce the flow resistance of the valve 110 to increase the total flow rate of the valve 110.

[0031] When no force is applied to either surface of the flap 117 to overcome the bias of the flap 117, the valve 110 is in a "normally closed" position because the flap 117 is disposed adjacent the sealing plate 116 where the holes 122 of the flap are offset or not aligned with the holes 118 of the sealing plate 116. In this "normally closed" position, the flow of fluid through the sealing plate 116 is substantially blocked or covered by the non-perforated portions of the flap 117

as shown in Figures 7A and 7B. When pressure is applied against either side of the flap 117 that overcomes the bias of the flap 117 and motivates the flap 117 away from the sealing plate 116 towards the retention plate 114 as shown in Figures 6C and 8A, the valve 110 moves from the normally closed position to an "open" position over a time period, an opening time delay (T_o), allowing fluid to flow in the direction indicated by the dashed arrows 124. When the pressure changes direction as shown in Figure 8B, the flap 117 will be motivated back towards the sealing plate 116 to the normally closed position. When this happens, fluid will flow for a short time period, a closing time delay (T_c), in the opposite direction as indicated by the dashed arrows 132 until the flap 117 seals the holes 120 of the sealing plate 116 to substantially block fluid flow through the sealing plate 116 as shown in Figure 7B. In other embodiments of the invention, the flap 117 may be biased against the retention plate 114 with the holes 118, 122 aligned in a "normally open" position. In this embodiment, applying positive pressure against the flap 117 will be necessary to motivate the flap 117 into a "closed" position. Note that the terms "sealed" and "blocked" as used herein in relation to valve operation are intended to include cases in which substantial (but incomplete) sealing or blockage occurs, such that the flow resistance of the valve is greater in the "closed" position than in the "open" position.

[0032] The operation of the valve 110 is a function of the change in direction of the differential pressure (ΔP) of the fluid across the valve 110. In Figure 7B, the differential pressure has been assigned a negative value ($-\Delta P$) as indicated by the downward pointing arrow. When the differential pressure has a negative value ($-\Delta P$), the fluid pressure at the outside surface of the retention plate 114 is greater than the fluid pressure at the outside surface of the sealing plate 116. This negative differential pressure ($-\Delta P$) drives the flap 117 into the fully closed position as described above wherein the flap 117 is pressed against the sealing plate 116 to block the holes 120 in the sealing plate 116, thereby substantially preventing the flow of fluid through the valve 110. When the differential pressure across the valve 110 reverses to become a positive differential pressure ($+\Delta P$) as indicated by the upward pointing arrow in Figure 8A, the flap 117 is motivated away from the sealing plate 116 and towards the retention plate 114 into the open position. When the differential pressure has a positive value ($+\Delta P$), the fluid pressure at the outside surface of the sealing plate 116 is greater than the fluid pressure at the outside surface of the retention plate 114. In the open position, the movement of the flap 117 unblocks the holes 120 of the sealing plate 116 so that fluid is able to flow through them and the aligned holes 122 and 118 of the flap 117 and the retention plate 114, respectively, as indicated by the dashed arrows 124.

[0033] When the differential pressure across the valve 110 changes back to a negative differential pressure ($-\Delta P$) as indicated by the downward pointing arrow in Figure 8B, fluid begins flowing in the opposite direction through the valve 110 as indicated by the dashed arrows 132, which forces the flap 117 back toward the closed position shown in Figure 7B. In Figure 8B, the fluid pressure between the flap 117 and the sealing plate 116 is lower than the fluid pressure between the flap 117 and the retention plate 114. Thus, the flap 117 experiences a net force, represented by arrows 138, which accelerates the flap 117 toward the sealing plate 116 to close the valve 110. In this manner, the changing differential pressure cycles the valve 110 between closed and open positions based on the direction (i.e., positive or negative) of the differential pressure across the valve 110. It should be understood that the flap 117 could be biased against the retention plate 114 in an open position when no differential pressure is applied across the valve 110, i.e., the valve 110 would then be in a "normally open" position.

[0034] Referring again to Figure 6A, the valve 110 is disposed within the primary aperture 46' of the pump 10 so that fluid is drawn into the cavity 11 through the primary aperture 46' and expelled from the cavity 11 through the secondary apertures 15 as indicated by the solid arrows, thereby providing a source of reduced pressure at the primary aperture 46' of the pump 10. The fluid flow through the primary aperture 46' as indicated by the solid arrow pointing upwards corresponds to the fluid flow through the holes 118, 120 of the valve 110 as indicated by the dashed arrows 124 that also point upwards. As indicated above, the operation of the valve 110 is a function of the change in direction of the differential pressure (ΔP) of the fluid across the entire surface of the retention plate 114 of the valve 110 for this embodiment of a negative pressure pump. The differential pressure (Δ^*P) is assumed to be substantially uniform across the entire surface of the retention plate 114 because the diameter of the retention plate 114 is small relative to the wavelength of the pressure oscillations in the cavity 115 and furthermore because the valve 110 is located in the primary aperture 46' near the centre of the cavity 115 where the amplitude of the central pressure anti-node 71 is relatively constant. When the differential pressure across the valve 110 reverses to become a positive differential pressure ($+\Delta P$) as shown in Figures 6C and 8A, the biased flap 117 is motivated away from the sealing plate 116 against the retention plate 114 into the open position. In this position, the movement of the flap 117 unblocks the holes 120 of the sealing plate 116 so that fluid is permitted to flow through them and the aligned holes 118 of the retention plate 114 and the holes 122 of the flap 117 as indicated by the dashed arrows 124. When the differential pressure changes back to the negative differential pressure ($-\Delta P$), fluid begins to flow in the opposite direction through the valve 110 (see Figure 8B), which forces the flap 117 back toward the closed position (see Figure 7B). Thus, as the pressure oscillations in the cavity 11 cycle the valve 110 between the normally closed and open positions, the pump 160 provides a reduced pressure every half cycle when the valve 110 is in the open position.

[0035] The differential pressure (Δ^*P) is assumed to be substantially uniform across the entire surface of the retention plate 114 because it corresponds to the central pressure anti-node 71 as described above, it therefore being a good

approximation that there is no spatial variation in the pressure across the valve 110. While in practice the time-dependence of the pressure across the valve may be approximately sinusoidal, in the analysis that follows it shall be assumed that the differential pressure (ΔP) between the positive differential pressure ($+\Delta P$) and negative differential pressure ($-\Delta P$) values can be represented by a square wave over the positive pressure time period (t_{p+}) and the negative pressure time period (t_{p-}) of the square wave, respectively, as shown in Figure 9A. As differential pressure (ΔP) cycles the valve 110 between the normally closed and open positions, the pump 10 provides a reduced pressure every half cycle when the valve 110 is in the open position subject to the opening time delay (T_o) and the closing time delay (T_c) as also described above and as shown in Figure 9B. When the differential pressure across the valve 110 is initially negative with the valve 110 closed (see Figure 7A) and reverses to become a positive differential pressure ($+\Delta P$), the biased flap 117 is motivated away from the sealing plate 116 towards the retention plate 114 into the open position (see Figure 7B) after the opening time delay (T_o). In this position, the movement of the flap 117 unblocks the holes 120 of the sealing plate 116 so that fluid is permitted to flow through them and the aligned holes 118 of the retention plate 114 and the holes 122 of the flap 117 as indicated by the dashed arrows 124, thereby providing a source of reduced pressure outside the primary aperture 46' of the pump 10 over an open time period (t_o). When the differential pressure across the valve 110 changes back to the negative differential pressure ($-\Delta P$), fluid begins to flow in the opposite direction through the valve 110 (see Figure 7C) which forces the flap 117 back toward the closed position after the closing time delay (T_c). The valve 110 remains closed for the remainder of the half cycle or the closed time period (t_c).

[0036] The retention plate 114 and the sealing plate 116 should be strong enough to withstand the fluid pressure oscillations to which they are subjected without significant mechanical deformation. The retention plate 114 and the sealing plate 116 may be formed from any suitable rigid material such as glass, silicon, ceramic, or metal. The holes 118, 120 in the retention plate 114 and the sealing plate 116 may be formed by any suitable process including chemical etching, laser machining, mechanical drilling, powder blasting, and stamping. In one embodiment, the retention plate 114 and the sealing plate 116 are formed from sheet steel between 100 and 200 microns thick, and the holes 118, 120 therein are formed by chemical etching. The flap 117 may be formed from any lightweight material, such as a metal or polymer film. In one embodiment, when fluid pressure oscillations of 20 kHz or greater are present on either the retention plate side 134 or the sealing plate side 136 of the valve, the flap 117 may be formed from a thin polymer sheet between 1 micron and 20 microns in thickness. For example, the flap 117 may be formed from polyethylene terephthalate (PET) or a liquid crystal polymer film approximately 3 microns in thickness.

[0037] In order to obtain an order of magnitude estimate for the maximum mass per unit area of the flap 117 according to one embodiment of the invention, it is again assumed that the pressure oscillation across the valve 110 is a square wave as shown in Figure 9A and that the full pressure differential is dropped across the flap 117. Further assuming that the flap 117 moves as a rigid body, the acceleration of the flap 117 away from the closed position when the differential pressure reverses from the negative to the positive value may be expressed as follows:

$$\ddot{x} = \frac{P}{m} \quad \text{[Equation 2]}$$

where x is the position of the flap 117, \ddot{x} represents the acceleration of the flap 117, P is the amplitude of the oscillating pressure wave, and m is the mass per unit area of the flap 117. Integrating this expression to find the distance, d , traveled by the flap 117 in a time t , yields the following:

$$d = \frac{P}{2m} t^2 \quad \text{[Equation 3]}$$

This expression may be used to estimate the opening time delay (T_o) and the closing time delay (T_c), in each case from the point of pressure reversal.

[0038] In one embodiment of the invention, the flap 117 should travel the distance between the retention plate 114 and the sealing plate 116, the valve gap (v_{gap}) being the perpendicular distance between the two plates, within a time period less than about one quarter (25%) of the time period of the differential pressure oscillation driving the motion of the flap 117, i.e., the time period of the approximating square wave (t_{pres}). Based on this approximation and the equations above, the mass per unit area of the flap 117 (m) is subject to the following inequality:

$$m < \frac{P}{2d_{gap}} \frac{t_{pres}^2}{16}, \quad \text{or alternatively } m < \frac{P}{2d_{gap}} \frac{1}{16f^2}$$

[Equation 4]

where d_{gap} is the flap gap, i.e., the valve gap (v_{gap}) minus the thickness of the flap 117, and f is the frequency of the applied differential pressure oscillation (as illustrated in Figure 10). In one embodiment, P may be 15kPa, f may be 20kHz, and d_{gap} may be 25 microns, indicating that the mass per unit area of the flap 117 (m) should be less than about 60 grams per square meter. Converting from mass per unit area of the flap 117 (m), the thickness of the flap 117 is subject to the following inequality:

$$\delta_{flap} < \frac{P}{2d_{gap}} \frac{1}{16f^2} \frac{1}{\rho_{flap}} \quad \text{[Equation 5]}$$

where ρ_{flap} is the density of the flap 117 material. Applying a typical material density for a polymer (e.g., approximately 1400 kg/m³), the thickness of the flap 117 according to this embodiment is less than about 45 microns for the operation of a valve 110 under the above conditions. Because the square wave shown in Figure 9A in general overestimates the approximately sinusoidal oscillating pressure waveform across the valve 110, and further because only a proportion of the pressure difference applied across the valve 110 will act as an accelerating pressure difference on the flap 117, the initial acceleration of the flap 117 will be lower than estimated above and the opening time delay (T_o) will in practice be higher. Therefore, the limit on flap thickness derived above is very much an upper limit, and in practice, to compensate for the decreased acceleration of the flap 17, the thickness of the flap 17 may be reduced to satisfy the inequality of Equation 5. The flap 117 is thinner so that it accelerates more quickly to ensure that the opening time delay (T_o) is less than about one quarter (25%) of the time period of the differential pressure oscillation (t_{pres}).

[0039] Minimizing the pressure drop incurred as air flows through the valve 110 is important to maximizing valve performance as it affects both the maximum flow rate and the stall pressure that are achievable. Reducing the size of the valve gap (v_{gap}) between the plates or the diameter of the holes 118, 120 in the plates both increase the flow resistance and increase the pressure drop through the valve 110. According to another embodiment of the invention, the following analysis employing steady-state flow equations to approximate flow resistance through the valve 110 may be used to improve the operation of the valve 110. The pressure drop for flow through a hole 118 or 120 in either plate can be estimated using the Hagan-Poiseuille equation:

$$\Delta p_{hole} = \frac{128\mu q t_{plate}}{\pi d_{hole}^3} \quad \text{[Equation 6]}$$

where μ is the fluid dynamic viscosity, q is the flow rate through the hole, t_{plate} is the plate thickness, and d_{hole} is the hole diameter.

[0040] When the valve 110 is in the open position as shown in Figure 7B, the flow of fluid through the gap between the flap 117 and the sealing plate 116 (the same value as the flap gap d_{gap}) will propagate generally radially through the gap to a first approximation after exiting the hole 120 in the sealing plate 116 before contracting radially into the hole 118 in the retention plate 114. If the pattern of the holes 118, 120 in both plates is a square array with a sealing length, s , between the holes 118 of the retention plate 114 and the holes 120 of the sealing plate 116 as shown in Figures 7B and 7D, the pressure drop through the cavity 115 of the valve 110 may be approximated by the following equation:

$$\Delta p_{gap} = \frac{6\mu q}{\pi d_{gap}^3} \ln \left(2 \left(\frac{s}{d_{hole}} + 1 \right)^2 \right) \quad \text{[Equation 7]}$$

Thus, the total pressure drop (approximately $\Delta p_{gap} + 2 \Delta p_{hole}$) can be very sensitive to changes in the diameter of the holes 118, 120 and the flap gap d_{gap} between the flap 117 and the sealing plate 116. It should be noted that a smaller flap gap d_{gap} , which can be desirable in order to minimize the opening time delay (T_o) and the closing time delay (T_c) of the valve 110, may increase the pressure drop significantly. According to the equation above, reducing the flap gap

d_{gap} from 25 microns to 20 microns doubles the pressure loss. In many practical embodiments of the valve, it is this trade-off between response time and pressure drop that determines the optimal flap gap d_{gap} between the flap 117 and the sealing plate 116. In one embodiment, the optimal flap gap d_{gap} falls within an approximate range between about 5 microns and about 150 microns.

5 **[0041]** In setting the diameter of the holes 120 of the sealing plate 116, consideration should be given both to maintaining the stress experienced by the flap 117 within acceptable limits during operation of the valve 110 (such stresses being reduced by the use of a smaller diameter for the holes 120 of the sealing plate 116) and to ensuring that the pressure drop through the holes 120 does not dominate the total pressure drop through the valve 110. Regarding the latter consideration, a comparison between equations 6 & 7 above for the hole and gap pressure drops yields a minimum diameter for the holes 120 at which the hole pressure drop is about equal to the valve gap pressure drop. This calculation sets a lower limit on the desirable diameter of the holes 120 above which diameter the hole pressure drop quickly becomes negligibly small.

10 **[0042]** Regarding the former consideration relating to the stress experienced by the flap 117 in operation, Figure 10 illustrates a portion of the valve 110 of Figure 7B in the normally closed position. In this position, the flap 117 is subjected to stress as the flap 117 seals and blocks the hole 120 in the sealing plate 116 causing the flap 117 to deform in the shape of a dimple extending into the opening of the holes 120 as illustrated. The level of stress on the flap 117 in this configuration increases with the diameter of the holes 120 in the sealing plate 116 for a given flap 117 thickness. The flap 117 material will tend to fracture more easily if the diameter of the holes 120 is too large, thus leading to failure of the valve 110. In order to reduce the likelihood that the flap 117 material fractures, the hole 120 diameter may be reduced to limit the stress experienced by the flap 117 in operation to a level which is below the fatigue stress of the flap 117 material.

20 **[0043]** The maximum stress experienced by the flap 117 material in operation may be estimated using the following two equations:

25
$$\frac{\Delta p_{max} r_{hole}^4}{Et^4} = K_1 \frac{y}{t} + K_2 \left(\frac{y}{t}\right)^3$$
 [Equation 8]

30
$$\frac{\sigma_{max} r_{hole}^2}{Et^2} = K_3 \frac{y}{t} + K_4 \left(\frac{y}{t}\right)^2$$
 [Equation 9]

35 where r_{hole} is the radius of the hole 120 of the sealing plate 116, t is the flap 117 thickness, y is the flap 117 deflection at the centre of the hole 120, Δp_{max} is the maximum pressure difference experienced by the flap 117 when sealed, E is the Young's Modulus of the flap 117 material, and K_1 to K_4 are constants dependant on the details of the boundary conditions and the Poisson ratio of the flap 117. For a given flap 117 material and geometry of the holes 120, equation 8 can be solved for the deformation, y , and the result then used in equation 9 to calculate stress. For values of $y \ll t$, the cubic and squared y/t terms in equations 8 and 9 respectively become small and these equations simplify to match small plate deflection theory. Simplifying these equations results in the maximum stress being proportional to the radius of the holes 120 squared and inversely proportional to the flap 117 thickness squared. For values of $y \gg t$ or for flaps that have no flexural stiffness, the cubic and squared y/t terms in the two equations become more significant so that the maximum stress becomes proportional to the hole 120 radius to the power 2/3 and inversely proportional to the flap 117 thickness to the power 2/3.

45 **[0044]** In one embodiment of the invention, the flap 117 is formed from a thin polymer sheet, such as Mylar having a Poisson ratio of 0.38, and is clamped to the sealing plate 116 at the edge of the holes 120. The constants K_1 to K_4 can be estimated as 6.23, 3.04, 4.68 and 1.73, respectively. Using these values in Equations 8 and 9 and assuming that the thickness of the flap 117 is about 3 microns with a Young's Modulus of 4.3GPa under 500mbar pressure difference, the deflection (y) of the flap 117 will be approximately 1 μ m for a hole radius of 0.06mm, about 4 μ m for a hole radius of 0.1mm, and about 8 μ m for a hole radius of 0.15mm. The maximum stresses under these conditions will be 16, 34 and 43MPa, respectively. Considering the high number of stress cycles applied to the flap 117 during the operation of the valve 110, the maximum stress per cycle tolerated by the flap 117 should be significantly lower than the yield stress of the flap 117 material in order to reduce the possibility that the flap 117 suffers a fatigue fracture, especially at the dimple portion of the flap 117 extending into the holes 120. Based on fatigue data compiled for a high number of cycles, it has been determined that the actual yield stress of the flap 117 material should be at least about four times greater than the stress applied to the flap 117 material (e.g., 16, 34 and 43MPa as calculated above). Thus, the flap 117 material should have a yield stress as high as 150MPa to minimize the likelihood of such fractures for a maximum hole diameter in this case of approximately 200 microns.

[0045] Reducing the diameter of the holes 120 beyond this point may be desirable as it further reduces flap 117 stress and has no significant effect on valve flow resistance until the diameter of the holes 120 approach the same size as the flap gap d_{gap} . Further, reduction in the diameter of the holes 120 permits the inclusions of an increased number of holes 120 per unit area of the valve 110 surface for a given sealing length (s). However, the size of the diameter of the holes 120 may be limited, at least in part, by the manner in which the plates of the valve 110 were fabricated. For example, chemical etching limits the diameter of the holes 120 to be greater than approximately the thickness of the plates in order to achieve repeatable and controllable etching results. In one embodiment, the holes 120 in the sealing plate 116 being between about 20 microns and about 500 microns in diameter. In another embodiment, the retention plate 114 and the sealing plate 116 are formed from sheet steel about 100 microns thick, and the holes 118, 120 are about 150 microns in diameter. In this embodiment the valve flap 117 is formed from polyethylene terephthalate (PET) and is about 3 microns thick. The valve gap (v_{gap}) between the sealing plate 116 and the retention plate 114 is around 25 microns.

[0046] Figures 11A and 11B illustrate yet another embodiment of the valve 110, valve 310, comprising release holes 318 extending through the retention plate 114 between the holes 118 in the retention plate 114. The release holes 322 facilitate acceleration of the flap 117 away from the retention plate 114 when the differential pressure across the valve 310 changes direction, thereby further reducing the response time of the valve 310, i.e., reducing the closing time delay (T_c). As the differential pressure changes sign and reverse flow begins (as illustrated by dashed arrows 332), the fluid pressure between the flap 117 and the sealing plate 112 decreases and so the flap 117 moves away from the retention plate 114 towards the sealing plate 116. The release holes 318 expose the outside surface 317 of the flap 117 in contact with the retention plate 114 to the pressure differential acting to close the valve 310. Also, the release holes 318 reduce the distance 360 that fluid must penetrate between the retention plate 114 and the flap 117 in order to release the flap 117 from the retention plate 114 as illustrated in Figure 11B. The release holes 318 may have a different diameter than the other holes 118, 120 in the valve plates. In Figures 11A and 11B, the retention plate 114 acts to limit the motion of the flap 117 and to support the flap 117 in the open position while having a reduced surface contact area with the surface 317 of the flap 117.

[0047] Figures 12A and 12B show two valves 110 as shown in Figure 7A wherein one valve 410 is oriented in the same position as the valve 110 of Figure 7A and the other valve 420 is inverted or reversed with the retention plate 114 on the lower side and the sealing plate 116 on the upper side. The valves 410, 420 operate as described above with respect to valve 110 of Figures 7A-7C and 8A-8B, but with the air flows in opposite directions as indicated by dashed arrow 412 for the valve 410 and dashed arrow 422 for the valve 420 wherein one valve acts as an inlet valve and the other acts as an outlet valve. Figure 12C shows a graph of the operating cycle of the valves 410, 420 between an open and closed position that are modulated by the square-wave cycling of the pressure differential (ΔP) as illustrated by the dashed lines (see Figures 9A and 9B). The graph shows a half cycle for each of the valves 410, 420 as each one opens from the closed position. When the differential pressure across the valve 410 is initially negative and reverses to become a positive differential pressure ($+\Delta P$), the valve 410 opens as described above and shown by graph 414 with fluid flowing in the direction indicated by the arrow 412. However, when the differential pressure across the valve 420 is initially positive and reverses to become a negative differential pressure ($-\Delta P$), the valve 420 opens as described above and shown by graph 424 with fluid flowing in the opposite direction as indicated by the arrow 422. Consequently, the combination of the valves 410, 420 function as a bi-directional valve permitting fluid flow in both directions in response to the cycling of the differential pressure (ΔP). The valves 410, 420 may be mounted conveniently side by side within the primary aperture 46' of the pump 10 to provide fluid flow in the direction indicated by the solid arrow in the primary aperture 46' as shown in Figure 6A for one half cycle, and then in the opposite direction (not shown) for the opposite half cycle.

[0048] Figures 13 and 14 show yet another embodiment of the valves 410, 420 of Figure 12A in which two valves 510, 520 corresponding to valves 410, 420, respectively, are formed within a single structure 505. Essentially, the two valves 510, 520 share a common wall or dividing barrier 540 which in this case is formed as part of the wall 112, although other constructions may be possible. When the differential pressure across the valve 510 is initially negative and reverses to become a positive differential pressure ($+\Delta P$), the valve 510 opens from its normally closed position with fluid flowing in the direction indicated by the arrow 512. However, when the differential pressure across the valve 520 is initially positive and reverses to become a negative differential pressure ($-\Delta P$), the valve 520 opens from its normally closed position with fluid flowing in the opposite direction as indicated by the arrow 522. Consequently, the combination of the valves 510, 520 function as a bi-directional valve permitting fluid flow in both directions in response to cycling of the differential pressure (ΔP).

[0049] Figure 15 shows yet another embodiment of a bi-directional valve 555 having a similar structure as the bi-directional valve 505 of Figure 14. Bi-directional valve 551 is also formed within a single structure having two valves 510, 530 that share a common wall or dividing barrier 560 which is also formed as part of the wall 112. The valve 510 operates in the same fashion as described above with the flap 117 shown in the normally closed position blocking the holes 20 as also described above. However, the bi-directional valve 550 has a single flap 117 having a first flap portion 117a within the valve 510 and a second flap portion 117b within the valve 530. The second flap portion 117b is biased

against the plate 516 and comprises holes 522 that are aligned with the holes 120 of the plate 516 rather than the holes 118 of the plate 514 unlike the valves described above. Essentially, the valve 130 is biased by the flap portion 117b in a normally open position as distinguished from the normally closed position of the other valves described above. Thus, the combination of the valves 510, 530 function as a bi-directional valve permitting fluid flow in both directions in response to the cycling of the differential pressure (ΔP) with the two valves opening and closing on alternating cycles.

Claims

1. A pump (10) comprising:

a pump body having a substantially cylindrical shape defining a cavity (11) for containing a fluid, the cavity being formed by a side wall (14) closed at both ends by end walls (12,13), at least one of the end walls being a driven end wall (12) having a central portion and a peripheral portion extending radially outwardly from the central portion of the driven end wall;

an actuator (40) operatively associated with the central portion of the driven end wall to cause an oscillatory motion of the driven end wall, thereby generating displacement oscillations of the driven end wall in a direction substantially perpendicular thereto with an annular node between the centre of the driven end wall and the side wall when in use;

a first aperture (16) disposed at any location in the cavity other than at the location of the annular node and extending through the pump body;

a second aperture (14) disposed at any location in the pump body other than the location of said first aperture and extending through the pump body; and,

a flap valve (46) disposed in at least one of said first aperture and second aperture;

whereby the displacement oscillations generate corresponding radial pressure oscillations of the fluid within the cavity of said pump body causing fluid flow through said first and second apertures when in use; **characterized by** an isolator (30) operatively associated with the peripheral portion of the driven end wall to reduce dampening of the displacement oscillations; and in that said flap valve comprises:

a first plate (116) having apertures (120) extending generally perpendicular through said first plate;

a second plate having first apertures extending generally perpendicular through said second plate (114), the first apertures (118) being substantially offset from the apertures of said first plate;

a spacer (112) disposed between said first plate and said second plate to form a cavity (115) therebetween in fluid communication with the apertures of said first plate and the first apertures of said second plate; and,

a flap (117) disposed and moveable between said first plate and said second plate, said flap having apertures (122) substantially offset from the apertures of said first plate (116) and substantially aligned with the first apertures of said second plate (114);

whereby said flap (117) is motivated between said first and second plates in response to a change in direction of the differential pressure of the fluid across said flap valve.

2. The pump (10) of claim 1, wherein said second plate (114) comprises second apertures (318) extending generally perpendicular through said second plate (114) and being spaced between the first apertures of said second plate, whereby the second apertures are offset from the apertures of said flap (117).

3. The pump (10) of claim 1, wherein said flap (117) is disposed adjacent either one of said first (116) and second (114) plates in a first position when the differential pressure is substantially zero and movable to the other one of said first and second plates in a second position when a differential pressure is applied, whereby said flap is motivated from the first position to the second position in response to a change in direction of the differential pressure of the fluid across said flap valve and back to the first position in response to a reversal in the direction of the differential pressure of the fluid.

4. The pump (10) of claim 3, wherein said flap (117) is disposed adjacent said second plate (114) in a normally open position, whereby the fluid flows through said flap valve when said flap is in the first position and the flow of the fluid is blocked by said flap valve when said flap is in the second position.

5. The pump (10) of claim 3, wherein said flap (117) is disposed adjacent said first plate (116) in a normally closed position, whereby the flow of the fluid is blocked by said flap valve when said flap is in the first position and the fluid

flows through said flap valve when said flap is in the second position.

- 5
6. The pump (10) of claim 4 and claim 5, wherein said second plate (114) further comprises second apertures (318) extending generally perpendicular through said second plate and spaced between the first apertures of said second plate, whereby the second apertures are offset from the apertures of said flap when in the second position.
- 10
7. A pump (10) according to claim 1, wherein said first (116) and second (114) plates are formed from a substantially rigid material selected from the group consisting of metal, plastic, silicon, and glass.
- 15
8. A pump (10) according to claim 7, wherein the metal is steel having a thickness between about 100 and about 200 microns.
- 20
9. A pump (10) according to claim 1, wherein said flap (117) and either one of said first (116) and second (114) plates are separated by a distance between about 5 microns and about 150 microns when said flap is disposed adjacent to the other said plate.
- 25
10. A pump (10) according to claim 9, wherein said flap (117) is formed from a polymer having a thickness of about 3 microns and the distance between said flap and either one of said first and second plates is between about 15 microns and about 50 microns when said flap is disposed adjacent to the other said plate.
- 30
11. A pump (10) according to claim 10, wherein said flap (117) is formed from a light-weight material selected from the group consisting of a polymer and metal.
- 35
12. A pump (10) according to claim 11, wherein the light-weight material is a polymer having a thickness of less than about 20 microns.
- 40
13. A pump (10) according to claim 12, wherein the polymer is polyethylene terephthalate or a liquid crystal film having a thickness of about 3 microns.
- 45
14. A pump (10) according to claim 1, wherein the apertures (120) in said first plate are less than about 500 microns in diameter.
- 50
15. A pump (10) according to claim 1, wherein said flap (117) is formed from a polymer having a thickness of about 3 microns and the apertures in said first plate are less than about 150 microns in diameter.
- 55
16. A pump (10) according to claim 1, wherein said first (116) and second (114) plates are formed from steel having a thickness of about 100 microns, and wherein the apertures (120) of said first plate, the first apertures (118) of said second plates, and the apertures (122) of said flap (117) are about 150 microns in diameter, and wherein said flap is formed from a polymer film having a thickness of about 3 microns.
17. A pump (10) according to claim 1, wherein said first (116) and second (114) plates, said spacer (112), and said flap (117) comprise a first valve portion (410), and said flap valve further comprises a second valve portion (420) comprising:
- a first plate (116) having apertures (120) extending generally perpendicular through said first plate;
 - a second plate (114) having first apertures (118) extending generally perpendicular through said second plate, the first apertures being substantially offset from the apertures of said first plate;
 - a spacer (112) disposed between said first plate and said second plates to form a cavity therebetween in fluid communication with the apertures of said first plate and the first apertures of said second plate; and
 - a flap (117) disposed and moveable between said first plate and said second plate, said flap having apertures (122) substantially offset from the apertures of said first plate and substantially aligned with the first apertures of said second plate;
- whereby said flap is motivated between said first and second plates in response to a change in direction of the differential pressure of the fluid across said flap valve; and
- wherein said first (410) and second (420) valve portions are oriented with respect to the differential pressure to permit fluid to flow through said two portions of said valve in opposite directions in response to cycling of the differential pressure of the fluid across said valve.

- 5
18. The pump (10) of claim 17, wherein said flap (117) of each valve portion is disposed adjacent either one of said first and second plates in a first position when the differential pressure is substantially zero and moveable to the other one of said first and second plates in a second position when a differential pressure is applied, whereby each of said flaps is motivated from the first position to the second position in response to a change in direction of the differential pressure of the fluid across said flap valve and back to the first position in response to a reversal in direction of the differential pressure of the fluid.
- 10
19. The pump (10) of claim 17, wherein said first (410) and second (420) valve portions are oriented in opposite directions respecting the differential pressure, and said flap of each valve portion is disposed adjacent said second plate in a normally open position, whereby the fluid flows through each of said valve portions when said flaps are in the first position and the flow of the fluid is blocked by said valve portions when said flaps are in the second position.
- 15
20. The pump (10) of claim 17, wherein said first (410) and second (420) valve portions are oriented in opposite directions respecting the differential pressure, and said flap of each valve portion is disposed adjacent said first plate in a normally closed position, whereby the flow of the fluid is blocked by said valve portions when said flaps are in the first position and the fluid flows through said valve portions when said flaps are in the second position.
- 20
21. The pump (10) of claim 17, wherein said first (410) and second (420) valve portions are oriented in opposite directions respecting the differential pressure, said flap of said first valve portion being disposed adjacent said first plate in a normally closed position whereby the flow of the fluid is blocked by said first valve portion when said flap is in the first position and the fluid flows through said first valve portion when said flap is in the second position, and said flap of said second valve portion being disposed adjacent said second plate in a normally open position whereby the fluid flows through said second valve portion when said flap is in the first position and the flow of the fluid is blocked by said second valve portion when said flap is in the second position.
- 25
22. The pump (10) of claim 1 wherein the oscillatory motion generates radial pressure oscillations of the fluid within the cavity causing fluid flow through said first aperture and second aperture.
- 30
23. The pump (10) of claim 22 wherein the lowest resonant frequency of the radial pressure oscillations is greater than about 500 Hz.
- 35
24. The pump (10) of claim 22 wherein the frequency of the oscillatory motion is about equal to the lowest resonant frequency of the radial pressure oscillations.
- 40
25. The pump (10) of claim 22 wherein the frequency of the oscillatory motion is within 20% of the lowest resonant frequency of the radial pressure oscillations.
- 45
26. The pump (10) of claim 22 wherein the oscillatory motion is mode-shape matched to the radial pressure oscillations.
- 50
27. The pump (10) of claim 1 wherein said flap valve is a bi-directional valve for controlling the flow of fluid in two directions, said bi-directional valve comprising at least two valve portions (410,420) for controlling the flow of fluid, each of said valve portions comprising:
a first plate (116) having apertures (120) extending generally perpendicular through said first plate;
a second plate (114) having apertures (118) extending generally perpendicular through said second plate, the first apertures being substantially offset from the apertures of said first plates;
a spacer (112) disposed between said first plate and said second plates to form a cavity therebetween in fluid communication with the apertures of said first plate and the apertures of said second plate; and
a flap (117) disposed and moveable between said first and second plates, said flap having apertures (122) substantially offset from the apertures of said first plate and substantially aligned with the apertures of said second plate;
whereby said flap is motivated between said first and second plates in response to a change in direction of the differential pressure of the fluid across said valve; and,
wherein said first and second valve portions are oriented with respect to the differential pressure to permit fluid to flow through said two portions of said valve in opposite directions in response to cycling of the differential pressure of the fluid across said valve.
- 55
28. The pump (10) of claim 27, wherein said flap (117) of each valve portion (410,420) is disposed adjacent either one

of said first and second plates in a first position when the differential pressure is substantially zero and moveable to the other one of said first and second plates in a second position when a differential pressure is applied, whereby each of said flaps are motivated from the first position to the second position in response to a change in direction of the differential pressure of the fluid across said valve and back to the first position in response to a reversal in the direction of the differential pressure of the fluid.

Patentansprüche

1. Pumpe (10), umfassend:

Einen Pumpenkörper mit einer im Wesentlichen zylindrischen Form, die einen Hohlraum (11) zum Beinhaltens eines Fluids definiert, wobei der Hohlraum durch eine an beiden Enden durch Endwände (12, 13) geschlossene Seitenwand (14) gebildet ist, wobei wenigstens eine der Endwände eine angetriebene Endwand (12) mit einem mittigen Abschnitt und einem peripheren Abschnitt ist, der sich mit mittigen Abschnitt der angetriebenen Endwand radial nach außen erstreckt;
 ein Betätigungsorgan (40), das operativ mit dem mittigen Abschnitt der angetriebenen Endwand assoziiert ist, um eine Schwingbewegung der angetriebenen Endwand zu bewirken, dadurch Verdrängungsschwingungen der angetriebenen Endwand in einer senkrechten Richtung dazu mit einem ringförmigen Knoten zwischen der Mitte der angetriebenen Endwand und der Seitenwand, wenn in Gebrauch, zu generieren;
 eine erste Öffnung (16), die an irgendeiner Stelle im Hohlraum, außer an der Stelle des ringförmigen Knotens, angeordnet ist und sich durch den Pumpenkörper erstreckt;
 eine zweite Öffnung (14), die an irgendeiner Stelle im Pumpenkörper, außer der Stelle der genannten ersten Öffnung angeordnet ist und sich durch den Pumpenkörper erstreckt; und,
 Ein Klappenventil (46), das in wenigstens einer der genannten ersten Öffnung bzw. zweiten Öffnung angeordnet ist;
 wodurch die Verdrängungsschwingungen entsprechende radiale Druckschwingungen des Fluids innerhalb des Hohlraums des genannten Pumpenkörpers generieren, was bewirkt, dass Fluid durch die genannten ersten und zweiten Öffnungen, wenn in Gebrauch, fließt; **gekennzeichnet durch** einen Isolator (30), der operativ mit dem peripheren Abschnitt der angetriebenen Endwand assoziiert ist, um Dämpfung der Verdrängungsschwingungen zu reduzieren; und **dadurch**, dass das genannte Klappenventil umfasst:

Eine erste Platte (116) mit Öffnungen (120), die sich generell senkrecht **durch** die genannte erste Platte erstrecken;
 eine zweite Platte mit ersten Öffnungen, die sich generell senkrecht **durch** die genannte zweite Platte (114) erstrecken, wobei die ersten Öffnungen (118) im Wesentlichen von den Öffnungen der genannten ersten Platte versetzt sind;
 einen Abstandshalter (112), der zwischen der genannten ersten Platte und der genannten zweiten Platte angeordnet ist, um einen Hohlraum (115) dazwischen in Fluidverbindung mit den Öffnungen der genannten ersten Platte und den ersten Öffnungen der genannten zweiten Platte zu bilden; und,
 eine Klappe (117), die zwischen der genannten ersten Platte und der genannten zweiten Platte angeordnet und bewegbar ist, wobei die genannte Klappe Öffnungen (122) aufweist, die im Wesentlichen von den Öffnungen der genannten ersten Platte (116) versetzt sind und im Wesentlichen mit den ersten Öffnungen der genannten zweiten Platte (114) fluchten;
 wodurch die Klappe (117) zwischen den genannten ersten und zweiten Platten, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Klappenventil, motiviert wird.

2. Pumpe (10) nach Anspruch 1, wobei die genannte zweite Platte (114) zweite Öffnungen (318) umfasst, die sich generell senkrecht durch die genannte zweite Platte (114) erstrecken und zwischen den ersten Öffnungen der genannten zweiten Platte beabstandet sind, wodurch die zweiten Öffnungen von den Öffnungen in der genannten Klappe (117) versetzt sind.

3. Pumpe (10) nach Anspruch 1, wobei die genannte Klappe (117) angrenzend an eine der beiden genannten ersten (116) und zweiten (114) Platten in einer ersten Position angeordnet ist, wenn der Differenzialdruck im Wesentlichen null ist und zur anderen der genannten ersten und zweiten Platten in eine zweite Position bewegbar ist, wenn ein Differenzialdruck angewandt wird, wodurch die genannte Klappe aus der ersten Position in die zweite Position, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Klappenventil und zurück

zur ersten Position, als Reaktion auf eine Richtungsumkehrung des Differenzialdrucks des Fluids motiviert wird.

4. Pumpe (10) nach Anspruch 3, wobei die genannte Klappe (117) in einer normal offenen Position angrenzend an die genannte zweite Platte (114) angeordnet ist, wodurch das Fluid durch das genannte Klappenventil fließt, wenn sich die genannte Klappe in der ersten Position befindet und der Fluss des Fluids wird vom genannten Klappenventil blockiert, wenn sich die genannte Klappe in der zweiten Position befindet.
5. Pumpe (10) nach Anspruch 3, wobei die genannte Klappe (117) in einer normal geschlossenen Position angrenzend an die genannte erste Platte (116) angeordnet ist, wodurch der Fluss des Fluids durch das genannte Klappenventil blockiert wird, wenn sich die genannte Klappe in der ersten Position befindet und das Fluid durch das genannte Klappenventil fließt, wenn sich die genannte Klappe in der zweiten Position befindet.
6. Pumpe (10) nach Anspruch 4 und Anspruch 5, wobei die genannte zweite Platte (114) ferner zweite Öffnungen (318) umfasst, die sich generell senkrecht durch die genannte zweite Platte erstrecken und zwischen den ersten Öffnungen der genannten zweiten Platte beabstandet sind, wodurch die zweiten Öffnungen von den Öffnungen in der genannten Klappe, wenn in der zweiten Position befindlich, versetzt sind.
7. Pumpe (10) nach Anspruch 1, wobei die genannten ersten (116) und zweiten (114) Platten aus einem im Wesentlichen starren Material gebildet sind, das aus der Gruppe selektiert wurde, die aus Metall, Kunststoff, Silicium und Glas besteht.
8. Pumpe (10) nach Anspruch 7, wobei das Metall Stahl mit einer Dicke zwischen ca. 100 und ca. 200 Mikron ist.
9. Pumpe (10) nach Anspruch 1, wobei die genannte Klappe (117) und eine der beiden genannten ersten (116) und zweiten (114) Platten durch einen Abstand zwischen ca. 5 Mikron und ca. 150 Mikron getrennt sind, wenn die genannte Klappe angrenzend an die andere der genannten Platte angeordnet ist.
10. Pumpe (10) nach Anspruch 9, wobei die genannte Platte (117) aus einem Polymer gebildet ist, das eine Dicke von ca. 3 Mikron hat und der Abstand zwischen der genannten Klappe und einer der beiden genannten ersten und zweiten Platten zwischen ca. 15 Mikron und ca. 50 Mikron beträgt, wenn die genannte Klappe angrenzend an die andere genannte Platte angeordnet ist.
11. Pumpe (10) nach Anspruch 10, wobei die genannte Klappe (117) aus einem Leichtbaumaterial gebildet ist, das aus der Gruppe selektiert wurde, die aus einem Polymer und Metall besteht.
12. Pumpe (10) nach Anspruch 11, wobei das Leichtbaumaterial ein Polymer eine Dicke von weniger als ca. 20 Mikron hat.
13. Pumpe (10) nach Anspruch 12, wobei das Polymer Polyethylenterephthalat oder ein Flüssigkristallfilm mit einer Dicke von ca. 3 Mikron ist.
14. Pumpe (10) nach Anspruch 1, wobei die Öffnungen (120) in der genannten ersten Platte im Durchmesser weniger als ca. 500 Mikron betragen.
15. Pumpe (10) nach Anspruch 1, wobei die genannte Klappe (117) aus einem Polymer gebildet ist, das eine Dicke von ca. 3 Mikron hat und die Öffnungen in der genannten ersten Platte weniger als ca. 150 Mikron im Durchmesser betragen.
16. Pumpe (10) nach Anspruch 1, wobei die genannten ersten (116) und zweiten (114) Platten aus Stahl einer Dicke von ca. 100 Mikron gebildet sind, und wobei die Öffnungen (120) der genannten ersten Platte, die ersten Öffnungen (118) der genannten zweiten Platten und die Öffnungen (122) der genannten Klappe (117) ca. 150 Mikron im Durchmesser sind, und wobei die genannte Klappe aus einem Polymerfilm gebildet ist, der eine Dicke von ca. 3 Mikron aufweist.
17. Pumpe (10) nach Anspruch 1, wobei die genannten ersten (116) und zweiten (114) Platten, der genannte Abstandhalter (112) und die genannte Klappe (117) einen ersten Ventilabschnitt (410) umfassen, und das genannte Klappenventil ferner einen zweiten Ventilabschnitt (420) umfasst, umfassend:

Eine erste Platte (116) mit Öffnungen (120), die sich generell senkrecht durch die genannte erste Platte erstrecken;

eine zweite Platte (114) mit ersten Öffnungen (118), die sich generell senkrecht durch die genannte zweite Platte erstrecken, wobei die ersten Öffnungen im Wesentlichen von den Öffnungen der genannten ersten Platte versetzt sind;

einen Abstandshalter (112), der zwischen der genannten ersten Platte und der genannten zweiten Platten angeordnet ist, um einen Hohlraum dazwischen in Fluidverbindung mit den Öffnungen der genannten ersten Platte und den ersten Öffnungen der genannten zweiten Platte zu bilden; und,

eine Klappe (117), die zwischen der genannten ersten Platte und der genannten zweiten Platte angeordnet und bewegbar ist, wobei die genannte Klappe Öffnungen (122) aufweist, die im Wesentlichen von den Öffnungen der genannten ersten Platte versetzt sind und im Wesentlichen mit den ersten Öffnungen der genannten zweiten Platte fluchten;

wodurch die Klappe zwischen den genannten ersten und zweiten Platten, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Klappenventil, motiviert wird; und

wobei die genannten ersten (410) und zweiten (420) Ventilabschnitte in Bezug auf den Differenzialdruck orientiert sind, um zu gestatten, dass Fluid durch die genannten zwei Abschnitte des genannten Ventils, als Reaktion auf Taktablauf des Differenzialdrucks des Fluids über das genannte Ventil, in entgegengesetzte Richtungen fließen kann.

18. Pumpe (10) nach Anspruch 17, wobei die genannte Klappe (117) jedes Ventilabschnitts angrenzend an eine der beiden genannten ersten und zweiten Platten in einer ersten Position angeordnet ist, wenn der Differenzialdruck im Wesentlichen null ist und zur anderen der genannten ersten und zweiten Platten in eine zweite Position bewegbar ist, wenn ein Differenzialdruck angewandt wird, wodurch jede der genannten Klappen aus der ersten Position in die zweite Position, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Klappenventil und zurück zur ersten Position, als Reaktion auf eine Richtungsumkehrung des Differenzialdrucks des Fluids motiviert wird.

19. Pumpe (10) nach Anspruch 17, wobei die genannten ersten (410) und zweiten (420) Ventilabschnitte auf den Differenzialdruck bezogen in entgegengesetzte Richtungen orientiert sind, und die genannte Klappe jedes Ventilabschnitts angrenzend an die genannte zweite Platte in einer normal offenen Position angeordnet ist, wodurch das Fluid durch jeden der genannten Ventilabschnitte fließt, wenn sich die genannten Klappen in der ersten Position befinden und der Fluss des Fluids durch die genannten Ventilabschnitte blockiert ist, wenn sich die genannten Klappen in der zweiten Position befinden.

20. Pumpe (10) nach Anspruch 17, wobei die genannten ersten (410) und zweiten (420) Ventilabschnitte auf den Differenzialdruck bezogen in entgegengesetzte Richtungen orientiert sind, und die genannte Klappe jedes Ventilabschnitts angrenzend an die genannte erste Platte in einer normal geschlossenen Position angeordnet ist, wodurch der Fluss des Fluids durch die genannten Ventilabschnitte blockiert ist, wenn sich die genannten Klappen in der ersten Position befinden und das Fluid durch die genannten Ventilabschnitte fließt, wenn sich die genannten Klappen in der zweiten Position befinden.

21. Pumpe (10) nach Anspruch 17, wobei die genannten ersten (410) und zweiten (420) Ventilabschnitte auf den Differenzialdruck bezogen in entgegengesetzte Richtungen orientiert sind, wobei die genannte Klappe des genannten ersten Ventilabschnitts in einer normal geschlossenen Position angrenzend an die genannte erste Platte angeordnet ist, wodurch der Fluss des Fluids durch den genannten ersten Ventilabschnitt blockiert ist, wenn sich die genannte Klappe in der ersten Position befindet und das Fluid durch den genannten ersten Ventilabschnitt fließt, wenn sich die Klappe in der zweiten Position befindet, und wobei die genannte Klappe des genannten zweiten Ventilabschnitts angrenzend an die genannte zweite Platte in einer normal offenen Position angeordnet ist, wodurch das Fluid durch den genannten zweiten Ventilabschnitt fließt, wenn sich die genannte Klappe in der ersten Position befindet und der Fluss des Fluids durch den genannten zweiten Ventilabschnitt blockiert ist, wenn sich die genannte Klappe in der zweiten Position befindet.

22. Pumpe (10) nach Anspruch 1, wobei die Schwingbewegung radiale Druckschwingungen des Fluids innerhalb des Hohlraums generiert, was bewirkt, dass das Fluid durch die genannte erste Öffnung und die zweite Öffnung fließt.

23. Pumpe (10) nach Anspruch 22, wobei die niedrigste Resonanzfrequenz der radialen Druckschwingungen größer als ca. 500 Hz ist.

24. Pumpe (10) nach Anspruch 22, wobei die Frequenz der Schwingbewegung ca. gleich der niedrigsten Resonanzfrequenz der radialen Druckschwingungen ist.

5 25. Pumpe (10) nach Anspruch 22, wobei die Frequenz der Schwingbewegung innerhalb 20% der niedrigsten Resonanzfrequenz der radialen Druckschwingungen ist.

26. Pump (10) nach Anspruch 22, wobei die Schwingbewegung in Bezug auf die Modusform den radialen Druckschwingungen angepasst ist.

10 27. Pumpe (10) nach Anspruch 1, wobei das genannte Klappenventil ein bidirektionales Ventil zum Steuern des Fluidflusses in zwei Richtungen ist, wobei das genannte bidirektionale Ventil wenigstens zwei Ventilabschnitte (410, 420) zum Steuern des Fluidflusses umfasst, wo bei jeder der genannten Ventilabschnitte umfasst:

15 Eine erste Platte (116) mit Öffnungen (120), die sich generell senkrecht durch die genannte erste Platte erstrecken;

eine zweite Platte (114) mit Öffnungen (118), die sich generell senkrecht durch die genannte zweite Platte erstrecken, wobei die ersten Öffnungen im Wesentlichen von den Öffnungen der genannten ersten Platten versetzt sind;

20 einen Abstandshalter (112), der zwischen der genannten ersten Platte und der genannten zweiten Platten angeordnet ist, um einen Hohlraum dazwischen in Fluidverbindung mit den Öffnungen der genannten ersten Platte und den Öffnungen der genannten zweiten Platte zu bilden; und

eine Klappe (117), die zwischen der genannten ersten und zweiten Platten angeordnet und bewegbar ist, wobei die genannte Klappe Öffnungen (122) aufweist, die im Wesentlichen von den Öffnungen der genannten ersten Platte versetzt sind und im Wesentlichen mit den Öffnungen der genannten zweiten Platte fluchten;

25 wodurch die genannte Klappe zwischen den genannten ersten und zweiten Platten, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Ventil, motiviert wird; und, wobei die genannten ersten und zweiten Ventilabschnitte in Bezug auf den Differenzialdruck orientiert sind, um zu gestatten, dass Fluid durch die genannten zwei Abschnitte des genannten Ventils, als Reaktion auf Taktablauf des Differenzialdrucks des Fluids über das genannte Ventil, in entgegengesetzte Richtungen fließen kann.

30 28. Pumpe (10) nach Anspruch 27, wobei die genannte Klappe (117) jedes Ventilabschnitts (410, 420) angrenzend an eine der beiden genannten ersten und zweiten Platten in einer ersten Position angeordnet ist, wenn der Differenzialdruck im Wesentlichen null ist und zur anderen der genannten ersten und zweiten Platten in eine zweite Position bewegbar ist, wenn ein Differenzialdruck angewandt wird, wodurch jede der genannten Klappen aus der ersten Position in die zweite Position, als Reaktion auf eine Richtungsänderung des Differenzialdrucks des Fluids über das genannte Ventil und zurück zur ersten Position, als Reaktion auf eine Umkehr in der Richtung des Differenzialdrucks des Fluids motiviert wird.

40 **Revendications**

1. Pompe (10) comportant:

45 un corps de pompe de forme essentiellement cylindrique qui définit une cavité (11) servant à contenir un fluide, la cavité étant formée par une paroi latérale (14) fermée aux deux extrémités par des parois d'extrémité (12, 13), au moins l'une des parois d'extrémité étant une paroi d'extrémité commandée (12) qui comporte une partie centrale et une partie périphérique s'étendant radialement vers l'extérieur à partir de la partie centrale de la paroi d'extrémité commandée;

50 un organe de commande (40) associé opérationnellement à la partie centrale de la paroi d'extrémité commandée pour faire osciller la paroi d'extrémité commandée, produisant ainsi des oscillations de déplacement de la paroi d'extrémité commandée dans une direction essentiellement perpendiculaire à elle, un noeud annulaire étant formé entre le centre de la paroi d'extrémité commandée et la paroi latérale en cours d'usage;

une première ouverture (16) disposée n'importe où dans le corps de pompe sauf à l'endroit où se trouve le noeud annulaire, et s'étendant à travers le corps de pompe;

55 une deuxième ouverture (14) disposée n'importe où dans le corps de pompe sauf à l'endroit où se trouve la première ouverture, et s'étendant à travers le corps de pompe; et

une soupape à clapet (46) disposée dans au moins la première ouverture ou bien la deuxième ouverture; et il en résulte que les oscillations de déplacement produisent des oscillations de pression radiale correspon-

dantes du fluide à l'intérieur de la cavité du corps de pompe, ce qui a pour effet de faire circuler le fluide à travers les première et deuxième ouvertures en cours d'usage; **caractérisée en ce qu'un** isolateur (30) est associé opérationnellement à la partie périphérique de la paroi d'extrémité commandée afin de réduire l'amortissement des oscillations de déplacement; et **en ce que**

la soupape à clapet comporte:

une première plaque (116) ayant des ouvertures (120) qui s'étendent de manière généralement perpendiculaire à travers la première plaque;

une deuxième plaque ayant des premières ouvertures qui s'étendent de manière généralement perpendiculaire à travers la deuxième plaque (114), les premières ouvertures (118) se trouvant essentiellement décalées par rapport aux ouvertures de la première plaque;

une pièce d'écartement (112) disposée entre la première plaque et la deuxième plaque de manière à former une cavité (115) entre elles qui se trouve en communication fluide avec les ouvertures de la première plaque et les premières ouvertures de la deuxième plaque; et

un clapet (117) disposé et pouvant être déplacé entre la première plaque et la deuxième plaque, le clapet ayant des ouvertures (122) essentiellement décalées par rapport aux ouvertures de la première plaque (116) et essentiellement alignées sur les premières ouvertures de la deuxième plaque (114);

ceci ayant pour effet de faire déplacer le clapet (117) entre les première et deuxième plaques en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape à clapet.

2. Pompe (10) selon la revendication 1, **caractérisée en ce que** la deuxième plaque (114) comprend des deuxièmes ouvertures (318) qui s'étendent de manière généralement perpendiculaire à travers la deuxième plaque (114) et qui sont espacées entre les premières ouvertures de cette deuxième plaque, **caractérisée en ce que** les deuxièmes ouvertures sont décalées par rapport aux ouvertures du clapet (117).

3. Pompe (10) selon la revendication 1, **caractérisée en ce que** le clapet (117) est disposé à côté de la première plaque (116) ou bien de la deuxième plaque (114) dans une première position lorsque la pression différentielle est essentiellement égale à zéro, et **en ce qu'il** peut être déplacé pour se mettre dans une deuxième position de l'autre plaque, lorsqu'une pression différentielle est appliquée, ceci ayant pour effet de faire déplacer le clapet de la première position à la deuxième position en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape à clapet, puis de le ramener à la première position en réponse à l'inversion de direction de la pression différentielle du fluide.

4. Pompe (10) selon la revendication 3, **caractérisée en ce que** le clapet (117) est disposé à côté de la deuxième plaque (114) en position normalement ouverte, ceci ayant pour effet de faire circuler le fluide à travers la soupape à clapet lorsque le clapet se trouve dans la première position, et de faire interrompre le débit de fluide par la soupape à clapet lorsque le clapet se trouve dans la deuxième position.

5. Pompe (10) selon la revendication 3, **caractérisée en ce que** le clapet (117) est disposé à côté de la première plaque (116) en position normalement fermée, ceci ayant pour effet de faire interrompre le débit de fluide par la soupape à clapet lorsque le clapet se trouve dans la première position, et de faire circuler le fluide à travers la soupape à clapet lorsque le clapet se trouve dans la deuxième position.

6. Pompe (10) selon la revendication 4 et la revendication 5, **caractérisée en ce que** la deuxième plaque (114) comprend par ailleurs des deuxièmes ouvertures (318) qui s'étendent de manière généralement perpendiculaire à travers la deuxième plaque et qui sont espacées entre les premières ouvertures de la deuxième plaque, et il en résulte que les deuxièmes ouvertures se trouvent décalées par rapport aux ouvertures du clapet lorsque celui-ci se trouve dans la deuxième position.

7. Pompe (10) selon la revendication 1, **caractérisée en ce que** les première (116) et deuxième (114) plaques sont réalisées à partir d'un matériau essentiellement rigide sélectionné dans le groupe composé de métal, de matière plastique, de silicium et de verre.

8. Pompe (10) selon la revendication 7, **caractérisée en ce que** le métal est de l'acier d'une épaisseur comprise entre environ 100 microns et environ 200 microns.

9. Pompe (10) selon la revendication 1, **caractérisée en ce que** le clapet (117) et l'une ou l'autre des première (116)

EP 2 438 302 B1

et deuxième (114) plaques sont séparés d'une distance comprise entre environ 5 microns et environ 150 microns lorsque le clapet est disposé à côté de l'autre plaque.

- 5 10. Pompe (10) selon la revendication 9, **caractérisée en ce que** le clapet (117) est réalisé à partir d'un polymère ayant une épaisseur d'environ 3 microns, et **en ce que** la distance entre le clapet et l'une ou l'autre des première et deuxième plaques est comprise entre environ 15 microns et environ 50 microns lorsque le clapet est disposé à côté de l'autre plaque.
- 10 11. Pompe (10) selon la revendication 10, **caractérisée en ce que** le clapet (117) est réalisé à partir d'un matériau léger sélectionné dans le groupe comportant un polymère et un métal.
12. Pompe (10) selon la revendication 11, **caractérisée en ce que** le matériau léger est un polymère ayant une épaisseur inférieure à environ 20 microns.
- 15 13. Pompe (10) selon la revendication 12, **caractérisée en ce que** le polymère est du téréphtalate de polyéthylène ou bien une pellicule de cristal liquide ayant une épaisseur d'environ 3 microns.
- 20 14. Pompe (10) selon la revendication 1, **caractérisée en ce que** les ouvertures (120) dans la première plaque sont d'un diamètre inférieur à environ 500 microns.
- 25 15. Pompe (10) selon la revendication 1, **caractérisée en ce que** le clapet (117) est réalisé à partir d'un polymère ayant une épaisseur d'environ 3 microns et **en ce que** les ouvertures dans la première plaque sont d'un diamètre inférieur à environ 150 microns.
- 30 16. Pompe (10) selon la revendication 1, **caractérisée en ce que** la première plaque (116) et la deuxième (114) plaque sont réalisées en acier ayant une épaisseur d'environ 100 microns, **en ce que** les ouvertures (120) dans la première plaque, les premières ouvertures (118) dans la deuxième plaque, et les ouvertures (122) dans le clapet (117) sont d'un diamètre d'environ 150 microns, et **en ce que** le clapet est réalisé à partir d'une pellicule de polymère ayant une épaisseur d'environ 3 microns.
- 35 17. Pompe (10) selon la revendication 1, **caractérisée en ce que** les première (116) et deuxième (114) plaques, la pièce d'écartement (112) et le clapet (117) constituent une première partie (410) de soupape, et **en ce que** la soupape à clapet constitue par ailleurs une deuxième partie (420) de soupape comportant :
- 40 une première plaque (116) ayant des ouvertures (120) qui s'étendent de manière généralement perpendiculaire à travers la première plaque;
- une deuxième plaque (114) ayant des premières ouvertures (118) qui s'étendent de manière généralement perpendiculaire à travers la deuxième plaque, les premières ouvertures se trouvant essentiellement décalées par rapport aux ouvertures de la première plaque;
- 45 une pièce d'écartement (112) disposée entre la première plaque et la deuxième plaque de manière à former une cavité entre elles qui se trouve en communication fluide avec les ouvertures de la première plaque et les premières ouvertures de la deuxième plaque; et
- un clapet (117) disposé et pouvant être déplacé entre la première plaque et la deuxième plaque, le clapet ayant des ouvertures (122) essentiellement décalées par rapport aux ouvertures de la première plaque et essentiellement alignées sur les premières ouvertures de la deuxième plaque;
- 50 ceci ayant pour effet de faire déplacer le clapet entre les première et deuxième plaques en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape à clapet; et **caractérisée en ce que** les première (410) et deuxième (420) parties de soupape sont orientées par rapport à la pression différentielle de manière à permettre la circulation du fluide à travers les deux parties de soupape dans des sens opposés en réponse au cyclage de la pression différentielle du fluide à travers la soupape.
- 55 18. Pompe (10) selon la revendication 17, **caractérisée en ce que** le clapet (117) de chaque partie de soupape est disposé à côté de la première plaque ou de la deuxième plaque dans une première position lorsque la pression différentielle est essentiellement égale à zéro, et **en ce qu'**il peut être déplacé pour se mettre dans une deuxième position de l'autre plaque, lorsqu'une pression différentielle est appliquée, ceci ayant pour effet de faire déplacer chacun des clapets de la première position à la deuxième position en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape à clapet, puis de le ramener à la première position en réponse à l'inversion de direction de la pression différentielle du fluide.

EP 2 438 302 B1

- 5 19. Pompe (10) selon la revendication 17, **caractérisée en ce que** les première (410) et deuxième (420) parties de soupape sont orientées dans des sens opposés par rapport à la pression différentielle, et **en ce que** le clapet de chaque partie de soupape est disposé à côté de la deuxième plaque en position normalement ouverte, ceci ayant pour effet de faire circuler le fluide à travers chacune des parties de soupape lorsque les clapets se trouvent dans la première position et de faire interrompre la circulation du fluide par ces parties de soupape lorsque les clapets se trouvent dans la deuxième position.
- 10 20. Pompe (10) selon la revendication 17, **caractérisée en ce que** les première (410) et deuxième (420) parties de soupape sont orientées dans des sens opposés par rapport à la pression différentielle, et **en ce que** le clapet de chaque partie de soupape est disposé à côté de la première plaque en position normalement fermée, ceci ayant pour effet de faire interrompre la circulation du fluide par ces parties de soupape lorsque les clapets en question se trouvent dans la première position, et de faire circuler le fluide à travers ces parties de soupape lorsque les clapets se trouvent dans la deuxième position.
- 15 21. Pompe (10) selon la revendication 17, **caractérisée en ce que** les première (410) et deuxième (420) parties de soupape sont orientées dans des sens opposés par rapport à la pression différentielle, **en ce que** le clapet de la première partie de soupape est disposé à côté de la première plaque en position normalement fermée, ceci ayant pour effet de faire interrompre la circulation du fluide par la première partie de soupape lorsque le clapet en question se trouve dans la première position, et de faire circuler le fluide à travers la première partie de soupape lorsque le clapet se trouve dans la deuxième position, et **en ce que** le clapet de la deuxième partie de soupape est disposé à côté de la deuxième plaque en position normalement ouverte, ceci ayant pour effet de faire circuler le fluide à travers la deuxième partie de soupape lorsque le clapet se trouve dans la première position, de faire interrompre la circulation du fluide par la deuxième partie de soupape lorsque le clapet se trouve dans la deuxième position.
- 20 22. Pompe (10) selon la revendication 1, **caractérisée en ce que** le mouvement oscillant produit des oscillations de pression radiale du fluide à l'intérieur de la cavité, ceci ayant pour effet de faire circuler le fluide à travers la première ouverture et la deuxième ouverture.
- 25 23. Pompe (10) selon la revendication 22, **caractérisée en ce que** la fréquence de résonance la plus basse des oscillations de pression radiale est supérieure à environ 500 Hz.
- 30 24. Pompe (10) selon la revendication 22, **caractérisée en ce que** la fréquence du mouvement oscillant est approximativement égale à la fréquence de résonance la plus basse des oscillations de pression radiale.
- 35 25. Pompe (10) selon la revendication 22, **caractérisée en ce que** la fréquence du mouvement oscillant se trouve à moins de 20% de la fréquence de résonance la plus basse des oscillations de pression radiale.
- 40 26. Pompe (10) selon la revendication 22, **caractérisée en ce que** le mouvement oscillant est adapté au mode des oscillations de pression radiale.
- 45 27. Pompe (10) selon la revendication 1, **caractérisée en ce que** la soupape à clapet est une soupape bidirectionnelle servant à contrôler la circulation du fluide dans deux sens, la soupape bidirectionnelle comportant au moins deux parties de soupape (410, 420) qui contrôlent la circulation du fluide, chacune des parties de soupape comprenant:
- 45 une première plaque (116) ayant des ouvertures (120) qui s'étendent de manière généralement perpendiculaire à travers la première plaque;
- une deuxième plaque (114) ayant des ouvertures (118) qui s'étendent de manière généralement perpendiculaire à travers la deuxième plaque, les premières ouvertures se trouvant essentiellement décalées par rapport aux ouvertures de la première plaque;
- 50 une pièce d'écartement (112) disposée entre la première plaque et la deuxième plaque de manière à former une cavité entre elles qui se trouve en communication fluide avec les ouvertures de la première plaque et les ouvertures de la deuxième plaque; et
- un clapet (117) disposé et pouvant être déplacé entre la première plaque et la deuxième plaque, le clapet ayant des ouvertures (122) essentiellement décalées par rapport aux ouvertures de la première plaque et essentiellement alignées sur les ouvertures de la deuxième plaque;
- 55 ceci ayant pour effet de faire déplacer le clapet entre les première et deuxième plaques en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape à clapet; et **caractérisée en ce que** les première et deuxième parties de soupape sont orientées par rapport à la pression

EP 2 438 302 B1

différentielle de manière à permettre la circulation du fluide à travers les deux parties de la soupape dans des sens opposés en réponse au cyclage de la pression différentielle du fluide à travers la soupape.

- 5
10
15
20
25
30
35
40
45
50
55
28. Pompe (10) selon la revendication 27, **caractérisée en ce que** le clapet (117) de chaque partie de soupape (410, 420) est disposé à côté de la première plaque ou de la deuxième plaque dans une première position lorsque la pression différentielle est essentiellement égale à zéro, et **en ce qu'il** peut être déplacé vers l'autre plaque dans une deuxième position lorsqu'une pression différentielle est appliquée, ceci ayant pour effet de faire déplacer chacun des clapets de la première position à la deuxième position en réponse au changement de direction de la pression différentielle du fluide qui est exercée à travers la soupape, puis de ramener le clapet à la première position en réponse à l'inversion de direction de la pression différentielle du fluide.

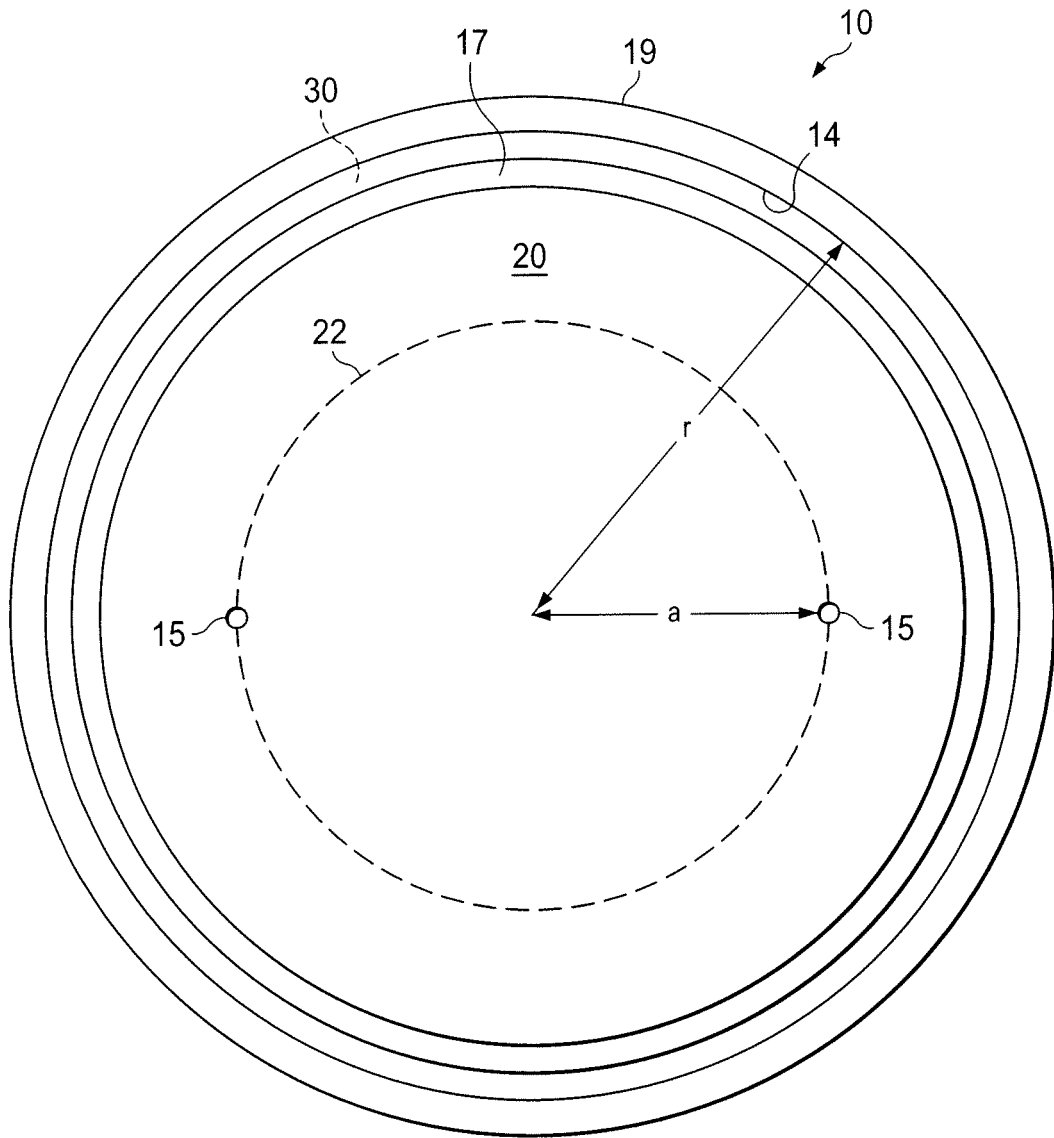


FIG. 2

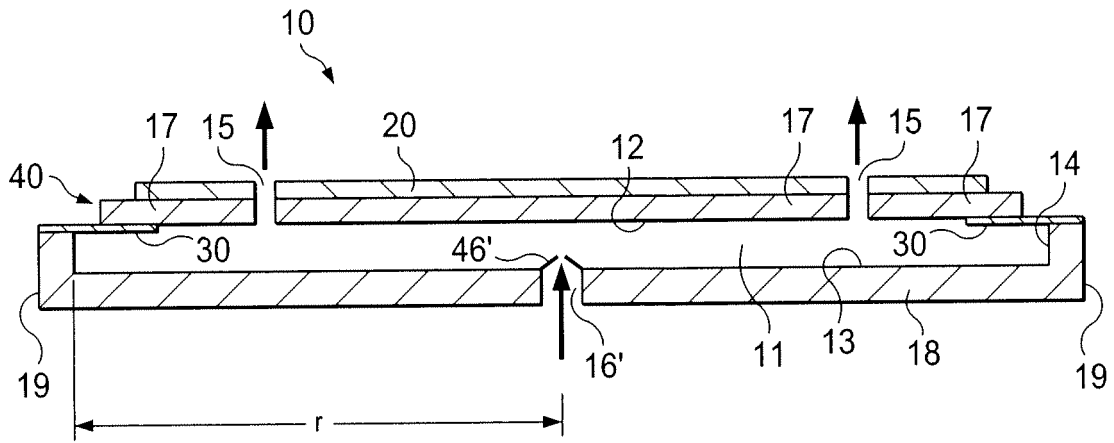


FIG. 3

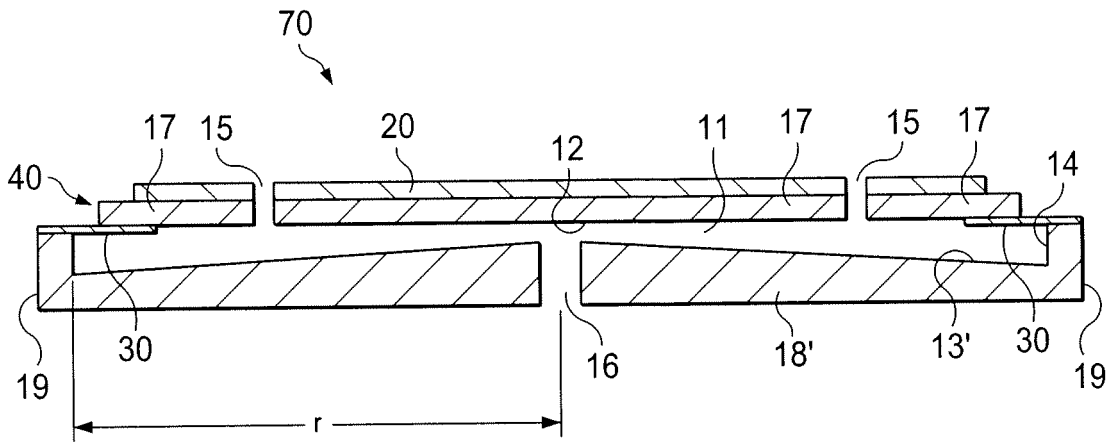


FIG. 4

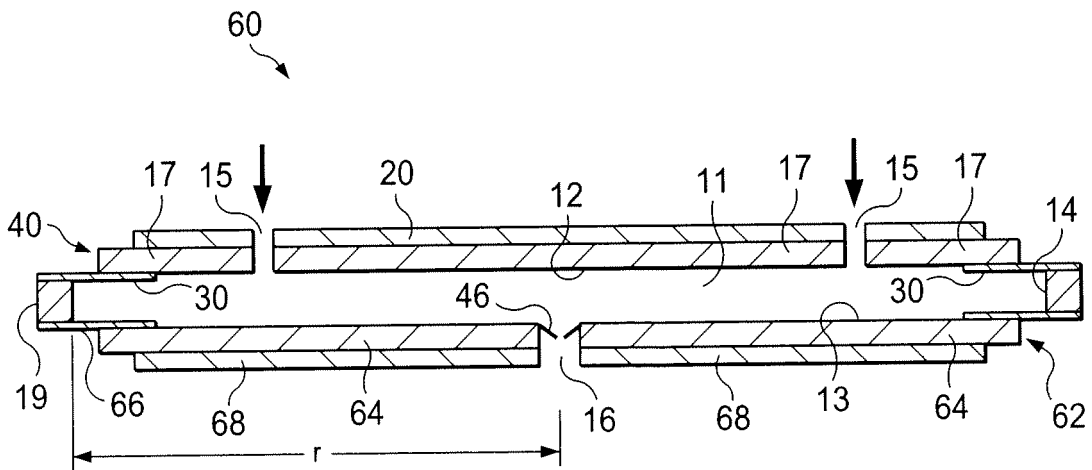


FIG. 5

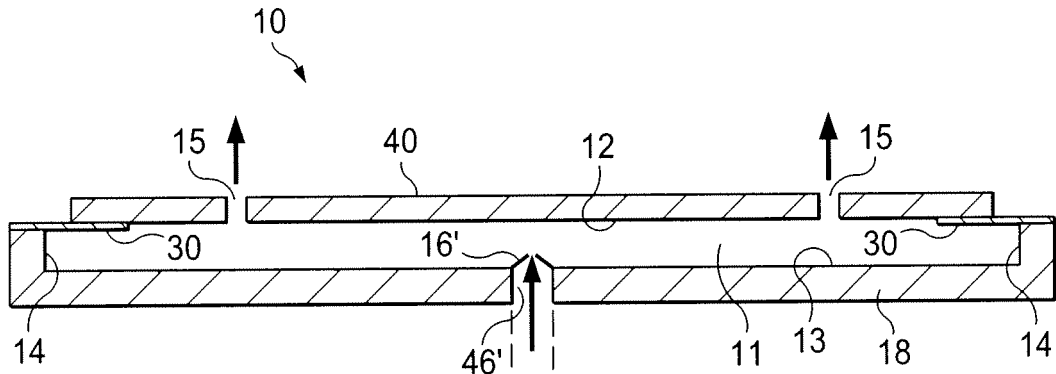


FIG. 6A

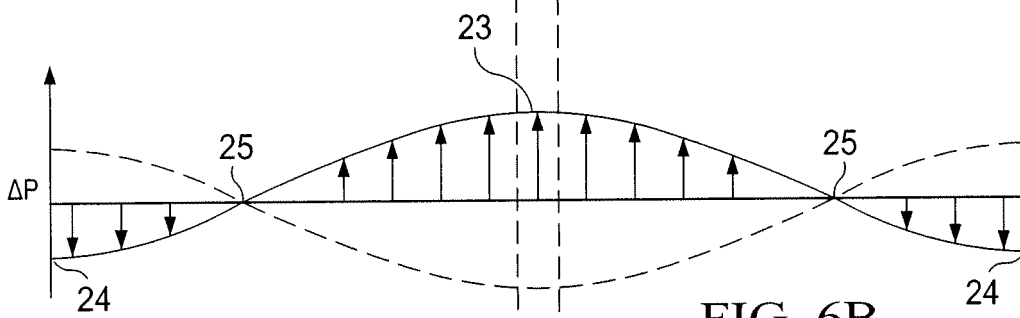


FIG. 6B

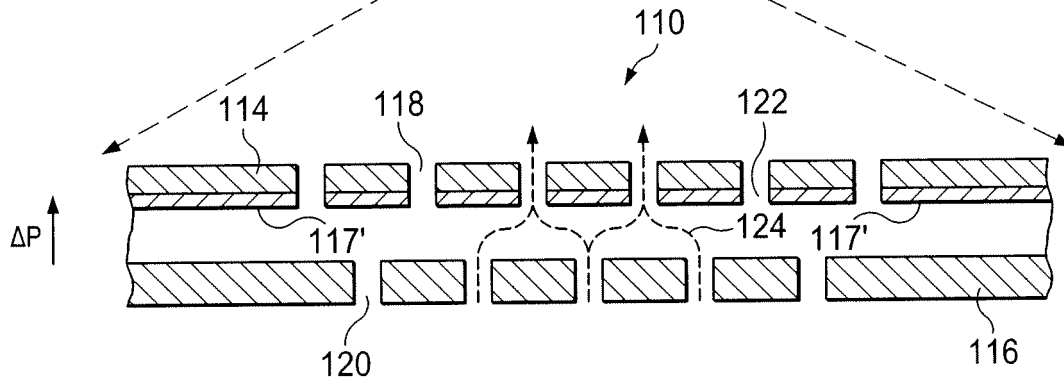


FIG. 6C

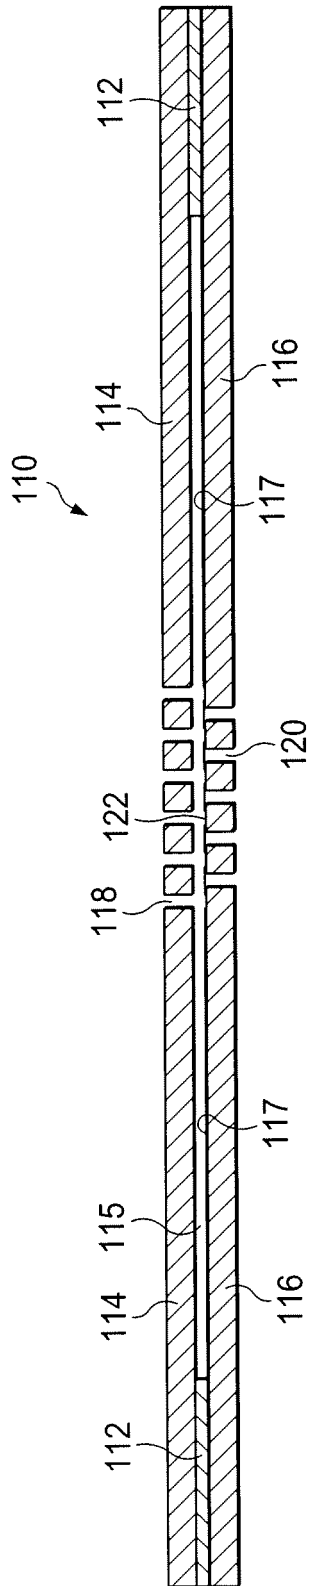


FIG. 7A

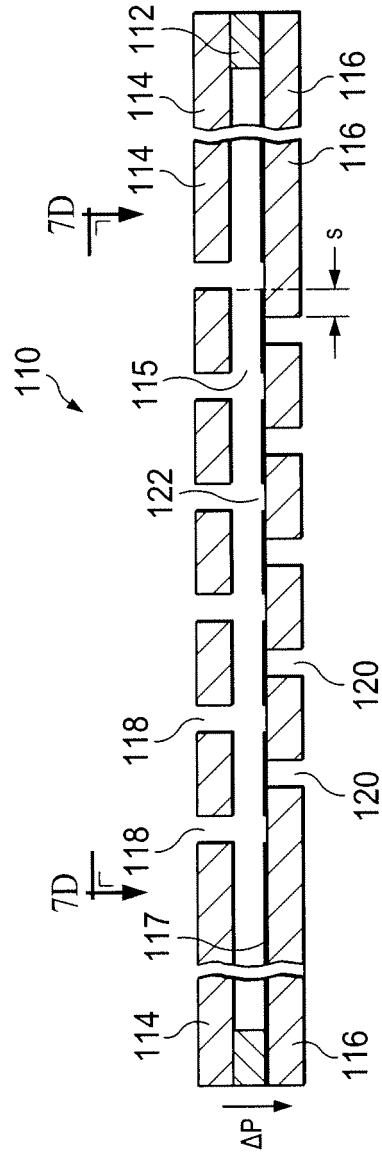


FIG. 7B

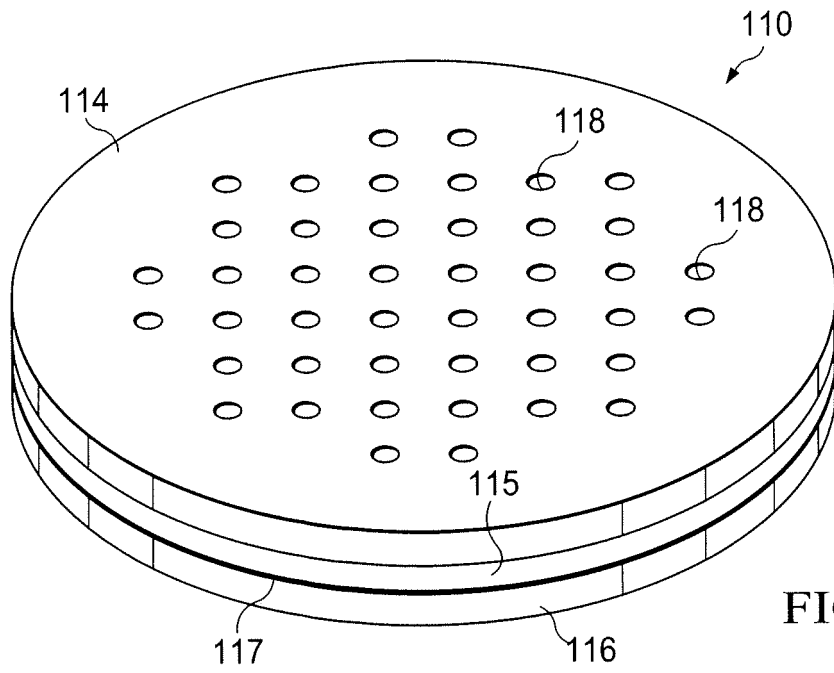


FIG. 7C

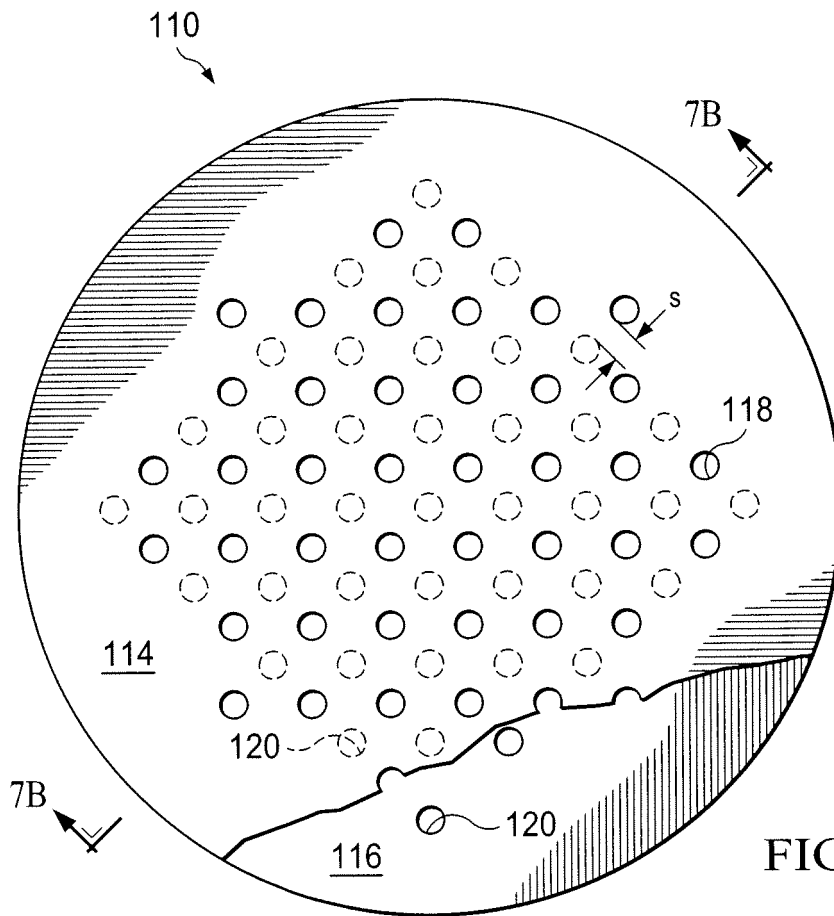


FIG. 7D

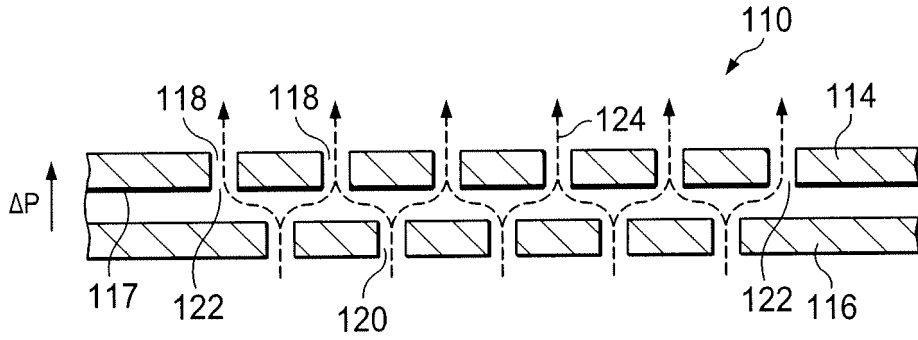


FIG. 8A

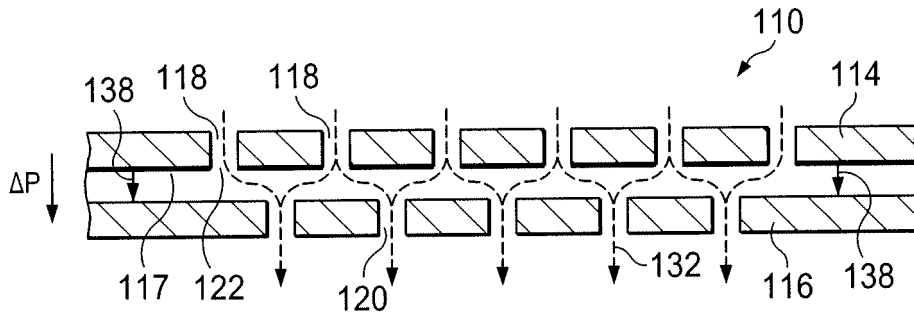


FIG. 8B

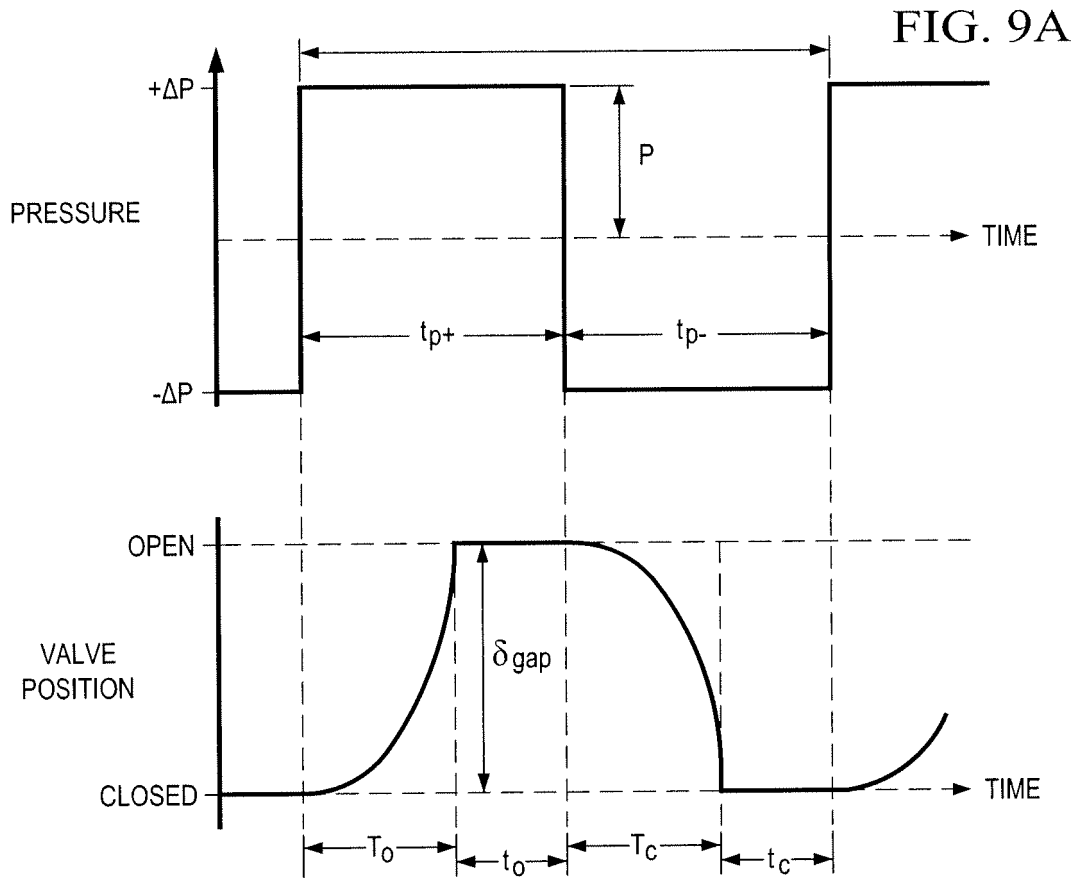


FIG. 9B

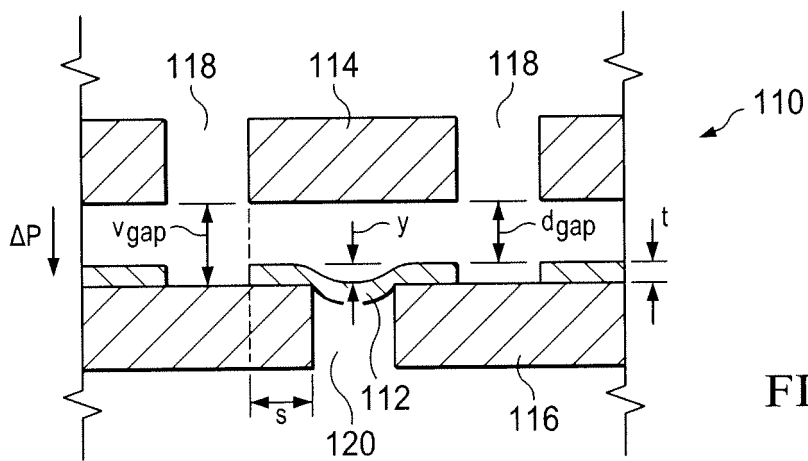
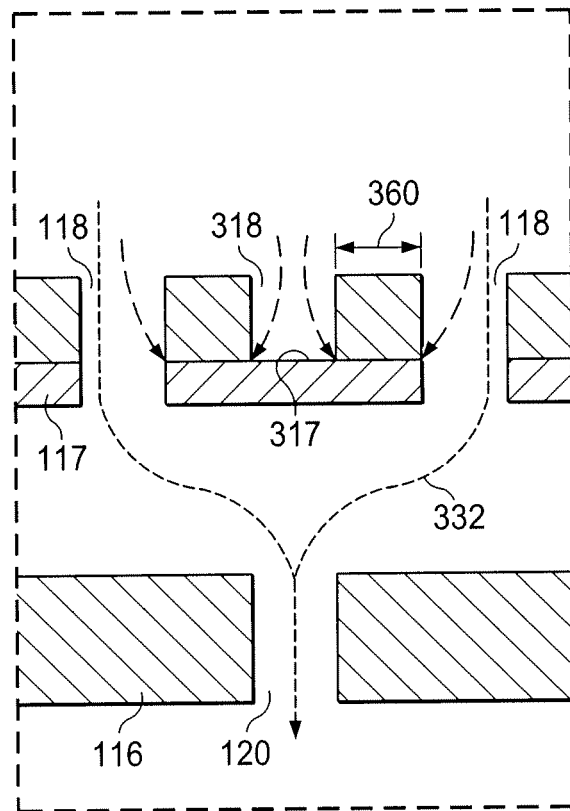
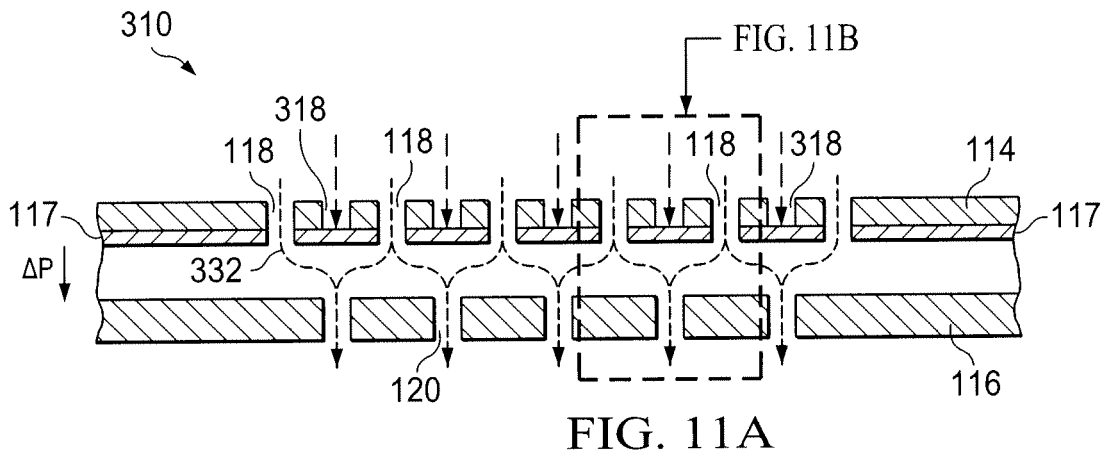


FIG. 10



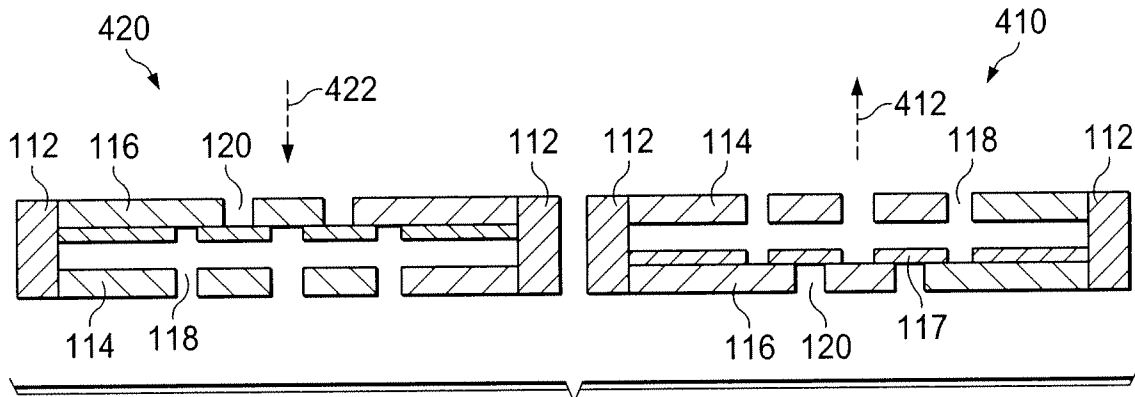


FIG. 12A

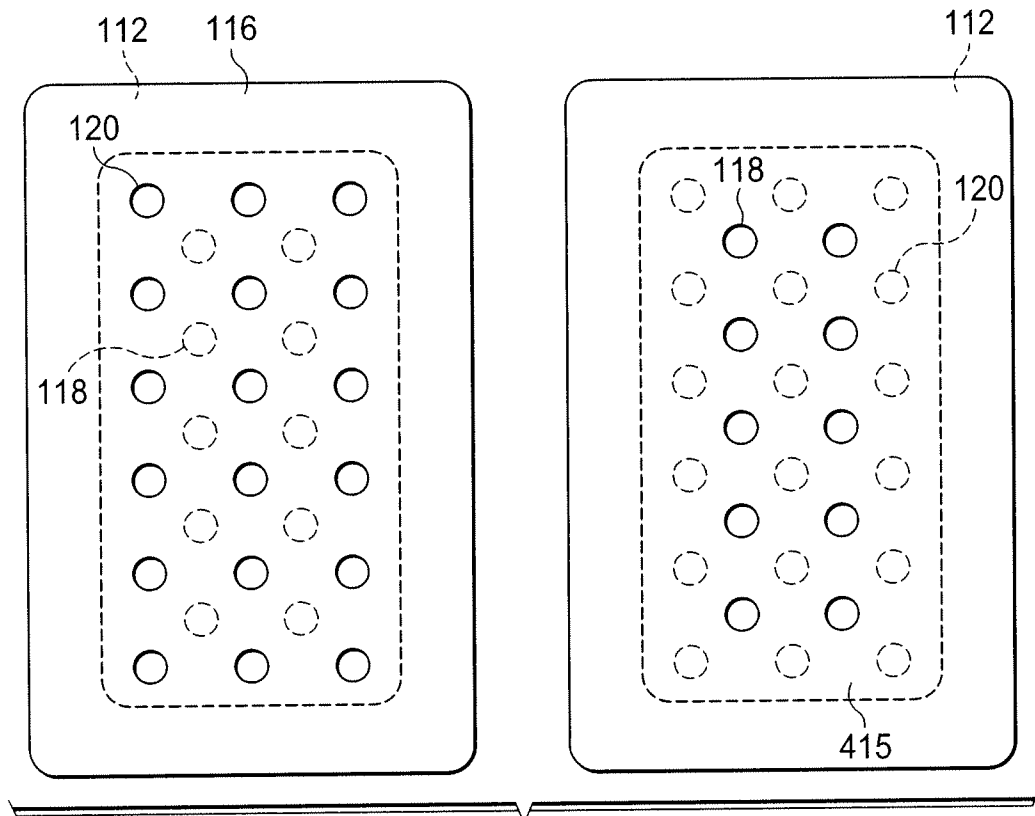


FIG. 12B

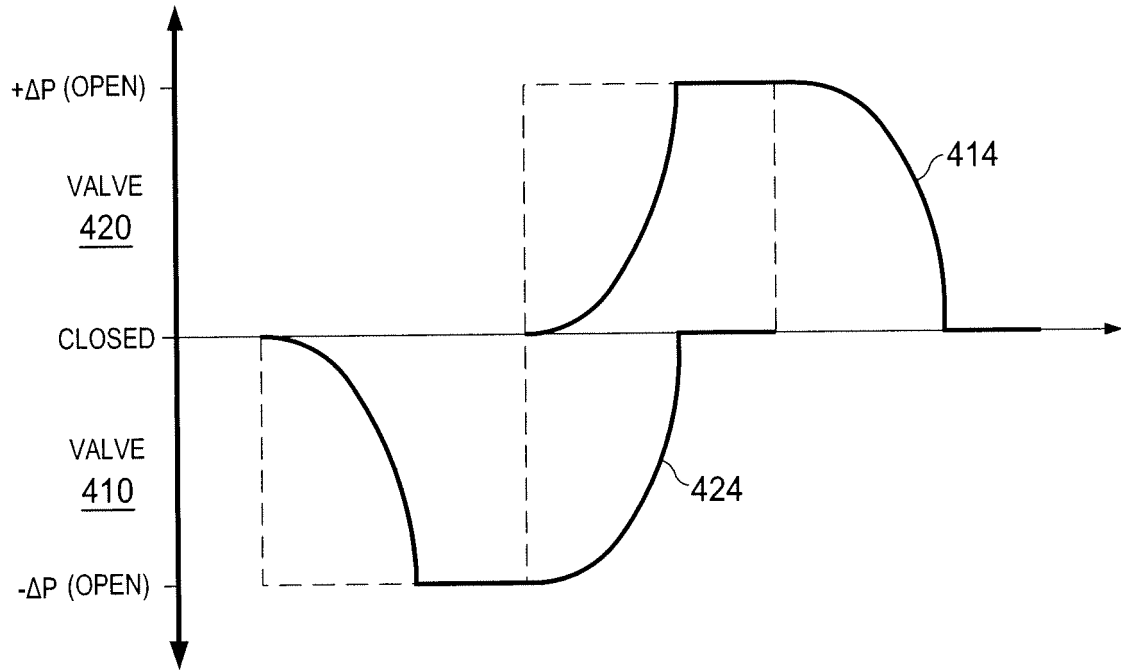


FIG. 12C

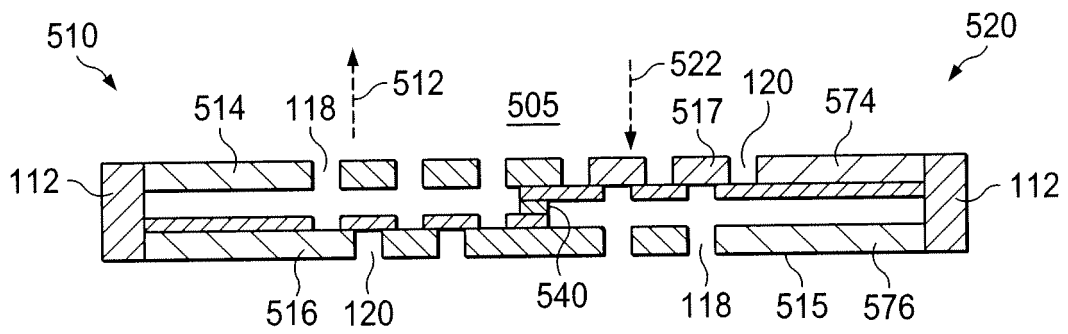


FIG. 13

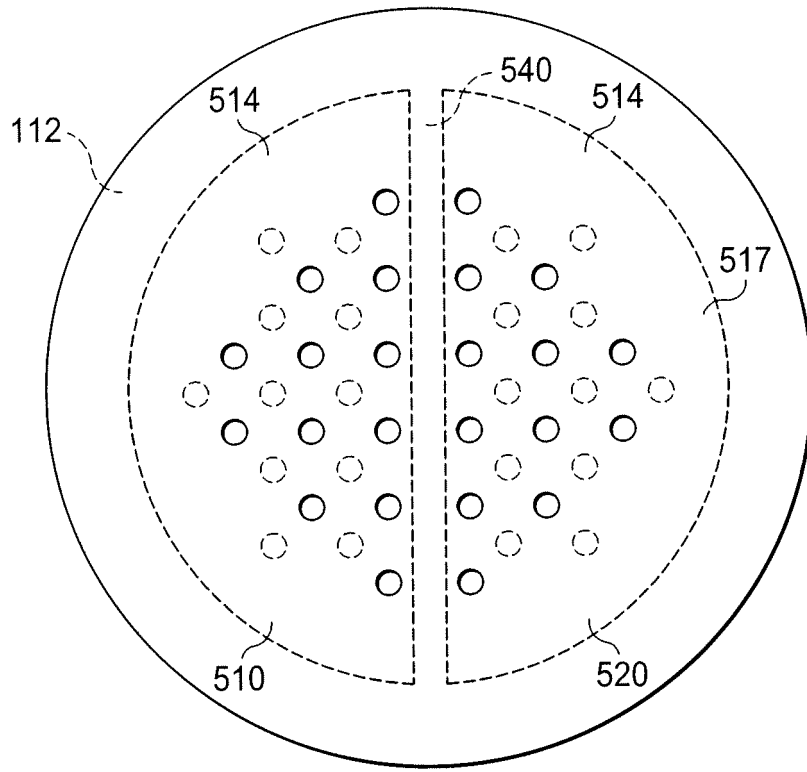


FIG. 14

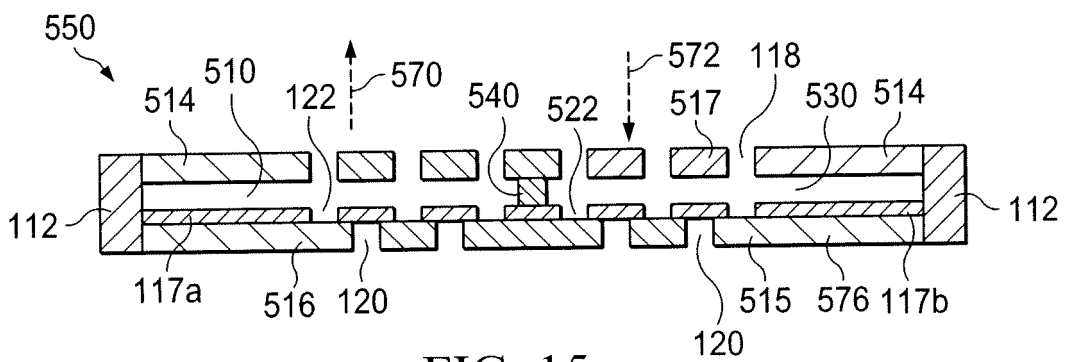


FIG. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 2006001487 W [0003]
- WO 2006111775 A [0003] [0006]
- WO 9419609 A [0007]