



US011992104B2

(12) **United States Patent**
Sullivan et al.

(10) **Patent No.:** **US 11,992,104 B2**

(45) **Date of Patent:** **May 28, 2024**

(54) **CONTAINER WITH RESEALABLE CLOSURE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **YETI Coolers, LLC**, Austin, TX (US)

1,513,395 A * 10/1924 Holmes A47L 9/149
383/69

(72) Inventors: **Derek G. Sullivan**, Austin, TX (US);
John Warren Dow, Austin, TX (US);
Calvin Tabor, Austin, TX (US); **Kyle Edward Rogers**, Austin, TX (US);
Erik Steven Larson, Austin, TX (US);
Keith Austin, Austin, TX (US)

1,631,371 A 6/1927 Greubel
1,671,385 A 5/1928 Strayer
1,712,109 A * 5/1929 Hammer A45C 11/22
206/811

1,809,696 A 6/1931 Heilweil
1,899,696 A 2/1933 Freedman et al.
1,942,246 A 1/1934 Johaneson
1,982,845 A * 12/1934 Wagman A45C 3/06
383/33

(73) Assignee: **YETI Coolers, LLC**, Austin, TX (US)

1,986,057 A 1/1935 Hackworth
2,304,528 A 12/1942 Bafia
2,496,296 A 2/1950 Lobl
2,513,575 A 7/1950 Lombard
2,522,480 A 9/1950 Lionel

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **17/673,688**

CA 179459 A 9/1917
CA 185600 A 7/1918

(22) Filed: **Feb. 16, 2022**

(Continued)

(65) **Prior Publication Data**

US 2023/0255334 A1 Aug. 17, 2023

OTHER PUBLICATIONS

Sep. 30, 2022—(JP) Office Action—App. No. 2021-552882.

(Continued)

(51) **Int. Cl.**

A45C 13/10 (2006.01)
A45C 3/00 (2006.01)
A45F 3/04 (2006.01)

Primary Examiner — Scott T McNurlen

(74) *Attorney, Agent, or Firm* — Banner & Witcoff, Ltd.

(52) **U.S. Cl.**

CPC **A45C 13/1069** (2013.01); **A45C 3/001** (2013.01); **A45F 3/04** (2013.01)

(57) **ABSTRACT**


A container device with an outer shell that has an opening that is sealed by a closure mechanism. The closure mechanism may include resealable closure elements that are configured to partially or wholly seal the opening. In some examples, the closure elements may be magnetic strips. In addition, the closure mechanism may include curved members to prevent the opening from closing when the closure mechanism is in an open configuration.

(58) **Field of Classification Search**

CPC **A45C 13/1069**; **B65D 33/16**; **B65D 33/24**; **B65D 33/30**

USPC 383/33, 34, 34.1, 48
See application file for complete search history.

25 Claims, 19 Drawing Sheets

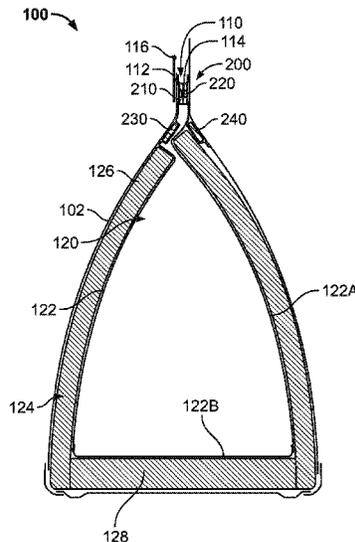

(56)

References Cited

U.S. PATENT DOCUMENTS

2,627,097	A	2/1953	Ellis	6,139,185	A	10/2000	Hamilton et al.
2,672,232	A	3/1954	Kessell, Jr.	6,149,305	A	11/2000	Fier
2,784,757	A	3/1957	Requa	6,179,677	B1	1/2001	Dornier
3,102,314	A	9/1963	Alderfer	6,223,551	B1	5/2001	Mitchell
3,111,735	A	11/1963	Ellis	6,224,258	B1	5/2001	Dodson
3,161,932	A	12/1964	Russell	6,226,842	B1	5/2001	Wong
3,455,359	A	7/1969	Schweizer	6,301,754	B1	10/2001	Grunberger et al.
3,716,091	A	2/1973	Gaines	6,336,340	B1	1/2002	Laby
3,749,301	A	7/1973	Peckar	6,361,210	B2	3/2002	Denko
3,827,019	A	7/1974	Serbu	6,397,560	B1	6/2002	Weder
3,831,986	A	8/1974	Kobayashi	D460,898	S	7/2002	Wang
3,998,304	A	12/1976	Edgerton, Jr. et al.	6,412,116	B1	7/2002	Clark
4,033,013	A	7/1977	Peterson	6,422,032	B1	7/2002	Greene
D256,097	S	7/1980	Amberg	6,427,475	B1	8/2002	DeFelice et al.
4,213,549	A	7/1980	Hibbard	6,434,801	B2	8/2002	Grunberger
4,258,493	A	3/1981	Kettlestrings et al.	D463,276	S	9/2002	Piscopo et al.
4,399,595	A	8/1983	Yoon et al.	6,468,624	B1	10/2002	Fujisawa et al.
4,408,643	A	10/1983	Laske et al.	6,470,705	B2	10/2002	Bride-Flynn
4,421,150	A	12/1983	Masters	6,505,385	B2	1/2003	Grunberger
4,489,770	A	12/1984	Reich, II	D472,773	S	4/2003	Samartgis
D284,254	S	6/1986	Carlson	D478,782	S	8/2003	Li
4,679,242	A	7/1987	Brockhaus	6,601,403	B1	8/2003	Roth et al.
4,716,947	A	1/1988	Haddock	D482,529	S	11/2003	Hardigg et al.
4,738,390	A	4/1988	Brennan	6,646,864	B2	11/2003	Richardson
4,810,102	A	3/1989	Norton	6,659,274	B2	12/2003	Enners
D304,008	S	10/1989	Hornung	D485,069	S	1/2004	Parker
4,898,477	A	2/1990	Cox et al.	6,678,923	B2	1/2004	Goldberg et al.
4,905,857	A	3/1990	Her	6,698,608	B2	3/2004	Parker et al.
4,911,962	A	3/1990	Baumann et al.	6,722,784	B2	4/2004	Breil, Jr.
4,988,216	A	1/1991	Lyman	6,742,354	B1	6/2004	Watts
5,010,988	A	4/1991	Brown	6,749,551	B2	6/2004	Metzler et al.
5,030,013	A	7/1991	Kramer	6,779,199	B1	8/2004	O'Dea et al.
5,148,580	A	9/1992	Dyckow	6,821,018	B1	11/2004	Denko
5,174,658	A	12/1992	Cook et al.	6,899,460	B2*	5/2005	Turvey B65D 33/2508
5,181,555	A	1/1993	Chruniak				383/33
5,184,896	A	2/1993	Hammond et al.	6,904,647	B2	6/2005	Byers, Jr.
5,196,818	A	3/1993	Anderson	6,915,934	B2	7/2005	Hassett
5,216,900	A	6/1993	Jones	6,929,125	B1	8/2005	Seamans
5,226,540	A	7/1993	Bradbury	6,955,381	B2	10/2005	Parker et al.
5,237,838	A	8/1993	Merritt-Munson	D513,123	S	12/2005	Richardson et al.
5,244,136	A	9/1993	Collaso	D513,451	S	1/2006	Richardson et al.
D343,288	S	1/1994	Chao	D514,808	S	2/2006	Morine et al.
D350,689	S	9/1994	Chao	D516,309	S	3/2006	Richardson et al.
5,370,622	A	12/1994	Livingston et al.	D516,807	S	3/2006	Richardson et al.
5,371,925	A	12/1994	Sawatsky	D516,870	S	3/2006	Martinez et al.
5,372,429	A	12/1994	Beaver, Jr. et al.	7,017,776	B1	3/2006	Hupp
5,473,799	A	12/1995	Aoki	7,033,657	B2	4/2006	Martin
5,505,305	A	4/1996	Scholz et al.	D523,242	S	6/2006	Hardigg et al.
D372,173	S	7/1996	Fukuda et al.	D527,226	S	8/2006	Maldonado
5,540,366	A	7/1996	Coomber	D529,344	S	10/2006	Maldonado
5,604,960	A	2/1997	Good	7,187,261	B2	3/2007	Cassar
D381,506	S	7/1997	Roeder	D543,700	S	6/2007	Parker et al.
5,645,205	A	7/1997	Kennedy	D550,210	S	9/2007	Polany et al.
D383,360	S	9/1997	Melk	7,299,652	B2	11/2007	Gagnon
D386,611	S	11/1997	Sheu	7,301,303	B1	11/2007	Hulden
5,682,653	A	11/1997	Berglof et al.	7,364,361	B2	4/2008	Turvey et al.
5,704,480	A	1/1998	Scholz et al.	D573,844	S	7/2008	Hanson et al.
5,706,940	A	1/1998	Amarello	7,400,917	B2	7/2008	Wood et al.
5,746,638	A	5/1998	Shiraishi	D577,261	S	9/2008	Wang
5,797,683	A	8/1998	Gunzi et al.	D578,409	S	10/2008	Clark
5,816,709	A	10/1998	Demus	7,496,195	B2	2/2009	Kramer
5,844,772	A	12/1998	Lee et al.	7,513,633	B2	4/2009	Ermeti
D406,730	S	3/1999	Freese et al.	D592,910	S	5/2009	Hanson et al.
5,875,795	A	3/1999	Bouix	7,527,430	B2	5/2009	Suskind
D411,416	S	6/1999	Freese et al.	D598,647	S	8/2009	Kertesz et al.
D411,446	S	6/1999	Cautereels	D601,383	S	10/2009	Shah
5,908,245	A	6/1999	Bost et al.	D602,740	S	10/2009	Urquiola
D412,267	S	7/1999	Anderson	D607,701	S	1/2010	Pedrazzi et al.
D421,371	S	3/2000	Fair	D609,005	S	2/2010	Dolce et al.
6,067,813	A	5/2000	Smith	D609,056	S	2/2010	Pierce
6,068,119	A	5/2000	Derr et al.	D609,470	S	2/2010	Guyon et al.
6,070,628	A	6/2000	Nastasi	7,665,895	B2	2/2010	Takita et al.
6,073,789	A	6/2000	Lundblade	D617,149	S	6/2010	Olivari
6,092,707	A	7/2000	Bowes, Jr.	7,730,739	B2	6/2010	Fuchs
6,112,959	A	9/2000	Townsend	D620,249	S	7/2010	Yu
				D620,376	S	7/2010	Peysner et al.
				D620,707	S	8/2010	Mogil
				D623,406	S	9/2010	Yu
				D623,853	S	9/2010	Yu

(56)

References Cited

U.S. PATENT DOCUMENTS

7,793,782 B2	9/2010	Chuang	D835,949 S	12/2018	Triska et al.
D627,199 S	11/2010	Pruchnicki	10,229,395 B2	3/2019	Smith et al.
D630,013 S	1/2011	Yu	D847,499 S	5/2019	Dumas
D630,939 S	1/2011	Peters et al.	D850,100 S	6/2019	Oviedo-Polanco
D632,074 S	2/2011	Chan et al.	D855,994 S	8/2019	Munie
7,896,199 B2	3/2011	Kaczmarek	10,373,128 B2	8/2019	Smith et al.
7,946,765 B2	5/2011	Melvan et al.	D861,338 S	10/2019	Seiders et al.
D644,024 S	8/2011	Jobert	10,494,146 B2	12/2019	Verma
8,005,251 B2	8/2011	Chan	10,548,391 B2	2/2020	Satterfield
D648,935 S	11/2011	Wickrama	D877,514 S	3/2020	Seiders et al.
D653,915 S	2/2012	George	10,582,734 B1	3/2020	Price
D664,425 S	7/2012	Krupa	10,586,641 B2	3/2020	Good
8,209,995 B2	7/2012	Kieling et al.	10,597,197 B2	3/2020	Verma
8,223,997 B2	7/2012	Wilson, II et al.	10,602,833 B2	3/2020	Powell
D668,119 S	10/2012	Everson	D883,047 S	5/2020	Kou
D670,906 S	11/2012	Du	10,660,428 B2	5/2020	Moreau et al.
8,302,749 B2	11/2012	Melmon et al.	10,696,085 B2	6/2020	Feingold
D677,511 S	3/2013	Gray	10,743,597 B2	8/2020	Tong
8,399,764 B2	3/2013	Klosky	10,781,028 B2*	9/2020	Munie A45C 13/10
8,403,975 B2	3/2013	Hadas	10,856,594 B2	12/2020	Smith, IV et al.
8,424,680 B2	4/2013	Fair et al.	D909,063 S	2/2021	Loudenslager et al.
8,434,617 B1	5/2013	Wang	10,981,716 B2	4/2021	Seiders et al.
D685,575 S	7/2013	Cullen et al.	D919,298 S	5/2021	Munie
D688,449 S	8/2013	Schinasi	11,027,889 B1	6/2021	Western et al.
8,550,714 B2	10/2013	Ben-Shushan et al.	11,076,666 B2	8/2021	Sullivan et al.
D693,573 S	11/2013	Holefleisch	D935,770 S	11/2021	Loudenslager et al.
8,573,002 B2	11/2013	Ledoux et al.	11,174,077 B2*	11/2021	Dais B65D 33/25865
D694,521 S	12/2013	Robinson et al.	11,174,090 B2	11/2021	Rogers
D695,015 S	12/2013	Robinson et al.	11,229,268 B2	1/2022	Munie et al.
D695,568 S	12/2013	Hayes	11,266,215 B2	3/2022	Larson et al.
8,607,536 B2	12/2013	Bailey et al.	D961,261 S	8/2022	Nichols et al.
D701,456 S	3/2014	Farley et al.	2001/0051378 A1	12/2001	Radmacher et al.
D703,493 S	4/2014	de Ste. Croix et al.	2002/0012480 A1	1/2002	Konno
D708,848 S	7/2014	Zwetzig	2003/0116461 A1	6/2003	Colloton
D709,333 S	7/2014	Stamatopoulos	2004/0165332 A1	8/2004	Beson
D709,334 S	7/2014	Stamatopoulos	2004/0173484 A1	9/2004	Bates et al.
8,770,402 B2	7/2014	Bergreen et al.	2004/0183313 A1	9/2004	Sherman et al.
D716,551 S	11/2014	Taylor	2004/0237266 A1	12/2004	Wang
D718,529 S	12/2014	Wang	2004/0238303 A1	12/2004	Haffif
8,939,642 B2	1/2015	Ackerman et al.	2005/0097711 A1	5/2005	Halstead
D727,107 S	4/2015	Parodi, Jr.	2005/0116003 A1	6/2005	Butler et al.
D734,642 S	7/2015	Vasbinder et al.	2005/0145302 A1	7/2005	Mutterer et al.
D734,643 S	7/2015	Boroski	2005/0230465 A1	10/2005	Metzler et al.
D734,761 S	7/2015	Ballou et al.	2005/0262871 A1	12/2005	Bailey-Weston
D736,569 S	8/2015	Bronwasser et al.	2006/0003709 A1	1/2006	Wood
9,122,941 B2	9/2015	Hoobler et al.	2006/0006969 A1	1/2006	Cassar
9,139,352 B2	9/2015	Seiders et al.	2006/0016841 A1	1/2006	Shurm
9,167,876 B2	10/2015	Yamaguchi et al.	2006/0072857 A1	4/2006	Revels
D745,272 S	12/2015	Slimane	2006/0090976 A1	5/2006	Repke et al.
9,220,328 B2	12/2015	Magness	2007/0051785 A1	3/2007	Roessiger
9,264,089 B2	2/2016	Tages	2007/0215663 A1	9/2007	Chongson et al.
D751,814 S	3/2016	Louboutin	2007/0232109 A1	10/2007	Parker et al.
9,290,313 B2	3/2016	De Lesseux et al.	2007/0261977 A1	11/2007	Sakai
9,307,315 B2	4/2016	McKeough	2007/0261978 A1	11/2007	Sanderson
9,334,087 B2	5/2016	Cho et al.	2008/0037907 A1	2/2008	Suskind
D758,805 S	6/2016	Myoung	2008/0077289 A1	3/2008	Fujishima
9,392,855 B2	7/2016	Taylor	2008/0142518 A1	6/2008	Maistrellis
D763,569 S	8/2016	Tal	2008/0179364 A1	7/2008	Thatcher
D763,629 S	8/2016	Swartz et al.	2008/0272872 A1	11/2008	Fiedler
D764,791 S	8/2016	Patel	2009/0046955 A1	2/2009	Schember et al.
9,444,506 B2	9/2016	Lai et al.	2009/0052810 A1	2/2009	Anda
D780,524 S	3/2017	Jacobsen	2009/0078731 A1	3/2009	Yi
D787,821 S	5/2017	Liu	2009/0114557 A1	5/2009	Nelson
9,687,054 B2	6/2017	Platt et al.	2009/0184143 A1	7/2009	Witt et al.
D798,670 S	10/2017	Seiders et al.	2009/0208146 A1	8/2009	Kirby
9,901,163 B2*	2/2018	Pactanac A63B 55/408	2010/0025442 A1	2/2010	Shurm
D811,738 S	3/2018	Dumas	2010/0040307 A1	2/2010	Lien
D811,823 S	3/2018	Kandel	2010/0140861 A1	6/2010	Kubota et al.
9,913,551 B1	3/2018	Baker	2010/0181220 A1	7/2010	Dasara
D824,664 S	8/2018	Munie	2010/0298025 A1	11/2010	Spence
D824,675 S	8/2018	Munie	2010/0310194 A1	12/2010	Archambault
D825,184 S	8/2018	Munie	2011/0000590 A1	1/2011	Welch et al.
D825,913 S	8/2018	Barlier	2011/0036473 A1	2/2011	Chan et al.
D827,299 S	9/2018	Vickery	2011/0150368 A1	6/2011	Ellsworth et al.
D828,112 S	9/2018	Furneaux et al.	2011/0242744 A1	10/2011	Klosky
			2011/0317943 A1	12/2011	Russo
			2012/0096669 A1	4/2012	Treacy
			2012/0111930 A1	5/2012	Maistrellis
			2012/0128273 A1	5/2012	Lytle

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EM	002515247-0002	10/2014	JP	2007319218	A	12/2007	
EM	002550715-0002	10/2014	JP	4074010	B2	4/2008	
EM	002630814-0002	2/2015	JP	D1355521		4/2009	
EM	002838573-0001	11/2015	JP	3154150	U	10/2009	
EM	002676536-0001	5/2016	JP	D1376358		12/2009	
EM	003117324-0009	5/2016	JP	2010030644	A	2/2010	
EM	003122464-0001	5/2016	JP	2020512281	A	4/2010	
EM	004109049-0001	7/2017	JP	D2010-8653		12/2010	
EM	00530559-0001	7/2018	JP	2011121631	A	6/2011	
EM	00530559-0003	7/2018	JP	D2012-551		8/2012	
EM	005511102-0001	8/2018	JP	3179745	U	11/2012	
EM	005511102-0002	8/2018	JP	5107522	B2	12/2012	
EM	005511102-0003	8/2018	JP	201356087	A	3/2013	
EM	005511102-0004	8/2018	JP	D1487395		1/2014	
EM	005618204-0001	8/2018	JP	D1500514		6/2014	
EM	005887585-0006	1/2019	JP	D1619280		12/2018	
EM	006501607-0001	5/2019	KR	20020046244	A	6/2002	
EP	03922399	A2	6/1999	KR	200341520	Y1	2/2004
EP	1683736	A2	7/2006	KR	200344351	Y1	3/2004
EP	1864916	A1	12/2007	KR	20070089473	A	8/2007
EP	2571391	A2	3/2013	KR	3020070006269		12/2007
EP	2211655	B1	4/2014	KR	3020070006271		2/2008
EP	3310678	B1	4/2020	KR	200452328	Y1	2/2011
EP	3634882	A4	3/2021	KR	3020100039256		4/2012
EP	3837179	B1	8/2022	KR	3020120016755		9/2012
FR	1069996	A	7/1954	KR	20130134750	A	12/2013
FR	1277415	A	12/1961	KR	10201473386	A	6/2014
FR	1545165	A	11/1968	KR	3020140014014		11/2014
FR	20105616-001	4/2011	TR	652921-0001		7/2013	
GB	2045117	6/1995	TW	201637950	A	11/2016	
GB	4012617	10/2009	TW	M581835	U	8/2019	
GB	2523728	A	9/2015	WO	9408541	A1	4/1994
JP	S4971312	U	6/1974	WO	D032527-029		5/1995
JP	S49112604	U	9/1974	WO	D038554-029		2/1997
JP	S49123217	A	11/1974	WO	0108527	A1	2/2001
JP	S5145006	U	4/1976	WO	2007071126	A1	6/2007
JP	S51108919	U	8/1976	WO	2007140916	A3	2/2008
JP	S5239481	A	3/1977	WO	08025905	A2	3/2008
JP	S53161363	U	12/1978	WO	11037356	A3	9/2011
JP	S58039009	A	3/1983	WO	2013132355	A2	9/2013
JP	S59070508	U	5/1984	WO	D082059-001		11/2013
JP	S6076076	U	5/1985	WO	D091354-003		3/2016
JP	S61073224	U	5/1986	WO	2017125229	A1	7/2017
JP	S62058606	A	3/1987	WO	2017136754	A1	8/2017
JP	S62134836	U	8/1987	WO	D099344-004		2/2018
JP	S63068865	U	5/1988	WO	D099344-034		2/2018
JP	S63111442	U	7/1988	WO	D099990-006		3/2018
JP	H01126956	U	8/1989	WO	2018165426	A1	9/2018
JP	1992074010	U	6/1992	WO	D103345-001		4/2019
JP	H0556809	A	3/1993	WO	2019135922	A1	7/2019
JP	H06021210	U	3/1994	WO	2020061513	A1	3/2020
JP	3003213	U	10/1994	WO	2020181243	A1	9/2020
JP	H06076076	U	10/1994				
JP	199326980	U	11/1994				
JP	H0679320	U	11/1994				
JP	H08502427	A	3/1996				
JP	H9328149	A	12/1997				
JP	H10127329	A	5/1998				
JP	3051283	U	8/1998				
JP	3051385	U	8/1998				
JP	H1126956	A	1/1999				
JP	H11147572	A	6/1999				
JP	3059196	U	7/1999				
JP	H11269713	A	10/1999				
JP	3073772	U	12/2000				
JP	3160109	B2	4/2001				
JP	2001267164	A	9/2001				
JP	2002507175	A	3/2002				
JP	200347517	A	2/2003				
JP	2003071978	A	3/2003				
JP	2004000355	A	1/2004				
JP	3515781	B2	4/2004				
JP	2005335769	A	12/2005				
JP	2005343482	A	12/2005				
JP	2006123987	A	5/2006				

OTHER PUBLICATIONS

Dec. 9, 2022—(AU) Examination Report No. 2—App. No. 2020231415.
 Nov. 24, 2022—(CA) Office Action—App. No. 3131600.
 Nov. 18, 2022—(EP) Office Action—App. No. 18763122.1.
 May 6, 2019—(WO) International Search Report and Written Opinion—App. No. PCT/US2018/066679.
 Jun. 19, 2018—(WO) ISR & WO—App. No. PCT/US18/021546.
 Feb. 27, 2015—(JP) Office Action—App. No. 2013-510725.
 Feb. 27, 2015—(CN) CSR—App. No. CN103237473B.
 Jan. 15, 2015—(CN) Office Action—App. No. 201180031291.5.
 Jun. 6, 2020—(WO) ISR—App. No. PCT/US20/021513.
 Apr. 30, 2020—(WO) International Search Report & Written Opinion—PCT/US20/021519.
 Oct. 30, 2020—(CN) Office Action—App. No. 201880015578.0.
 Oct. 20, 2020—(IP) Office Action—App. No. 2019548313.
 Jan. 29, 2021—(EP) Supplementary Search Report—U.S. Appl. No. 18/763,122.
 Jun. 9, 2021—(CN) Second Office Action—App. No. 201880015578.0.
 B&H, “Clik Elite Schulter Shoulder Bag”, First reviewed Aug. 2, 2012. (https://www.bhphotovideo.com/c/product/828772-REG/Clik_Elite_CE733GR_Schulter_Shoulder_Bag_Gray.html/reviews)(Year: 2012).

(56)

References Cited

OTHER PUBLICATIONS

Amazon, "F40C4TMP Packable Lunch Bag Work Lunch Box for Men . . .", First on sale Aug. 4, 2020. (<https://www.amazon.com/dp/B08F7S9JJT/>)(Year:2020).

Amazon,"AKASO 6L Small Collapsible Cooler Bag for 12 Cans . . .", First on sale Mar. 19, 2021. (<https://www.amazon.com/AKASO-Collapsible-Leakproof-Waterproof-Insulated/dp/B08ZHDTTQD/>)(Year:2021).

Oct. 1, 2021—(JP) Decision of Rejection—App. No. 2019-548313.

May 6, 2020—(WO) Isr & WO—App. No. PCT/US2020/021513.

Apr. 30, 2020—(WO) ISR & WO—App. No. PCT/US2020/021519.

Dec. 7, 2021—(CN) Third Office Action—App. No. 201880015578.0.

Jan. 17, 2022—(EP) Office Action—App. No. 18763122.1.

Amazon, "Insulated Reusable Eco Snack bag . . .", First on sale Apr. 8, 2020. (<https://www.amazon.com/Insulated-Reusable-Sandwich-Insulin-Cooling/dp/B086W5DFGL/?th=1>) (Year: 2020).

Amazon, "Ensign Peak Basic Lunch Sack . . .", First on sale Apr. 12, 2016. (<https://www.amazon.com/Ensign-Peak-Basic-Lunch-Black/dp/B01E64H21A/?th=1>) (Year: 2016).

Amazon, "AKASO Packable Insulated Lunch Bag . . .", First on sale Nov. 9, 2021. (<https://www.amazon.com/dp/B09K49Q67N/?th=1>) (Year: 2021).

Overstock, "Wildkin Zebra Lunch Bag", First reviewed Apr. 23, 2016. (<https://www.overstock.com/Luggage-Bags/Wildkin-Zebra-Lunch-Bag/9765841/product.html?option=14691201>) (Year: 2016).

May 17, 2022—(CN) First Office Action—App. No. 202080019089.X.

Jul. 7, 2022—(AU) Examination Report No. 1—App. No. 2020231415.

Jul. 9, 2022—(AU) Examination Report No. 1—App. No. 2020232017.

Jun. 9, 2022—(PH) Substantive Examination Report—App. No. 12019501924.

May 25, 2022—(CN) First Office Action—App. No. 202080018671.4.

Oct. 20, 2022—(EP) Office Action w/Partial ESR—App. No. 20716299.1.

Jun. 23, 2022—(MX) First Office Action—App. No. MX/a/2019/010534.

Nov. 14, 2022—(JP) Office Action—App. No. 2021-552871.

Nov. 23, 2022—(CA) Office Action—App. No. 3131599.

Feb. 28, 2023—(JP) Office Action—App. No. 2022-013906.

Mar. 24, 2023—(AU) Examination Report No. 1—App. No. 2018230395.

May 25, 2023—(CN) Decision of Rejection—App. No. 202080019089.X.

May 24, 2023—(CN) Office Action—App. No. 202080018671.4.

May 24, 2023—(JP) Office Action—App. No. 2021552871.

Jun. 13, 2023—(NZ) Office Action—App No. 778976.

Youtube, "How to Sew a Simple Lunch Bag with Hook & Loop Closure", By "DIYDanielle" on Sep. 12, 2016. (<https://www.youtube.com/watch?v=3vtidkeCaj0>) (Year: 2016).

Etsy Shop "LunchBagShopUA", "Lunch bag insulated gift for him for her for mom lunch box", First review for item Feb. 28, 2018. (<https://www.etsy.com/listing/566937249/lunch-bag-insulated-gift-for-him-for-her?ref=reviews>) (Year: 2018).

Jan. 18, 2023—(CN) Second Office Action—App. No. 202080019089.X.

Jan. 20, 2023—(CN) Second Office Action—App. No. 202080018671.4.

Jun. 12, 2023—(NZ) Examination Report 1—App. No. 778975.

YETI Daytrip Packable Lunch Bag, first available Jan. 31, 2022. Retrieved from: <https://www.amazon.com/YETI-Daytrip-Packable-Alpine-Yellow/dp/B09RLK9H1P?th=1> on Apr. 25, 2023.

Hydro Flask Insulated Lunch Box, first available Jun. 1, 2022. Retrieved from: <https://www.amazon.com/Hydro-Flask-Insulated-Lunch-Box/dp/B09VM5RWQ7?th=1> on Apr. 25, 2023.

ZENPAC Insulated Lunch Bag, first available Jun. 30, 2020. Retrieved from: https://www.amazon.com/dp/B08BG9Y3G5/ref=sbl_dp_x_dining-lunch-bags_B0BSDQ2ZD3_0?th=1 on Apr. 25, 2023.

YETI Hopper Flip 12 Portable Soft Cooler, first available Jan. 31, 2022. Retrieved from <https://www.amazon.com/YETI-Hopper-Portable-Cooler-Alpine/dp/B09RKVPF7G/> on Apr. 25, 2023.

Jul. 4, 2023—(JP) Final Office Action—App. No. 2022-013906.

Jul. 19, 2023—(CN) Office Action—App. No. 202210605876.3.

Aug. 2, 2023—(WO) International Search Report & Written Opinion—PCT/US2023/062537.

* cited by examiner

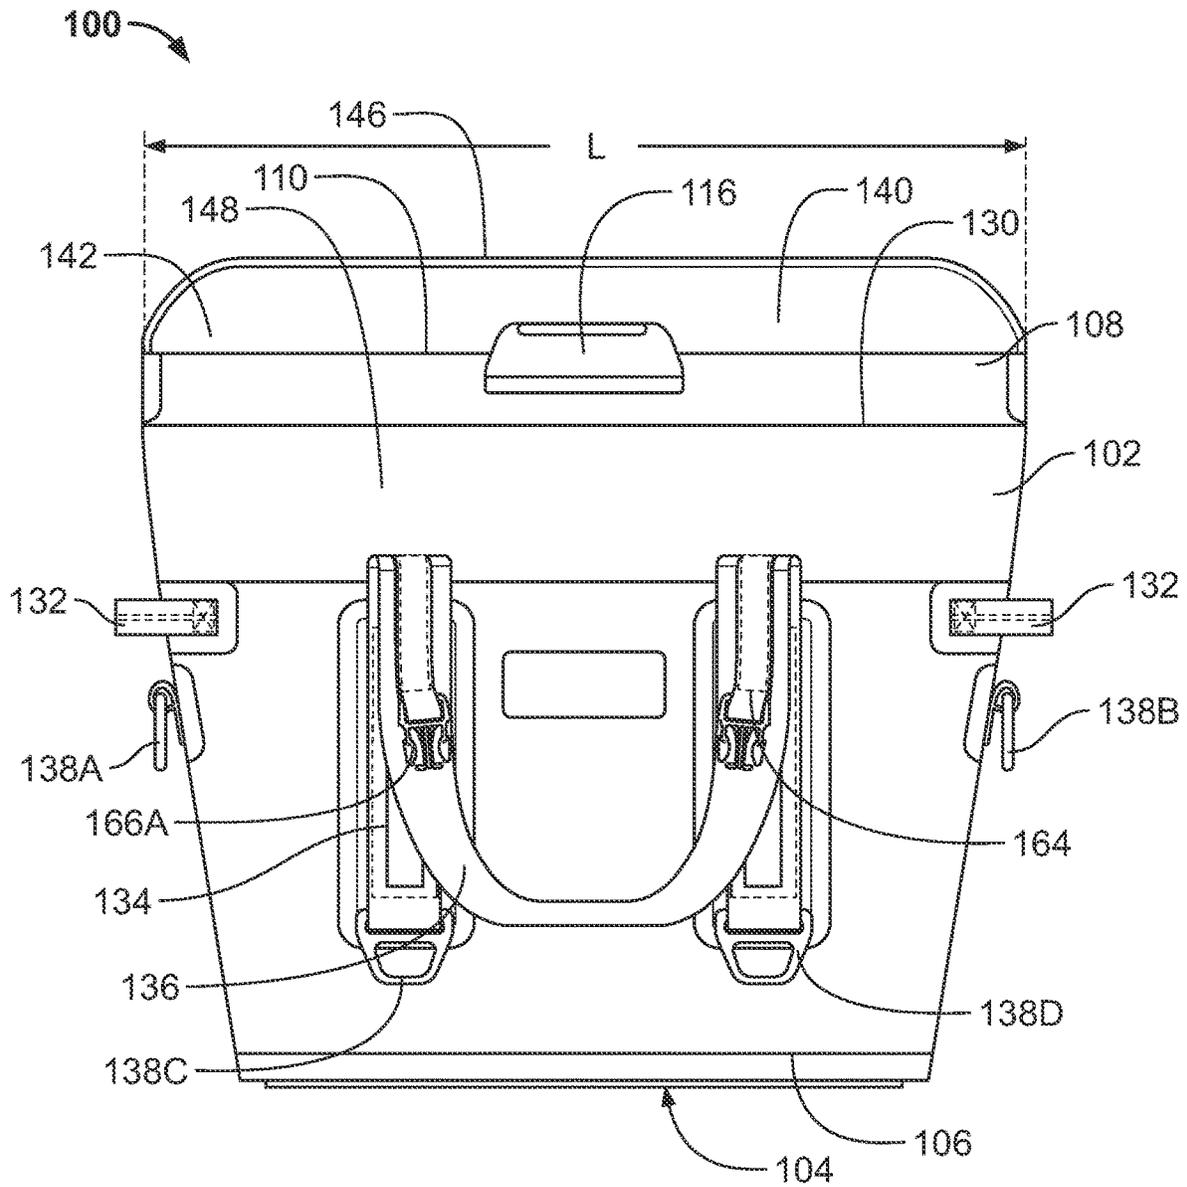


FIG. 1

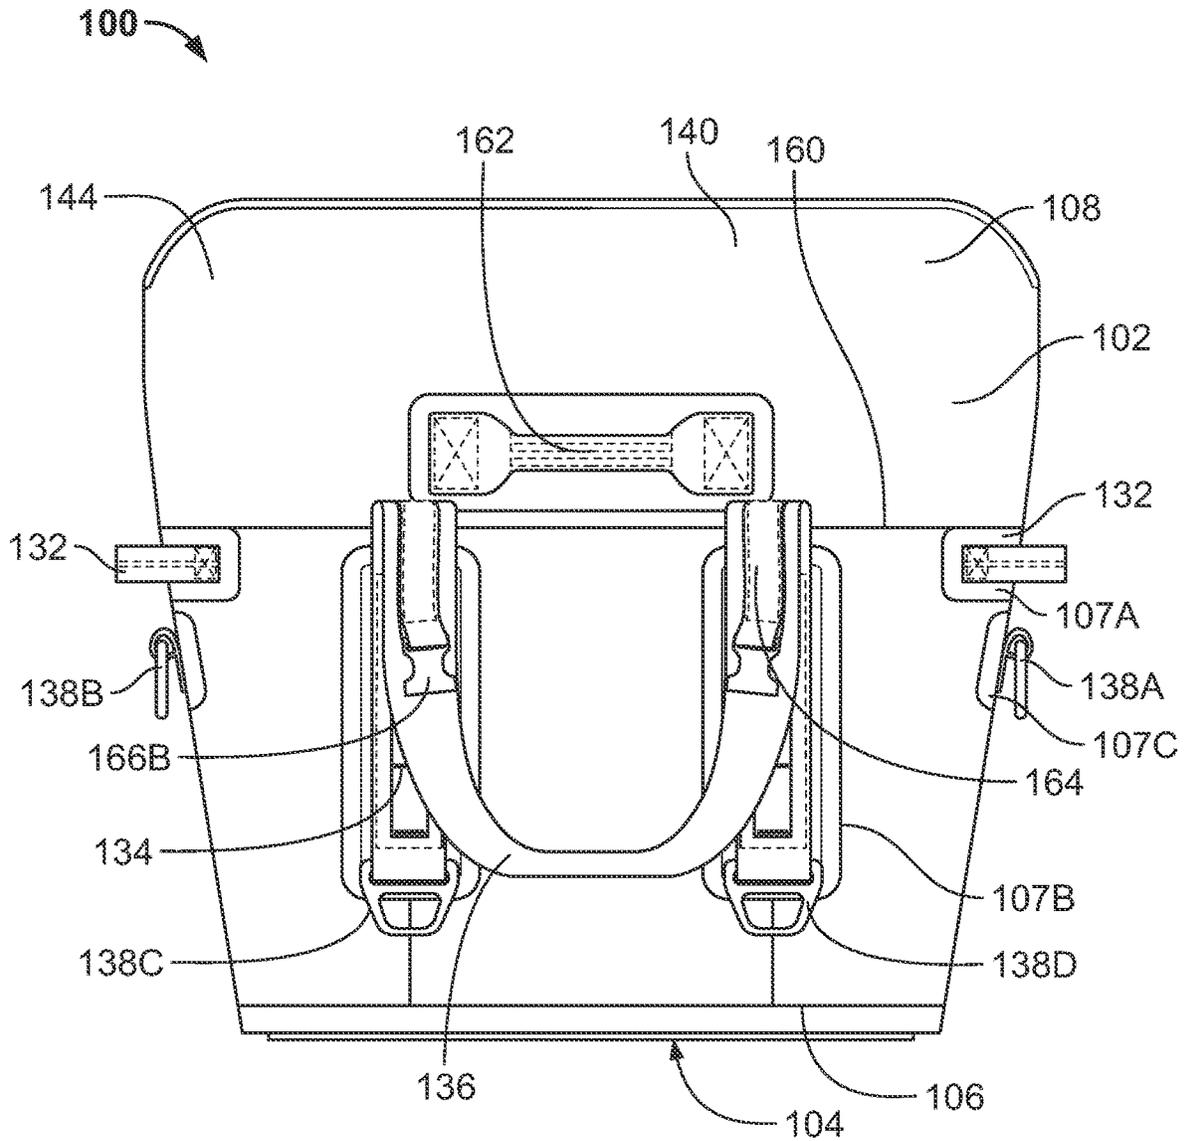
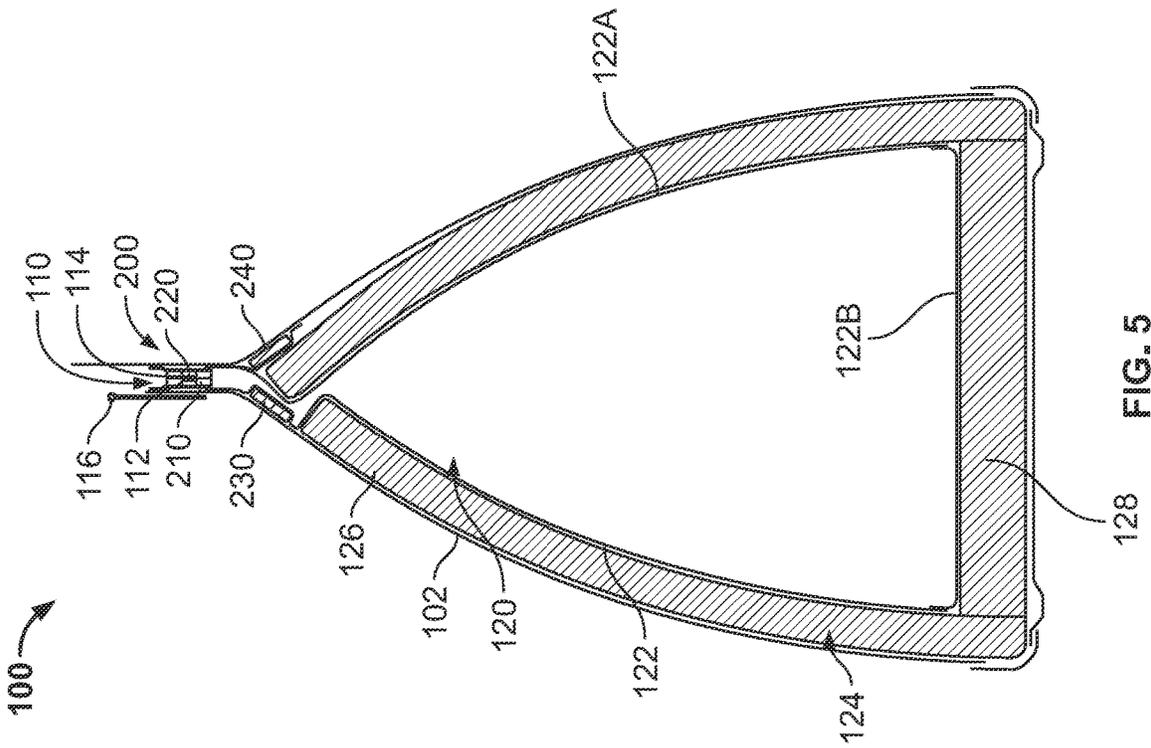
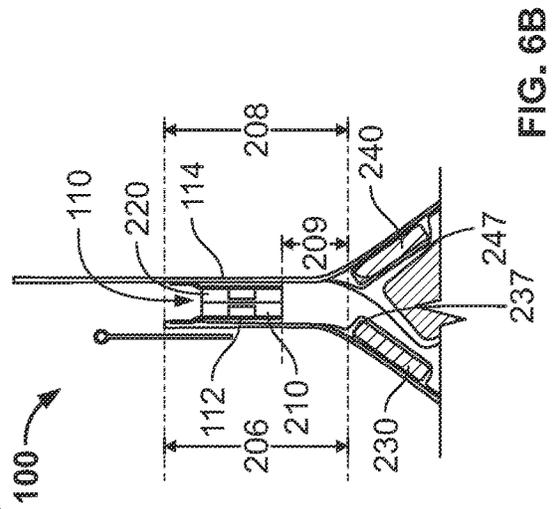
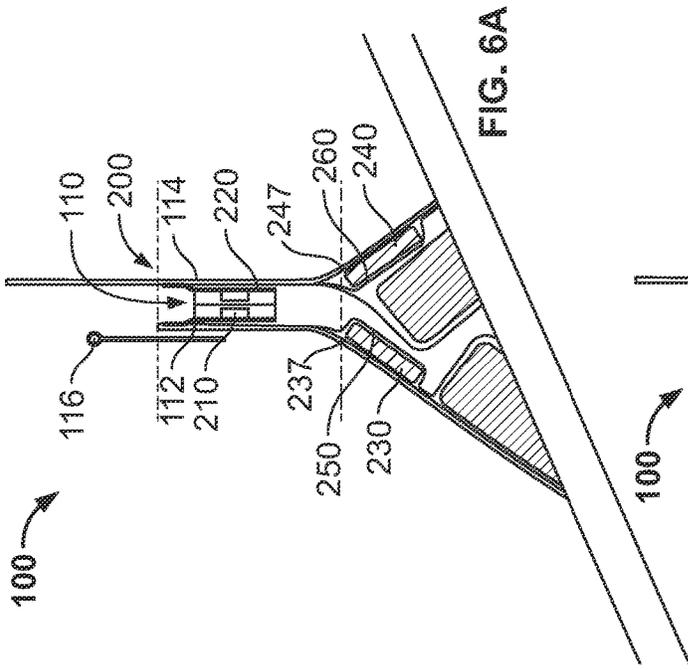


FIG. 2



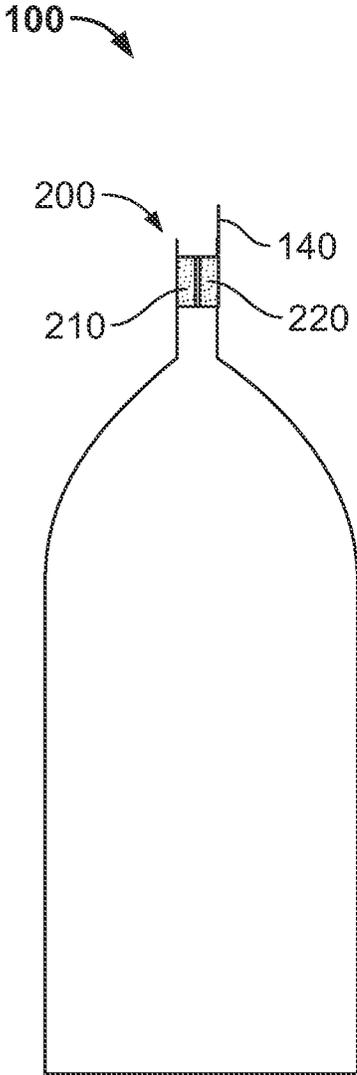


FIG. 7A

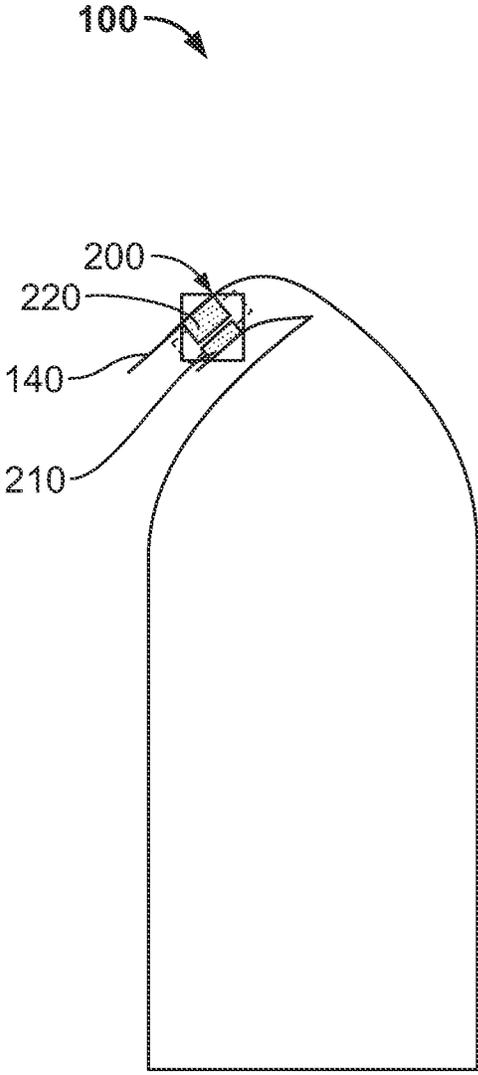


FIG. 7B

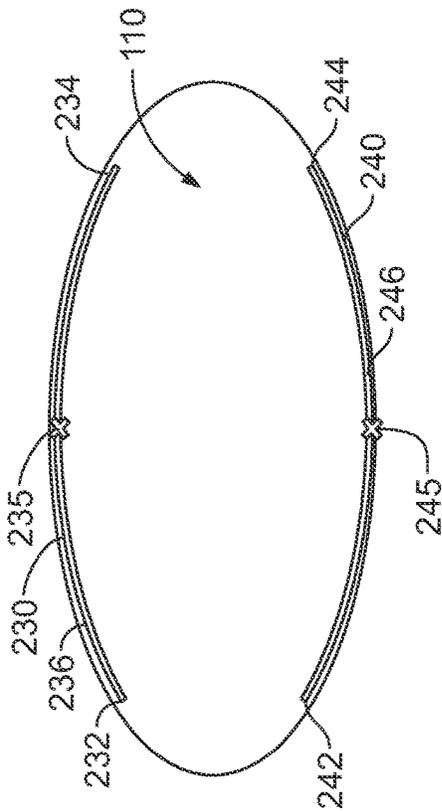


FIG. 8A

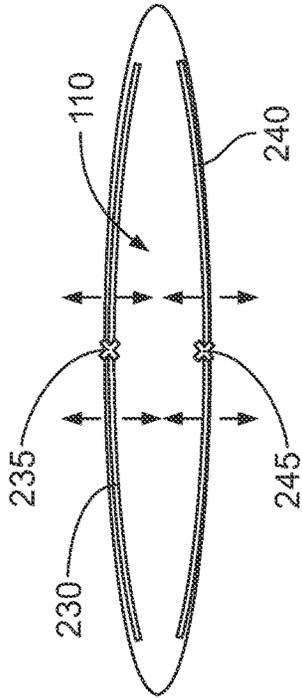


FIG. 8B

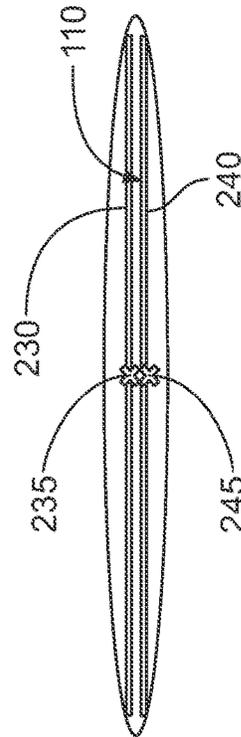


FIG. 8C

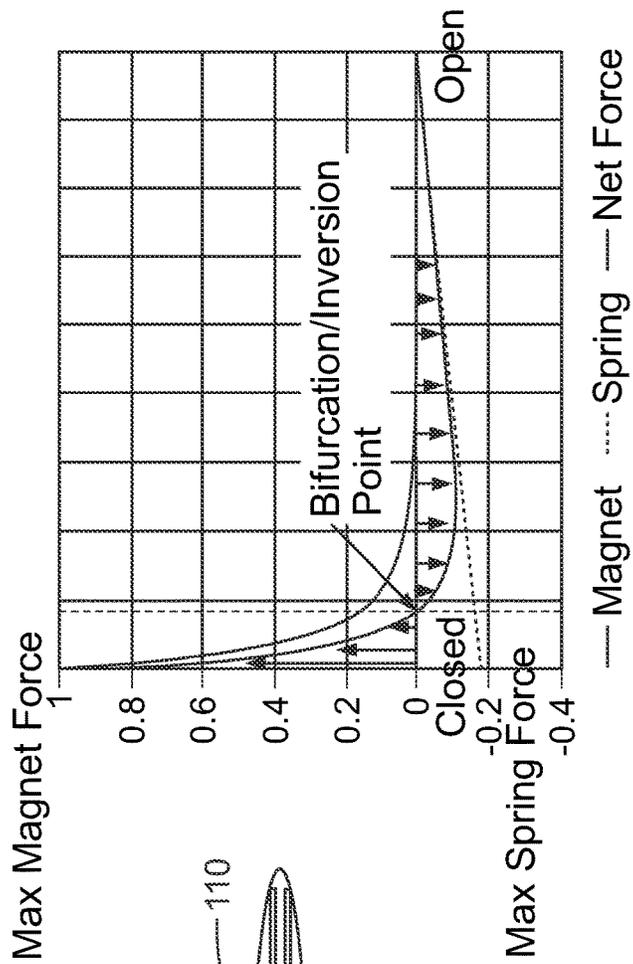


FIG. 9

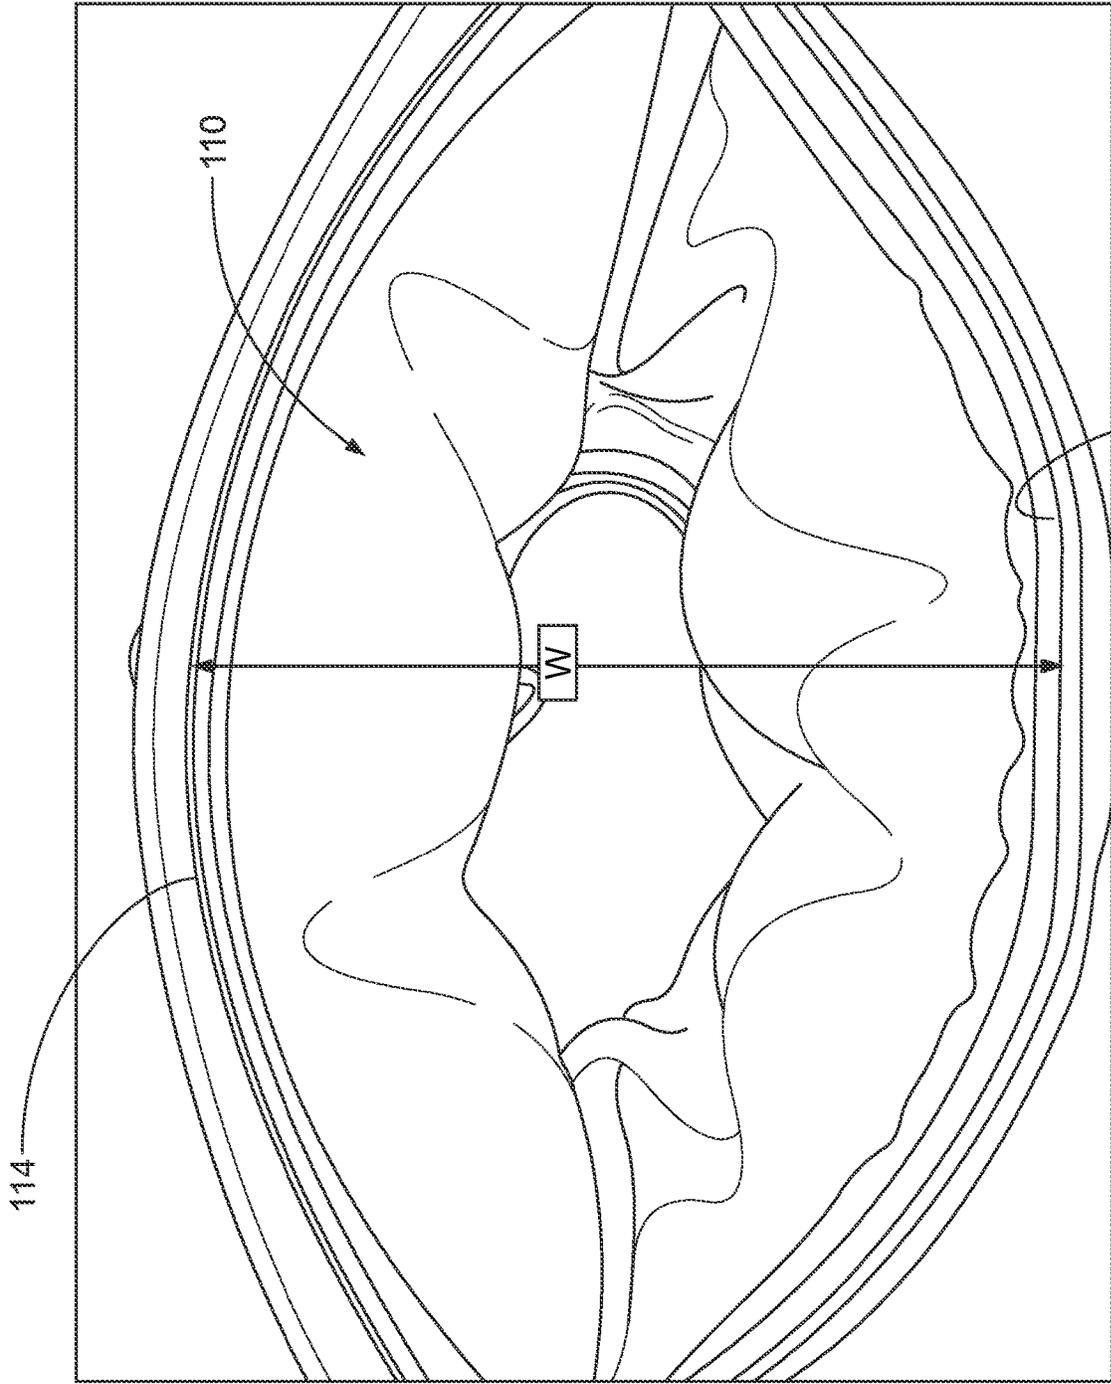


FIG. 8D 112

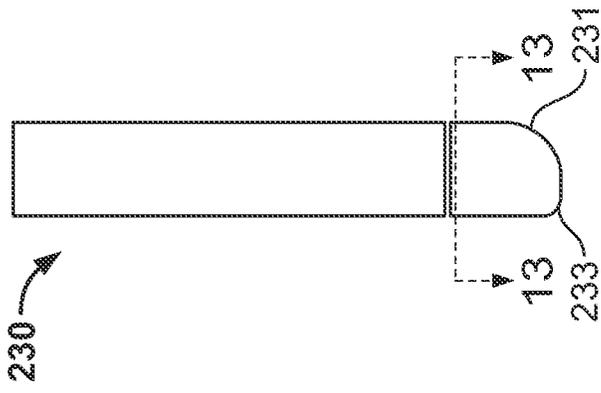


FIG. 12




FIG. 13

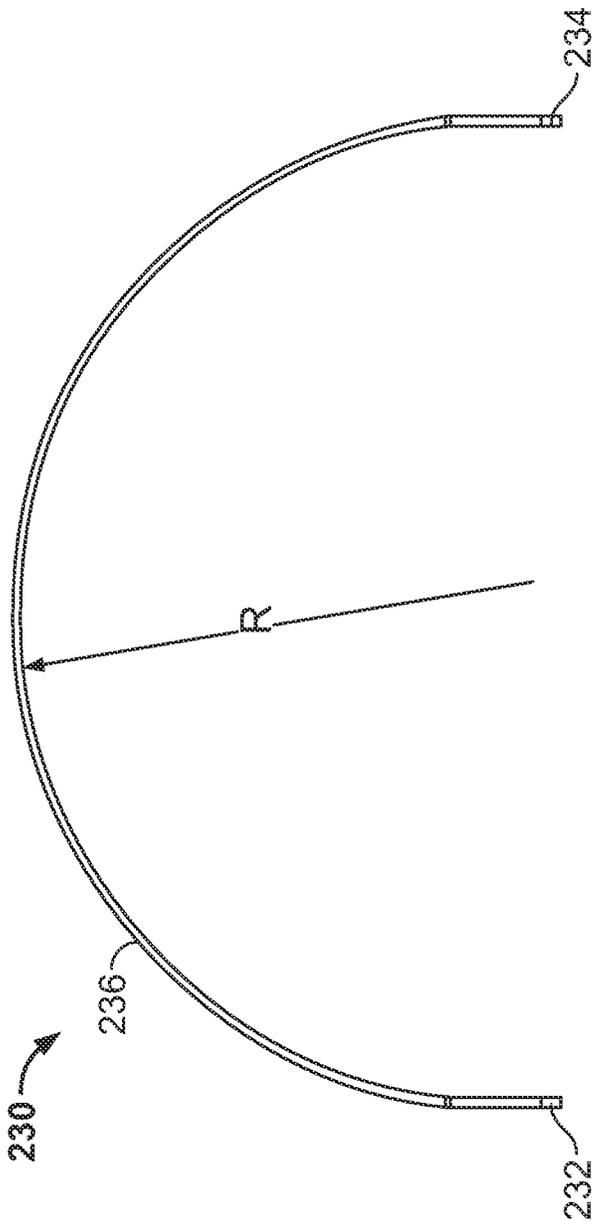


FIG. 10

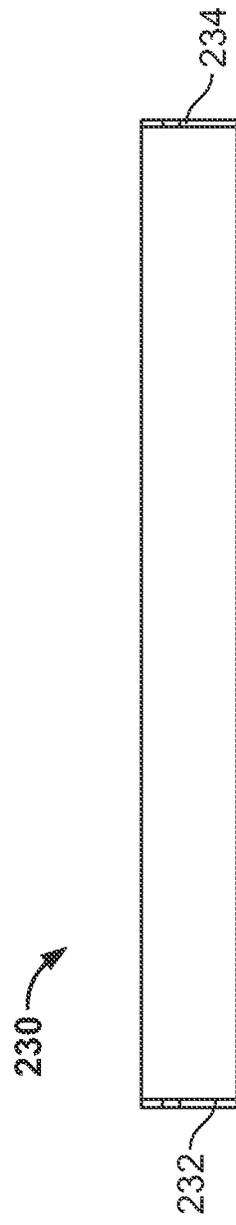


FIG. 11

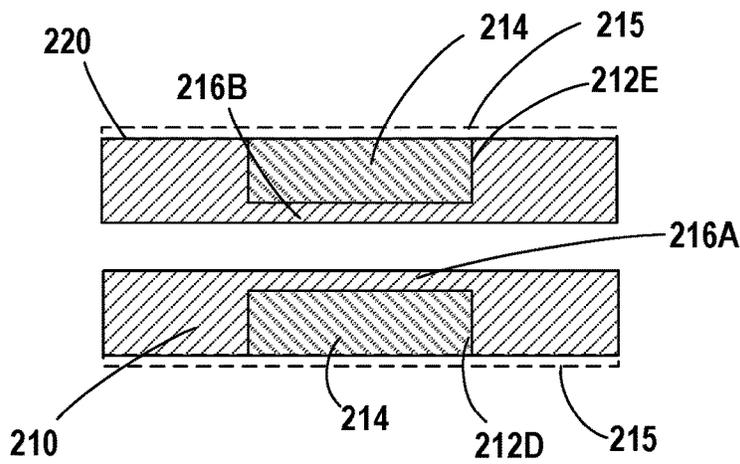
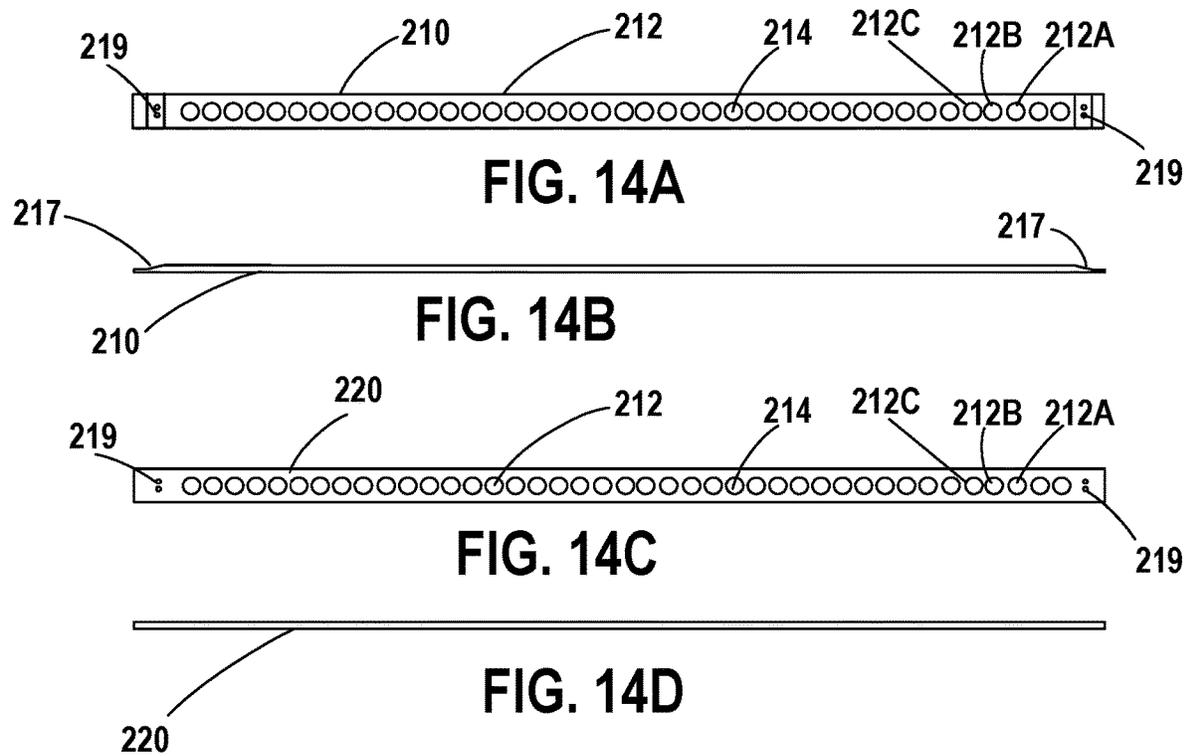


FIG. 15

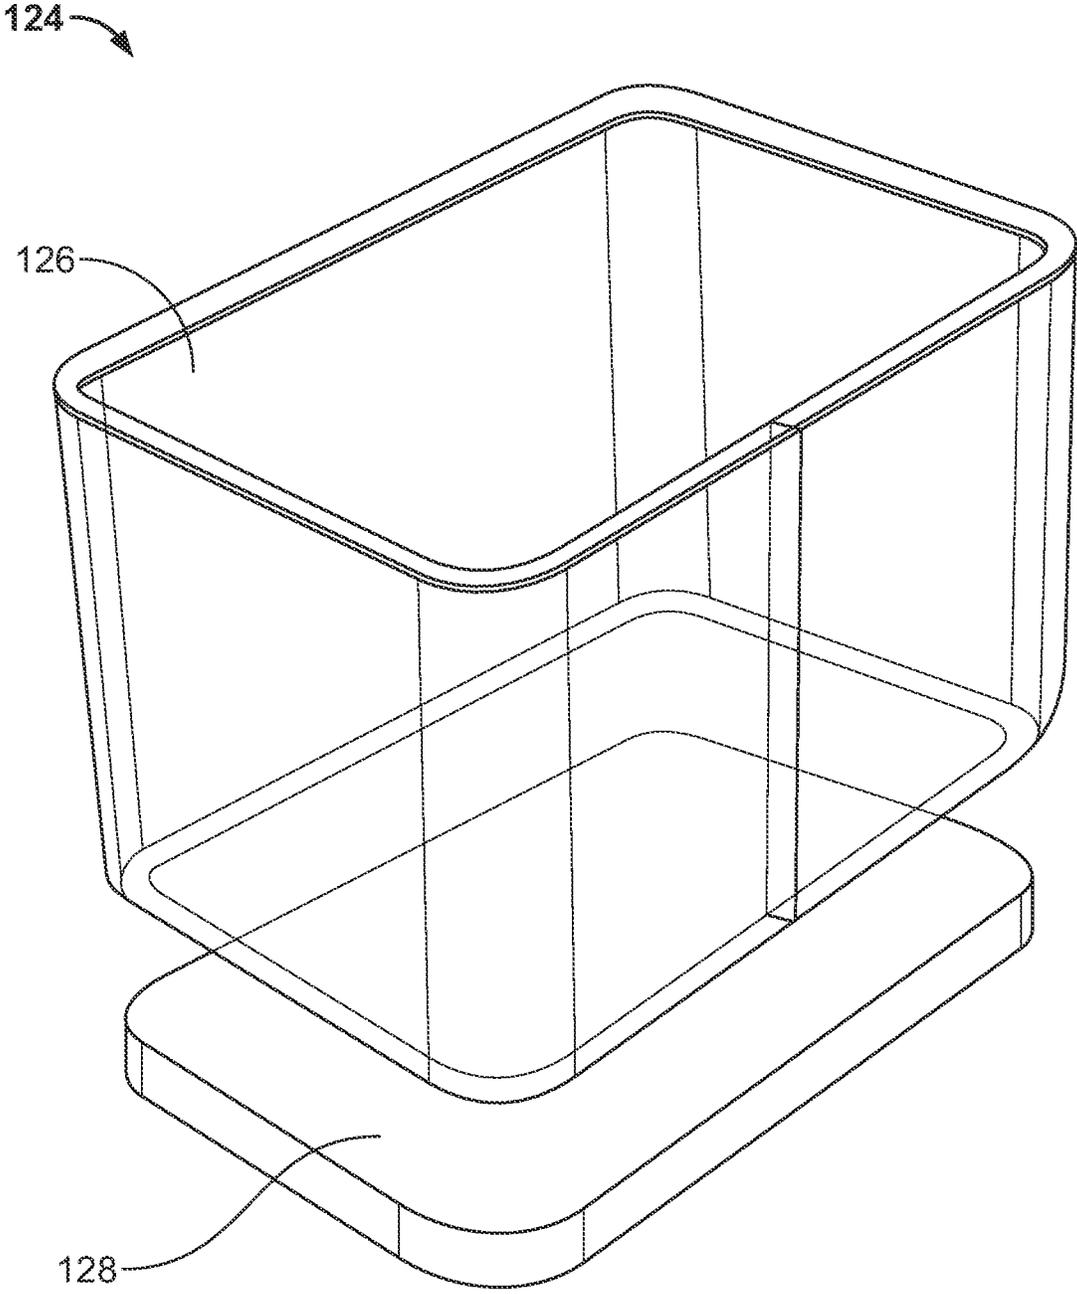


FIG. 16

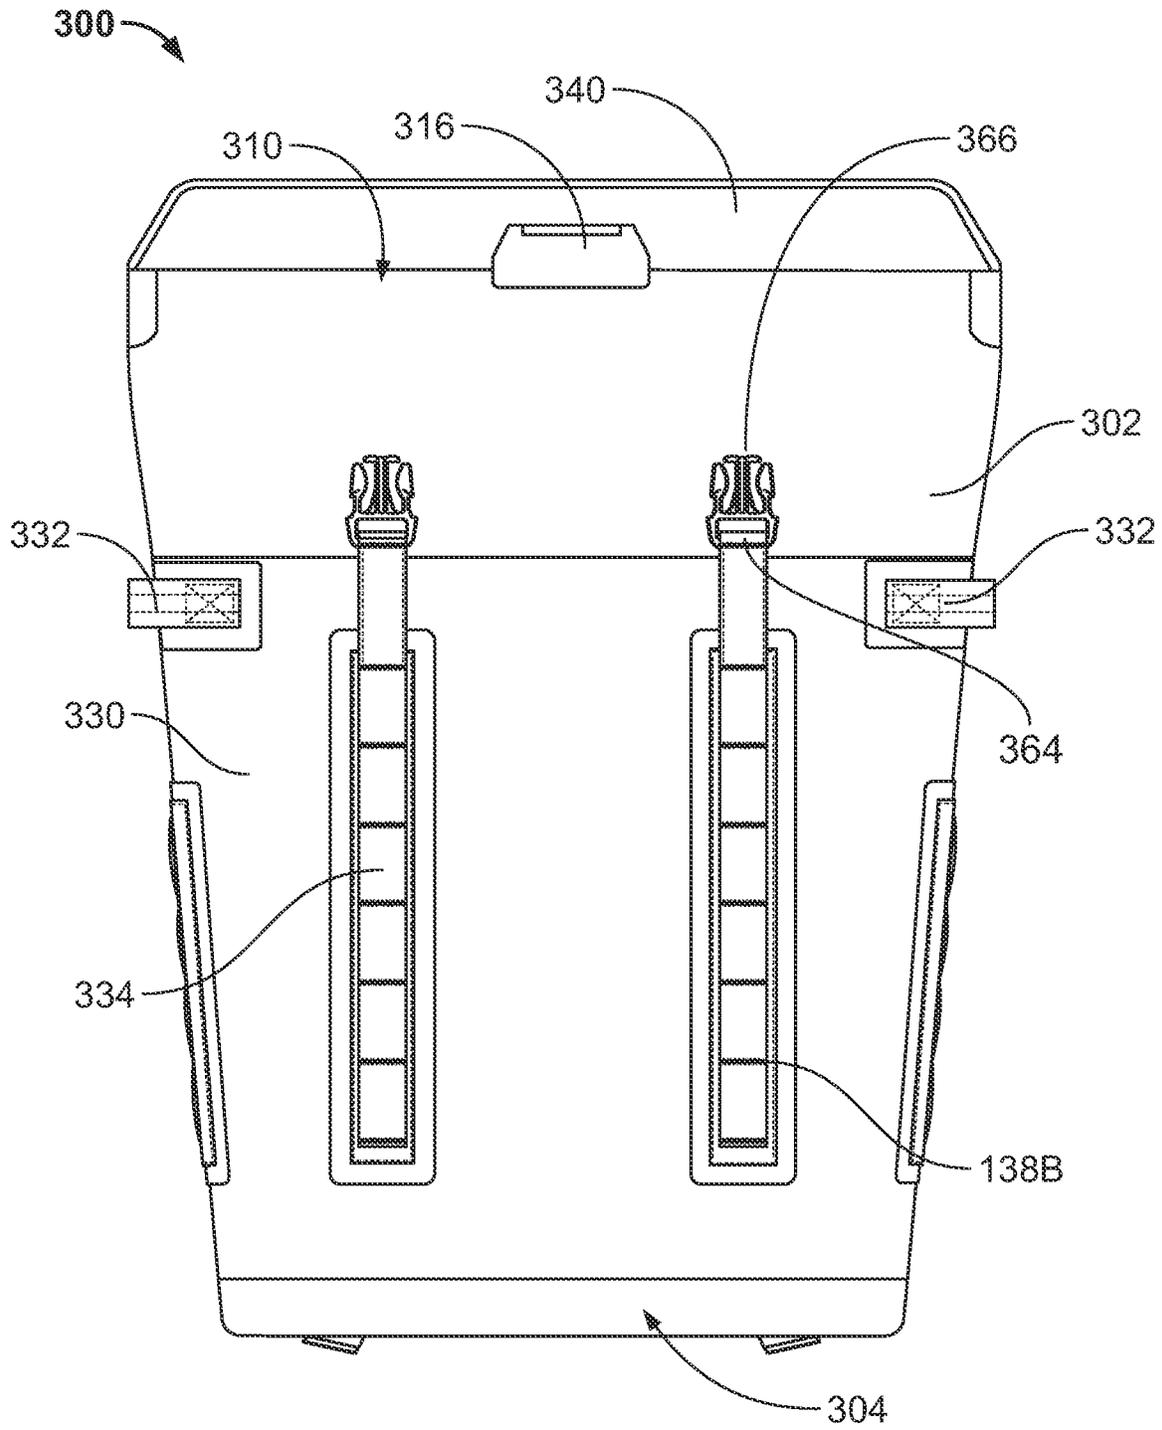


FIG. 17

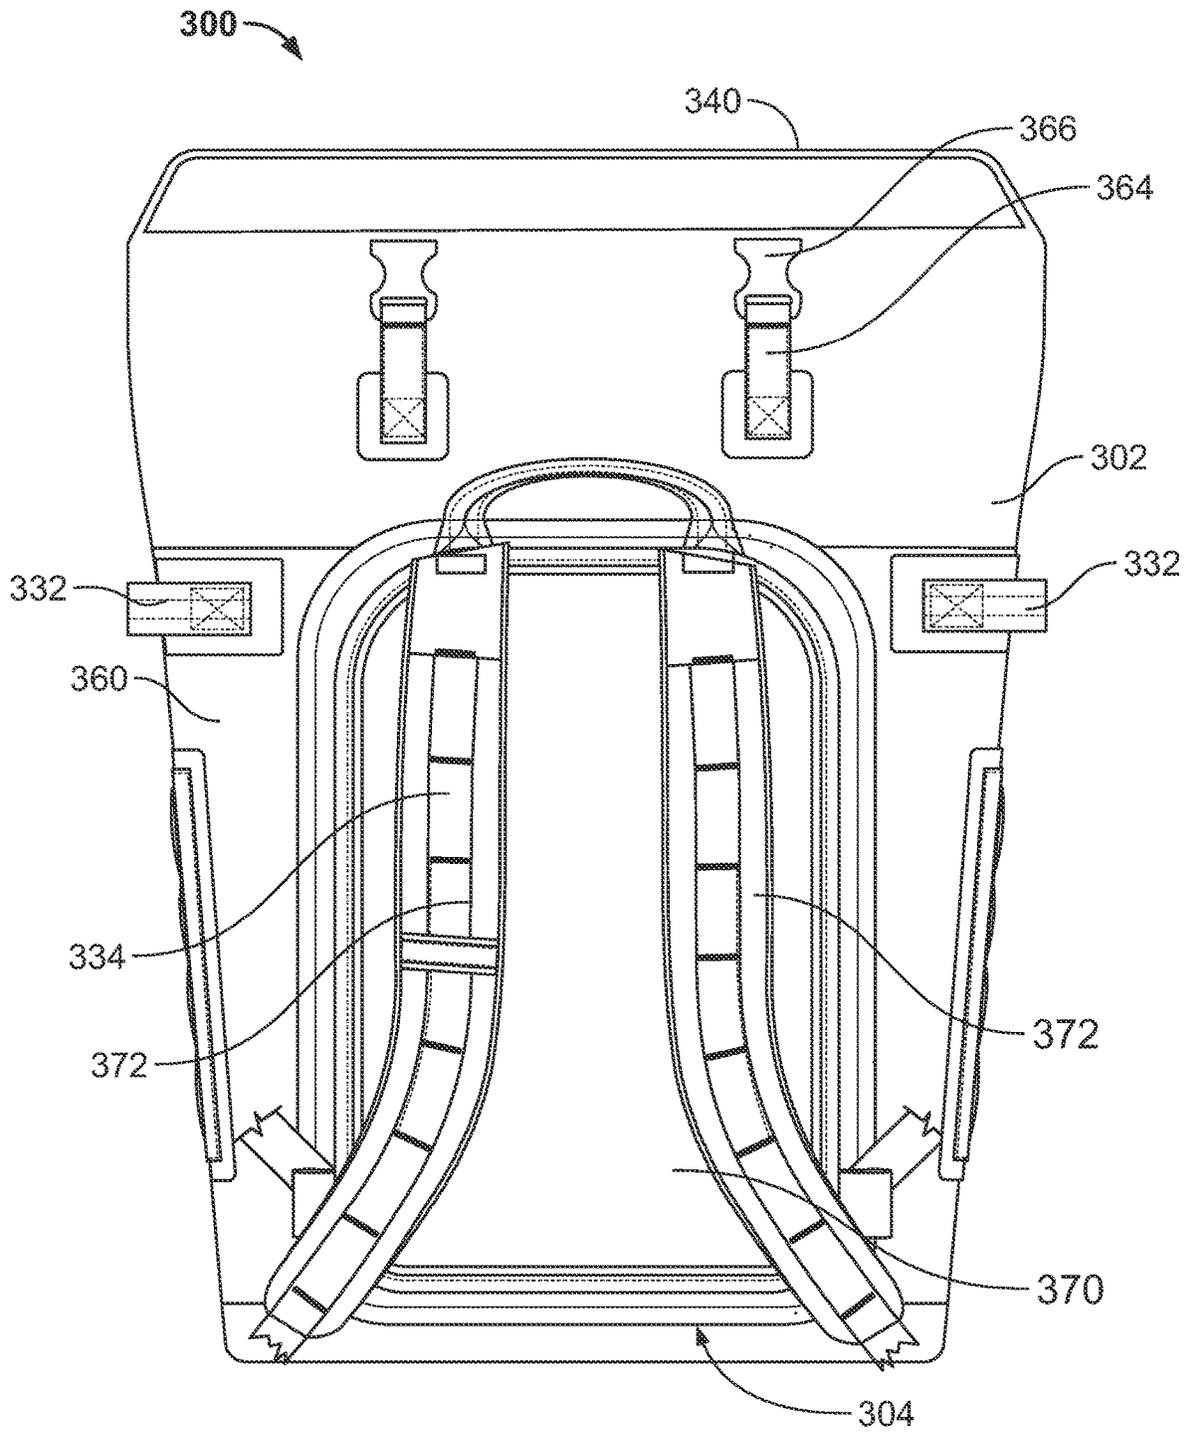


FIG. 18

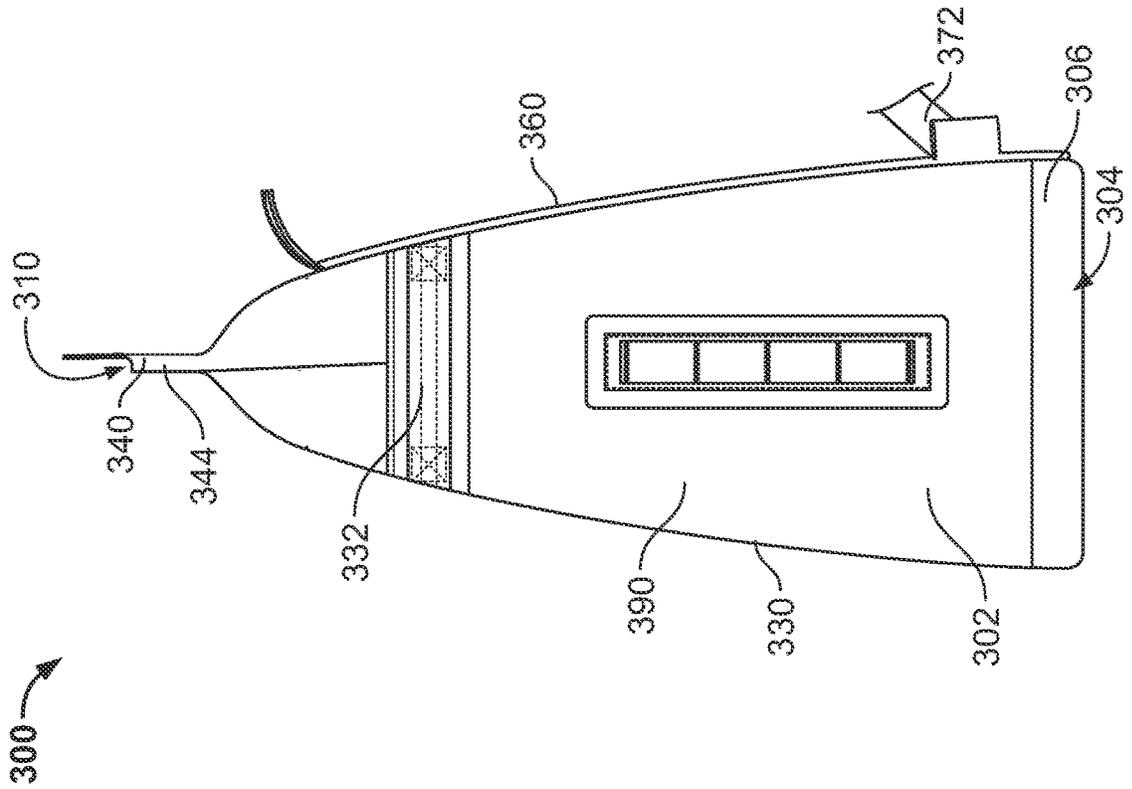


FIG. 19

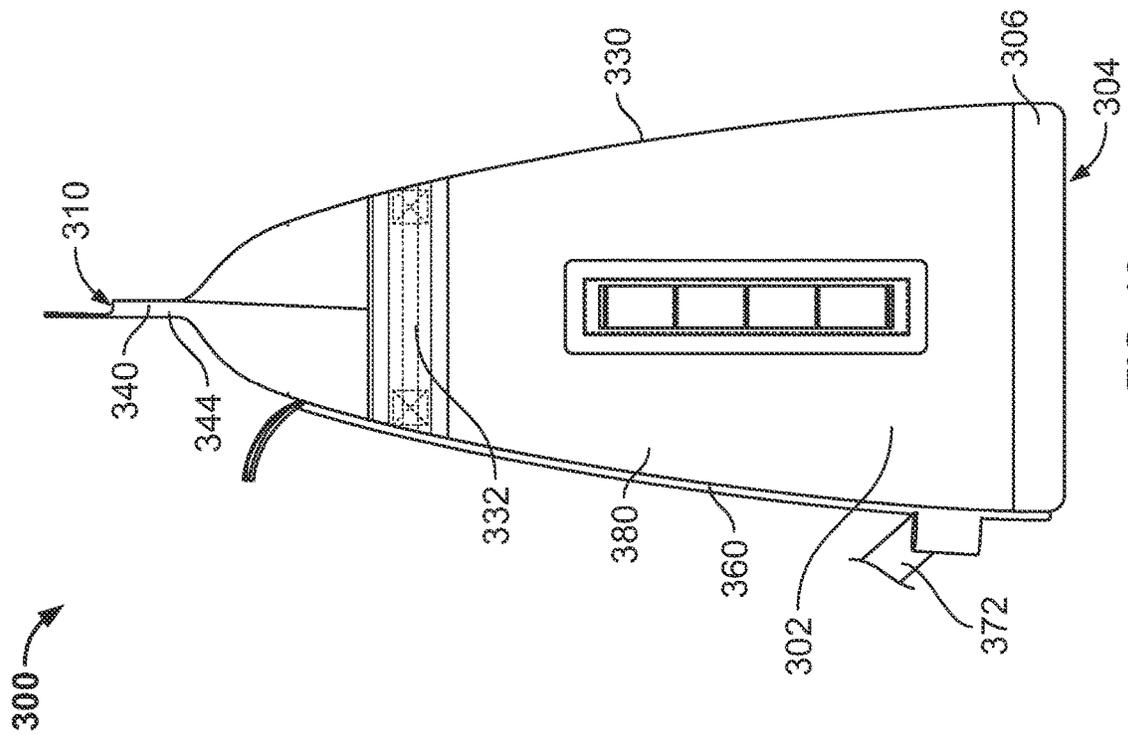


FIG. 20

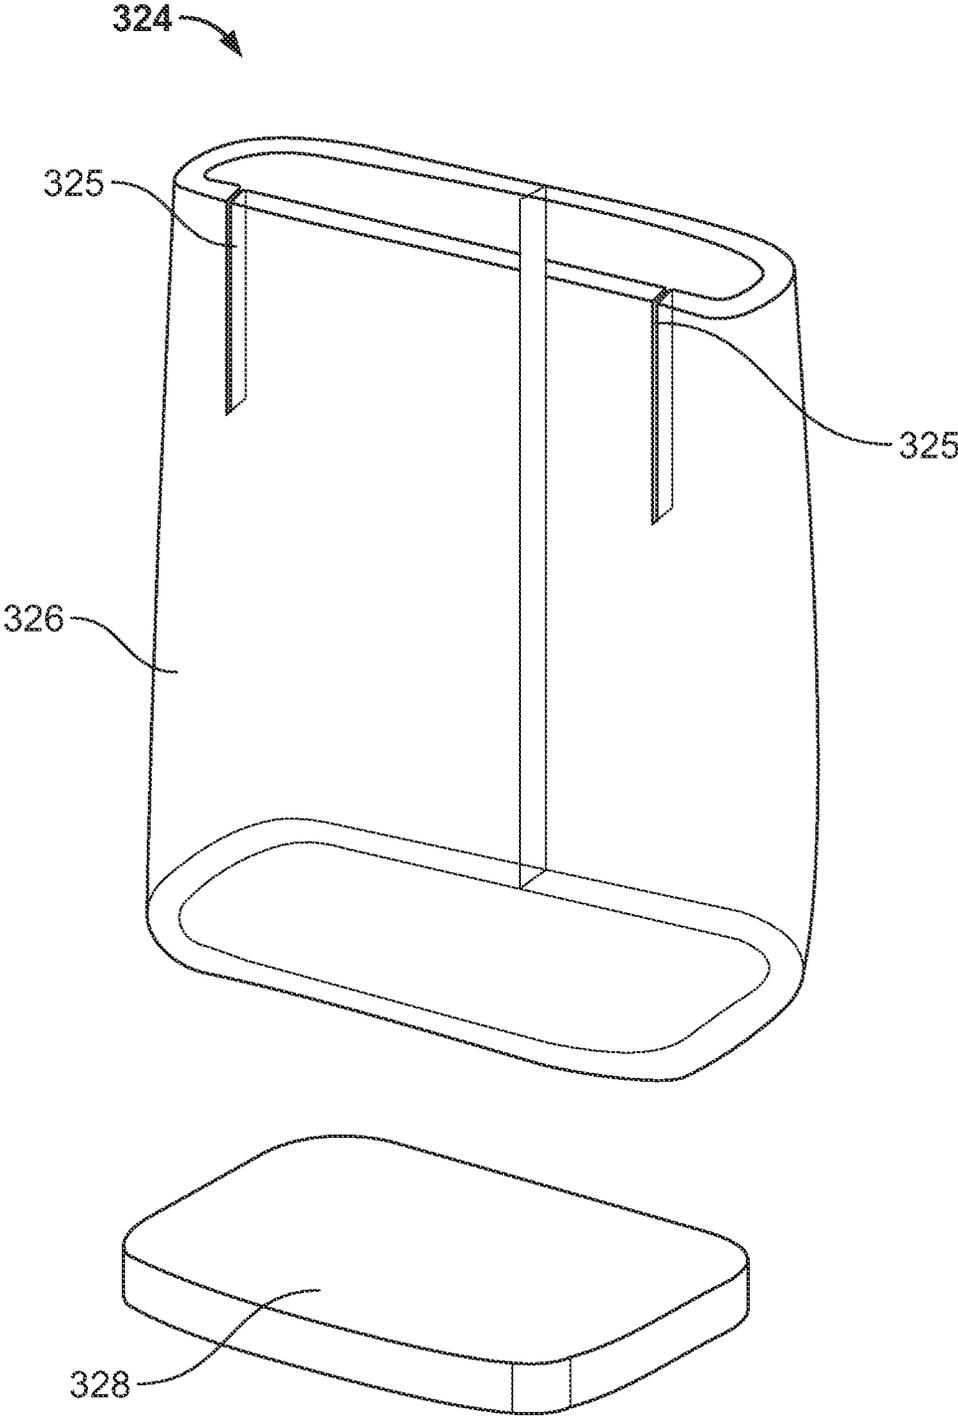


FIG. 21

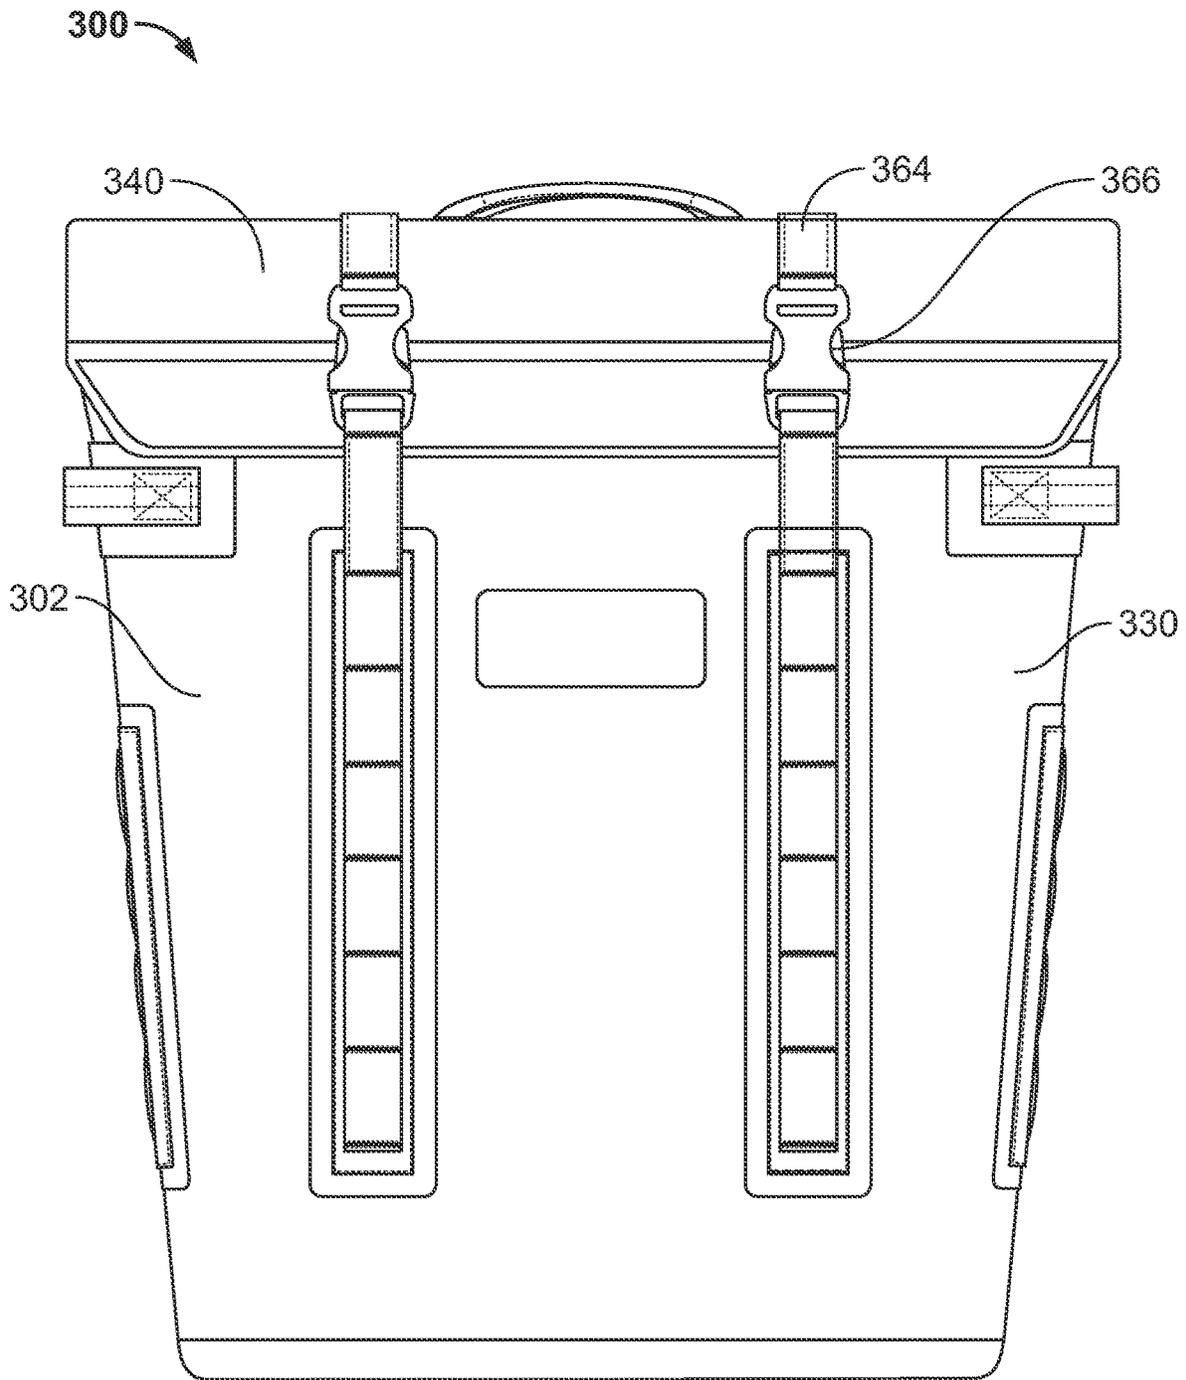
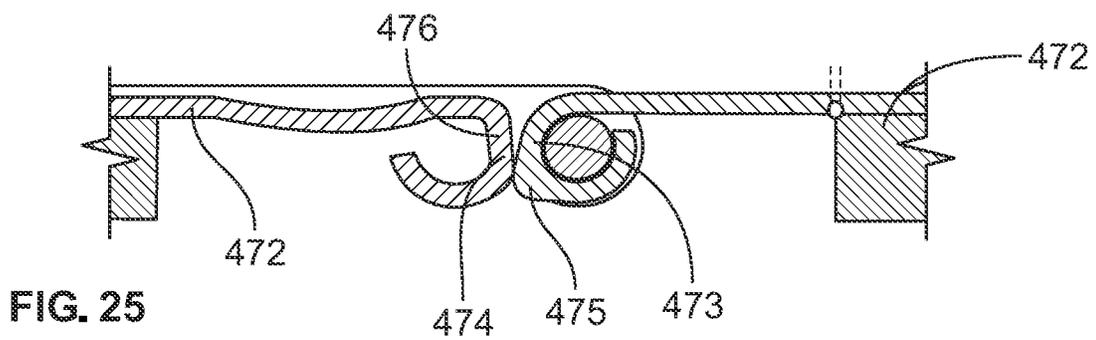
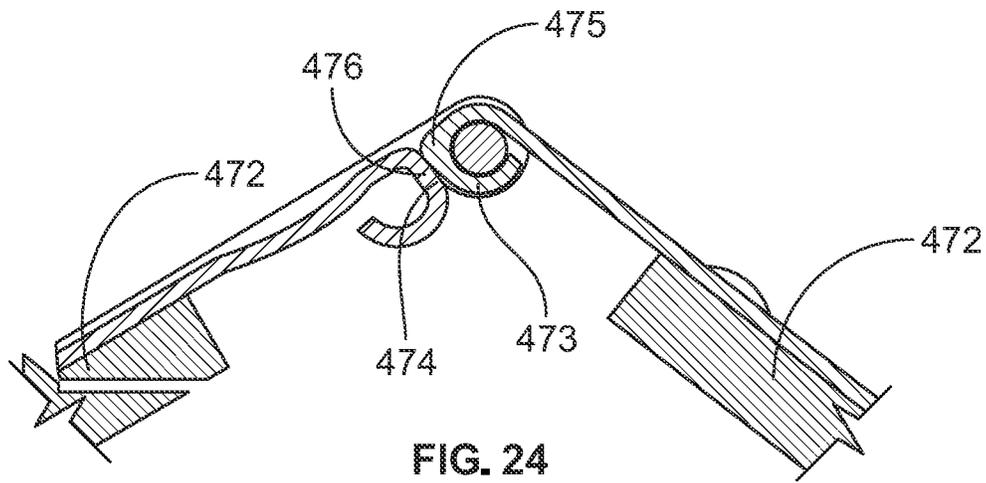
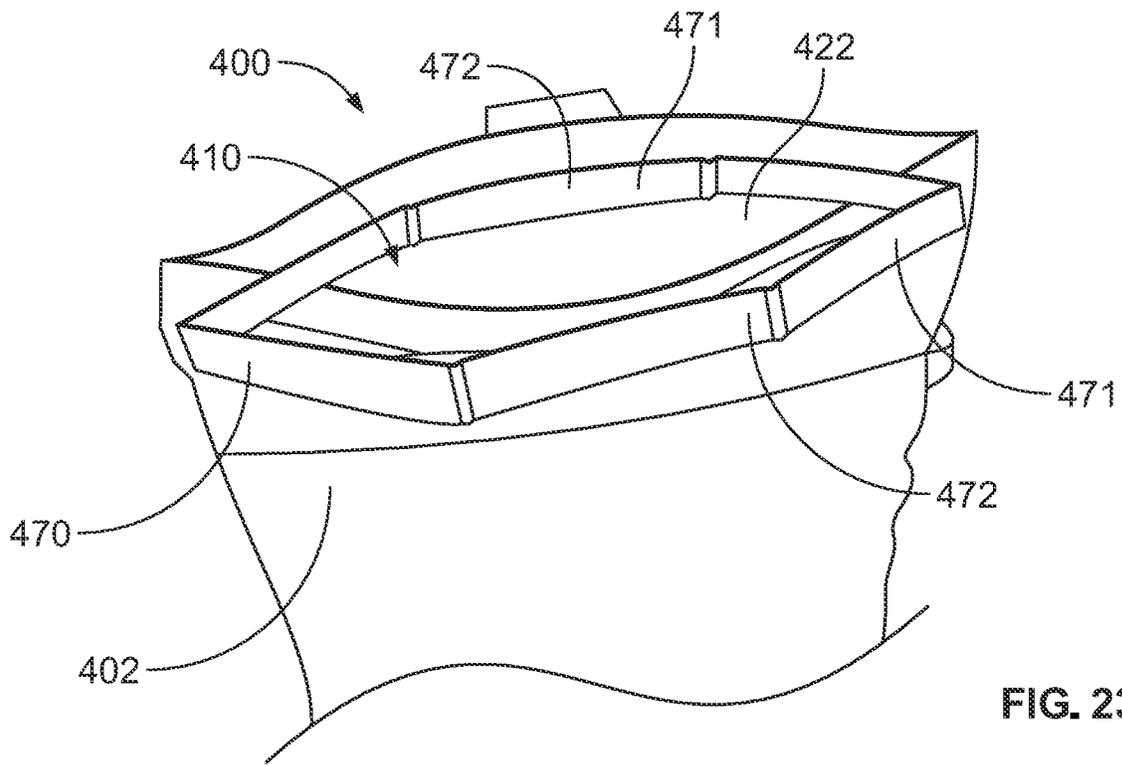


FIG. 22



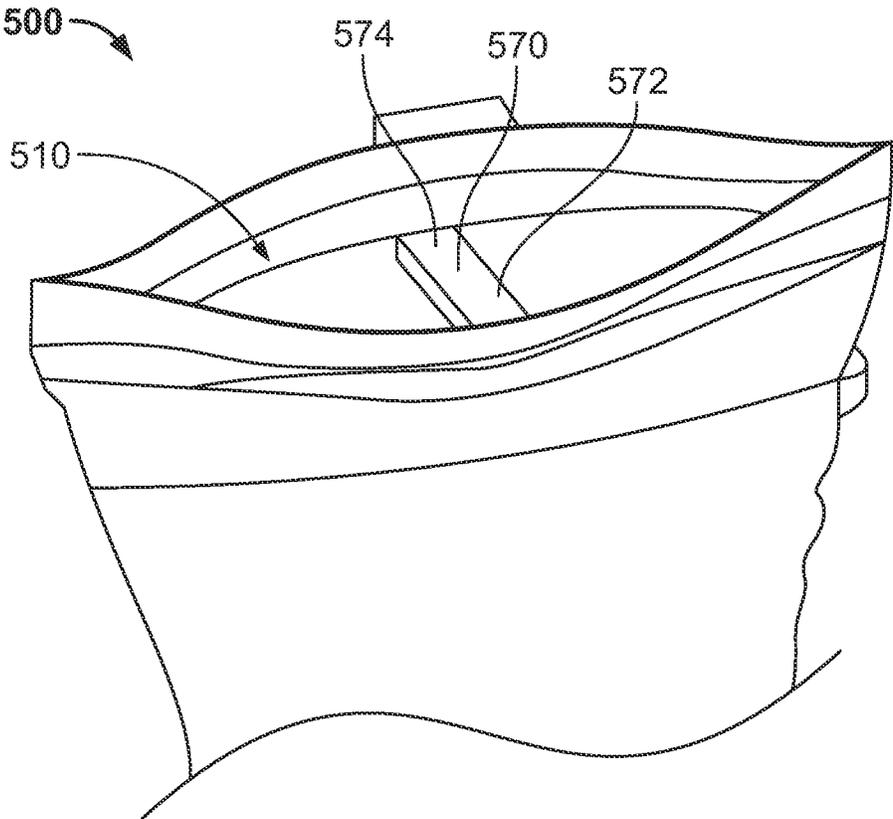


FIG. 26

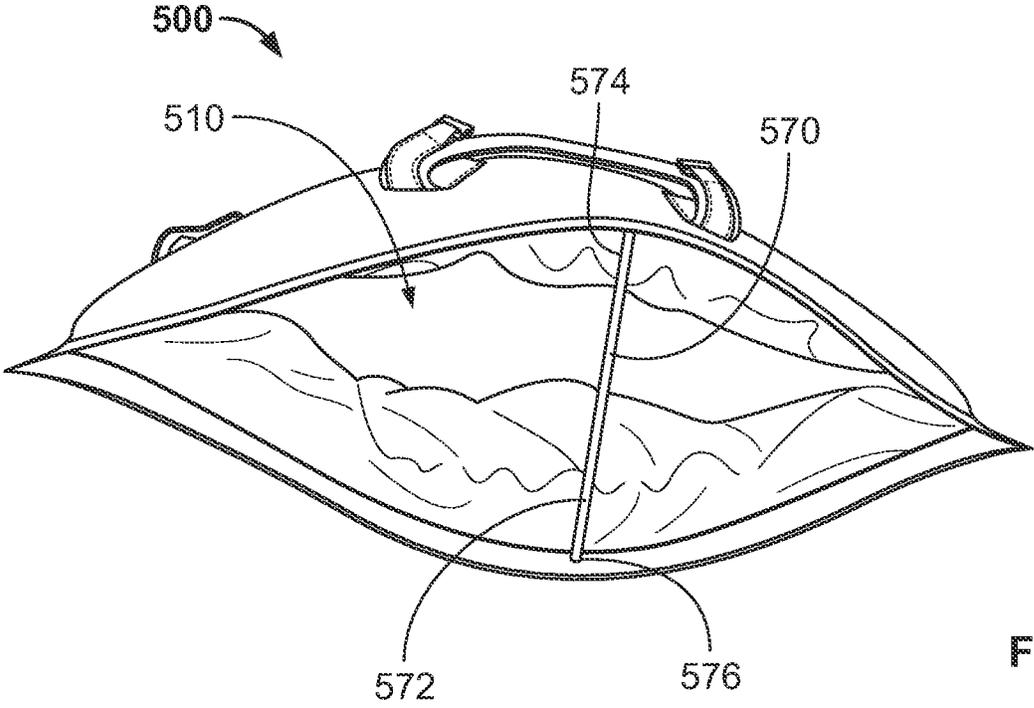


FIG. 27

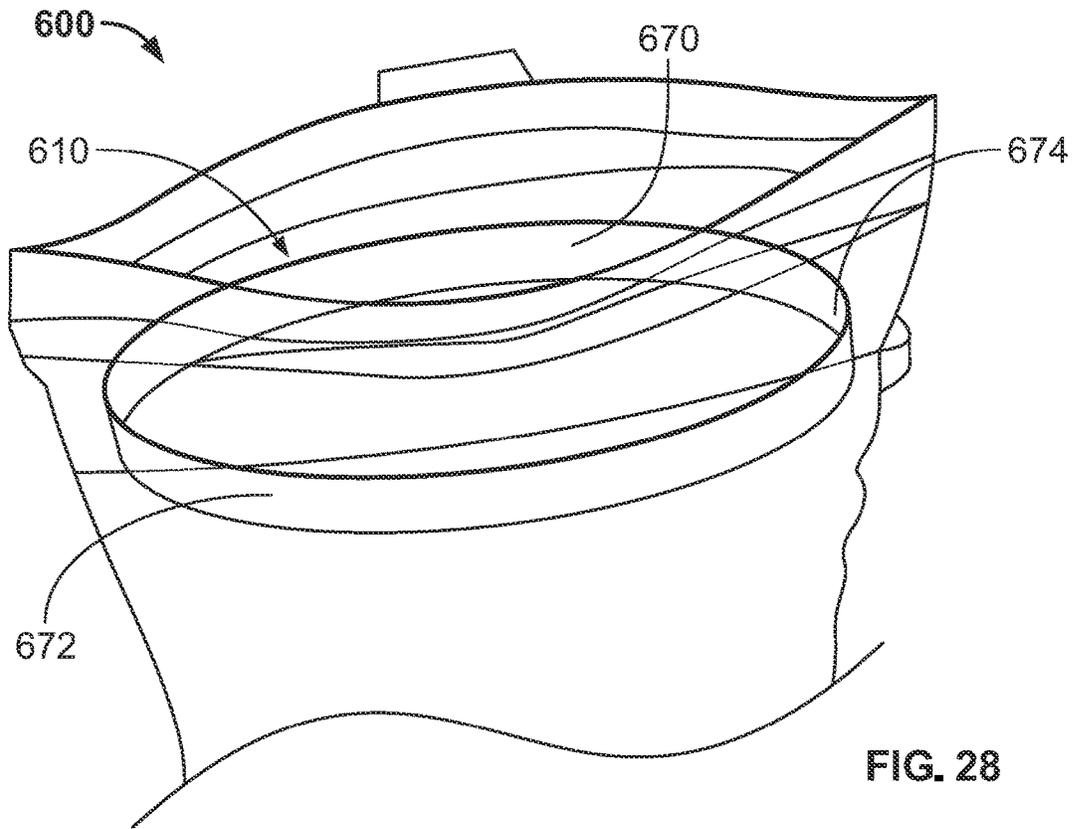


FIG. 28

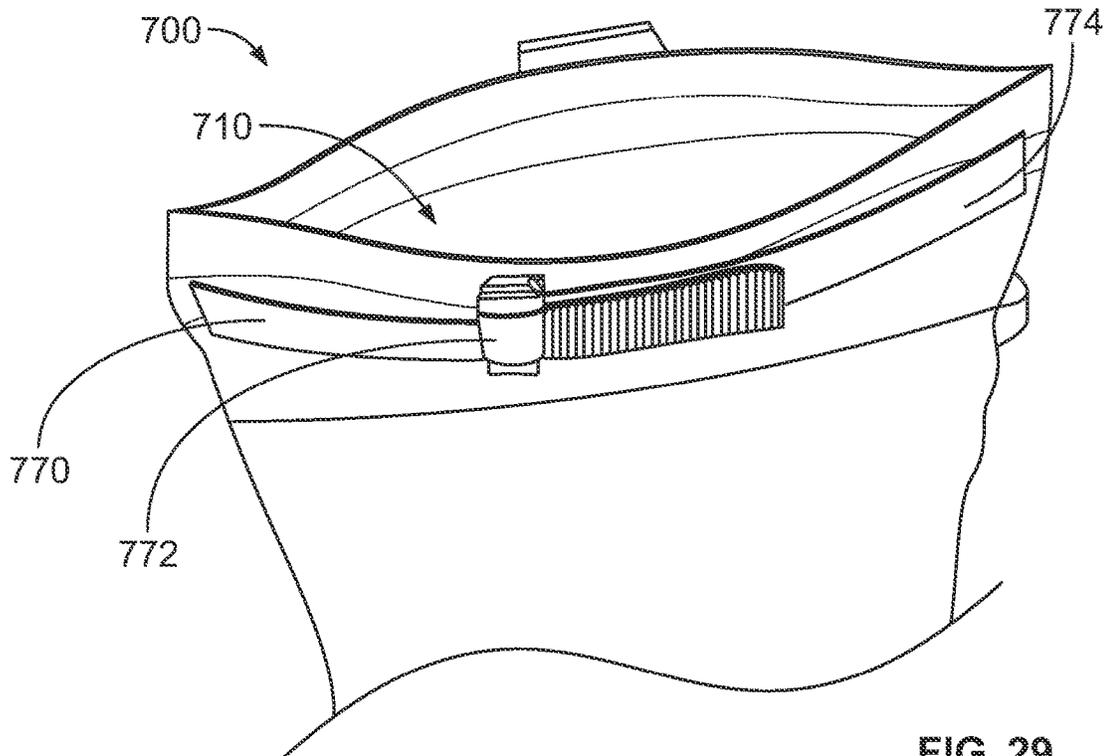


FIG. 29

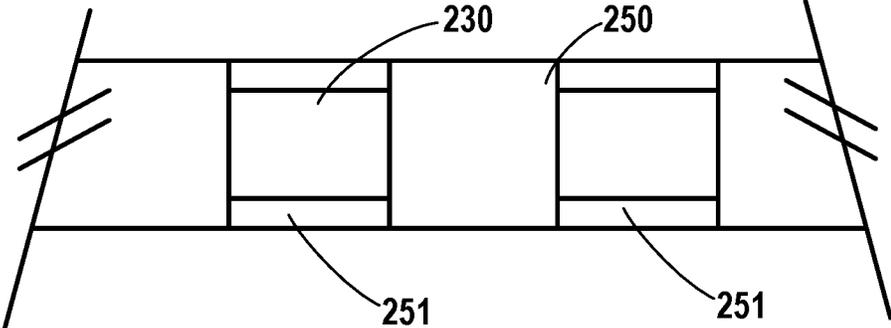


FIG. 30

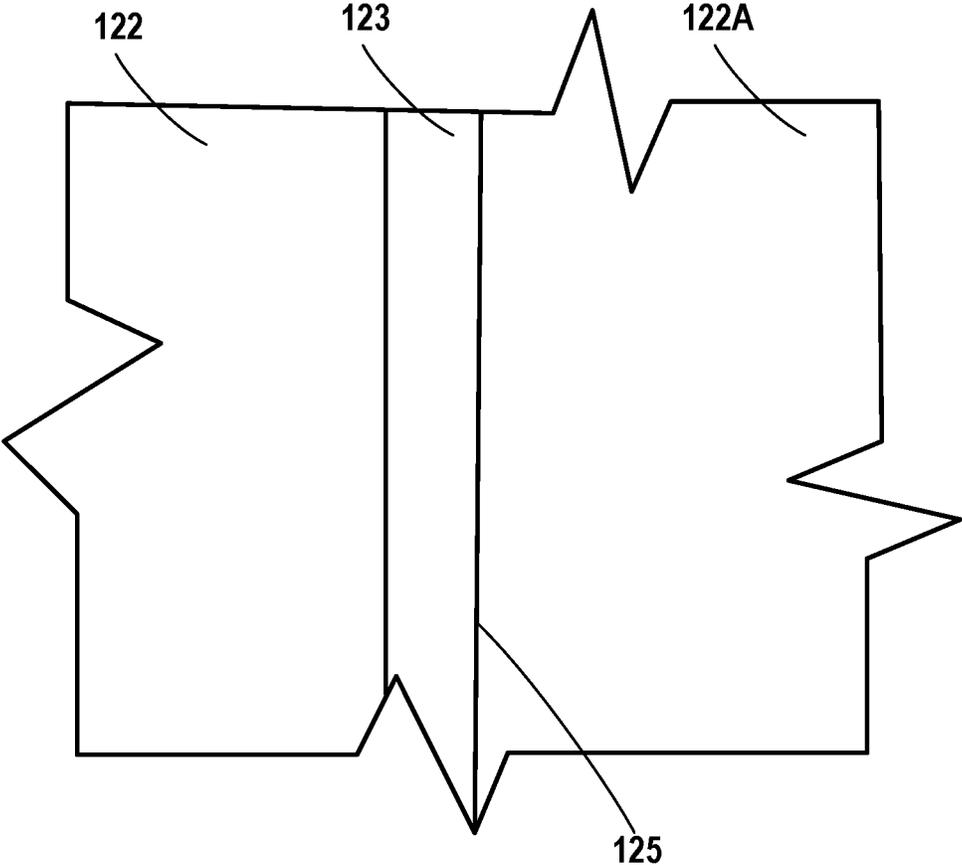


FIG. 31

1

**CONTAINER WITH RESEALABLE
CLOSURE****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application is related to U.S. application Ser. No. 16/295,682, filed Mar. 7, 2019, U.S. application Ser. No. 16/096,206, filed Oct. 24, 2018, PCT/US18/21546, filed Mar. 8, 2018, and U.S. Provisional Patent Application No. 62/468,673, filed Mar. 8, 2017. All of these applications are incorporated herein by reference in their entirety for any and all non-limiting purposes.

FIELD

The present disclosure relates generally to non-rigid, semi-rigid and rigid portable container devices useful for storing personal belongings in a sealed storage compartment that has a magnetic closure.

BACKGROUND

Containers may be designed to store a user's personal belongings in order to provide a degree of protection from incidental impact (e.g. drops), as well as from liquids and dirt. Containers may be composed of rigid materials such as metal or plastics or flexible materials such as fabric or foams. Containers may be designed with an opening/aperture that allows access to the interior contents of the container. The opening may also be provided with a closure mechanism.

SUMMARY

This Summary provides an introduction to some general concepts relating to this invention in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the invention.

Aspects of this disclosure herein may relate to container devices having one or more of (1) a partial or full waterproof closure and/or (2) a magnetic closure, and a mechanism to keep the container open.

Other aspects of this disclosure may relate to a container, comprising: an outer shell with a front portion, a back portion, and a base portion, the outer shell further comprising: (a) an opening at a top of the container extending into a storage compartment, where the container has an open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment; and (b) a closure mechanism, further comprising: (1) a first magnetic strip extending along and coupled to an internal surface of the front portion at a front side of the opening; (2) a second magnetic strip extending along and coupled to an internal surface of the back portion at a back side of the opening; (3) a first curved member spaced apart from the first magnetic strip, where the first curved member has a first end, a second end, and a first curved member body extending between the first end and the second end; and (4) a second curved member spaced apart from the second magnetic strip, where the first curved member has a first end, a second end, and a second curved member body extending between the first end and the second end. The first magnetic strip may be magnetically attracted to the second magnetic strip to resealably seal the opening, and the first curved member and the second curved

2

member may prevent the opening from closing when the container is in the open configuration. The first curved member may be formed from a non-metallic material. The first curved member and the second curved member may be configured to flex from a first curved configuration to a second curved configuration when the opening is sealed. When the container is in the closed configuration, a portion of a first upper edge of the first curved member and a portion of a second upper edge of the second curved member may be substantially parallel. The first curved member body may comprise a substantially rectangular cross-sectional shape. In addition, the first curved member may have a curvature with a radius between 120 mm and 160 mm, and may also include a non-metallic coating. In some examples, the first end and the second end of the first curved member may both have rounded corners. The first curved member includes a portion formed from a steel alloy. The first curved member may be received in a first receiver in the front portion, and the second curved member may be received in a second receiver in the back portion. Additionally, the first end and the second end of the first curved member are slidable within the first receiver. The container may also include an inner liner forming the storage compartment, the inner liner having a front portion and a back portion, and an insulating layer positioned between the front portion of the outer shell and the front portion of the inner liner and the insulating layer positioned between the back portion of the outer shell and the back portion of the inner liner. The insulating layer may provide insulation for the storage compartment, where the second curved member is between the insulating layer and the outer shell. The container may also include a flap portion extending from the back portion above the back side of the opening, where the flap portion has a first fastener element and a second fastener element coupled to an external surface of the front portion, where the outer shell is configured to fold to removably couple the first fastener element to the second fastener element. Also, at least one of the first magnetic strip and the second magnet strip may comprise a row of circular magnetic elements spaced apart along a flexible polymer strip. The container may also include a pair of straps coupled to the back portion of the outer shell configured to allow a user to carry the container as a backpack.

Still other aspects of this disclosure may relate to an insulated container that comprises: (a) an outer shell defining a sidewall and a base, the outer shell having a front portion, a back portion, side portions, and a base portion; (b) an inner liner forming a storage compartment, the inner liner having a front portion and a back portion; (c) an insulating layer positioned in between the outer shell and the inner liner, the insulating layer providing insulation for the storage compartment; (d) an opening at a top of the insulating container extending into the storage compartment, the opening having a front side and a back side; and (e) a flap portion extending between a top of the outer shell and the opening. The insulated container may also include a closure mechanism that includes: (1) a first closure element extending along and coupled to the front side of the opening; (2) a second closure element extending along and coupled to the back side of the opening; (3) a first curved member spaced below the first magnetic strip, wherein the first curved member has a first end, a second end, and a first curved member body extending between the first end and the second end; and (4) a second curved member spaced below the second magnetic strip, wherein the first curved member has a first end, a second end, and a second curved member body extending between the first end and the second end.

The first magnetic strip may be magnetically attracted to the second magnetic strip to resealably seal the opening, and the first curved member and the second curved member may prevent the opening from closing when the insulating container is in an open configuration. The flap portion, when folded, may be configured to provide a secondary seal of the opening. In addition, the first curved member may be received in a first receiver in the front portion, and the second curved member may be received in a second receiver in the back portion. The first end and the second end of the first curved member may be slidable within the first receiver. Also, the first curved member may extend along the front portion, and the second curved member may extend along the back portion.

Additional aspects of this disclosure may relate to a container, comprising: (a) an outer shell defining a sidewall and a base, the outer shell having a front portion, a back portion, side portions, and a base portion; (b) an opening at a top of the container extending into a storage compartment, the opening having a front side and a back side, where the container has an open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment; (c) a flap portion extending between a top of the outer shell and the opening. The container may also include a closure mechanism that includes: (a) a first magnetic strip extending along and coupled to the front side of the opening; (b) a second magnetic strip extending along and coupled to the back side of the opening; (c) a first curved member spaced below the first magnetic strip, where the first curved member has a first end, a second end, and a first curved member body extending between the first end and the second end; and (d) a second curved member spaced below the second magnetic strip, wherein the first curved member has a first end, a second end, and a second curved member body extending between the first end and the second end. When the container is in the closed configuration, a portion of a first upper edge of the first curved member and a portion of second upper edge of the second curved member are substantially parallel. The first magnetic strip may be magnetically attracted to the second magnetic strip to resealably seal the opening, and the first curved member and the second curved member may prevent the opening from closing when the container is in the open configuration. The first curved member may be received in a first receiver in the front portion, and the second curved member may be received in a second receiver in the back portion. The first end and the second end of the first curved member may be slidable within the first receiver. The first curved member may be fixedly attached to the front portion at a central region of the first curved member.

Still other aspects of this disclosure may relate to a closure mechanism comprising: (a) a first closure element positioned at a first side of an opening; (b) a second closure element positioned at a second side of the opening; (c) a first curved member, where the first curved member has a first end and a second end, and a first curved member body extending between the first end and the second end; and (d) a second curved member, where the first curved member has a first end and a second end, and a second curved member body extending between the first end and the second end. The first fastening element and the second fastening element together may resealably seal the opening, and the first curved member and the second curved member may be configured to maintain the opening in an open configuration. The first curved member body may comprise a substantially rectangular cross-sectional shape and include a portion formed from a steel alloy. The first curved member may also

include a non-metallic coating, where the first end and the second end of the first curved member both have rounded corners. Additionally, the first curved member may be received in a first receiver in the first side of the opening, and the second curved member may be received in a second receiver in the second side of the opening. Both the first curved member and the second curved member may flex from a first curved configuration for maintaining the opening in the open configuration to a second curved configuration when the opening is sealed or in a closed configuration. When the first curved member and the second curved member may be substantially parallel when in the closed configuration.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing Summary, as well as the following Detailed Description, will be better understood when considered in conjunction with the accompanying drawings in which like reference numerals refer to the same or similar elements in all of the various views in which that reference number appears.

FIG. 1 depicts a front view an exemplary insulating container that can be configured to keep contents cool or warm for an extended period of time, according to one or more aspects described herein.

FIG. 2 depicts a back view of the exemplary insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 3 depicts a left side view of the exemplary insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 4 depicts a right side view of the exemplary insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 5 schematically depicts a view of the exemplary insulating container of FIG. 1, according to one or more aspects described herein.

FIGS. 6A-6B schematically depict an enlarged cross-sectional side view of the insulating container of FIG. 5, according to one or more aspects described herein.

FIGS. 7A-7B schematically depict cross-sectional views of an insulating container in respective unfolded and folded configurations, according to one or more aspects described herein.

FIGS. 8A-8C schematically depict top views of the exemplary curved members of the insulating container of FIG. 1 as the insulating container moves from an open configuration and a closed configuration, according to one or more aspects described herein.

FIG. 8D depicts a top perspective view of the insulating container of FIG. 1 in an open configuration, according to one or more aspects described herein.

FIG. 9 depicts a graph of magnetic and spring forces during opening and closing of the container, according to one or more aspects described herein.

FIG. 10 depicts a top view of an exemplary curved member of the insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 11 depicts a front view of an end of the exemplary curved member of FIG. 10, according to one or more aspects described herein.

FIG. 12 depicts a side view of an end of the exemplary curved member of FIG. 9, according to one or more aspects described herein.

FIG. 13 schematically depicts a cross-sectional view of the exemplary curved member of FIG. 10, according to one or more aspects described herein.

FIG. 14A-14D depict front and side views of magnetic strips, which may be used to form a magnetic closure of an opening of the insulating device of FIG. 1, according to one or more aspects described herein.

FIG. 15 schematically depicts a cross-sectional view of the magnetic strips of FIG. 14, according to one or more aspects described herein.

FIG. 16 schematically depicts an insulating layer of the insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 17 depicts a front view of another exemplary insulating container that can be configured to keep contents cool or warm for an extended period of time, according to one or more aspects described herein.

FIG. 18 depicts a back view of the exemplary insulating container of FIG. 17, according to one or more aspects described herein.

FIG. 19 depicts a left side view of the exemplary insulating container of FIG. 17, according to one or more aspects described herein.

FIG. 20 depicts a right side view of the exemplary insulating container of FIG. 17, according to one or more aspects described herein.

FIG. 21 schematically depicts an insulating layer of the insulating container of FIG. 17, according to one or more aspects described herein.

FIG. 22 depicts a front view of the exemplary insulating container of FIG. 17 in a closed and folded configuration, according to one or more aspects described herein.

FIG. 23 depicts a schematic perspective view of an alternate insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 24 depicts a schematic side view of an exemplary hinge in an unlocked position of the insulating container of FIG. 23, according to one or more aspects described herein.

FIG. 25 depicts a schematic side view of the exemplary hinge of FIG. 24 in a locked position, according to one or more aspects described herein.

FIG. 26 depicts a schematic perspective view of an alternate insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 27 depicts a top perspective view of the insulating container of FIG. 26, according to one or more aspects described herein.

FIG. 28 depicts a schematic perspective view of an alternate insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 29 depicts a schematic perspective view of an alternate insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 30 depicts a schematic view of an exemplary curved member within an intermittent receiver of the insulating container of FIG. 1, according to one or more aspects described herein.

FIG. 31 depicts a schematic view of an exemplary liner seam of the insulating container of FIG. 1, according to one or more aspects described herein.

Further, it is to be understood that the drawings may represent the scale of different components of various examples; however, the disclosed examples are not limited to that particular scale. Further, the drawings should not be interpreted as requiring a certain scale unless otherwise stated.

DETAILED DESCRIPTION

In the following description of the various examples and components of this disclosure, reference is made to the accompanying drawings, which form a part hereof, and in which are shown by way of illustration various example structures and environments in which aspects of the disclosure may be practiced. It is to be understood that other structures and environments may be utilized and that structural and functional modifications may be made from the specifically described structures and methods without departing from the scope of the present disclosure.

Also, while the terms “frontside,” “backside,” “front,” “back,” “top,” “base,” “bottom,” “side,” “forward,” and “rearward” and the like may be used in this specification to describe various example features and elements, these terms are used herein as a matter of convenience, e.g., based on the example orientations shown in the figures and/or the orientations in typical use. Nothing in this specification should be construed as requiring a specific three dimensional or spatial orientation of structures in order to fall within the scope of the claims.

The term “substantially aligned” as used herein may be defined as two items (i.e., edges, surfaces, or centerlines) being within a range of ± 4 mm of each other. In addition, the term “substantially parallel” as used herein may be defined as two items (i.e. edges, surfaces, or centerlines) being within a range of ± 5 degrees of each other.

In the description that follows, reference is made to one or more container structures. It is contemplated that any of the disclosed structures may be constructed from any polymer, composite, and/or metal/alloy material, without from the scope of these disclosures. Additionally, it is contemplated that any manufacturing methodology may be utilized, without departing from the scope of these disclosures. For example, one or more welding (e.g. high frequency, ultrasonic welding, or laser welding of fabric, or metal/alloy welding), gluing, stitching, molding, injection molding, blow molding, stamping, deep-drawing, casting, die-casting, drilling, deburring, grinding, polishing, sanding, or etching processes, among many others, may be utilized to construct of the various containers described throughout these disclosures. Additionally, where reference is made to a magnetic element or structure throughout these disclosures, it may be assumed that the element or structure includes one or more magnets (e.g. permanent magnets), or one or more metals or alloys (e.g. ferromagnetic materials, among others), which may be attracted to magnets. Further, a magnetic strip, as described herein, may include a continuous magnetic element, a series of two or more discrete magnetic elements, or a two- or three-dimensional array of magnetic elements. Additionally, these magnetic elements may be constructed from any magnetic metal or alloy, and may be combined with one or more non-magnetic materials, such as polymers, ceramics, or non-magnetic metals or alloys. It is also contemplated that the various disclosures described in this document may be combined in any manner, such that various permutations of combined elements may be possible.

Various magnetic closure mechanisms are described throughout the following disclosures. These magnetic closure mechanisms may be configured to be partially or fully watertight and/or airtight. It is contemplated that the magnetic closure mechanisms may include gaskets and seals in addition to the described magnetic elements, without departing from the scope of these disclosures.

It is contemplated that any of the containers discussed throughout this document may be partially or fully watertight, airtight, and/or sealed to substantially or fully prevent dust or other materials from entering into and/or escaping from the containers. For example, containers **100** and/or **200**, which are described in further detail in the proceeding paragraphs, may include partially or fully water resistant outer shells/outer walls and closure mechanisms.

FIG. 1 depicts a front view an exemplary insulating container **100** that can be configured to keep contents cool or warm for an extended period of time. The insulating container **100** may include elements similar to those described in U.S. Pat. No. 10,143,282, issued on Dec. 4, 2018 and filed 6 Mar. 2017, the entire contents of which are incorporated herein by reference in their entirety for any and all non-limiting purposes. FIG. 2 depicts a back view of the insulating container **100**, and FIGS. 3-4 depict side views of the insulating container **100**. The insulating container **100** generally includes an outer shell **102** that defines a front portion **130**, a back portion **160**, a left side portion **180**, a right side portion **190**, and a base **104**. In one example, the front portion **130**, the back portion **160**, and the side portions **180**, **190** may collectively be referred to as the sidewall of the container **100**. The container **100** additionally includes an opening **110** at a top portion of the container and may include a flap portion **140** that extends above the opening from one or both sides of the front portion **130** or back portion **160**. Accordingly, the flap portion **140** is configured to extend above a top of the outer shell **102**, and the opening **110**. The opening **110** is configured to provide a resealable point of entry into a storage compartment **120** of the container **100**. The storage compartment is shown in further detail in FIG. 5. In one example, the opening **110** may include a front side **112** coupled to the front portion **130** and a back side **114** coupled to the back portion **160**. The opening **110** may be resealably sealed by closure mechanism **200**, where the container **100** may have an open configuration that allows access to the storage compartment **120** and a closed configuration that prevents access to the storage compartment **120**. The opening **110** may additionally include a pull tab **116**, which is configured to be manually gripped to pull the front and back sides **112** and **114** away from one another to unseal the opening **110**. In some examples, the container **110** may include two pull tabs **116** such that a pull tab **116** is arranged on each side of the opening **110**.

As shown in FIGS. 5, 6A, and 6B, the closure mechanism **200** may include a first closure or fastening element **210**, a second closure or fastening element **220**, a first curved member **230**, and a second curved member **240**. The closure elements **210**, **220** may be releasable closure elements such as hook and loop fasteners, mechanical snaps, an interlocking closure of elements where a plug on one closure element fits into a groove and an opposing closure element to form a waterproof seal, magnetic strips, or other releasable closure elements known to one skilled in the art. In some examples, the closure mechanism **200** may include a magnetic strip **210**, a magnetic strip **220**, a first curved member **230**, and a second curved member **240**. The first magnetic strip **210** may extend along and be coupled to an internal surface of the front portion **130** at a front side **112** of the opening **110**, and the second magnetic strip **220** may extend along and be coupled to an internal surface of the back portion **160** at a back side **114** of the opening **110**. The first magnetic strip **210** may be magnetically attracted to the second magnetic strip **220** to resealably seal the opening **110** to keep the container **100** in a closed configuration. The first

curved member **230** may extend along an internal surface of the front portion **130** and be spaced by a predetermined distance **206** below the first magnetic strip **210**. In one example, the predetermined distance **206** between the first magnetic strip and the first curved member **230** may be approximately 49 mm or within a range of 40 and 60 mm, where the predetermined distance **206** is defined along from an upper edge of the first magnetic strip **210** to an upper edge **237** of the first curved member **230**. Similarly, the second curved member **240** may extend along an internal surface of the back portion **160** and be spaced a predetermined distance **208** below the second magnetic strip **220**. In one example, the predetermined distance **208** between the second magnetic strip **220** and the second curved member may be approximately 46 mm from the first magnetic strip **210**, or within a range of 40 and 60 mm, where the predetermined distance **208** is defined along from an upper edge of the second magnetic strip **220** to an upper edge **247** of the second curved member **240**. Additionally, a gap or spacing **209** between a lower edge a magnetic strip **210**, **220** and an upper edge **237**, **247** of the curved members **230**, **240** may be approximately 16 mm, or within a range of 12 and 28 mm to allow the flap portion **140** to fold between the magnetic strips **210**, **220** and the curved members **230**, **240**. However, because of the curvature of the front portion **130** and the back portion **160** of the upper edge **237** of the first curved member **230** may be substantially aligned with the upper edge **247** of the second curved member **240**. The first curved member **230** may be secured in a front receiver **250** of the front portion **130** of the container **100**, and the second curved member **240** may be secured in a back receiver **260** of the back portion **160** of the container **100**. When in the closed configuration, the first and second magnetic strips **210**, **220** may be substantially aligned with each other, and the first and second curved members **230**, **240** may be substantially aligned. Alternatively, the curved members **230**, **240** may extend along and be coupled to an exterior surface of the front and back portions **130**, **160** respectively. As an example, the receivers **250**, **260** may be located along an exterior surface of the outer shell **102**. Once a user moves the container **100** to an open configuration by separating the first and second magnetic strips **210**, **220**, the first and second curved members **230**, **240** may act to prevent the container **100** from closing and hold (or maintain) the container **100** in an open configuration. Optionally, the closure mechanism **200** may have only a single curved member **230** or **240** arranged on only one side of the closure (e.g., a single curved member **230** along the front portion **130** of the container **100**, or a single curved member **240** along the back portion **160** of the container **100**).

The first and second curved members **230**, **240** may exert spring forces in an opposite direction to the magnetic forces that act between the first magnetic strip **210** and the second magnetic strip **220** to prevent the opening **110** of the container **100** from accidentally closing, and these opposing forces may also allow the opening **110** to move from an open configuration to a closed configuration in a controlled manner. The closure mechanism **200** moving from an open configuration to a closed configuration in a slow and controlled manner may prevent any injury to a user from the closure mechanism **200** closing too quickly and provide a safe and effective sealing mechanism.

In particular, the curved members **230**, **240** may provide spring forces that act against the magnetic forces of the magnetic strips **210**, **220**. The curved members **230**, **240** may be formed with a curved profile with a concave contour that faces the opening **110** of the container **100**. The first

curved member 230 may have a first end 232, a second end 234, and a curved member body 236 that extends between the first end 232 and the second end 234. Similarly, the second curved member 240 may have a first end 242, a second end 244, and a curved member body 246 that extends between the first end 242 and the second end 244. In addition, the curved members 230, 240 may be fixedly attached to the front portion 130 and back portion 160 at the curved members 230, 240 respective attachment points 235, 245 that may be located at or near a center of each curved member 230, 240. Each end 232, 234, 242, 244 may be free to move and slide within their respective receivers 250, 260 as the curved members 230, 240 may deform or flex during the opening and closing process. When the opening 110 is in an open configuration, as schematically shown in FIG. 8A, the curved members 230, 240 are in an undeformed state or substantially undeformed state (i.e., the curved members 230, 240 have their original curved profile shape or a first curved configuration). As shown in FIG. 8D, the width, W, or size of the opening 110 may be defined as a distance measured at the center of the opening 110 in a direction from the front side 112 to the back side 114. In some examples, the width, W, of the opening, when the container 100 is in the open configuration, may be approximately 7 inches, or may be within a range of 6 inches and 9 inches. When a user applies a force to move the opening 110 towards a closed configuration, as shown in FIG. 8B, the magnetic forces between the magnetic strips 210, 220 begin pulling the front side 112 toward the back side 114 of the opening 110, while simultaneously, the curved members 230, 240 begin exerting spring forces pulling the front side 112 and the back side 114 away from each other. These opposite forces cause the opening 110 to close in a slow and controlled manner. At one point, the forces reach a bifurcation distance where the opening 110 is opened at its center to a distance, where the magnetic forces between the magnetic strips 210, 220 and the spring forces between the curved members 230, 240 are balanced. Additionally, when the width, W, of the opening 110 is open a distance greater than the bifurcation distance, the spring forces may be greater than the magnetic forces to keep the opening 110 in an open configuration as shown in FIG. 8A. When the width, W, of the opening 110 is open a distance less than the bifurcation distance, the magnetic forces may be greater than the spring forces and as the width, W, of the opening 110 decreases beyond the bifurcation distance the magnetic forces increase at a faster rate than the spring forces causing the opening to move and stay in the closed configuration as shown in FIG. 8C. As the opening 110 moves from an open configuration to a closed configuration, the first curved member 230 and the second curved member 240 move from a first curved configuration when the opening is in an opened configuration to a second curved configuration when the bag is in the closed configuration. But the second curved configuration is such that the curved members 230, 240 may be substantially parallel. In some examples, when in the closed configuration, portions of the upper edges 237, 247 of the curved members 230, 240 may be substantially parallel to each other, or in some cases, a majority of the first curved member 230 may be substantially parallel with a majority of the second curved member 240. In other examples, when in the closed configuration, the curved members 230, 240 may have some regions that are not parallel to each other.

The magnetic and spring forces exerted on the opening 110 in various configurations are illustrated in FIG. 9. FIG. 9 illustrates that the magnetic forces obey the inverse square law where the magnetic forces increase as a relationship that

is inversely proportional to the distance between the first and second magnetic strips 210, 220 squared (i.e., $F \propto 1/d^2$), whereas the spring forces from the curved members 230, 240 increase linearly as the curved shape of each curved member 230, 240 is deformed into a substantially linear or straight shape as shown in FIG. 8C. When the opening 110 is in the closed configuration, the curved members 230, 240 are in a deformed state or a second curved configuration (i.e., may be deformed to almost a linear shape or may have a minimal curvature that is reduced from the curvature of the first curved configuration), which exerts a spring force that is linearly proportional to the amount of deformation of each curved member 230, 240. As discussed above, when the curved members 230, 240 are in a deformed state (or second curved configuration), the curved members 230, 240 may be substantially parallel. When the opening 110 is in a closed configuration, the distance between the magnetic strips 210, 220 is minimal or zero, because the magnetic strips 210, 220 may contact each other, which results in the magnetic forces being greater than the spring forces exerted by the curved members 230, 240. When the opening 110 is open to width, W, that equals the bifurcation distance, the spring forces and the magnetic forces are equal. As discussed above, when the width, W, is greater than the bifurcation distance the spring forces may be greater than the magnetic forces, and when the width, W, is less than the bifurcation distance the magnetic forces may be greater than the spring forces. When the opening 110 is in an open configuration, the curved members 230, 240 may be in their undeformed state, which results zero spring force acting on the opening 110, but the center distance (i.e., width, W) of the opening 110 is large enough such that the magnetic forces from the magnetic strips 210, 220 are not strong enough to overcome any spring forces that may be generated by even a slight deformation of the curved members 230, 240. Thus, the opening 110 is prevented from closing without being acted upon by an external force such as a push from a user.

FIGS. 5, 6A, and 6B schematically depict a cross-sectional side view of the insulating container 100. As shown in FIGS. 5, 6A and 6B, the magnetic strips 210, 220 may be located at the opening 110, and the curved members 230, 240 may be spaced below their respective magnetic strips 210, 220. In the illustrated example, an inner liner 122 forms a chamber, receptacle, or storage compartment 120 for receiving and storing contents therein. The insulating container 100 may include an inner liner 122, an insulating layer 124, and an outer shell 102. The insulating layer 124 may be located between the inner liner 122 and the outer shell 102, and may be formed as a foam insulator to assist in maintaining the internal temperature of the storage compartment 120 for storing contents desired to be kept cool or warm. In addition, the first curved member 230 may be positioned between the inner liner 122 and the outer shell 102. As shown in FIGS. 5, 6A, and 6B, the back curved member 240 may be located between the insulating layer 124 and the outer shell 102. In addition, the front receiver 250 and back receiver 260 may be formed to secure the curved members 230, 240 on all sides such that the curved members 230, 240 are sealed within the receivers 250, 260 respectively. The curved members 230, 240 may be slid into their respective receivers 250, 260 before ends of the receivers 250, 260 are sealed. The receivers 250, 260 may be formed from the same material as the inner liner 122 or from a similar material as known to one skilled in the art using a welding process to join the receivers 250, 260 to container 100. As discussed above, a center portion of the curved members 230, 240 may be fixedly attached to the respective front and back portions

130, 160 to allow the ends of each curved member 230, 240 to move freely. Alternatively or optionally, the curved members 230, 240 may not be fixedly attached at any point or multiple points and be allowed to move or slide freely within their respective receivers 250, 260. For example, the curved members 230, 240 may be partially or fully contained within their respective receivers 250, 260 and may be fixedly attached in some examples at multiple positions, such as near the center and near each end. In addition, each receiver 250, 260 may be continuous and free of openings, or one or both of the receivers 250, 260 may be intermittent with one or more openings 251 that expose the respective curved member to the interior of the container 110 as shown in FIG. 30. The openings 251 may be evenly spaced apart or alternatively unevenly spaced apart. In one example, both of the curved members 230, 240 may be located between the insulating layer 124 and the outer shell 102, or in another example, neither of the curved members 230, 240 may be located between the insulating layer 124 and the outer shell 102. In some examples, the insulating layer 124 adjacent the back portion 160 of the container 100 may have an upper end that is higher than an upper end of the insulating layer 124 adjacent the front portion 130. In these examples, the upper portion of the insulating layer 124 adjacent the back portion 160 may be skived or tapered to the closure mechanism 200 operate smoothly.

The insulating layer 124 may be located in between the inner liner 122 and the outer shell 102, and may be unattached to either the inner liner 122 or the outer shell 102 such that it floats between the inner liner 122 and the outer shell 102. In one example, the inner liner 122 and the outer shell 102 may be connected at a top portion 108 of the insulating container 100 such that the insulating layer 124 may float freely within a pocket formed by the inner liner 122 and the outer shell 102. The inner layer or inner liner 122 can be formed of a first inner liner sidewall portion 122A and a bottom inner liner portion 122B. The first inner liner sidewall portion 122A and the bottom inner liner portion 122B can be secured together by, for example, welding, to form the storage compartment 120. In some examples, the storage compartment 120 may be a "dry bag," or vessel for storing contents. In one example, a tape, such as a TPU tape, can be placed over the seams to help join and seal the sections of the storage compartment 120 after the sections of the storage compartment 120, after the first inner liner sidewall portion 122A and the bottom inner liner portion 122B are secured or joined together. As another option, a tape or other film 123, such as a TPU tape, may be wrapped around an edge 125 of a first inner liner sidewall portion 122A, such that the tape is wrapped along both sides of the edge 125 of the first inner liner sidewall portion 122A and then welded to a second inner liner sidewall portion 122A to seal the fibrous edge 125 of the first inner liner sidewall portion 122A with the second edge of the liner sidewall portion 122A as shown in FIG. 31. The welded joint may be a lap joint or butt joint. The tape 123 may be wrapped around one or both of the edges 125 of the liner sidewall portion to be joined. In some examples, both edges may have tape 123 wrapped along the edges of both inner liner sidewall portions. The tape may also be used seals the seams formed between the first inner liner sidewall portion 122A and the bottom inner liner portion 122B to provide an additional barrier to liquid to prevent liquid from either entering or exiting the storage compartment 120. The inner liner 122 can, thus, either maintain liquid in the storage compartment 120 of the insulating container 100 or prevent liquid contents from entering into the storage compartment 120 of the insulating container 100. It is also contemplated,

however, that the inner liner 122 may be formed as an integral one-piece structure that may be secured within the outer shell 102. The liner material may comprise a thermoplastic polyurethane (TPU), thermoplastic elastomer (TPE), thermoplastic copolyester elastomers (TPC), or other materials known to one skilled in the art.

In one example, the closure mechanism 200 used to seal the opening 110 may be substantially waterproof or water resistant and prevent or reduce liquid ingress into and/or egress from the insulating container 100. Further, the flap portion 140 may be folded to further seal the opening 110 as shown in FIGS. 7A-7B. The flap portion 140 may fold between the magnetic strips 210, 220 and the curved members 230, 240.

Referring back to FIGS. 1 and 2, various handles, straps or loops, and webs (e.g., 132, 134, 136) may also be included on the insulating container 100 for carrying, holding, or securing the insulating container 100. In this regard, the outer shell 102 can also include multiple reinforcement areas or patches, e.g., 107A-107C that are configured to assist in structurally supporting the optional handles or straps (e.g., 132, 134, 136, 162). These reinforcement areas or patches may be located on an inner or outer surface of the outer shell 102. The handles or straps (e.g., 132, 134, 136, 162) and other attachments may be stitched, glued, welded or riveted, or attached using any other attachment methodology, or combination of methodologies, to the main structure of the insulating container 100.

The insulating the container 100 may include two carry handles 136 that are connected to the front portion 130 of the insulating container 100 and the back portion 160 of the insulating container 100. In one example, a shoulder strap can be attached to attachment rings 138A, 138B. The insulating container 100 may additionally include side handles 132 to facilitate carrying of the insulating container 100. Additionally, webbing formed as loops 134 may be sewn onto or otherwise attached to the straps of the handles 136. The loops 134 can be used to attach items (e.g., carabineers, dry bags) to the insulating container 100. In one example, the carry handles 136, side handles 132, and loops 134 may be constructed of nylon webbing. Other materials may include, among others, polypropylene, neoprene, polyester, Dyneema, Kevlar, cotton fabric, leather, plastics, rubber, or rope.

In one example, the rings 138A-138D may be Acetal (POM) D-rings. The attachment rings 138A-138D may be constructed from one or more polymers, metals, ceramics, glasses, alloys, or combinations thereof. In certain specific examples, the attachment rings 138A-138D may be constructed from nylon, polypropylene, neoprene, polyester, Dyneema, and Kevlar, cotton fabric, leather, plastics, rubber, or rope. In some examples, the attachment rings 138A-138D may include some amount of recycled material. The attachment rings 138A-138D may include other shapes, sizes, and configurations other than the depicted "D" shape. Examples include round, square, rectangular, triangular, or rings with multiple attachment points.

FIG. 1 further depicts a base 104 and a base support ridge 106. The base support ridge 106 may provide structural integrity and support to the insulating container 100 (also referred to as an insulating device 100) when the insulating container 100 is placed onto a surface.

The flap portion 140 may have a front side 142 and a back side 144. Further, in one implementation, the flap portion 140 may be configured to fold such that a top flap portion 146 folds over onto a bottom flap portion 148. When folded, the top flap portion 146 may be removably coupled to the

13

bottom flap portion **148** by a secondary closure mechanism. In one example, both of the top flap portion **146** and the bottom flap portion **148** may include magnetic elements (e.g., permanent magnets and magnetic materials) that are embedded within the container **100** along the length, *L*, of the opening **110**. In one example, a single magnetic strip may be embedded in one or more of the top flap portion **146** and the bottom flap portion **148** and extend along at least a portion of the length of **106**. In some examples, a top flap portion **146** may be taller than the bottom flap portion **148**, or in some examples, the top flap portion **146** may have the same height as the bottom flap portion **148**. Additionally or alternatively, a series of one or more discrete magnetic elements may be embedded in one or more of the top flap portion **146** and the bottom flap portion **148** and extend along at least a portion of the length, *L*. In other implementations, hook and loop fasteners, or other fastener types, may be used in combination with or as an alternative to magnetic fasteners to removably couple the top flap portion **146** and the bottom flap portion **148** to one another.

In the illustrated example, the flap portion **140** may be folded wherein the top flap portion **146** may be held in a folded configuration by buckles and straps that extend over the top of the container **100** between the back portion **160** and the front portion **130**. Strap **164** and fastener element or buckle **166A**, which may be coupled to the carry handle **136** on the front portion **130**, may be utilized to hold the top flap portion **146** in a folded configuration when removably coupled to a corresponding fastener element or buckle **166B** coupled to the carry handle **136** of the back portion **160** of the container **100**.

FIGS. **10-13** depict an exemplary curved member **230**, which may also represent curved member **240** as the two curved members may be identical in shape and size. FIG. **10** illustrates a top view of curved member **230** where the curved members **230**, **240** have curves that move away from each other, such that the curved members **230**, **240** may have a convex outward facing surface. Alternatively or optionally, the curved members **230**, **240** may both curve toward each other such that the curved members have the concave side facing outward. As another option, the curved members **230**, **240** may have both have curvature that is arranged in the same direction (e.g. the concave sides of both curved members **230**, **240** face toward the front of the container **100** or the concave sides of both curved members **230**, **240** face toward the rear of the container **100**). The curved member **230** may have a curvature defined by an interior radius, *R*, that may be approximately 145 mm, or within a range of 120 mm and 180 mm in one example and may be approximately 230 mm or within a range of 200 mm and 280 mm in another example. The curvature may be described as a function of the length, *L*, of the opening **110**, the strength of the magnets (i.e., the strength of magnet strips **210**, **220**), the horizontal distance between ends **232**, **234**, and the desired stiffness of the curved members **230**, **240**. In some examples, the curvature of the curved members **230**, **240** may be expressed as a percentage of a length, *L*, of the opening **110** when length, *L*, is measured when the opening **110** is in the closed configuration. For example, the curvature of the curved member **230** may be approximately 30 percent of the length, *L*, or approximately 38 percent of the length, *L*, or within a range of 25 percent and 45 percent of the length, *L*, of the opening **110**, or within a range of 15 percent of the length, *L*, and 60 percent of the length, *L*.

As described above, the first curved member **230** may have a first end **232**, a second end **234**, and a curved member body **236** that extends between the first end **232** and the

14

second end **234**. Similarly, the second curved member **240** may have a first end **242**, a second end **244**, and a curved member body **246** that extends between the first end **242** and the second end **244**. Each end **232**, **234**, **242**, **244** of the curved members **230**, **240** may have a curved profile as shown in FIG. **12**. As shown, each end **232**, **234**, **242**, **244** may have a lower portion **231** with a larger radius than an upper portion **233**. In some examples, the radius for the lower portion **231** may be up to three times larger than the radius of the upper portion **233**. Alternatively, each end **232**, **234**, **242**, **244** may have a lower portion with a radius that is equal with the upper portion. By having a rounded profile on each end **232**, **234**, **242**, **244**, the curved members **230**, **240** may avoid damaging any of the portions of the container **100** as the ends **232**, **234**, **242**, **244** move during the opening and closing process (i.e., the outer shell **102**, the inner liner **122**, the insulating layer **124**, or the receivers **250**, **260**).

The curved members **230**, **240** may be formed of various materials and dimensions to create the desired spring forces for the closure mechanism **200**. For instance, in one example, the curved members **230**, **240** may include a core portion formed from a steel alloy with a thickness of approximately 3 mm, or within a range of 1.5 mm and 5 mm and a width of approximately 25 mm, or within a range of 15 and 40 mm. In other examples, the curved members **230**, **240** may be formed from other metallic materials, such as aluminum based alloys, titanium alloys, or other metallic materials. The curved members **230**, **240** may be formed using an extrusion process and may have a substantially constant cross-sectional shape. The curved member **230**, **240** may have a substantially rectangular cross-sectional shape although alternate cross-sectional shapes are contemplated such as square, oval, round, elliptical, triangular, or other geometric shapes. In some examples, the curved members **230**, **240** may have a concave or convex shaped cross-sectional shape.

When using a metallic material for the core portion **238**, the curved member **230**, **240** may include a non-metallic outer layer **239** as shown in FIG. **13**. The non-metallic outer layer **239** may be an elastomeric material, a polyethylene based material, or a polyvinyl chloride based material. This encapsulation helps to protect the core portion **238** from corrosion and also helps to protect the container components from any damage caused by the movement of the curved members **230**, **240**. The non-metallic coating **239** may also help to reduce friction of the curved members **230**, **240** to allow free movement of the ends **232**, **234**, **242**, **244**. The metallic core portion **238** may have a constant thickness. The encapsulation may be applied as a heat shrink tube onto the metallic core portion **238**, may be injection molded, overmolded, dipped, or powder coated onto the core portion **238**, or may be encapsulated by other means known to one skilled in the art. The non-metallic outer layer **239** may be applied to the entire curved members **230**, **240** or applied only to the ends **232**, **234**, **242**, **244**. For instance, the non-metallic outer layer **239** may be applied from the ends **232**, **234**, **242**, **244** to a distance of approximately 30 to 80 mm from ends **232**, **234**, **242**, **244**. In some examples, the non-metallic outer layer **239** may only be applied to one of the ends **232**, **234**, **242**, **244** of each curved member **230**, **240**. In some examples, the curved members **230**, **240** may be coated with the non-metallic coating **239** with the exception of a portion of one end which is used to grip the curved member **230**, **240** when the coating is applied that leaves that end with an exposed portion. In these case, the exposed portion may be coated using a heat shrink tubing to encapsulate the exposed portion.

In alternate examples, the curved members **230**, **240** may be formed from a non-metallic material such as a high strength polymer, such as polycarbonate, a fiberglass material, or a composite material. A non-metallic curved member may have similar end geometry as described above and may or may not be encapsulated in an elastomeric material. As another option, the thickness may be variable as to adjust the stiffness and durability of the curved member.

FIGS. **14A-B** depict a front and side view of the front magnetic strip **210**, while FIGS. **14C-D** depict a front and side view of the rear magnetic strip **220**. The two magnetic strips **210** and **220** may be used to form the closure mechanism **200** of the opening **110**. As previously described, the closure mechanism **200** may be used to resealably seal the opening **110**. The magnetic strips **210**, **220** may have a magnetic strength of approximately 4500 Gauss, or within a range of 3500 Gauss and 5500 Gauss, wherein the magnetic strength is checked with the opening **110** is in a closed configuration and a magnetic tester is placed directly between the two magnetic strips **210**, **220**. In one implementation, both of the magnetic strips **210** and **220** include a series of discrete permanent magnets that are retained within magnet wells **212**. In one example, the first magnetic strip **210** and the second magnetic strip **220** may comprise a row of circular magnetic elements **214** spaced apart of a flexible polymer strip that are rigidly affixed into the magnet wells **212**. While the magnetic elements **214** are depicted as circular magnetic elements, it is contemplated that the magnetic elements may be of any shape, such as rectangular, square, triangular, oval, or other geometric shape as known to one skilled in the art. As shown in the illustrated examples, magnetic strip **210** may include a tapered region **217** at either or both ends as shown in FIG. **14B**. This tapered region **217** assists in the proper fit of the magnetic strip **210** and to ensure a proper seal. The tapered region **217** may be formed on both of the magnetic strips **210**, **220** or may only be on one of the magnetic strips. As shown in FIG. **14D**, magnetic strip **220** may not have the tapered region **217** and have a constant thickness. Optionally, both magnetic strips **210**, **220** may not have a tapered region and have a constant thickness. The magnetic elements **214** may be oriented such that adjacent magnetic elements **214** have opposite polarity. For example, for the magnets **214** positioned within the exemplary wells **212**, the magnet **214** within well **212A** may face its north pole toward magnetic strip **210**, the magnet **214** within well **212B** may face its south pole toward magnetic strip **210**, and the magnet **214** within well **212C** may face its north pole toward magnetic strip **210**, etc. It is contemplated that the magnetic strips **210** and **220** may be coupled to the front portion **130** and back portion **160** using any fixation methodology, technique and/or technology. In some examples, the ends of each magnetic strip **210**, **220** may be welded to the container **100**. To prevent distortion of the magnetic strips **210**, **220** during the welding process, each magnetic strip **210**, **220** may include one or more relief holes **219** near the end of each magnetic strip **210**, **220** as shown in FIGS. **14A** and **14C**. The relief holes **219** may be outboard of the magnetic wells **212** and may help to prevent any distortion of the magnetic strips **210**, **220** during the welding process by providing a location to receive any flowable material generated by the welding process. The relief holes **219** may be blind holes with a predetermined depth, but may also extend through the magnetic strip **210**, **220**. The relief holes **219** may also be located on the tapered region **217** of one of the magnetic strips **210**, **220** and have a diameter that is smaller than the diameter of the wells **212**. While the illustrated examples

show two relief holes **219** near each end of the magnetic strips **210**, **220**, the number of relief holes **219** may be a single hole, 3 holes, or more than 3 holes near each end. It is further contemplated that the magnets **214** affixed within the wells **212** may be constructed from any material, without departing from the scope of these disclosures. As depicted, a pull tab **116**, which may be configured to be manually gripped to pry apart the magnetic strips **210**, **220** of the closure mechanism **200** of the opening **110**, may extend from one of the magnetic strips **210** or **220**. In an alternative implementation, each of the magnetic strips **210** and **220** may include a pull tab **116**. In yet another implementation, the pull tab **116** may not be coupled to one of the magnetic strips **210** or **220**. In such an implementation, the pull tab **116** may instead be coupled to one or both sides of the opening **110**. For example, one or more pull tabs **116** may be coupled to one or both of the front side **112** and the back side **114** of the opening **110**, and may not form part of the magnetic strip **210** or the magnetic strip **220**. In yet another example, the insulating container **100** may be implemented without one or more pull tabs **116** on the front portion **130** and/or the back portion **160**. The first and second magnetic strips **210** and **220** may have top edges that are coupled to the respective front and back sides **112** and **114** of the opening **110**. The first and second magnetic strips **210**, **220** may have bottom edges that are not attached to an internal surface of the container **100**, and may be described as loose ends.

FIG. **15** schematically depicts a cross-sectional view of the magnetic strips **210** and **220**. In one example, the magnetic strips **210** and **220** may be constructed from a thermoplastic polyurethane (TPU). However, it is contemplated that combination of polymers, metals, or alloys, among others, may be used to construct the magnetic strips **210** and **220**. FIG. **15** depicts two exemplary magnet wells **212D** and **212E**, which are opposite one another and configured to retain to magnets **214**. In one example, buffer layers **216A** and **216B** separate the magnets **214** positioned within wells **212D** and **212E**, when magnetically coupled to one another. It is contemplated that these buffer layers **216A** and **216B** may be implemented with a predetermined thickness such the magnetic attraction is maintained. In addition, a sealing film **215** may be placed on the front or rear surfaces (e.g. over the side that receives the magnets **214**). This sealing film **215** may help to prevent moisture intrusion into the magnetic strips **210**, **220** and may be a clear or opaque material. In some examples, the sealing film **215** may be made from a TPU materials, but may be made of any suitable material known to one skilled in the art.

In another implementation, the magnetic strips **210** and **220** may be implemented without the buffer layers **216A** and **216B**, such that the magnets **214** held within wells **212D** and **212E** are positioned proximate one another when magnetically coupled to one another. In yet another example, the buffer layers **216A** and **216B** may be formed from an alternative material type to the rest of the structure of the magnetic strips **210**, **220**, without departing from the scope of these disclosures.

The primary seal of the insulating container **100** created by the magnetic closure of the opening **110** and the secondary seal created by the folding of the flap portion **140** may combine to make the insulating container **100** substantially water and/or airtight. In certain specific examples, the insulating container **100** may be configured to retain water (ice and melted ice) without or with reduced leakage of water from the storage compartment **120** through the opening **110** and out to the external environment. In certain specific

examples, the insulating container 100 may be configured to be positioned on its side (e.g., front portion 130 or back portion 160) and/or positioned in a downward facing orientation (with opening 110 facing downward) and the container 100 may be configured to prevent or substantially reduce the egress of water held within the storage compartment 120 when held in one of these positions for prolonged periods of time. In certain specific examples, the insulating container 100 may be configured to allow less than 5%, 2%, 1%, 0.5%, 0.1%, 0.05%, or 0.01% of the water (or water and ice combination) held within the storage compartment 120 to leak out through the opening 110 when the insulating container 100 is held for at least 1 minute, 2 minutes, 5 minutes, 10 minutes, 15 minutes, 20 minutes, 25 minutes, 30 minutes, 35 minutes, 45 minutes, or 1 hour with the opening 110 facing downward at an incline of: 90 degrees (i.e., upside down), 60 degrees, 45 degrees, 30 degrees, or 0 degrees (i.e., the container held on front portion 130 or back portion 160).

FIG. 16 schematically depicts the insulating layer 124 for the insulating container 100. The insulating layer 124 may be formed of a first portion or an upper portion 126, a second portion or base portion 128. It is contemplated that the insulating layer 124 may be formed from any insulating material. The insulating material of the insulating layer 124 may include, among others, an EVA foam that may include a nonwoven scrim layer laminated on both sides of the upper portion 126 to help quiet any noise made from movement of the insulating layer within the container 100, while the lower portion 128 may not have the scrim layer and/or any other foam material having any density and/or insulation values/properties. The nonwoven scrim layer may be removed at the bottom edge of the upper portion 126 to assist in bonding the upper portion 126 of the insulating layer 124 to the base portion 128.

FIGS. 17-22 depict an alternate insulating container 300 that may be configured with closing mechanism 200. For the exemplary container of FIGS. 17-22, the features are referred to using similar reference numerals under the "3xx" series of reference numerals, rather than "1xx" as used in the example of FIGS. 1-16. Accordingly, certain features of the container 300 that were already described above with respect to insulating container 100 of FIGS. 1-16 may be described in lesser detail, or may not be described at all. Additionally, any features described above with respect to the insulating container 100 in FIGS. 1-16 may be utilized with insulating container 300. Additionally or alternatively, the insulating containers 100, 300 may be configured in different sizes (i.e., height, width, and depth) without departing from the scope of the disclosure described herein.

Container 300 may be configured as an insulating container that may be carried as a backpack. Insulating container 300 may generally include an outer shell 302 that defines a front portion 330, a back portion 360, a left side portion 380, a right side portion 390, and a base 304. In one example, the front portion 330, the back portion 360, and the side portions 380, 390 may collectively be referred to as the sidewall of the container 300. The container 300 additionally includes an opening 310 at a top portion of a flap portion 340. Accordingly, the flap portion 340 is configured to extend between a top of the outer shell 302, and the opening 310. The opening 310 is configured to provide a resealable point of entry into a storage compartment 320 of the container 300. The back portion 360 of container 300 may include a back pad 370 and a pair of elongated and adjustable straps 372 to allow a user to carry the insulating container 300 like a backpack. While container 300 is

configured as a backpack, the closure mechanism described herein may also be utilized in other soft sided containers, such as a duffel bag, soft sided suitcase, or other soft sided container known to one skilled in the art.

Container 300 may have an opening 310 that is resealably sealed by closure mechanism 200 similar to the container 100, where the container 300 may have an open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment. The closure mechanism 200 for container 300 may include a first magnetic strip 210, a second magnetic strip 220, a first curved member 230, and a second curved member 240 and work in a similar manner as closure mechanism 200 described above and illustrated in FIGS. 5, 6A, and 6B as one manner in which the closure 200 may be arranged.

Container 300 may have a smaller size than container 100, to make it easier to carry for a user. As such, as shown in FIG. 21 schematically depicts the insulating layer 324 for the insulating container 300. The insulating layer 324 may be formed of a first portion or an upper portion 326, a second portion or base portion 328. The upper portion 326 may include slits 325 in the upper portion 326 to allow for more flexibility within the insulating layer 324. The slits 325 may be arranged along the front of the insulating layer 324 as shown, or may be in other locations such as on the left and right side along the upper portion 326, or in other locations as contemplated by one skilled in the art to provide adequate insulation while also being flexible to move with the container 300. It is contemplated that the insulating layer 324 may be formed from any insulating material. The insulating material of the insulating layer 324 may include, among others, an EVA foam that may include a nonwoven scrim layer laminated on both sides of the upper portion 326 to help quiet any noise made from movement of the insulating layer within the container 300, while the lower portion 328 may not have the scrim layer and/or any other foam material having any density and/or insulation values/properties. The nonwoven scrim layer may be removed at the bottom edge of the upper portion 326 to assist in bonding the upper portion 326 of the insulating layer 324 to the base portion 328.

FIG. 22 illustrates container 300 in with the flap portion 340 folded and held in a folded configuration by buckles 366 and straps 364 that extend over the top of the container 300 between the back portion 360 and the front portion 330. Strap 364 and buckle 366, which may be releasably coupled to a corresponding strap 334 and buckle 366 on the front portion 330. The coupled straps 364 may be utilized to hold the flap portion 340 in a folded configuration.

FIGS. 23-25 illustrate an alternate insulating container 400. For the exemplary container of FIGS. 23-25, the features are referred to using similar reference numerals under the "4xx" series of reference numerals, rather than "1xx" as used in the example of FIGS. 1-16. Accordingly, certain features of the container 400 that were already described above with respect to insulating container 100 of FIGS. 1-16 may be described in lesser detail, or may not be described at all. Additionally, any features described above with respect to the insulating container 100 in FIGS. 1-16 may be utilized with insulating container 400. Additionally or alternatively, the insulating container 400 may be configured in different sizes (i.e., height, width, and depth) without departing from the scope of the disclosure described herein. Insulating container 400 may have a closure mechanism 200 similar to closure mechanism 200 described above except the curved members 230, 240 may be replaced by a

hinged expander 470. Accordingly, the closure mechanism 200 of container 400 may include a first magnetic strip 210, a second magnetic strip 220, and a hinged expander 470 that can help to keep the opening 410 of the container 400. The hinged expander 470 may be arranged along an interior surface of the container or between the outer shell 402 and inner liner 422 of the container 400. The hinged expander 470 may have a first and second member 471 where each member 471 is located on each side of the opening 410. Each member 471 may be joined together at each end with a pinned connection. Each member 471 may be formed from a plurality of hinged elements 472, where each hinged element 472 may have a first end 473 that has a cam 475 or bulged region that engages an engaging member 476 on a second end 474 of the adjacent hinged element 472. The hinged elements 472 may be pinned together where the cam 475 locks the first end 473 of the adjacent hinged element 472 with a second end 474. As shown in FIG. 24, the hinged elements 472 may be in a locked position to help keep the opening 410 of the container 400 in an opened position as the hinged elements 472. As the cam 475 moves past a predetermined location on the engaging member 476, the cam 475 may lock into place to keep the hinged elements 472 in an intersecting or converging orientation. When the hinged elements 472 are locked into the converging orientation, the hinged expander 470 may be arranged to overcome the magnetic forces between the magnetic strips 210, 220 to keep the opening 410 in an open position. When a user closes the opening, the user will apply a force to move the cam 475 over the predetermined location on the engaging member 476 to cause the adjacent hinged elements 472 to form an approximately coplanar or collinear orientation as shown in FIG. 25. When the hinged elements 472 are in the coplanar or collinear orientation, the first and second members 471 of the hinged expander 470 forms two substantially parallel members 471 that allow the magnetic strips 210, 220 to close the opening 410.

FIGS. 26 and 27 illustrate an alternate insulating container 500. For the exemplary container of FIGS. 26-27, the features are referred to using similar reference numerals under the "5xx" series of reference numerals, rather than "1xx" as used in the example of FIGS. 1-16. Accordingly, certain features of the container 500 that were already described above with respect to insulating container 100 of FIGS. 1-16 may be described in lesser detail, or may not be described at all. Additionally, any features described above with respect to the insulating container 100 in FIGS. 1-16 may be utilized with insulating container 500. Additionally or alternatively, the insulating container 500 may be configured in different sizes (i.e., height, width, and depth) without departing from the scope of the disclosure described herein. Insulating container 500 may have a closure mechanism 200 similar to closure mechanism 200 described above except the curved members 230, 240 may be replaced by a kickstand 570. Accordingly, the closure mechanism 200 of container 500 may include a first magnetic strip 210, a second magnetic strip 220, and a kickstand 570 that can help to keep the opening 510 of the container 500. The kickstand 570 may comprise a beam or rod 572 with a first end 574 and a second end 576 opposite the first end 574. Each end 574, 576 may be received into a receiver located in each side of the opening 510 to secure the rod 572 within the opening 510 to maintain the opening 510 in an open position and overcome the magnetic forces from the magnetic strips 210, 220. In some examples, the rod 572 may be a free member that is stored in a compartment of the container 500. In other examples, the rod 572 may be attached at a first end 574 or

a second end 576 while the opposite end is free. The rod 572 may rotate around the attached end while when a user wants to put the kickstand 570 into a usage position, the rod 572 may be rotated such that the free end is secured in a receiver on the opposite side of the opening 510 from where the rod 572 is attached. When the kickstand 570 is engaged position to keep the opening 510 in the open configuration, a user may easily load the container 500. When the kickstand 570 is unengaged, the magnetic forces from the magnetic strips 210, 220 are able to secure the opening 510 in the closed configuration.

FIG. 28 illustrates another insulated container 600. For the exemplary container of FIG. 28, the features are referred to using similar reference numerals under the "6xx" series of reference numerals, rather than "1xx" as used in the example of FIGS. 1-16. Accordingly, certain features of the container 600 that were already described above with respect to insulating container 100 of FIGS. 1-16 may be described in lesser detail, or may not be described at all. Additionally, any features described above with respect to the insulating container 100 in FIGS. 1-16 may be utilized with insulating container 600. Additionally or alternatively, the insulating container 600 may be configured in different sizes (i.e., height, width, and depth) without departing from the scope of the disclosure described herein. Insulating container 600 may have a closure mechanism 200 similar to closure mechanism 200 described above except the curved members 230, 240 may be replaced by a stiffener loop 670 that extends around the opening 610 of the container 600. The stiffener loop 670 may be located along the interior of the container 600. The stiffener loop 670 may be a continuous loop of metallic material with elongated rounded sides 672 and rounded end portions 674. The elongated rounded sides 672 may be arranged to help hold the opening 610 in an open configuration once a user has opened the opening 610. The elongated rounded sides 672 may provide spring forces in a similar manner as the curved members 230, 240 described above. Accordingly, the closure mechanism 200 of container 600 may include a first magnetic strip 210, a second magnetic strip 220, and a stiffener loop 670 that can help to keep the opening 610 of the container 600. The stiffener loop 670 may have a constant thickness and constant height. When the container 600 is in the open configuration, the stiffener loop 670 provides spring forces to counteract the magnetic forces of the magnetic strips 210, 220 and to help keep the container 600 in an open configuration once the user opens the container 600. Similarly, once a user moves to close the container the stiffener loop 670 may help to provide the closure mechanism 200 to move from an open configuration to a closed configuration in a slow and controlled manner. Once the closure mechanism 200 is in a closed configuration, the magnetic forces overcome the spring forces created by the stiffener loop 670 and may deform the stiffener loop 670 such that the elongated rounded sides 672 may be flattened such that the elongated rounded sides 672 may be substantially parallel. In some examples, the stiffener loop 670 may be formed from a non-metallic material.

FIG. 29 illustrates another insulated container 700. For the exemplary container of FIG. 29, the features are referred to using similar reference numerals under the "7xx" series of reference numerals, rather than "1xx" as used in the example of FIGS. 1-16. Accordingly, certain features of the container 700 that were already described above with respect to insulating container 100 of FIGS. 1-16 may be described in lesser detail, or may not be described at all. Additionally, any features described above with respect to the insulating container 100 in FIGS. 1-16 may be utilized with insulating

21

container 700. Additionally or alternatively, the insulating container 700 may be configured in different sizes (i.e., height, width, and depth) without departing from the scope of the disclosure described herein. Insulating container 700 may have a closure mechanism 200 similar to closure mechanism 200 described above except the curved members 230, 240 may be replaced by a ratcheting strap 770 that extends around the opening 710 of the container 700. The ratcheting strap 770 may include a ratcheting mechanism 772 that may be activated by a user to either tighten or loosen the tension with the ratcheting strap 770. As the tension is increased within the strap 770, the opening 710 may be squeezed open by deforming the magnetic strips 210, 220 to overcome the magnetic forces between them and to keep the opening 710 in an open configuration. Conversely, as the ratcheting mechanism 772 is engaged by a user to release the tension in the strap 774, the magnetic forces between the magnetic strips 210, 220 may overcome the tension in the strap 774 to cause the closure mechanism 200 to move to a closed configuration.

The present disclosure is disclosed above and in the accompanying drawings with reference to a variety of examples. The purpose served by the disclosure, however, is to provide examples of the various features and concepts related to the disclosure, not to limit the scope of the disclosure. One skilled in the relevant art will recognize that numerous variations and modifications may be made to the examples described above without departing from the scope of the present disclosure.

We claim:

1. A container, comprising:
 - an outer shell, and having a front portion, a back portion, and a base portion;
 - an inner liner forming a storage compartment, the inner liner having a front portion and a back portion;
 - an insulating layer positioned between the front portion of the outer shell and the front portion of the inner liner and the insulating layer positioned between the back portion of the outer shell and the back portion of the inner liner, the insulating layer providing insulation for the storage compartment;
 - an opening at a top of the container extending into the storage compartment, wherein the container has an open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment; and
 - a closure mechanism, further comprising:
 - a first magnetic strip extending along and coupled to an internal surface of the front portion of the outer shell at a front side of the opening;
 - a second magnetic strip extending along and coupled to an internal surface of the back portion of the outer shell at a back side of the opening;
 - a first curved member, wherein the first curved member has a first end, a second end, and a first curved member body extending between the first end and the second end; and
 - a second curved member, wherein the second curved member has a first end, a second end, and a second curved member body extending between the first end and the second end; and
- wherein the first magnetic strip is magnetically attracted to the second magnetic strip to resealably seal the opening, and the first curved member and the second curved member prevent the opening from closing when the container is in the open configuration; and

22

wherein the second curved member is between the insulating layer and the outer shell.

2. The container of claim 1, wherein the first curved member and the second curved member are configured to flex from a first curved configuration to a second curved configuration when the opening is sealed.

3. The container of claim 1, wherein the first curved member body comprises a substantially rectangular cross-sectional shape.

4. The container of claim 1, wherein the first curved member has a curvature with a radius between 120 mm and 160 mm.

5. The container of claim 1, wherein the first curved member includes a non-metallic coating.

6. The container of claim 1, wherein the first end and the second end of the first curved member both have rounded corners.

7. The container of claim 1, wherein the first curved member includes a portion formed from a steel alloy.

8. The container of claim 1, wherein the first curved member is received in a first receiver in the front portion, and the second curved member is received in a second receiver in the back portion.

9. The container of claim 8, wherein the first end and the second end of the first curved member are slidable within the first receiver.

10. The container of claim 1, further comprising:

a flap portion extending from the back portion above the back side of the opening, the flap portion having a first fastener element;

a second fastener element coupled to an external surface of the front portion of the outer shell; and

wherein the outer shell is configured to fold to removably couple the first fastener element to the second fastener element.

11. The container of claim 1, wherein at least one of the first magnetic strip and the second magnetic strip comprises a row of circular magnetic elements spaced apart along a flexible polymer strip.

12. The container of claim 1, further comprising a pair of straps coupled to the back portion of the outer shell configured to allow a user to carry the container as a backpack.

13. An insulated container, comprising:

an outer shell defining a sidewall and a base, the outer shell having a front portion, a back portion, side portions, and a base portion;

an inner liner forming a storage compartment, the inner liner having a front portion and a back portion;

an insulating layer positioned between the front portion of the outer shell and the front portion of the inner liner and the insulating layer positioned between the back portion of the outer shell and the back portion of the inner liner, the insulating layer providing insulation for the storage compartment;

an opening at a top of the insulated container extending into the storage compartment, the opening having a front side and a back side;

a flap portion extending between a top of the outer shell and the opening;

a closure mechanism, further comprising:

a first closure element extending along and coupled to the front side of the opening; and

a second closure element extending along and coupled to the back side of the opening,

a first curved member spaced below the first closure element, wherein the first curved member has a first

23

end, a second end, and a first curved member body extending between the first end and the second end; and
 a second curved member spaced below the second closure element, wherein the second curved member has a first end, a second end, and a second curved member body extending between the first end and the second end; and
 wherein the first closure element and the second closure element resealably seal the opening, and the first curved member and the second curved member prevent the opening from closing when the insulated container is in an open configuration; and
 wherein the second curved member is between the insulating layer and the outer shell.

14. The insulated container of claim 13, wherein the flap portion, when folded, is configured to provide a secondary seal of the opening.

15. The insulated container of claim 13, wherein the first curved member is received in a first receiver in the front portion of the outer shell, and the second curved member is received in a second receiver in the back portion of the outer shell, and
 wherein the first end and the second end of the first curved member are slidable within the first receiver.

16. The insulated container of claim 13, wherein the first curved member extends along the front portion of the outer shell and the second curved member extends along the back portion of the outer shell.

17. A container, comprising:
 an outer shell defining a sidewall and a base, the outer shell having a front portion, a back portion, side portions, and a base portion;
 an inner liner forming a storage compartment, the inner liner having a front portion and a back portion;
 an insulating layer positioned between the front portion of the outer shell and the front portion of the inner liner and the insulating layer positioned between the back portion of the outer shell and the back portion of the inner liner, the insulating layer providing insulation for the storage compartment;
 an opening at a top of the container extending into the storage compartment, the opening having a front side and a back side and wherein the container has an open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment;
 a flap portion extending between a top of the outer shell and the opening;
 a closure mechanism, further comprising:
 a first magnetic strip extending along and coupled to the front side of the opening; and
 a second magnetic strip extending along and coupled to the back side of the opening,
 a first curved member spaced below the first magnetic strip, wherein the first curved member has a first end, a second end, and a first curved member body extending between the first end and the second end;
 a second curved member spaced below the second magnetic strip, wherein the second curved member has a first end, a second end, and a second curved member body extending between the first end and the second end;
 wherein when the container is in the closed configuration, a portion of a first upper edge of the first curved member and a portion of a second upper edge of the second curved member are substantially parallel;

24

wherein the first magnetic strip is magnetically attracted to the second magnetic strip to resealably seal the opening, and the first curved member and the second curved member prevent the opening from closing when the container is in the open configuration; and
 wherein the second curved member is between the insulating layer and the outer shell.

18. The container of claim 17, wherein the first curved member is received in a first receiver in the front portion of the outer shell, and the second curved member is received in a second receiver in the back portion of the outer shell, and wherein the first end and the second end of the first curved member are slidable within the first receiver.

19. The container of claim 17, wherein the first curved member is fixedly attached to the front portion of the outer shell at a central region of the first curved member.

20. A closure mechanism comprising:
 a first closure element positioned at a first side of an opening;
 a second closure element positioned at a second side of the opening;
 a first curved member, wherein the first curved member has a first end and a second end, and a first curved member body extending between the first end and the second end; and
 a second curved member, wherein the second curved member has a first end and a second end, and a second curved member body extending between the first end and the second end; and
 wherein the first closure element and the second closure element together resealably seal the opening, wherein the first curved member and the second curved member are configured to maintain the opening in an open configuration; and
 wherein the closure mechanism is connected to the opening at a top of a container,
 wherein the container comprises:
 an outer shell having a front portion, a back portion, side portions, and a base portion;
 an inner liner forming a storage compartment, the inner liner having a front portion and a back portion;
 an insulating layer positioned between the front portion of the outer shell and the front portion of the inner liner and the insulating layer positioned between the back portion of the outer shell and the back portion of the inner liner, the insulating layer providing insulation for the storage compartment;
 wherein the opening has a front side and a back side and wherein the container has the open configuration that allows access to the storage compartment and a closed configuration that prevents access to the storage compartment; and
 wherein the second curved member is between the insulating layer and the outer shell.

21. The closure mechanism of claim 20, wherein the first curved member body comprises a substantially rectangular cross-sectional shape and includes a portion formed from a steel alloy.

22. The closure mechanism of claim 20, wherein the first curved member includes a non-metallic coating and wherein the first end and the second end of the first curved member both have rounded corners.

23. The closure mechanism of claim 20, wherein the first curved member is received in a first receiver in the first side of the opening, and the second curved member is received in a second receiver in the second side of the opening.

24. The closure mechanism of claim 20, wherein both the first curved member and the second curved member flex from a first curved configuration for maintaining the opening in the open configuration to a second curved configuration when the opening is sealed.

5

25. The closure mechanism of claim 24, wherein when the first curved member and the second curved member are substantially parallel when in the closed configuration.

* * * * *