

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 676 302 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.11.1998 Bulletin 1998/48

(51) Int Cl.⁶: **G03G 15/00**, B42B 4/00,
B42C 1/12

(21) Application number: **95106413.8**

(22) Date of filing: **19.12.1991**

(54) **Saddle stitcher apparatus for a modular finisher apparatus**

Sattelheftvorrichtung für eine Endverarbeitungsvorrichtung

Brocheuse de selle pour appareil de finition modulaire

(84) Designated Contracting States:
DE GB

(30) Priority: **02.01.1991 US 636785**
02.01.1991 US 636786
02.01.1991 US 636792

(43) Date of publication of application:
11.10.1995 Bulletin 1995/41

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
92903799.2 / O 517 903

(73) Proprietor: **EASTMAN KODAK COMPANY**
Rochester, New York 14650 (US)

(72) Inventors:
• **Shea, Robert Howard,**
c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)

- **Hacknauer, Frank, c/o Eastman Kodak Company**
Rochester, New York 14650-2201 (US)
- **Russel, Steven Matthew,**
c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(74) Representative: **Blickle, K. Werner, Dipl.-Ing. et al**
KODAK AKTIENGESELLSCHAFT
Patentabteilung
70323 Stuttgart (DE)

(56) References cited:

DD-A- 57 590	DE-C- 68 459
US-A- 4 134 672	US-A- 4 169 674
US-A- 4 270 742	US-A- 4 410 170
US-A- 4 509 732	US-A- 4 592 651
US-A- 4 595 187	US-A- 4 903 952
US-A- 4 917 364	US-A- 4 930 765

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 676 302 B1

Description

This invention relates to a saddle stitcher apparatus for forming completely finished reproduction sets of a series of reproductions produced on sheets respectively by a reproduction apparatus, said saddle stitcher including a support frame, said frame including means for mating with means for detachably accepting the said saddle stitcher with a housing of a modular finisher apparatus, means associated with said support frame for defining a sheet feed path communicating with reproduction sheet receiving means, means mounted on said frame for registering reproduction sheets, means associated with said frame for stapling registered reproduction sheets at substantially the mid-line thereof to form a reproduction set, and folding a stapled reproduction set substantially along the mid-line thereof, and an output hopper for collecting folded stapled reproduction sets.

Today's ever increasing document information flow, in the form of paper documents, necessitates the ability to reproduce multi-page documents in a timely and efficient manner. As a result, reproduction apparatus, such as electrostatographic copier/duplicators or electronic printers, have been significantly improved as to their sophistication of operation, ease of use, and speed. In order to take full advantage of high speed reproduction apparatus, handling of the original information to be reproduced and of the completed reproductions into completely finished sets so as to match overall reproduction output productivity with reproduction apparatus speed has assumed increased importance.

Recent significant advances in the state of the art of reproduction apparatus deal with the handling of original information for information input to such apparatus. One such novel original information handling device, referred to as a recirculating document feeder, is shown for example in US-A-4,169,674. With the recirculating document feeder of the shown type, document sheets from a collated document sheet stack are circulated serially from the stack of document sheets to an exposure station of a reproduction apparatus for copying and then returned to such stack, in order, a number of times equal to the desired number of reproductions to be made of such stack. As a result, the collected reproductions are in precollated sets which eliminates the need for further complex and expensive collation equipment. Of course, reproduction apparatus which handle original information electronically may also produce the desirable precollated reproduction sets.

The production of precollated reproduction sets has an additional advantage in that the sets are immediately available for further handling to provide desired completely finished reproduction sheet sets. This of course improves the overall productivity of the reproduction system. A typical example of such further reproduction sheet set handling is stapling of the sheets in a set together to form the completely finished reproduction set. Finisher apparatus to carry out reproduction set stapling

is shown in USA-4,134,672.

Although finishers of the above type have been very successful, they are limited in that they typically can effect only some types of finishing. Completed reproduction sets may require additional or other finishing operations, such as for example folding oversized sheets, saddle stitching the reproduction set to form a booklet, or insertion of supplemental sheets (e.g., covers). Separate auxiliary devices to accomplish these various ends are available in the industry today, although for the most part these devices are of the off-line type. That is to say, such auxiliary devices are not integrally associated with the reproduction apparatus (and basic finisher apparatus) and require either manual or mechanical intervention to bring reproduction sets to such devices in a form in which such auxiliary devices can perform the desired operation thereon. This adds expense to the overall reproduction process, and complexity to the total reproduction apparatus system, without adding to the efficiency or increasing the productivity of operation thereof.

Moreover, in the case of auxiliary saddle stitchers, typical saddle stitchers employ a knife blade to urge a stack of sheets to be folded through a pair of folding rollers. The force on the folding rollers and their initial spacing requires particular complex adjustment to assure a neat, complete fold for various sheet stack thicknesses without damaging the stack. Such adjustment has in practice been difficult to accurately control.

An exemplary saddle stitcher device is disclosed in DE-C-68459, this saddle stitcher including means for receiving, collecting, stapling and folding sheets.

The DD-A-57 590 discloses a device for producing booklets which is a combination of wellknown single devices forming an assembly line.

A modular device of a sheet post-processing apparatus is shown in US-PS 4,917,364.

SUMMARY OF THE INVENTION

This invention is directed to an improved saddle stitcher apparatus for forming completely finished reproduction sets of a series of reproductions produced on sheets respectively by a reproduction apparatus.

The improved saddle stitcher is defined by the features of claim 1, wherein said stapling and folding means includes an elongated knife blade, a plurality of pairs of nip rollers, said knife blade being mounted for reciprocation in a direction transverse to the sheet feed path of said sheet feed path defining means, said knife blade lying in a plane passing through the mid-line of a stapled reproduction set and the nips of said pairs of nip rollers to urge a stapled reproduction set sequentially through said pairs of nip rollers and then into said output hopper, a subframe, and means for urging said subframe toward said frame, and wherein one roller of each of said plurality of pairs of nip rollers is supported in said frame and the other roller of each of said plurality of pairs of nip

rollers is supported in said subframe, a pivot pin for pivotably connecting said subframe to said frame, said pivot pin is located downstream, in the direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers, and said urging means located upstream, in the direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers, whereby a progressively increasing mechanical advantage is exhibited at each of said nip roller pairs.

The invention, and its objects and advantages, will become more apparent in the detailed description of the preferred embodiment presented below.

BRIEF DESCRIPTION OF THE DRAWINGS

In the detailed description of the preferred embodiment of the invention presented below, reference is made to the accompanying drawings, in which:

- Fig. 1 is a front elevational view, in cross-section, of the modular finisher according to this invention, with portions shown schematically, removed, or broken away to facilitate viewing;
- Fig. 2 is a view in perspective of the support tray of the stapling module of the modular finisher;
- Figs. 3a and 3b are plan and front elevational views respectively of a sheet folded by the Z-folder of the modular finisher;
- Figs. 4a and 4b are front and side elevational views respectively of an alternate embodiment of the folding nip roller pairs and knife blade of the folding mechanism for the saddle stitcher of the modular finisher apparatus according to this invention.
- Fig. 5 is a top plan view of the folding mechanism of the saddle stitcher of the modular finisher according to this invention, with portions removed or broken away to facilitate viewing;
- Figs. 6a to 6c are rear elevational views of the folding mechanism of the saddle stitcher, in cross-section and with portions removed or broken away, respectively taken along the lines designated 6a-6a, 6b-6b, and 6c-6c of Fig. 5, and

Fig. 7

is a side elevational view of the compression assembly of the saddle stitcher folding mechanism.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the accompanying drawings, Fig. 1 shows the improved modular finisher apparatus according to the saddle stitcher of this invention, designated generally by the numeral 10. The finisher apparatus 10 may be associated with an electrostatographic copier or copier/duplicator, a thermal or electronic printer, or a photographic printer. The reproduction apparatus of the illustrated embodiment, shown only in part in Fig. 1, is designated generally by the numeral 12. The purpose of the modular finisher 10 is to efficiently finish reproduction sets from any conventional well known reproduction apparatus to form completely finished reproduction sets of a desired configuration at a speed which makes maximum use of the speed of the reproduction apparatus. As used herein, the term "reproduction sheets" refers to sheets bearing information reproduced in any well known manner by the reproduction apparatus or other sheets inserted into a reproduction set, such as for example blank sheets, cover sheets or tab stock; and the term "reproduction sets" refers to a plurality of reproduction sheets which when viewed together make up a copy corresponding to a multi-page original information bearing document.

The timing and control of the various operative components of the modular finisher apparatus 10 with respect to each other and to the reproduction apparatus are controlled by a logic and control unit C including a microprocessor for example. The microprocessor receives input and timing signals from sensors (not shown) located at points in the paths of sheets through the finisher and associated with the components of the finisher. Based on such signals and a program for the microprocessor, the unit C produces signals to control the operation of the various components of the finisher. The production of a program for commercially available microprocessors suitable for use with this invention is a conventional skill well understood in the art. The particular details of any such program would, of course, depend on the architecture of the selected microprocessor.

Typical high productivity reproduction apparatus reproduce information on individual sheets in a precollated manner so that the sheets upon exiting the apparatus (at chute 14 in the illustrated embodiment) may be readily grouped into reproduction sets. To provide precollated reproduction sets of information contained in a document sheet stack, the reproduction apparatus may include a recirculating document feeder of the type described in the aforementioned US-A-4,169,674, operating to recirculate document sheets from a document sheet stack seriatim from the stack of document sheets to an exposure station of a reproduction apparatus for

copying and then returned to such stack, in order, a number of times equal to the desired number of reproductions to be made of such stack. Alternatively, such as with reproduction apparatus including a mechanism for capturing or creating information electronically, information can be electronically acquired and saved in a memory storage device to thereafter be recalled at a desired time to form the desired number of multiple pre-collated reproductions sets.

As noted above, the production of precollated reproduction sets enables the ready production of completely finished reproduction sets to markedly improve the overall productivity of the reproduction system. The finisher 10, constructed to provide a device in modular form which can accomplish the production of completely finished reproduction sets in a selectable variety of forms, includes an upper transport module 20, a stapling module 30, and an output hopper 50. Additionally, the finisher has provisions for optional auxiliary devices selected from the group including a Z-folder 70, a saddle stitcher 90, and an insert tray 150. By its unique construction, the modular finisher 10 can readily accommodate any combination of the optional auxiliary devices.

The upper transport module 20 of the finisher 10 is incorporated in a self-contained housing 22 having a first transport path P₁. The transport path P₁ is defined, for example, by wire-form or sheet metal guides and driven nip rollers located at appropriately spaced intervals with respect to the guides. The upper transport module 20 is positioned such that the entrance E to the path P₁ is adjacent to the chute 14 of the reproduction apparatus 12. In this manner, the information-bearing reproduction sheets of a reproduction set exiting the apparatus 12 are received seriatim in the path P₁ and directed under normal operating circumstances to a sheet delivery station 24.

The sheet delivery station 24 (which may be for example of the type shown and described in US-A-4,930,765, issued June 5, 1990, in the name of Russel et al) directs the received sheets of a reproduction set to the stapling module 30.

Under certain circumstances, it may be desired to review a full reproduction set prior to accomplishing finishing operations thereon. Accordingly, the upper transport module 20 also includes a bypass transport path P_{1A} similarly defined by wire-form or sheet metal guides and spaced driven nip rollers. In path P_{1A}, sheets are directed to a proof set hopper 26 readily accessible to an operator for retrieval and review. If, after review, the proof set is found to be in the desired condition ready for finishing, a diverter 28 is returned to its normal position so that sheets constituting the second reproduction set (and all subsequently produced reproduction sets) are directed to the sheet delivery station.

The stapling module includes a tray 34 positioned to accept the sheets making up a full reproduction set from the sheet delivery station 24 of the upper transport module 20. The sheets of the reproduction set, delivered

seriatim through the station 24, are respectively corner registered on the tray 34 against a registration gate 36a selectively located to intercept the reproduction set travel path and an edge guide 36b at right angles to the gate. Such corner registration may be effected for example by a rotating flexible disk jogger 38, which can urge the individual sheets of the reproduction set in a direction perpendicular to sheet travel against the gate and edge guide. As illustrated in Fig. 2, a sheet S is moved in mutually perpendicular directions respectively by the jogger 38, rotating in the direction of its associated arrow, and under the influence of gravity, in the general direction of sheet travel. The sheet S thus moves from its solid line position through its broken line position into the corner formed by gate 36a and edge guide 36b.

Once all of the sheets making up the full reproduction set are properly corner registered, a stapling assembly 40 controlled by unit C is activated to place staples at a desired location (or plurality of locations) along the lead edge of the reproduction set registered against the gate 36a. An exemplary stapling assembly is shown and described in US-A-4,903,952, issued Feb. 27, 1990, in the name of Russel et al. After the reproduction set has been stapled by the stapling assembly 40, the registration gate 36a is moved to a remote location (out of the travel path for the stapled reproduction set) and an ejector roller 48 urges the stapled set from the tray 34 toward the output hopper 50.

The output hopper 50 is attached to the housing 32 adjacent to an external wall thereof. An entrance slot 52 in the external housing wall provides for communication between the output hopper 50 and the stapling module 30. As such, stapled reproduction sets (or alternatively sets which pass directly through the stapling module without being stapled) are directed to the output hopper and stacked for ready operator retrieval. A pair of foam rollers 54 urge the reproduction sets toward a tray 56 angled from the horizontal in an "up hill" direction relative to the path of the incoming reproduction sets. The rollers 54 are of a relatively large diameter foam construction to enable the rollers to handle a wide variety of thicknesses of reproduction sets. A pair of dangler arms 58a, 58b, formed of relatively light weight flexible material intercept the travel path of the incoming reproduction sets to urge the sets onto the tray 56.

Due to the angle of the tray 56 with respect to the horizontal, the incoming reproduction sets are urged by gravitational forces to a location where their initial trailing longitudinal edge becomes the leading edge and engages a guide plate 60. In this manner the stack of reproduction sets on the tray 56 are relatively aligned against the guide plate.

A plurality of fingers 62 (one shown in Fig. 1) are movable under the control of unit C to a remote position (broken line) relative to the incoming reproduction sets as a set is being registered against the guide plate 60, and to a position (solid line) overlying the set stack once a set has been registered. The fingers 62 are spring

urged for example to apply a downward force on the stack of reproduction sets on the tray 56 to hold the set stack against the guide plate 60 thereby substantially preventing dishevelment of the stack.

The elevation of the tray 56 is controlled by an elevator mechanism 64 of any suitable type, such as for example a spring-urged support, a rotating screw thread or a chain drive. The tray 56 is lowered by the elevator mechanism 64 as reproduction sets are delivered and stacked on the tray. Further, a motor M connected to the output hopper 50 selectively reciprocates the hopper in a direction cross-track relative to the path of incoming reproduction sets delivered to the tray 56. The timing of reciprocation of the output hopper is selected such that sequentially received reproduction sets are offset for ease of separation and removal from the tray by an operator.

Turning now to the optional auxiliary devices, the the module defining the Z-folder 70 will first be described. The Z-folder 70 is for the express purpose of folding large individual sheets into a reduced overall size where the folded sheets can be included for example in a booklet or stack with other smaller sized sheets. As an illustrative example, a 279 mm x 432 mm (11"x17") sheet is folded so that its overall dimensions are 279 mm x 216 mm (11"x8 1/2") (see Figs. 3a, 3b) for inclusion in a reproduction set with basic overall dimensions of 279 mm x 216 mm (11"x8 1/2"). The Z-folder 70 includes a driven cluster of rotating rollers 72 and sheet guide chutes 74 and 76 which cooperatively act on a sheet to achieve the desired folded configuration for the sheet. The cluster of rollers 72 and guide chutes 74 and 76 is mounted on a frame 82 readily receivable in the housing 22 of the upper transport module 20 on cooperating slide guides 84 for example. In this manner, if it is desired to include a Z-folder in the finisher 10, a Z-folder module is merely slid into place in the finisher.

When it is desired to effect folding of a sheet, such sheet is transported along the path P_{1A} and then directed by a diverter 78 into the path P_{1B} . The diverter 78 is controlled for example by a solenoid actuator for movement to a position (solid line position of Fig. 1) for directing sheets along the path P_{1A} to the Z-folder 70 or to a position (broken line position of Fig. 1) for directing sheets to the proof set hopper 26.

In the folding operation on the Z-folder 70, a sheet Z in the path P is urged into the nip between rotating roller 72a, driven by a motor to become a driving roller, and idler roller 72b of the roller cluster 72. The roller pair 72a, 72b urge the sheet into the upper chute 74 until the lead edge of the sheet engages an adjustable stop 74a.

The sheet Z, with the first fold F_1 now being the leading edge, continues to be driven into the chute 76 until such new lead edge engages the stop 76a. Similarly to the action described above relative to accomplishing the first fold F_1 , the stop 76a prevents the sheet from moving further into the chute 76. The urging of the sheet Z by the rollers 72a and 72c thus causes the sheet to buckle

and be fed into the second fold nip between the rollers 72a and 72d. The second fold F_2 is then formed by the rollers 72a and 72d, and the folded sheet is thereafter urged by such rollers in a direction out of the Z-folder opposite to its incoming direction.

The module defining the saddle stitcher 90 of the modular finisher 10 according to this invention is for the purpose of providing the finisher with the capability of making center stapled and folded booklets. The saddle stitcher 90 has five major components: a transport path P_3 , a stapling mechanism 92, a folding mechanism 94, an edge registration assembly 96, and a booklet-receiving output hopper 98. As with the optional Z-folder module 70, the major components of the saddle stitcher are readily receivable in the finisher 10. Particularly, the major components are, for example, slidably receivable on cooperating slide guides 100 in the housing 32. In this manner, if it is desired to include a saddle stitcher module 90 in the finisher 10, the components of the saddle stitcher module are merely received in place in the finisher.

The transport path P_3 for the saddle stitcher 90 is located such that it communicates with the path P_1 of the upper transport module 20 downstream, in the direction of sheet travel, from the diverter 28. A diverter 102, associated with the path P_3 , is movable for example by a solenoid actuator to a position (solid line position of Fig. 1) remote from the path P_1 , or to a position (broken line position of Fig. 1) intercepting the path P_1 to direct sheets into the path P_3 . Sheets received serially in the path P_3 are aligned in the cross-track direction by a jogger mechanism 104 (similar for example to the jogger 38 associated with the stapling module 30).

The lead edges of the respective cross-track aligned sheets comprising a reproduction set are registered against a first gate 106 of the registration assembly 96 located to intercept the path P_3 . In order to accommodate for formation of neat booklets from reproduction sets of various overall dimensions, the gate 106 must be adjustable along the path P_3 to properly locate the center staples for the booklets. Accordingly, the gate 106 is mounted on a support 106a adjustable along a slide bar 106b in the direction of sheet travel (i.e., the direction of arrow 106c in Fig. 1). Adjustment of the support 106a positions the first gate 106, when in its path intercepting position, to locate the lead edges of the delivered sheets at a preselected distance from the stapling line defined by the stapling mechanism 92. Such preselected distance is desirably substantially equal to one-half the dimension of the sheets in the sheet travel direction.

Once the requisite number of sheets for completing a full reproduction set have been delivered to the saddle stitcher module 90, the stapling mechanism 92 thereof is actuated by the control unit C to staple the reproduction set along the stapling line, substantially corresponding to the center line of the sheets in the sheet travel direction. After stapling has been accomplished, the

gate 106 is pulled out of the path P_3 by a solenoid actuator 106s enabling the stapled reproduction set to continue its travel in the path P_3 under the influence of gravity for example. The stapled reproduction set continues its travel until the lead edge thereof is registered against a second gate 108 located to intercept the path P_3 downstream of the gate 106.

The gate 108 is adjustable in the direction of sheet travel to locate the lead edges of the delivered stapled reproduction set sheets at a preselected distance from the folding line defined by the folding mechanism 94. Such preselected distance is desirably substantially equal to one-half the dimension of the sheets in the sheet travel direction. Another way of looking at the adjustable placement of the gate 108 is that the gate 108 should be located a distance from the gate 106 substantially equal to the distance between the stapling line defined by the stapling mechanism 92 and the folding line defined by the folding mechanism 94. In this manner, when the stapled reproduction set is delivered to the gate 108, the established folding line will correspond to the stapling line such that folding accomplished by the mechanism 94 occurs on the center line of the sheets in the sheet travel direction resulting in formation of a neat booklet from the reproduction set.

As is apparent, the distance between the staple line as defined by the stapling mechanism 92 and the folding line as defined by the folding mechanism 94 is fixed. Accordingly, any adjustment of the first gate 106 necessitates a similar (substantially equal) adjustment of the second gate 108. Therefore, for the simplicity of construction and convenience of operation, the adjustability of the second gate 108 may be accomplished by connecting the second gate to the support 106a for the first gate for movement therewith to provide simultaneous corresponding adjustment of the gates.

The folding mechanism 94 includes a knife blade 110 selectively actuatable into cooperative relation with a double set of folding nip rollers 112. As more particularly shown in Figs. 5 and 6a-6c, the knife blade 110 is supported by a bar 114 which is, in turn, mounted for reciprocation in linear slides 116 provided respectively in spaced frame plates 118. The slides 116, made from a friction reducing material, are aligned with the folding nip roller pairs 112 to accurately guide the knife blade 110 between the rollers on reciprocation of the blade. The individual rollers 112a-112d, which comprise the folding nip roller pairs 112, are designed to maintain significant structural rigidity under load to minimize deflection. For example, the rollers may respectively be constructed as a solid aluminum core coated with rubber with steel shafts knurled and pressed into the bored ends thereof. The lower rollers 112b, 112d of the roller pairs are rotatably supported in the frame plates 118, while the upper rollers 112a, 112c are rotatably supported in spaced subframe plates 118a. The subframe plates 118a are connected to the frame plates 118 respectively by pivot pins 118b located downstream (in the

direction of sheet travel) from the folding nip roller pairs. Accordingly, sheets being folded are urged by the knife blade 110 through one roller nip (i.e., between the rollers 112a and 112b) and then through the other roller nip (i.e., between the rollers 112c and 112d).

In order to accomplish neat folding of the sheets of the reproduction set, it is necessary to provide a desired predetermined engagement force between the rollers of the folding roller nip pairs 112 as the sheets of the reproduction set are urged therebetween. Accordingly, a compression assembly 120 is provided. The compression assembly 120 (best shown in Figs. 5, 6c, and 7) includes an upper anchor bar 120a interconnected between the frame plates 118 and a lower anchor bar 120b interconnected between the subframe plates 118a. A pair of compression springs 122 are retained between the upper anchor bar 120a and the lower anchor bar 120b by long bolts 124. The long bolts are guided in bearings in the upper anchor bar and are threaded to the lower anchor bar to maintain a predetermined preload force between the bars and thus between the associated structure including, ultimately, the nip roller pairs 112. The attachment of the upper and lower anchor bars to the frame plates and subframe plates respectively are by way of pivot pins 126. The pivot pins 126 enable the anchor bars 120a, 120b to pivot relative to the frame plates 118 and the subframe plates 118b in order to prevent binding of the long bolts 124 as the springs 122 compress during the folding operation.

The provision of folding nip roller pairs 112 offers several significant advantages in the operation of the folding mechanism 94. Due to the location of the compression springs 122 of the compression assembly 120 relative to the nip roller pairs 112 and the pivotal relationship between the upper rollers and lower rollers of the nip roller pairs, a different mechanical advantage is exhibited at each of the nip roller pairs. Specifically, the mechanical advantage at the second nip roller pair (rollers 112b and 112d) closest to the pivot axis of the subframe plates 118a is significantly greater than the mechanical advantage at the first nip roller pair (rollers 112a and 112c), for example on the order of twice as large. Therefore, the fold formed in the reproduction set is accomplished in two steps of increasing clamping force. Thus the force at the first nip roller pair may be set to be substantially less than has heretofore been necessary to accomplish the desired booklet folding. With this arrangement, it is not a concern that the fold at the first nip roller pair be complete, and accordingly the force at such first nip pair can be set to assure the starting of an accurate and neat fold without forcing the reproduction set to be folded into the nip under such pressure as might damage the set. Moreover, as the reproduction set being folded passes through the first nip roller pair, the subframe plates 118a are wedged slightly open relative to the frame plates 118. Therefore, the greater force-applying second nip roller pair is already somewhat spread apart to readily receive the reproduction set

being folded to complete the folding operation. With this arrangement then, the first nip roller pair is thus wedged open with a relatively light (non-damaging to the reproduction set) force irrespective of the thickness of the reproduction set being folded, and the second nip roller pair is accordingly partially opened by the set passing through the first nip roller pair. As a result, the folding mechanism 94 is effectively operational to automatically fold reproduction sets of various thicknesses without the need for a nip gap adjustment mechanism as would be required to accommodate various reproduction set thicknesses when only one nip roller pair is utilized to accomplish the folding operation.

In order to effect selective reciprocation of the knife blade 110, under the control of unit C, the folding mechanism 94 of the saddle stitcher 90 includes a motor 130 having an output shaft 130a (see Fig. 6c). The output shaft 130a is drivingly connected to a main pulley 132a of a belt-and-pulley drive arrangement 132 (see Fig. 6b). A plurality of elements of the drive arrangement 132 are coupled respectively to the rollers 112a-112d of the folding roller nip pairs 112 to continuously rotate the rollers. Further, elements of the drive arrangement 132 are coupled to drive gears 134, fixedly mounted on a cross shaft 134a, through a clutch mechanism 136 to rotate the cross shaft (and thus the drive gears) on actuation of the clutch mechanism. The drive gears 134 mesh with cranks 138 (see Fig. 6a) which have links 140 pivotably connected at their respective ends to the cranks and the knife blade support bar 114.

A switch (not shown) of any well known type detects the angular position of the cranks 138 and provides a signal for the control unit C to effect actuation of the clutch mechanism 136. Such clutch mechanism actuation occurs for one revolution of the cranks 138 so that for each reproduction set to be folded, the knife blade 110 is reciprocated through one complete stroke. A complete stroke of the knife blade 110 contemplates travel of the blade a distance sufficient to urge the reproduction set being folded completely through the folding mechanism 94 and out of the nip roller pairs 112 where the formed booklet falls under the influence of gravity into the output hopper 98. The hopper 98 is mounted in the housing 32 of the modular finisher 10 on slides 98a so as to enable the hopper to move to a convenient location, for example external to the housing, to facilitate operator retrieval of the folded booklets collected in the hopper.

In one preferred embodiment of the saddle stitcher 90 according to this invention, the links 140 are of somewhat different lengths. Accordingly, the angle of the knife blade 110 relative to the folding nip roller pairs 112 changes during the reciprocation of the knife blade. As a result, the reproduction set being folded is sent into the nips of the roller pairs at a skewed angle (rather than squarely with respect to the nips) so that the edge being folded does not contact the nip rollers all at once. Rather, the fold is effected sequentially in the direction of the

fold during a segment of the travel distance of the reproduction set through the nip. This results in a tighter fold than can be accomplished when the fold is produced all at once (for a given nip pressure), and reduces the noise and power to complete the fold.

In another preferred embodiment of the saddle stitcher according to this invention, the rollers of the folding nip roller pairs have a plurality of under-cut portions for accepting a complementary shaped knife blade. As shown in Figs. 4a and 4b, an exemplary roller pair designated by the numeral 112' has undercut portions 142. Such under-cut portions readily receive complementary portions 144 of the knife blade 110' in a substantially non-contacting manner. With such arrangement, the angle of the knife blade to the nip roller pairs can be kept square, thus assuring a square fold in forming the reproduction set into a folded booklet, and the force on the roller pairs to effect folding is substantially independent of the insertion of the knife blade therebetween.

Turning now to the module defining the insert tray 150 (shown in Fig. 1), the insert tray is for the purpose of providing the modular finisher 10 according to this invention with the ability to selectively add additional sheets to a reproduction set. For example the additional sheets may be preprinted cover sheets of the same or different stock characteristics to the sheets of the reproduction set, or may be sheets utilized within a reproduction set to separate distinct portions of the set. The insert tray 150 includes a sheet receiving hopper 152 removably locatable in the top cover 154 for the finisher 10. The hopper 152 has appropriate guides (not shown) for aligning a stack of sheets therein relative to a sheet feed device 156. The sheet feed device 156, of any well known type such as a scuff feeder or a vacuum feeder for example, is activated by the control unit C when it is desired to selectively feed a single sheet from the hopper 152 to have such sheet inserted into a reproduction set being received by the finisher 10. The sheet is fed into a transport path P_4 communicating with the transport path P_1 of the upper transport module 20 between the entrance E and the diverter 28. Accordingly, the additional sheet is selectively inserted into the path P_1 at a desired time during the finishing of a reproduction set to be treated the same as any other sheet in the set during the finishing operation.

Claims

1. Saddle stitcher apparatus (90) for forming completely finished reproduction sets of a series of reproductions produced on sheets respectively by a reproduction apparatus (12), said saddle stitcher (90) including a support frame (118), said frame including means (100) for mating with means for detachably accepting the said saddle stitcher with a housing (32) of a modular finisher apparatus (10), means associated with said support frame (118) for

defining a sheet feed path (P_3) communicating with reproduction sheet receiving means (E), means (96) mounted on said frame (118) for registering reproduction sheets, means (92, 94) associated with said frame for stapling registered reproduction sheets at substantially the mid-line thereof to form a reproduction set, and folding a stapled reproduction set substantially along the mid-line thereof, and an output hopper (98) for collecting folded stapled reproduction sets, wherein said stapling and folding means (92, 94) includes an elongated knife blade (110), a plurality of pairs of nip rollers (112), said knife blade (110) being mounted for reciprocation in a direction transverse to the sheet feed path (P_3) of said sheet feed path defining means, said knife blade lying in a plane passing through the mid-line of a stapled reproduction set and the nips of said pairs of nip rollers (112) to urge a stapled reproduction set sequentially through said pairs of nip rollers (112) and then into said output hopper (98), a subframe (118a), and means (120) for urging said subframe (118a) toward said frame (118); and wherein one roller (112b, 112d) of each of said plurality of pairs of nip rollers (112) is supported in said frame (118), and the other roller (112a, 112c) of each of said plurality of pairs of nip rollers is supported in said subframe (118a), a pivot pin (118b) for pivotably connecting said subframe (118a) to said frame (118), said pivot pin is located downstream, in the direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers (112), and said urging means (120) is located upstream, in the direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers, whereby a progressively increasing mechanical advantage is exhibited at each of said nip roller pairs (112a, 112b; 112c, 112d).

2. The saddle stitcher apparatus of Claim 1 **characterized by** said registration means (96) including a first gate (106), and means (106s) for selectively moving said first gate to a position intercepting the sheet feed path of said sheet feed path defining means to register reproduction sheets in preparation for stapling, and to a position remote from such path after stapling reproduction sheets into a reproduction set, said registration means (96) further including means (106a) for adjustably supporting said first gate (106) on said frame (118) for movement in the direction (106c) of the sheet feed path of said sheet feed path defining means, whereby the location at which said first gate (106) of said registration means intercepts such sheet feed path can be adjusted in accordance with the dimension of reproduction sheets along such sheet feed path so that such reproduction sheets are registered at said first gate with the mid-line of such sheets aligned with said stapling means.

3. The saddle stitcher apparatus of Claim 2 **characterized in that** said registration means (96) further includes a second gate (108) positioned to intercept the path of said sheet feed path defining means downstream of said first gate (106), in the direction of travel of the reproduction sheets, at a location whereby, when said first gate (106) is moved to its remote position, the lead edge of a stapled reproduction set is moved to engage and be registered by said second gate (108) at a position where the mid-line of said stapled reproduction set is aligned with said folding means (94).

4. The saddle stitcher apparatus of Claim 3 **characterized in that** said second gate (108) is interconnected with said first gate (106) so as to move therewith as said first gate is adjusted to similarly adjust said second gate.

5. The saddle stitcher apparatus of Claim 1 **characterized in that** said folding means (94) includes means (130) for reciprocating said knife blade (110) in said plane at an angle to the nip line of said pairs of nip rollers (112) to pass through said nips thereof progressively, whereby the fold in a reproduction set is effected sequentially in the direction of the fold during a segment of the travel distance of such reproduction set through said nips.

6. The saddle stitcher apparatus of Claim 5 **characterized in that** said reciprocating means (130) includes a rotatable drive shaft (130a), at least one crank (138) rotatably driven by said drive shaft, at least one link (140) connected to said at least one crank (138) at one end and connected at its opposite end to said knife blade (110).

7. The saddle stitcher apparatus of Claim 6 **characterized in that** said reciprocating means (130) includes a motor having a rotating output shaft, clutch means (136) for selectively coupling said motor output shaft to said drive shaft, and control means for actuating said clutch means to couple said output shaft to said drive shaft for a time sufficient to rotate said crank (138) through one revolution to effect one reciprocation cycle for said knife blade (110).

8. The saddle stitcher apparatus of Claim 7 **characterized in that** said reciprocating means includes a pair of cranks (138) and a pair of links (140) associated respectively therewith, said links being connected to opposite ends of said elongated knife blade (110), with one link being longer than the other link.

Patentansprüche

1. Heftvorrichtung (90) zum Herstellen fertiger Kopiensätze aus einer Reihe von auf Blättern in einer Reproduktionseinrichtung (12) hergestellten Kopien, wobei die Heftvorrichtung (90) einen Tragrahmen (118) mit Mitteln (100) zum Eingreifen in Mittel zur lösbaren Aufnahme der Heftvorrichtung in einem Gehäuse (32) einer modularen Endbearbeitungsvorrichtung (10) aufweist, ferner dem Tragrahmen (118) zugeordnete Mittel zum Festlegen einer Blattzufuhrbahn (P3), die mit einer Kopienempfangseinrichtung (E) in Verbindung steht, eine am Rahmen (118) befestigte Einrichtung (96) zum Ausrichten der Kopien, dem Rahmen (118) zugeordnete Mittel (92, 94) zum Heften der ausgerichteten Kopien im wesentlichen an ihrer Mittellinie, um einen Kopiensatz zu erzeugen, und zum Falten eines gehefteten Kopiensatzes im wesentlichen entlang seiner Mittellinie, und einen Ausgabebehälter (98) zum Sammeln der gefalteten und gehefteten Kopiensätze, **dadurch gekennzeichnet**, daß die Heft- und Faltmittel (92, 94) eine längliche Messerklinge (110) und eine Vielzahl von Walzenpaaren (112) aufweisen, wobei die Messerklinge (110) für eine Hin- und Herbewegung in einer Richtung quer zur Blattzufuhrbahn (P3) der Blattzufuhrbahn-Festlegungsmittel angeordnet ist und in einer Ebene liegt, die durch die Mittellinie eines gehefteten Kopiensatzes und die Walzenspalte der Walzenpaare (112) verläuft, um einen gehefteten Kopiensatz nacheinander durch die Walzenpaare (112) und anschließend in den Ausgabebehälter (98) zu schieben, ferner einen Hilfsrahmen (118a) und ein Mittel (120) zum Andrücken des Hilfsrahmens (118a) an den Rahmen (118), wobei eine Walze (112b, 112d) von jedem der Vielzahl der Walzenpaare (112) im Rahmen (118) und die jeweils andere Walze (112a, 112c) im Hilfsrahmen (118a) gehalten ist, einen Drehzapfen (118b) zum schwenkbaren Verbinden des Hilfsrahmens (118a) mit dem Rahmen (118), wobei der Drehzapfen nach der Vielzahl der Walzenpaare (112) und das Andrückmittel (120) vor der Vielzahl der Walzenpaare, jeweils in der Bewegungsrichtung eines zu faltenden Kopiensatzes gesehen, angeordnet sind, wodurch sich bei jedem der Walzenpaare (112a, 112b; 112c, 112d) eine allmählich ansteigende mechanische Andruckkraft ergibt.
2. Heftvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Ausrichteinrichtung (96) ein erstes Tor (106) und ein Mittel (106s) zum wahlweisen Bewegen des ersten Tores in eine Stellung, in der es in der Blattzufuhrbahn der Blattzufuhrbahn-Festlegungsmittel einen Anschlag bildet, um die Kopien zur Vorbereitung des Heftvorgangs auszurichten, und in eine von der Blattzufuhrbahn entfernte Stellung, nachdem die Kopien zu einem Kopiensatz geheftet wurden, wobei die Ausrichteinrichtung (96) zusätzlich ein Mittel (106a) zum verstellbaren Halten des ersten Tores (106) am Rahmen (118) für eine Bewegung in der Richtung (106c) der Blattzufuhrbahn der Blattzufuhrbahn-Festlegungsmittel aufweist, wobei die Stelle, an der das erste Tor (106) der Ausrichteinrichtung in der Blattzufuhrbahn einen Anschlag bildet, entsprechend den Abmessungen der Kopien an der Blattzufuhrbahn einstellbar ist, so daß die Kopien am ersten Tor so ausgerichtet werden, daß ihre Mittellinie mit dem Heftmittel fluchtet.
3. Heftvorrichtung nach Anspruch 2, dadurch gekennzeichnet, daß die Ausrichteinrichtung (96) ein zweites Tor (108) aufweist, das so angeordnet ist, daß es in der Bahn der Blattzufuhrbahn-Festlegungsmittel, in Bewegungsrichtung der Kopien gesehen, nach dem ersten Tor (106) einen Anschlag bildet, an einer Stelle, an der bei der Bewegung des ersten Tores (106) in seine entfernte Stellung die Vorderkante eines gehefteten Kopiensatzes in Eingriff mit dem zweiten Tor (108) gelangt und von diesem ausgerichtet wird, in einer Stellung, in der die Mittellinie des gehefteten Kopiensatzes mit dem Faltmittel (94) ausgerichtet ist.
4. Heftvorrichtung nach Anspruch 3, dadurch gekennzeichnet, daß das zweite Tor (108) mit dem ersten Tor (106) verbunden ist und mitbewegt wird, wenn das erste Tor verstellt wird, um das zweite Tor entsprechend zu verstellen.
5. Heftvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß das Faltmittel (94) ein Mittel (130) zur Hin- und Herbewegung der Messerklinge (110) in der Ebene unter einem Winkel zur Spaltlinie der Walzenpaare (112) aufweist, damit die Klinge allmählich durch die Spalte dringt, wodurch die Faltung in einem Kopiensatz sequentiell in Richtung des Falzes während eines Abschnitts des Bewegungsweges des Kopiensatzes durch die Walzenspalte erfolgt.
6. Heftvorrichtung nach Anspruch 5, dadurch gekennzeichnet, daß das Mittel (130) für die Hin- und Herbewegung eine drehbare Antriebswelle (130a), mindestens eine von der Antriebswelle gedrehte Kurbel (138) und mindestens eine Kurbelstange (140) aufweist, welche an einem Ende mit der mindestens einen Kurbel (138) und am anderen Ende mit der Messerklinge (110) verbunden ist.
7. Heftvorrichtung nach Anspruch 6, dadurch gekennzeichnet, daß das Mittel für die Hin- und Herbewegung einen Motor aufweist mit einer rotierenden Motorwelle, einer Kupplung (136) zum wahlweisen

Verbinden der Motorwelle mit der Antriebswelle, und einem Steuermittel zum Betätigen der Kuppelung für die Verbindung der Motorwelle mit der Antriebswelle so lange, bis die Kurbel (138) eine Um-

8. Heftvorrichtung nach Anspruch 7, dadurch gekennzeichnet, daß das Mittel für die Hin- und Herbewegung zwei Kurbeln (138) und zwei entsprechend zugeordnete Kurbelstangen (140) aufweist, wobei die Kurbelstangen mit den gegenüberliegenden Enden der länglichen Messerklinge (110) verbunden sind und eine Kurbelstange länger als die andere ist.

Revendications

1. Dispositif de brocheuse (90) destiné à former des ensembles de reproduction entièrement finis composés d'une série de reproductions produites respectivement sur des feuilles par un dispositif de reproduction (12), ladite brocheuse (90) comprenant un bâti de support (118), ledit bâti comprenant un moyen (100) destiné à s'accoupler à un moyen permettant d'associer de façon amovible ladite brocheuse à un coffret (32) d'un dispositif de finition modulaire (10), un moyen associé audit bâti de support (118) afin de définir un trajet d'avance de feuilles (P_3) communiquant avec un moyen de réception de feuilles de reproduction (E), un moyen (96) monté sur ledit bâti (118) afin d'aligner des feuilles de reproduction, un moyen (92, 94) associé audit bâti afin d'agrafer des feuilles de reproduction alignées sensiblement au niveau de la ligne médiane de celles-ci afin de former un ensemble de reproduction, et destiné à replier un ensemble de reproduction agrafé pratiquement suivant la ligne médiane de celui-ci, ainsi qu'un bac de sortie (98) destiné à recueillir les ensembles de reproduction agrafés repliés, dans lequel ledit moyen d'agrafage et de pliage (92, 94) comprend une lame de couteau allongée (110), une pluralité de paires de rouleaux de pincement (112), ladite lame de couteau (110) étant montée en vue d'un mouvement alternatif suivant une direction transversale au trajet d'avance de feuilles (P_3) dudit moyen définissant un trajet d'avance de feuilles, ladite lame de couteau s'étendant dans un plan passant par la ligne médiane d'un ensemble de reproduction agrafé et les pincements desdites paires de rouleaux de pincement (112) afin de pousser un ensemble de reproduction agrafé en séquence à travers lesdites paires de rouleaux de pincement (112) puis jusque dans ledit bac de sortie (98), un bâti secondaire (118a) et un moyen (120) destinés à pousser ledit bâti secondaire (118a) en direction dudit bâti (118) et dans lequel un premier rouleau (112b, 112d) de chaque paire de ladite plu-


ralité de paires de rouleaux de pincement (112) est supporté dans ledit bâti (118), et l'autre rouleau (112a, 112c) de chaque paire de ladite pluralité de paires de rouleaux de pincement est supporté dans ledit bâti secondaire (118a), un axe de pivot (118b) destiné à relier de façon pivotante ledit bâti secondaire (118a) audit bâti (118), ledit axe de pivot est situé en aval, dans la direction de déplacement d'un ensemble de reproduction qui est replié, par rapport à ladite pluralité de paires de rouleaux de pincement (112), et ledit moyen de poussée (120) est situé en amont, dans la direction de déplacement d'un ensemble de reproduction qui est replié à partir de ladite pluralité de paires de rouleaux de pincement, grâce à quoi une amplification croissante progressivement de la force mécanique s'exerce au niveau de chacune desdites paires de rouleaux de pincement (112a, 112b ; 112c, 112d).

2. Dispositif de brocheuse selon la revendication 1, caractérisé par ledit moyen d'alignement (96) comprenant une première porte (106), et un moyen (106s) destiné à déplacer sélectivement ladite première porte jusqu'à une position interceptant le trajet d'avance de feuilles dudit moyen définissant un trajet d'avance de feuilles afin d'aligner des feuilles de reproduction en préparation d'un agrafage, et jusqu'à une position éloignée d'un tel trajet après l'agrafage des feuilles de reproduction en un ensemble de reproduction, ledit moyen d'alignement (96) comprenant en outre un moyen (106a) destiné à supporter ladite première porte (106) de façon réglable sur ledit bâti (118) en vue d'un déplacement dans la direction (106c) du trajet d'avance de feuilles dudit moyen définissant un trajet d'avance de feuilles, grâce à quoi l'emplacement auquel ladite première porte (106) dudit moyen d'alignement intercepte un tel trajet d'avance de feuilles peut être réglé en correspondance avec la dimension des feuilles de reproduction le long d'un tel trajet d'avance de feuilles de façon que de telles feuilles de reproduction soient alignées au niveau de ladite première porte, la ligne médiane de telles feuilles étant alignée avec ledit moyen d'agrafage.
3. Dispositif de brocheuse selon la revendication 2, caractérisé en ce que ledit moyen d'alignement (96) comprend en outre une seconde porte (108) positionnée de façon à intercepter le trajet dudit moyen définissant un trajet d'avance de feuilles en aval de ladite première porte (106), dans la direction de déplacement des feuilles de reproduction, à un emplacement grâce auquel, lorsque ladite première porte (106) est déplacée jusqu'à sa position éloignée, le bord avant d'un ensemble de reproduction agrafé est déplacé pour venir en contact avec ladite seconde porte (108) et être aligné par celle-ci à un emplacement auquel la ligne médiane dudit ensem-

ble de reproduction agrafé est aligné avec ledit moyen de pliage (94).

4. Dispositif de brocheuse selon la revendication 3, caractérisé en ce que ladite seconde porte (108) est reliée à ladite première porte (106) de façon à se déplacer avec celle-ci lorsque ladite première porte est réglée, afin de régler de façon similaire ladite seconde porte. 5
10
5. Dispositif de brocheuse selon la revendication 1, caractérisé en ce que ledit moyen de pliage (94) comprend un moyen (130) destiné à faire aller et venir ladite lame de couteau (110) dans ledit plan suivant un angle par rapport à la ligne de pincement desdites paires de rouleaux de pincement (112) afin qu'elle passe progressivement au travers desdits pincements de ceux-ci, grâce à quoi le pliage d'un ensemble de reproduction est effectué de façon séquentielle dans la direction du pliage pendant un segment de la distance de déplacement d'un tel ensemble de reproduction au travers desdit pincements. 15
20
6. Dispositif de brocheuse selon la revendication 5, caractérisé en ce que ledit moyen de mouvement alternatif (130) comprend un arbre d'entraînement rotatif (130a), au moins une manivelle (138) entraînée en rotation par ledit arbre d'entraînement, au moins une bielle (140) reliée à ladite au moins une manivelle (138) à une première extrémité et reliée au niveau de son extrémité opposée à ladite lame de couteau (110). 25
30
7. Dispositif de brocheuse selon la revendication 6, caractérisé en ce que ledit moyen de va-et-vient (130) comprend un moteur comportant un arbre de sortie tournant, un moyen d'embrayage (136) destiné à coupler sélectivement ledit arbre de sortie du moteur audit arbre d'entraînement, et un moyen de commande destiné à actionner ledit moyen d'embrayage afin de coupler ledit arbre de sortie audit arbre d'entraînement pendant une durée suffisante pour faire tourner ladite manivelle (138) sur un tour complet afin d'effectuer un cycle de va-et-vient de ladite lame de couteau (110). 35
40
45
8. Dispositif de brocheuse selon la revendication 7, caractérisé en ce que ledit moyen de va-et-vient comprend une paire de manivelles (138) et une paire de bielles (140) associées respectivement à celles-ci, lesdites bielles étant reliées à des extrémités opposées de ladite lame de couteau allongée (110), une bielle étant plus longue que l'autre bielle. 50
55

FIG. 1

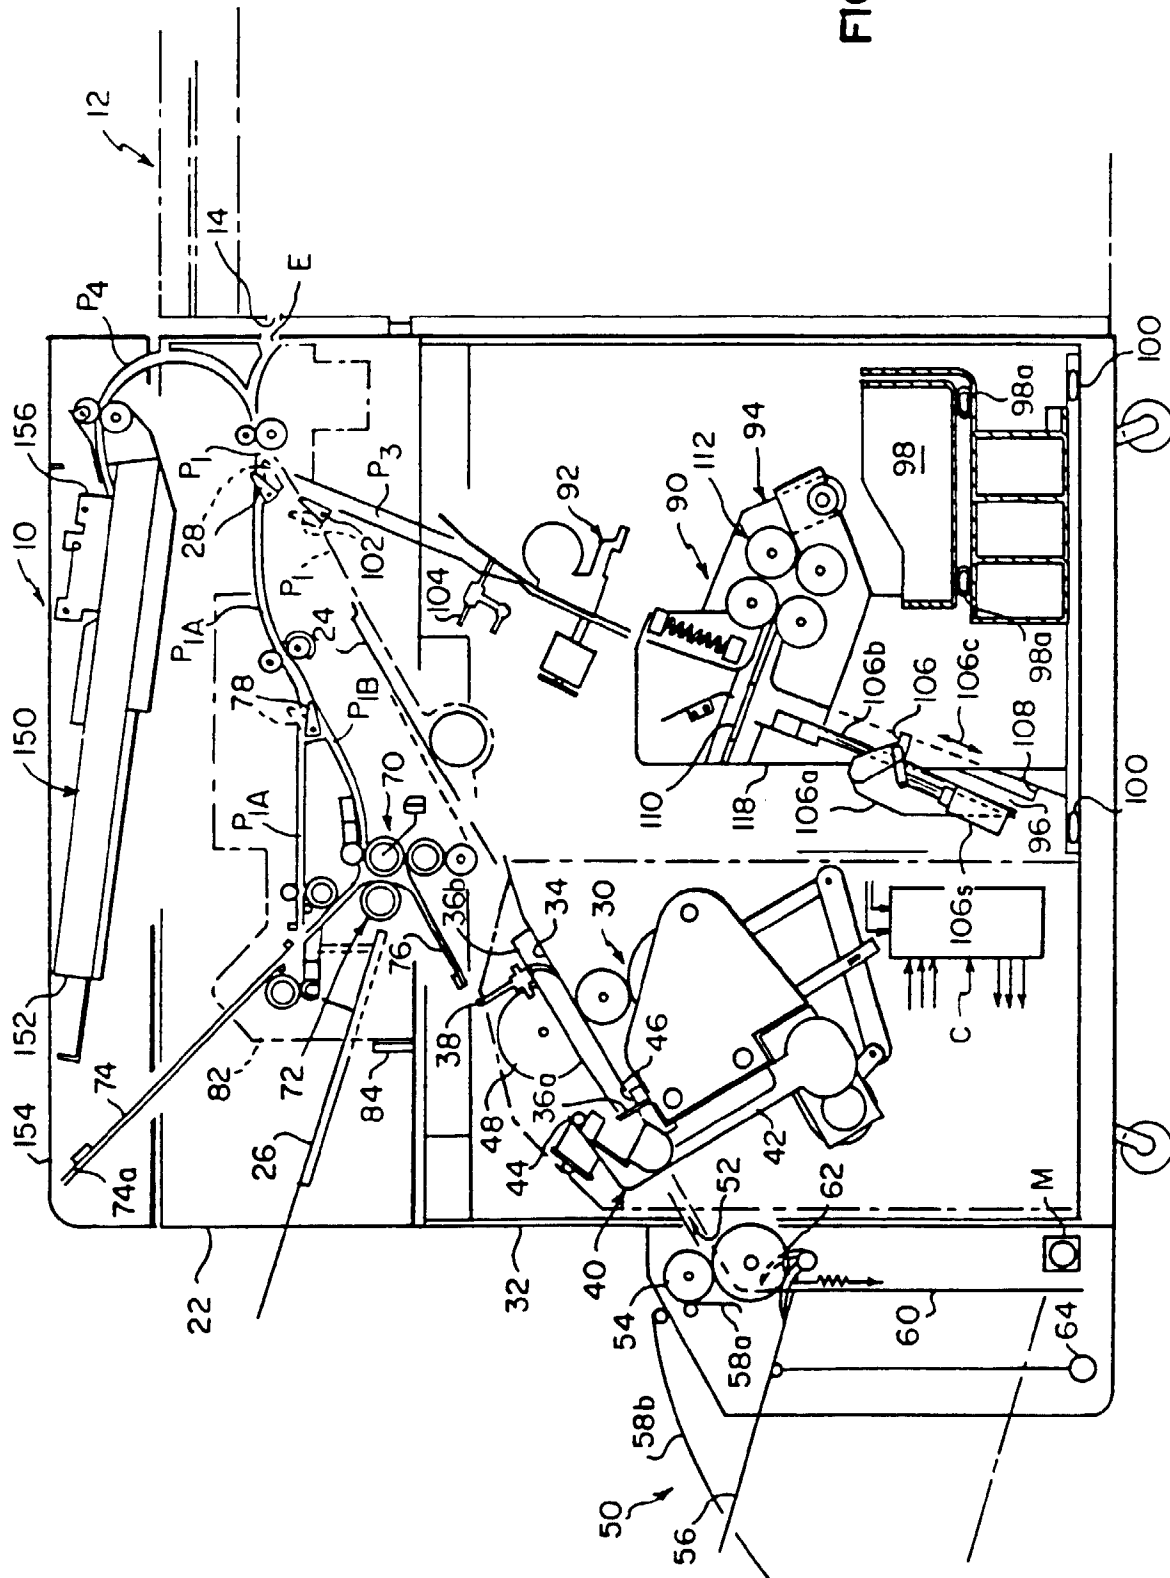

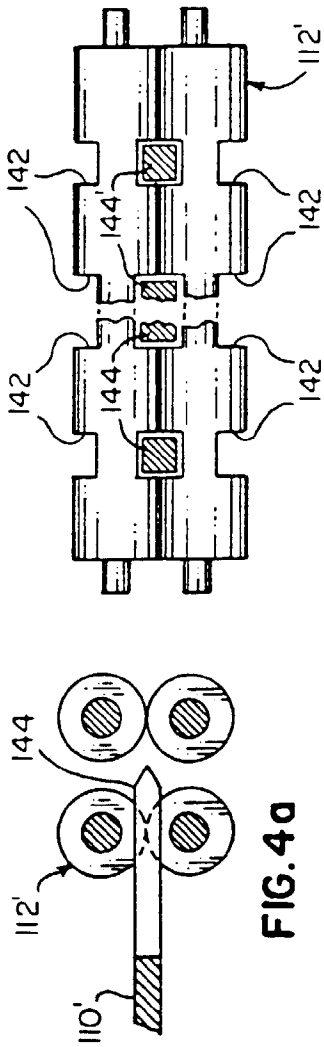


FIG. 4a

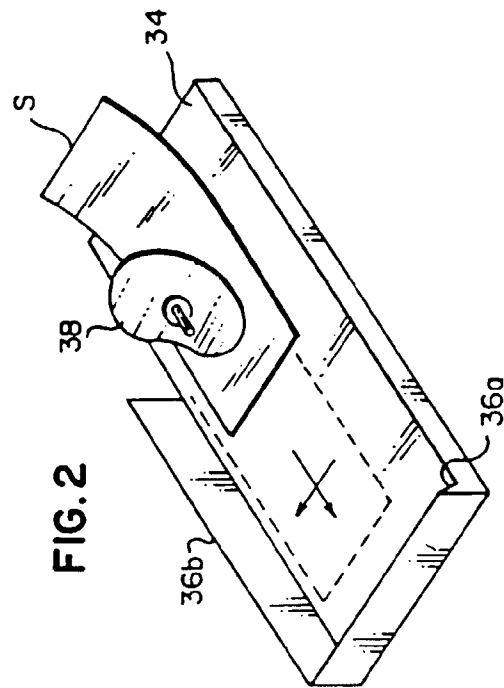


FIG. 2

FIG. 4b

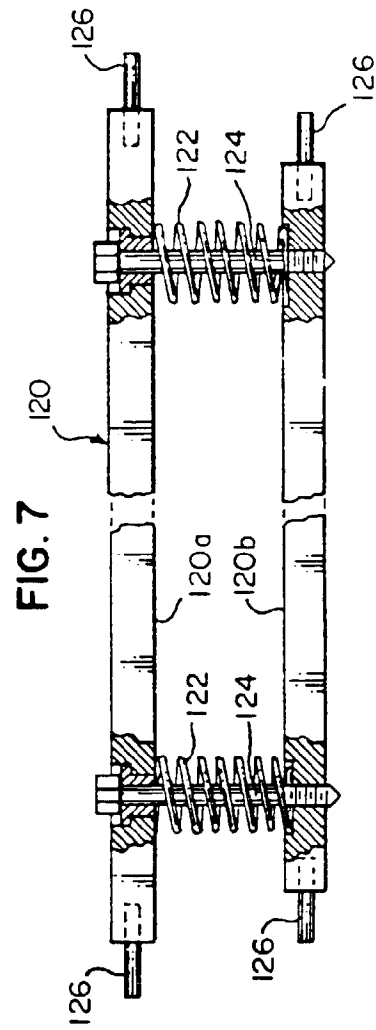


FIG. 7

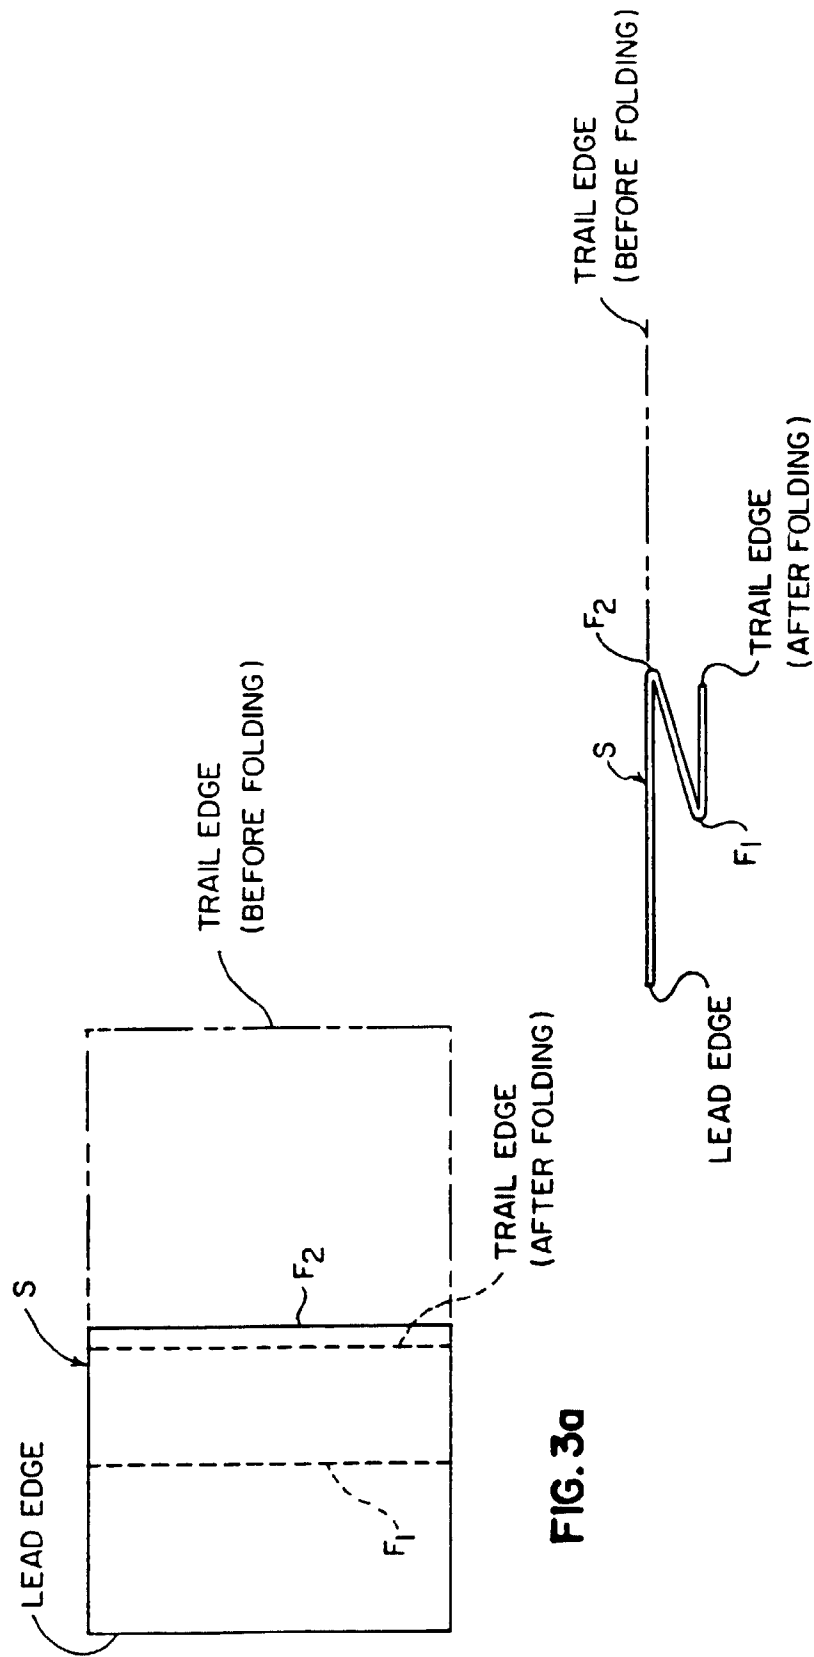


FIG. 3b

FIG. 5

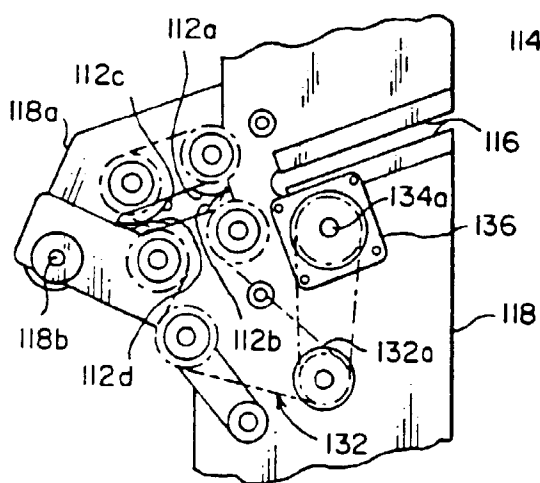
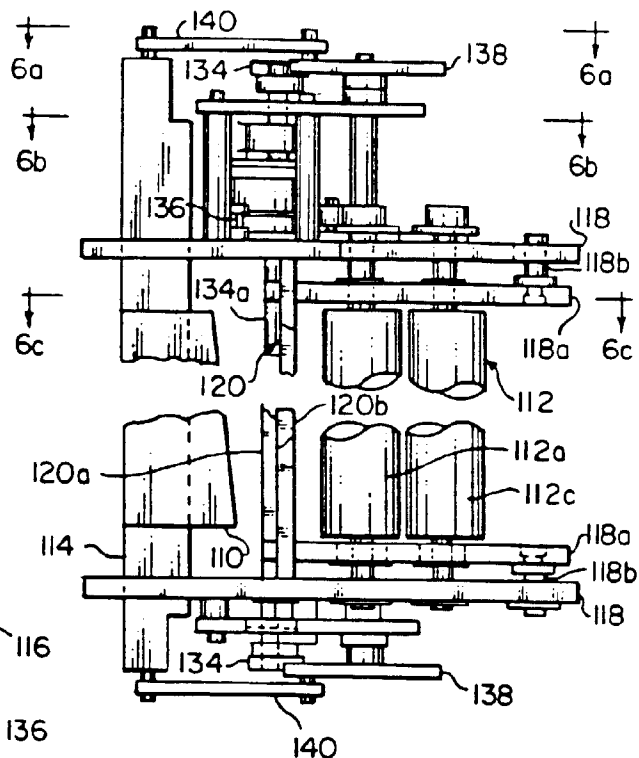


FIG. 6b

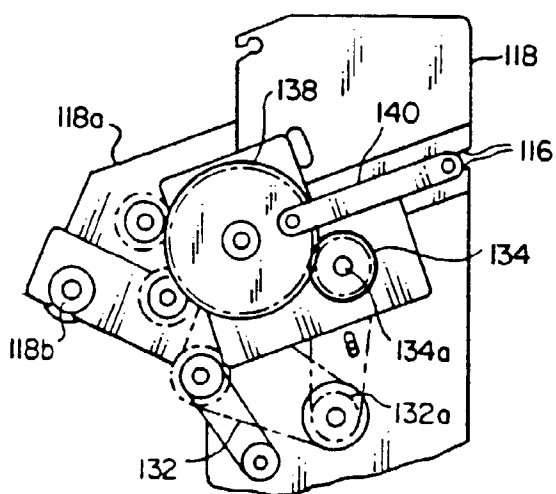


FIG. 6a

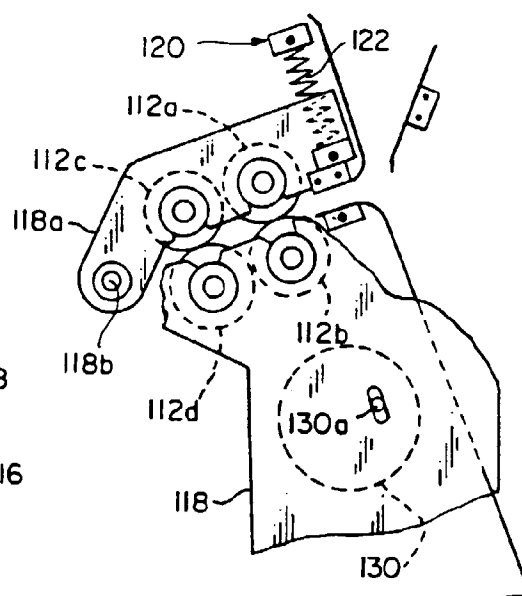


FIG. 6c