




US 20100083513A1


(19) **United States**(12) **Patent Application Publication**
Pellenc(10) **Pub. No.: US 2010/0083513 A1**(43) **Pub. Date: Apr. 8, 2010**(54) **STATIC COOLING ELECTRIC CHAIN SAW
AND METHOD USED TO ACHIEVE SAID
COOLING**(30) **Foreign Application Priority Data**


Feb. 26, 2007 (FR) 07/01358


Publication Classification(76) Inventor: **Roger Pellenc, Pertuis (FR)**Correspondence Address:
**EGBERT LAW OFFICES
412 MAIN STREET, 7TH FLOOR
HOUSTON, TX 77002 (US)**(51) **Int. Cl.**
B27B 17/08 (2006.01)
H02K 9/22 (2006.01)
H02K 5/18 (2006.01)
H02K 11/00 (2006.01)(52) **U.S. Cl. 30/383; 310/64; 310/68 D**(57) **ABSTRACT**


Electric chain saw with static cooling features a cutting chain fitted so as to turn around a drive sprocket and a guide bar of oblong shape, and an electric motor effecting the drive of this chain, through the intermediary of the sprocket. The electric drive motor drive of the cutting chain is a brushless direct current motor enclosed in a housing formed by at least two components and made of a light metallic alloy, with one surface of the housing being in contact with the drive motor drive, to provide static cooling.

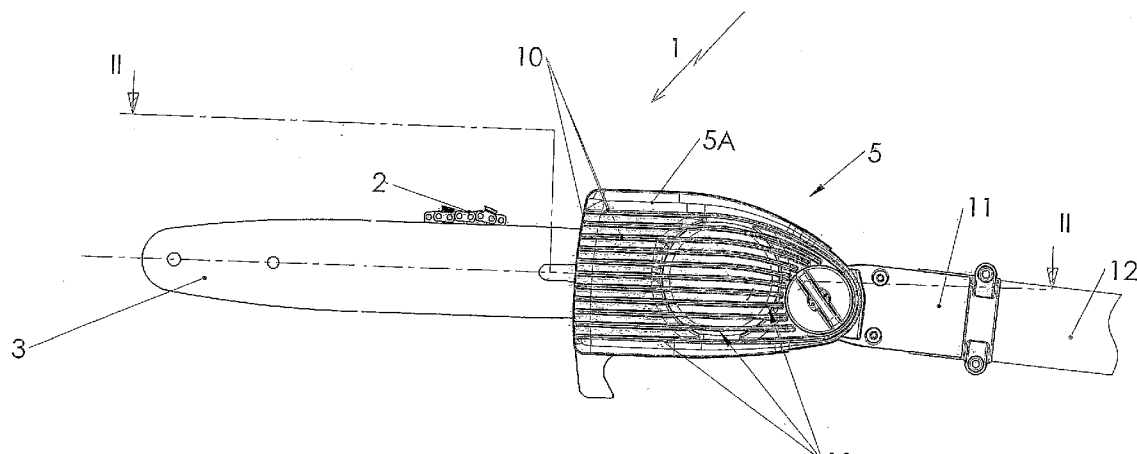(21) Appl. No.: **12/527,656**(22) PCT Filed: **Feb. 25, 2008**(86) PCT No.: **PCT/FR2008/000246**§ 371 (c)(1),
(2), (4) Date: **Dec. 7, 2009**

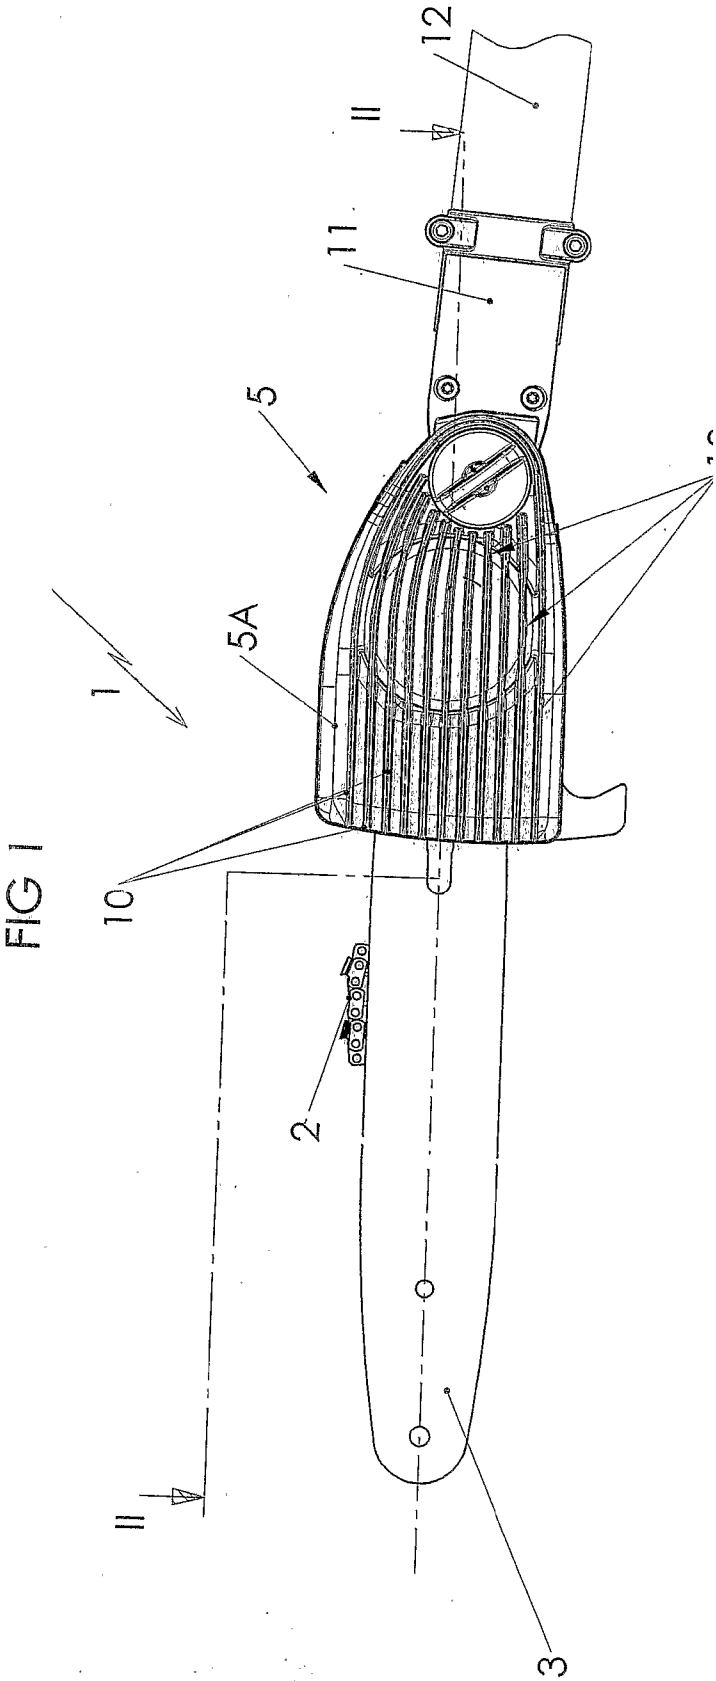

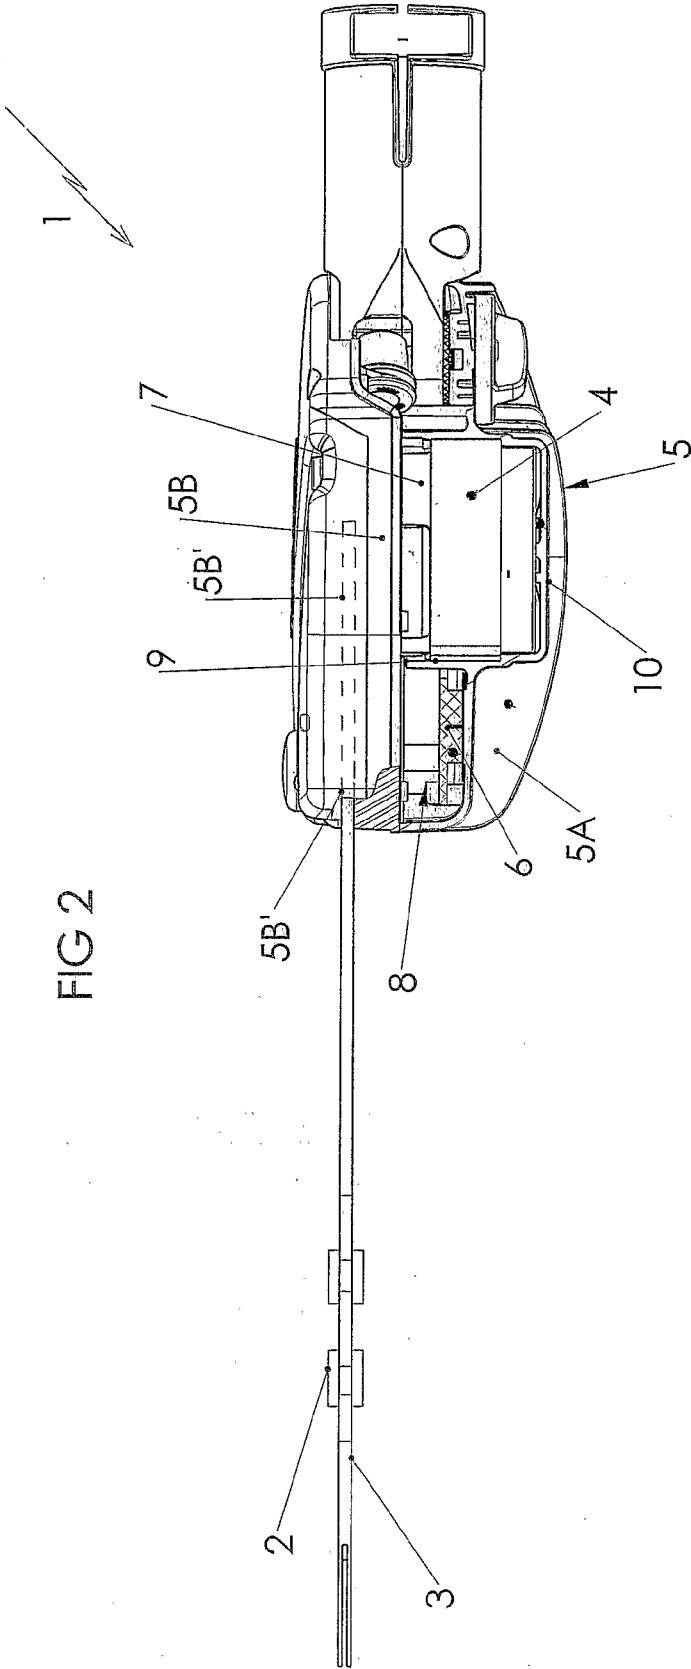

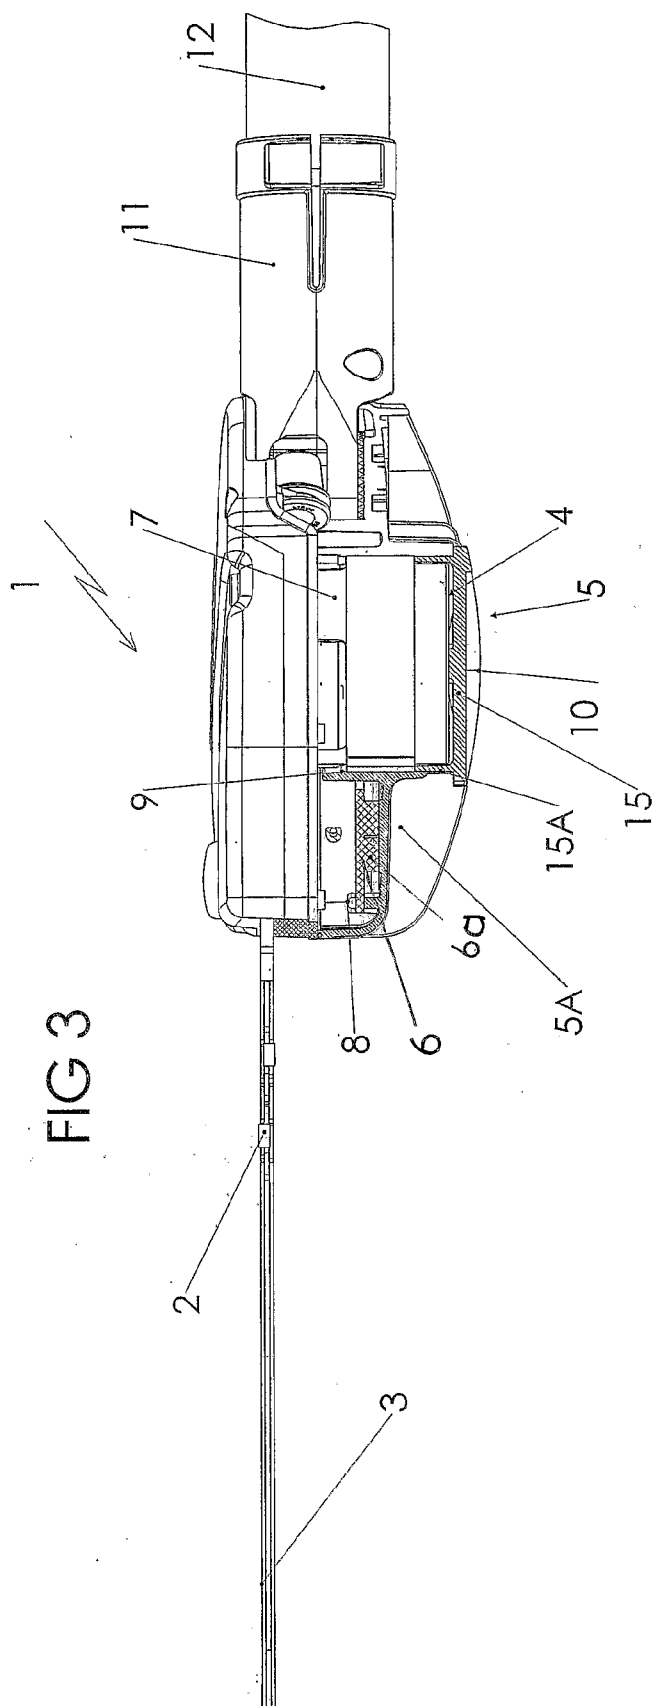

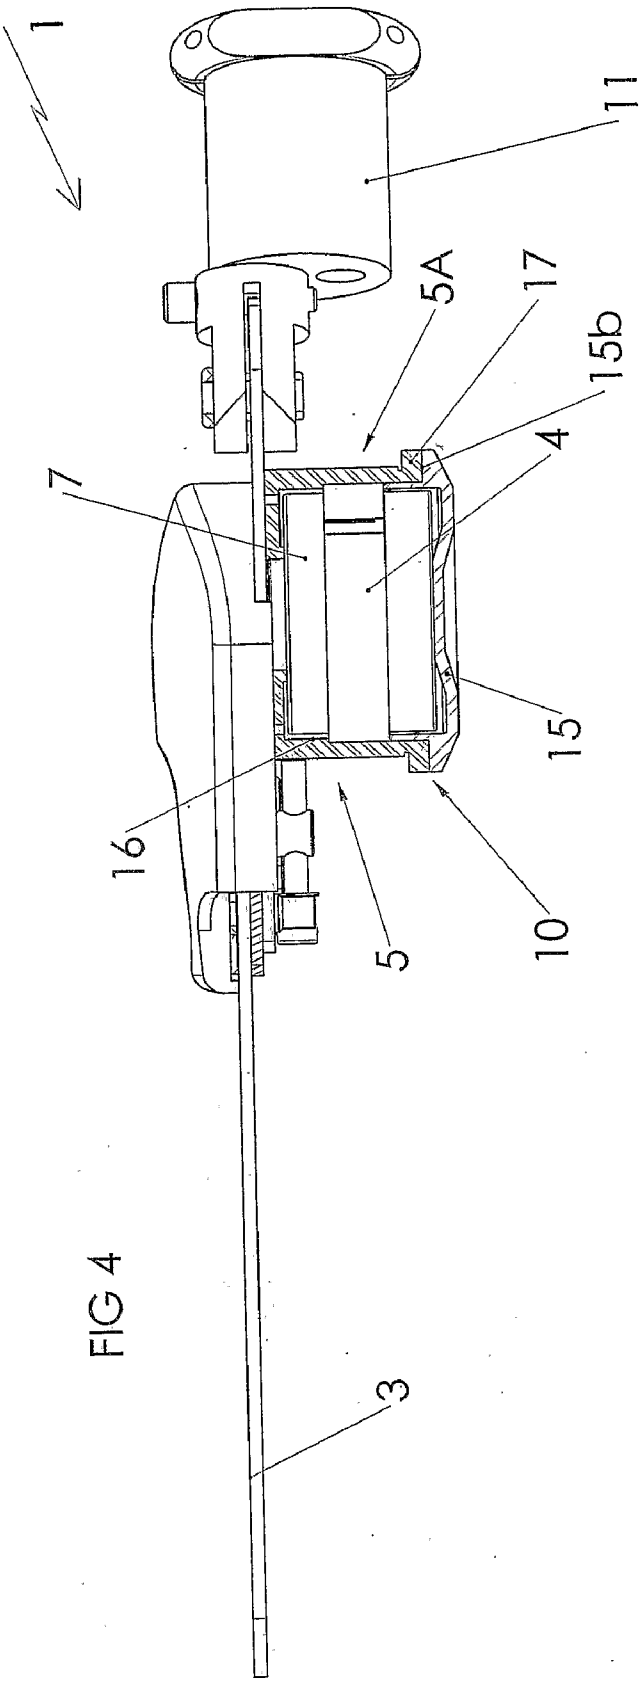

STATIC COOLING ELECTRIC CHAIN SAW AND METHOD USED TO ACHIEVE SAID COOLING

CROSS-REFERENCE TO RELATED U.S. APPLICATIONS

[0001] Not applicable.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Not applicable.

NAMES OF PARTIES TO A JOINT RESEARCH AGREEMENT

[0003] Not applicable.

[0004] REFERENCE TO AN APPENDIX SUBMITTED
ON COMPACT DISC

[0005] Not applicable.

BACKGROUND OF THE INVENTION

[0006] 1. Field of the Invention

[0007] The present invention concerns a static cooling electric chain saw. It also deals with the method implemented to achieve this static cooling.

[0008] More precisely, the invention applies to chain saws in which the drive of the cutting chain is performed by an electric motor.

[0009] 2. Description of Related Art Including Information Disclosed Under 37 CFR 1.97 and 37 CFR 1.98.

[0010] The drive of the cutting chain of the known electric chain saw is performed by means of low performance electric motors, so that about 50% of the power delivered by the motor is to be dissipated, to avoid the effect of overheating, because of the significant thermal losses generated.

[0011] The devices used to carry out the dissipation of the heat generated by the electric motor employ turbines or ventilators creating air circulation around the motor. The addition of a turbine or a ventilator to the motor of the saw has the considerable inconvenience of complicating the manufacture of the tool, increasing its production cost, and causing additional energy consumption, and adding to what is necessary to driving the cutting chain.

[0012] Furthermore, to be efficient, these cooling systems require openings to be made in the motor housing to facilitate the circulation of cooling air around the motor. The main inconvenience of these openings is to disrupt the sealing of the motor and to allow the penetration of water, dust and sawdust resulting from wood cutting wood operations.

[0013] In the document US-2005/0236917, an electric hand tool is described which includes an electric motor enclosed in a casing which is itself embedded in the tool housing, and a cooling system constituted by a thermal conducting device connecting said casing to said housing, so as to allow the heat produced by the motor to dissipate. This cooling device complicates the manufacture of the tool and does not allow for efficient heat dissipation for high-powered electric motors like those, which generally equip electric chain saws.

[0014] The particular aim of the invention is to remedy the aforementioned inconveniences of electric chain saws and their cooling system.

BRIEF SUMMARY OF THE INVENTION

[0015] One recalls that tools that are commonly called chain saws are well known and are commonly used to cut various materials (wood, concrete, bricks, tiles, etc.) They include a cutting device constituted by an endless cutting chain fitted so as to turn around a drive sprocket and a guide bar generally of an oblong shape and equipped with a peripheral guide rail and a power source which, in the case of electric saws is constituted by an electric motor effecting the drive of this chain, through the intermediary of said sprocket.

[0016] According to a first characteristic arrangement of the invention, the electric motor driving the cutting chain is constituted by a brushless direct current motor, commonly so called, enclosed in a housing constituted by at least two parts and made of a light metal alloy, with one surface of which it is in contact so as to ensure the static cooling of said motor.

[0017] According to another characteristic arrangement, the chain saw features an electronic control card of the motor driving the cutting chain and this electronic card is also encased in said cooling housing a surface of which is in direct contact with the commutation components of this electronic control card.

[0018] Preferably, the cooling housing is made of an aluminum alloy or a magnesium alloy.

[0019] According to a preferred mode of execution, at least one of the housing parts features one or several cooling fins.

[0020] According to another mode of execution, one of the faces of one of the components of the cooling housing is fitted so as to receive and support the removable guide bar of the tool and with which the latter is in contact so that said guide bar thereby contributes to the dissipation of the heat generated by the motor.

[0021] According to another mode of execution, the handle of the chain saw attached to the cooling housing of the chain saw constitutes an exchanging device participating in the cooling of the motor driving the cutting chain of said saw.

[0022] Preferably, the handle is an integrated part of the housing.

[0023] According to another mode of execution, the cooling handle is fastened on the two components forming the housing.

[0024] According to another mode of execution, applicable to pole-mounted chain saws, the pole also constitutes an exchanging device participating in the cooling of the motor driving the cutting chain of said saws.

[0025] Advantageously, each of the components of the cooling housing, the guide bar, the handle and the pole cooperate with the motor and with the electronic control card of said motor to carry the heat generated by the latter toward the outside.

[0026] According to an interesting mode of execution, the stator of the motor is in direct contact with one of the components of the cooling housing.

[0027] Advantageously, the leading out wires of the winding of the motor stator are wrapped, without contact, by one and the other components of the housing, respectively.

[0028] Interestingly, the respective seats of the motor and the electronic control card in the housings are separated by cooling partitions made in the two components of the cooling

housing. Advantageously, the assembly of the two housing components is waterproof and dustproof.

[0029] The static cooling electric chain saw according to the invention offers several interesting advantages.

[0030] Use of a brushless motor with high performance, above 68%, generating low thermal losses, that is to say, little energy to dissipate, allows the implementation of an efficient device for static cooling by convection or radiation. This device also allows evacuating the heat emitted by the power commutation components of the electronic control card.

[0031] The high efficiency of the motor and the static cooling device make it possible to have a space-saving and light-weight tool body which does not interfere with the utilization of the tool.

[0032] The cooling device is economical and of a simple design, requiring no addition of supplemental parts to the motor as such.

[0033] It requires no provision of any opening in the housing so that it will not be contaminated by humidity, dust or sawdust.

[0034] Motorized electric chain saws equipped with the cooling system according to the invention constitute professional tools that are capable of operating over long periods of time.

[0035] According to the method of the invention, the drive of said chain is achieved by means of a brushless direct current motor, and this motor is enclosed in a housing constituted by at least two components and produced of a light metallic alloy, one surface at least of this housing being put into contact with said motor, so as to provide the static cooling of the latter.

[0036] According to a preferred mode of implementation applied to a chain saw featuring an electronic card for controlling the motor, the method is also remarkable in that the commutation components of the card are put into contact with at least one component of the cooling housing.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0037] The aforementioned aims, characteristics and advantages, and still more, will become clearer from the description below and the attached drawings.

[0038] FIG. 1 is a front elevational view of a production example of a chain saw on which the application can be implemented.

[0039] FIG. 2 is an exploded perspective view and partial sectional view along line II-II of FIG. 1.

[0040] FIG. 3 is a partial perspective and sectional view analogous to FIG. 2, showing a chain saw according to a second mode of production of the invention.

[0041] FIG. 4 is also a partial perspective and sectional view analogous to FIG. 2, showing a chain saw according to a third mode of implementation of the invention.

[0042] Reference is made to said drawings to describe interesting, although by no means limiting examples of production of the chain saw and its cooling method according to the invention.

[0043] The elements of the chain saw, which fulfill the same functions in the three illustrated and described modes of

implementation, are designated by the same references on the drawings and the following presentation.

DETAILED DESCRIPTION OF THE INVENTION

[0044] Chain saws 1, commonly used to cut various materials (wood, concrete, bricks, tiles, . . .) include a cutting device constituted by an endless cutting chain 2 fitted so as to turn around a drive sprocket and a guide bar 3 generally of an oblong shape and equipped with a peripheral guide rail and a power source which, in this case, is constituted by an electric motor 4.

[0045] According to the invention, this electric motor 4 is constituted by a brushless direct current motor preferably of a rating above 500 W and of high efficiency, above 68%, for example, of a rating of 1 kW and an efficiency rating between 85 and 90%, its operation generating only small quantities of heat energy to be dissipated.

[0046] This brushless electric motor is encased in a housing 5 constituted by at least two components 5A, 5B and produced of light metallic alloy, being a good heat conductor, preferably of an aluminum alloy or of a magnesium alloy.

[0047] The motor 4 is positioned in the housing 5 so as to be in direct contact with at least one surface of at least one (5A) of the components 5A, 5B of the housing 5, thereby providing the static cooling of said motor, by convection and/or radiation.

[0048] In certain preferred modes of production, the chain saw may feature an electronic card 6 for controlling the motor 4.

[0049] According to a mode of execution, the electronic control card of motor 4 driving the cutting chain 2 of the saw is likewise encased in the cooling housing 5, so that its power commutation components 6a are in contact with at least one surface of at least one of the components 5A, 5B of the housing, thereby providing the static cooling of said commutation components, by convection and/or radiation.

[0050] The motor 4 is installed in a first recess 7 made in the housing 5, whereas the electronic card 6 is positioned in a second recess 8 made in proximity of the first and separated from it by a partition 9, forming a cooling wall.

[0051] At least one of the components 5A, 5B of the housing 5, preferably component 5A as shown on the drawings, is equipped with one or several cooling fins 10 extending to the exterior, in a substantially parallel manner and over the entire length of the housing 5, as shown particularly in FIG. 1.

[0052] The stator 4a of the motor 4 is placed directly in contact with one (5A) of the components 5A, 5B of the housing.

[0053] For example, the motor 4 is mounted in a blind cylinder 13, which presents the internal face of the component 5a of the housing 5, and the bottom 13' of this blind cylinder is in contact with the cooling fins 10. Preferably, the stator 4a of the motor 4 is directly in contact with the sidewall of this cylinder 13.

[0054] On the other hand, the leading out wires 4B of the winding of the stator 4a of the motor 4 are wrapped respectively by one and the other of the components 5A, 5B of the cooling housing 5.

[0055] The two components 5A, 5B are assembled in a tight manner by means of any appropriate link system (screw, bolts, etc.)

[0056] According to another characteristic arrangement, one of the faces (5B') of one of the constitutive components 5A, 5B of the cooling housing 5, is fitted to receive and

support the removable metallic guide bar or the chain saw. In this case, the guide bar is in contact with a surface 5B' of the housing, so that said guide bar constitutes an additional means of heat exchange and contributes also to the dissipation of the heat generated by the motor 4 driving the cutting chain 2. It is produced in a light metallic alloy, which is a good heat conductor.

[0057] According to another mode of execution, the handle of the chain saw attached to the cooling housing 5 of the saw constitutes also an additional heat exchanger and participates in the dissipation of the heat generated by the motor 4 driving the cutting chain of the chain saw.

[0058] This handle may be an integral part of the housing 5. It may be detachable on said cooling housing and fastened on one or both parts 5A, 5B of the latter by any suitable means. In this case, the handle is made of a light metallic alloy, a good heat conductor.

[0059] According to another mode of execution applicable to pole-mounted chain saws, according to which the cutting head is positioned at a distance from the control handle by means of an arm or pole 12, this pole also constitutes an exchanging device participating in the cooling of the motor 4 driving the cutting chain. In this case, the pole 12 and the connection sleeve 11 of the pole are made of a light metallic alloy, a good heat conductor.

[0060] Each of the components 5A, 5B of the cooling housing 5, the removable guide bar 3, the handle and, in the case of pole-mounted chain saws, the pole 12, collaborate with the motor 4 and with the electronic control card 6 of said motor, to evacuate the heat generated by the latter items towards the outside.

[0061] According to the mode of execution illustrated in FIG. 3, the cylinder 13 is open and the component 5A of the housing 5 has an opening 14 which provides access to the seat 7 and which facilitates the installation and removal of the motor 4 in said seat. A metallic cover plate 15 closes this opening 14 and thus forms the bottom of said cylinder 13. This cover plate 15 features a ring-shaped skirt 15a which is forced into the seat 7 and which tightens a part of the motor 4 against the cylinder 13. The cover plate 15 is preferably made of the same heat conducting material of which the other components of the housing 5 are made.

[0062] According to the mode of execution shown in FIG. 4, the cooling housing 5 defines only one single seat 16. The cover 15 is screwed into a flange 17 of the housing 5. This flange 17 and the peripheral portion 15b of the cover plate 15b [sic] together form the single cooling fin 10 provided for component 5A of the housing 5.

1. Electric chain saw comprising:

a cutting chain fitted to rotate around a drive sprocket and a guide bar (3) of oblong shape, and

an electric motor driving the chain by the sprocket, said electric motor being comprised of a brushless direct current motor enclosed in a housing of light metallic alloy and being comprised of at least two components, the electric motor being in contact with a surface of said housing so as to provide static cooling of said electric motor.

2. Electric chain saw according to claim 1, further comprising:

an electronic control card for the electric motor being located in the housing, the housing having one surface in direct contact with commutation components of said electronic control card.

3. Electric chain saw according to claim 1, wherein the housing is comprised of an aluminum alloy or a magnesium alloy.

4. Electric chain saw according to claim 1, wherein at least one of the components of the housing has a cooling fin.

5. Electric chain saw according to claim 1, wherein one of the components has one face forming the housing fitted to receive and support a removable metallic guide bar, the guide bar cooperating in dissipation of the heat generated by the motor.

6. Electric chain saw according to claim 1, further comprising:

a metallic handle attached to the housing, the handle having an additional exchanger participating in cooling of the motor.

7. Electric chain saw according to claim 6, wherein the handle is an integral part of the housing.

8. Electric chain saw according to claim 6, wherein the handle is fastened on the two components of the housing (5).

9. Electric chain saw according to claim 1, further comprising:

a pole being comprised of an exchange device participating in cooling of the motor of the chain.

10. Electric chain saw according to claim 9, wherein each of the components of the housing, the removable guide bar, the handle and the pole collaborate with the motor and with the electronic control card of the motor to evacuate the heat generated by the motor towards the outside.

11. Electric chain saw according to claim 1, wherein a stator of the motor is in direct contact with one of the components of the housing, such as a side wall of a cylinder of the housing.

12. Electric chain saw according to claim 11, wherein leading out wires of winding of the stator are wrapped, respectively, by one and the other components of the housing.

13. Electric chain saw according to claim 2, wherein the motor has respective seats and the electronic control card made in the components of the housing are separated by a cooling partition provided in the two components of the cooling housing.

14. Electric chain saw according to claim 2, wherein the two components of the housing are assembled in a leak-proof manner.

15. Cooling method for electric chain saws, the method comprising the steps of:

fitting a cutting chain to turn around a drive sprocket and a guide bar of oblong shape;

driving the chain by an electric motor through the sprocket, by a brushless direct current motor, the motor being enclosed in a housing of a light metallic alloy and being comprised of at least two components, the motor being put into contact with at least one surface of said housing so as to ensure the static cooling of said motor.

16. Method of static cooling according to claim 15, wherein said electric motor has an electronic control card with commutation components in contact with a surface of at least one component of the housing.

* * * * *