

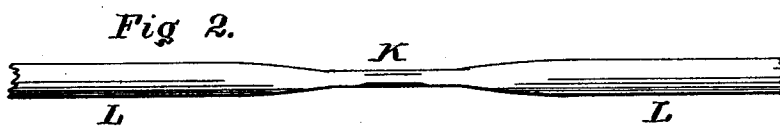


L. YAKEL.

MACHINES FOR ROLLING BLANKS FOR SOCKETS FOR OIL WELL
RODS.

No. 183,739.

Patented Oct. 24, 1876.

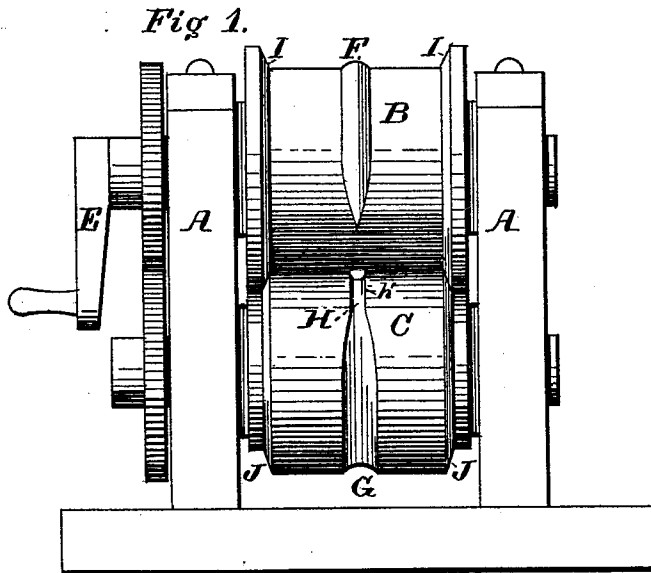

WITNESSES.

INVENTOR.

A. L. K. Evans
R. H. Evans

Levi Yakel
per atty. A. H. Evans & Co.

UNITED STATES PATENT OFFICE.

LEVI YAKEL, OF ALLEGHENY, PENNSYLVANIA.

IMPROVEMENT IN MACHINES FOR ROLLING BLANKS FOR SOCKETS FOR OIL-WELL RODS.

Specification forming part of Letters Patent No. **153,739**, dated October 24, 1876; application filed September 20, 1876.

To all whom it may concern:

Be it known that I, LEVI YAKEL, of Allegheny, Pennsylvania, have invented certain new and useful Improvements in Rolls for Manufacturing Blanks for Sockets for Oil-Well Rods and other analogous articles, of which the following is a clear, full, and exact description, reference being had to the accompanying drawings making a part of this specification, in which—

Figure 1 represents a front elevation of my invention. Fig. 2 represents a rolled blank. Fig. 3 represents a socket completed. Fig. 4 represents a socket-collar. Fig. 5 represents a blank partially rolled.

My invention relates to the manufacture of blanks for sockets used principally on oil-well rods; and it consists in a combination of devices for rolling the socket-blank from a previously-prepared blank, as hereinafter described and claimed.

To enable others skilled in the art to make and use my invention, I will proceed to describe the exact manner in which I have carried it out.

In the drawings, A A represent standards or frame-work, which furnishes bearings for the rollers B C. On the roller B is formed the elongated tapering die F, and on the roller C is a groove or matrix, G, of corresponding shape, the groove, however, extending entirely around the roller C, and, where not touched by the die, shaped as shown at H h', to make the part which forms the shank of the socket, as shown at k in Fig. 2. The

roller B is provided with the flanges I I, to embrace the ends of the roller C, as shown in Fig. 1, the flanges fitting in the depressions J J, thus securing a steady movement of the die and matrix as the blanks pass between the rollers. The rollers are provided with the ordinary cog-gearing, and may be operated by means of the crank E, or by the application of steam or other power. After the blank L has been properly formed, by passing it between the rollers B C, as above described, it is severed at the point K, and the two parts brought together and welded or otherwise secured, as shown in Fig. 3, the socket-point M being then ready for the reception of the rod. Over the shank N of the socket is passed and secured the ring or collar P, to form a shoulder and give greater security to the socket. Fig. 5 shows a blank partially rolled, the parts s s showing the portions of the blank acted on by the dies, and the portion R representing the portion which is to be formed into the part N, as seen in Fig. 3.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

In combination with a suitable frame, the roller B, provided with the tapering die F, and the roller C, provided with the matrix G and connecting groove H h', substantially as set forth.

LEVI YAKEL.

Witnesses:

FARRELLY ALDEN,
ABRAM ALEXANDER.