

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 April 2011 (21.04.2011)

PCT


(10) International Publication Number
WO 2011/046795 A1

- (51) **International Patent Classification:**
C07C 311/09 (2006.01) *B01F 17/00* (2006.01)
C07C 311/24 (2006.01) *A62D 1/00* (2006.01)
C11D 1/00 (2006.01)
- (21) **International Application Number:**
PCT/US2010/051742
- (22) **International Filing Date:**
7 October 2010 (07.10.2010)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/579,488 15 October 2009 (15.10.2009) US
- (71) **Applicant (for all designated States except US):** **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **PENG, Sheng** [CN/US]; 549 Cabot Drive, Hockessin, Delaware 19707 (US). **YAKE, Allison, Mary** [US/US]; 168 Walnut Run Road, Landenberg, Pennsylvania 19350 (US).
- (74) **Agent:** **MAYER, Nancy, S.**; E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHODS USING AMPHOTERIC SURFACTANTS

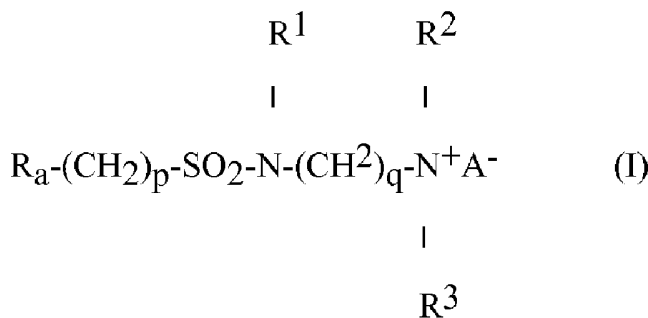

(57) **Abstract:** [A method of providing a surface effect to a medium or substrate comprising contacting the medium or substrate with a compound of formula (I) : wherein R_a is linear or branched $F(CF_2)_n(CH_2CF_2)_m-$, or linear or branched $F(CF_2)_n-O-B-$; B is $(C_3F_7)_s$ optionally interrupted by 1 to 2 catenary oxygen atoms, each oxygen bonded to two carbon atoms, n is 2 to 4, m is 1 to 4, r is 1 to 4, s is 1 to 4, provided that $(r - s)$ is a maximum of 7, A is O or $(CH_2)_k-COO$, R^1 is hydrogen or a methyl, R^2 and R^3 are each independently alkyl having 1 to 6 carbon atoms, and p, q and k are each independently integers from 1 to 10.

WO 2011/046795 A1

TITLE**METHODS USING AMPHOTERIC SURFACTANTS**FIELD OF THE INVENTION

This invention relates to use of amphoteric fluorinated sulfonate
5 compounds which contain at least one vinylidene fluoride or oxygen moiety in
methods to provide surface effects in several applications, and is particularly
suitable for oilfield applications and for coating applications.

BACKGROUND OF THE INVENTION

Fluorinated sulfonates are useful as surfactants in various applications.
10 Commercially available fluorinated surfactants usually contain a perfluoroalkyl
terminal chain. Honda, et al., in "Molecular Aggregation Structure and Surface
Properties of Poly(fluoroalkylacrylate) Thin Films" *Macromolecules* (2005),
38(13), 5699-5705, disclose that a perfluoroalkyl chain of at least 8 carbons is
necessary to maintain the perfluoroalkyl chains in a parallel orientation. For such
15 perfluoroalkyl chains containing less than 8 continuous perfluorinated carbons, a
reorientation occurs which decreases or eliminates the ability for exhibiting
desirable surface properties. Thus longer perfluoroalkyl chains which contain a
higher fluorine content at a given concentration typically provide better
performance. However, the fluorinated materials derived from longer
20 perfluoroalkyl chains are more expensive. Reducing the fluorine content with
delivery of the same or better performance is therefore desirable.


U.S. Patent 6,201,122, discloses a fluoroaliphatic radical-containing
sulfonamido anionic compound, wherein the fluoroaliphatic radical group
contains 3 to 20 carbons, and is preferably C_nF_{2n+1} wherein n is 4 to 10. The
25 compounds are useful as anionic surfactants in liquid systems. However, anionic
surfactants are known to precipitate out of formulations in certain end use
applications, such as formulations commonly used in fire fighting applications
and oilfield applications.

It is desirable to have methods of imparting surface effects using
30 surfactants containing partially fluorinated or shorter fluorinated terminal groups
to achieve equivalent or improved surface performance at lower expense. It is
also desirable to have such methods useful in a variety of applications without

precipitation from the formulation employed. The present invention provides such methods.

SUMMARY OF THE INVENTION

The present invention comprises a method of providing a surface effect to a medium or substrate comprising contacting the medium or substrate with a compound of formula (I):

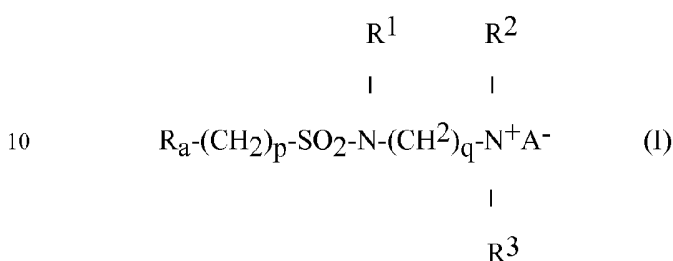

wherein

15 R_a is linear or branched $\text{F(CF}_2\text{)}_n\text{(CH}_2\text{CF}_2\text{)}_m\text{-}$, or linear or branched $\text{F(CF}_2\text{)}_r\text{-O-B-}$;

B is $\text{(C}_s\text{F}_2\text{)}_s$ optionally interrupted by 1 to 2 catenary oxygen atoms, each oxygen bonded to two carbon atoms,

20 n is 2 to 4, m is 1 to 4, r is 1 to 4, s is 1 to 4, provided that $(r + s)$ is a maximum of 7,

A is O or $\text{(CH}_2\text{)}_k\text{-COO}$,

R^1 is hydrogen or a methyl,

R^2 and R^3 are each independently alkyl having 1 to 6 carbon atoms, and

p , q and k are each independently integers from 1 to 10.

25 The present invention further comprises a method of lowering surface tension of an aqueous medium comprising contacting the medium with a compound of formula (I) as defined above.


DETAILED DESCRIPTION

Trademarks are shown herein in upper case.

The present invention comprises a method of providing a surface effect to a medium or substrate comprising contacting the medium or substrate with a
 5 compound of formula (I) as defined above.

The present invention comprises a method of reducing surface tension of an aqueous medium at low concentrations employing compounds that have amphiphilic properties. By “amphiphilic” is meant that the compounds are attracted to different kinds of media.

10 The methods of the present invention use a compound of formula (I):

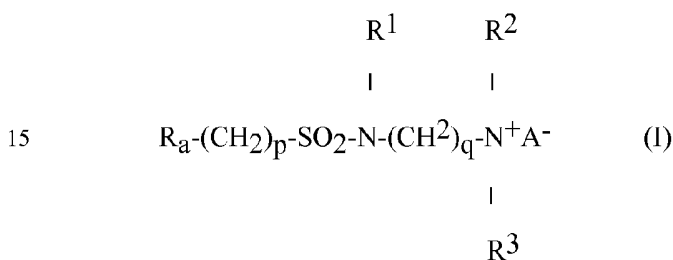

wherein

20 R_a is linear or branched $F(CF_2)_n(CH_2CF_2)_m-$, or linear or branched $F(CF_2)_r-O-B-$;

B is (C_sF_{2s}) optionally interrupted by 1 to 2 catenary oxygen atoms, each oxygen bonded to two carbon atoms,

n is 2 to 4, m is 1 to 4, r is 1 to 4, s is 1 to 4, provided that $(r + s)$ is a
 25 maximum of 7,

A is O or $(CH_2)_k-COO$,

R^1 is hydrogen or a methyl,


R^2 and R^3 are each independently alkyl having 1 to 6 carbon atoms, and

p , q and k are each independently integers from 1 to 10.

30

Preferred compounds of formula (I) for use in the methods of the present invention are those wherein R_a is $F(CF_2)_n(CH_2CF_2)_m$ - wherein n is 1 to 4, and m is 1 to 3, preferably 2. Also preferred are those compounds of formula (I) wherein R_a is $F(CF_2)_r-O-B$ wherein r is 2 to 4, preferably 3 to 4, and B is $(C_3F_2)_s$ wherein s is 2 to 3, preferably 2.

The compounds of formula (I) are prepared from an intermediate amine of the formula (II):

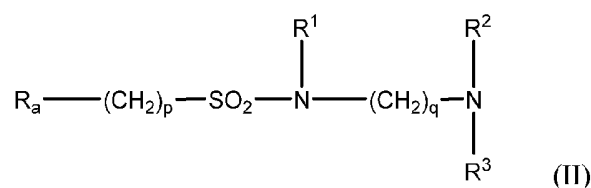

wherein R_a , p , q , R^1 , R^2 , and R^3 are the same as defined above in formula (I).

Compounds of formula (II) are reacted with alpha-ethylenic acids, aliphatic lactones or beta-halo-carboxylic acids to produce the compounds of formula (I). For example, the intermediate amine in formula (II) is reacted with sodium chloroacetate at temperature of about 78 °C for about 24 hours to produce compounds of formula (I) wherein A is $(CH_2)_k-C(O)O$. Alternatively, the intermediate amine in formula (II) is oxidized to produce the compounds of Formula (I) wherein A is O . For example, the intermediate amine of formula (II) is reacted with hydrogen peroxide at a temperature of about 50 °C for about 56 hours, followed by a second addition of hydrogen peroxide, and the reaction is maintained at about 50 °C for an extra 12 hours to produce compounds of formula (I) wherein A is O .

The intermediate amine of formula (II) can be synthesized by reacting an amine, preferably diaminopropylamine, with a fluorinated sulfonyl chloride of formula (III)




wherein R_a and p are as defined in formula (I).

The fluorinated sulfonyl chloride of formula (III) is formed by reacting a fluorinated thiocyanate of formula (IV)



wherein R_a and p are as defined in formula (I), with chlorine and acetic acid at about 45°C to 50°C.

The fluorinated thiocyanate of formula (IV) is prepared by reacting ethylene iodides of formula (V)



with potassium thiocyanate and trioctylmethylammonium chloride at 90 °C.

The ethylene iodides of formula (V) are prepared by reacting fluorinated iodides of formula (VI).



10 wherein R_a is as defined above in formula (I), with ethylene by the procedures described in U.S. Patent 3,979,469, (Ciba-Geigy, 1976).


Fluorinated iodides of formula (VI) havng the formula

$F(CF_2)_n(CH_2CF_2)_mI$ are produced by the known telomerization of vinylidene fluoride (VDF) with linear or branched perfluoroalkyl iodides. For example, see

15 Balague, et al, "Synthesis of fluorinated telomers, Part 1, Telomerization of vinylidene fluoride with perfluoroalkyl iodides", J. Flour Chem. (1995), 70(2), 215-23. Preferred examples of iodides needed to make compounds of formula (I) wherein R_a is $F(CF_2)_n(CH_2CF_2)_m-$ include $F(CF_2)_4(CH_2CF_2)I$ and $F(CF_2)_4(CH_2CF_2)_2I$.

20 Fluorinated iodides of formula (VI) havng the formula $F(CF_2)_r-O-B-$ wherein B is as defined above can be prepared from perfluoroalkyl ether iodides which can be made by the procedure described in US Patent 5,481,028. Preferred is the process in Example 8. This patent discloses the preparation of perfluoroalkyl ether iodides from perfluoro-n-propyl vinyl ether. Preferred
25 examples of iodides needed to make compounds of formula (I) wherein R_a is $F(CF_2)_r-O-B-$ are $F(CF_2)_3O(CF_2)_2I$, $F(CF_2)_2O(CF_2)_4I$, and $F(CF_2)_4O(CF_2)_2I$.


In a preferred embodiment of this invention, the methods employ a surfactant of formula (I) having the following specific formula:

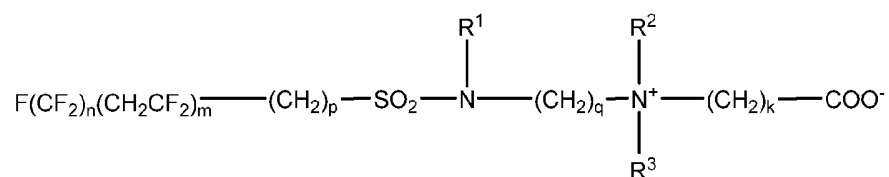

wherein m is 1 to 4 and n, p, k, R¹, R², and R³ are as defined above in formula (I).

In a further preferred embodiment of this invention, the methods employ a surfactant of formula (I) having the following specific formula:

5

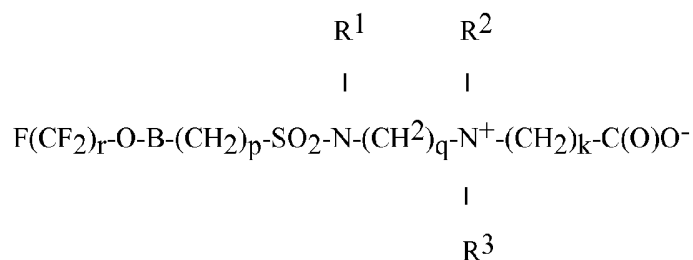


10

wherein r, B, p, q, k, R¹, R², and R³ are as defined above in formula (I).

In a further preferred embodiment of this invention, the methods employ a surfactant of formula (I) having the following specific formula:

15

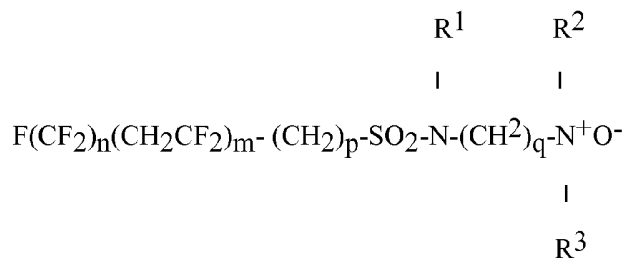


20

wherein m is 1 to 4 and n, p, k, R¹, R², and R³ are as defined above in formula (I).

In a further preferred embodiment of this invention, the methods employ a surfactant of formula (I) having the following specific formula:

25

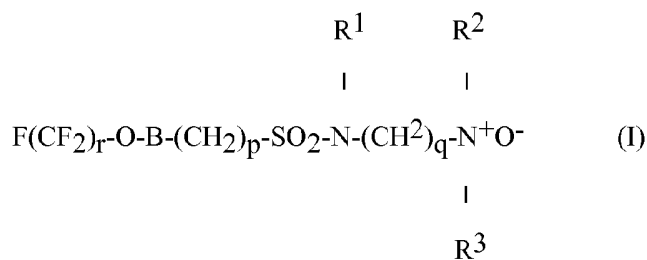

30

wherein r , B , p , q , R^1 , R^2 , and R^3 are as defined above in formula (I)

The method of the present invention significantly reduce the surface tension of aqueous solutions at low concentrations. Uses include, but are not limited to, filming, foaming, wetting, leveling, dispersing and as emulsifying agents.

One embodiment of the present invention is a method of lowering surface tension comprising contacting an aqueous medium with a compound of formula (I) at low concentrations. This method is capable of lowering the surface tension of aqueous media to values less than about 25 milli-newtons per meter, preferably less than about 20 milli-newtons per meter, at a concentration of the surfactant in the medium of less than about 0.5 % by weight, and preferably less than 0.2 % by weight, more preferably less than about 0.1% by weight. This method is characterized by its efficiency in lowering the surface tension at low concentrations by selective adsorption on the interface, which is determined by the amphiphilic nature of the surfactants.

Any of a wide variety of media are suitable for use in the method of the present invention. Typically, the medium is a liquid. Examples of suitable medium include an aqueous solution, water, sea water, saline solution, hydrocarbon, halocarbon system, coating composition, latex, polymer, floor finish, ink, oil or gas field additive or stream, emulsifying agent, foaming agent, release agent, repellency agent, flow modifier, film evaporation inhibitor, wetting agent, penetrating agent, cleaner, grinding agent, electroplating agent, corrosion inhibitor, etchant solution, soldering agent, dispersion aid, microbial agent, pulping aid, rinsing aid, polishing agent, personal care composition, drying agent, antistatic agent, floor polish, or bonding agent. Adding a compound of formula (I) in the method of the present invention to the medium results in lowering the surface tension of the medium due to the surfactant properties of the compound. The compound of formula (I) is typically simply blended with or added to the medium. A concentration of about 0.1% by weight of surfactant is sufficient to lower surface tension to less than about 25 mN/m, preferably less than about 20 nM/m.

Another embodiment of the present invention comprises a method of providing surface effects to a medium or substrate. The surface effect is provided by contacting a compound of formula (I) with the medium or substrate. Suitable media are as discussed above. For a coated substrate a compound of formula (I) is often added to a coating base prior to deposition on the substrate. Surface effects include, for example, in addition to lowering surface tension, leveling and wetting. "Leveling and wetting" as used herein refers to the uniformity of coverage of the coating when applied to a substrate. It is undesirable to have streaking, surface defects, or withdrawal of the coating from the substrate surface at the edges or otherwise. An even coating will provide a superior dried coating on the substrate surface.

Suitable coating compositions, referred to herein by the term "coating base", include a composition, typically a liquid formulation, of an alkyd coating, Type I urethane coating, unsaturated polyester coating, or water-dispersed coating, and is applied to a substrate for the purpose of creating a lasting film on the substrate surface. These are conventional paints, stains, and similar coating compositions.

By the term "alkyd coating" as used herein is meant a conventional liquid coating based on alkyd resins, typically a paint, clear coating, or stain. The alkyd resins are complex branched and cross-linked polyesters containing unsaturated aliphatic acid residues. Conventional alkyd coatings utilize, as the binder or film-forming component, a curing or drying alkyd resin. Alkyd resin coatings contain unsaturated aliphatic acid residues derived from drying oils. These resins spontaneously polymerize in the presence of oxygen or air to yield a solid protective film. The polymerization is termed "drying" or "curing" and occurs as a result of autoxidation of the unsaturated carbon-carbon bonds in the aliphatic acid component of the oil by atmospheric oxygen. When applied to a surface as a thin liquid layer of formulated alkyd coating, the cured films that form are relatively hard, non-melting, and substantially insoluble in many organic solvents that act as solvents or thinners for the unoxidized alkyd resin or drying oil. Such drying oils have been used as raw materials for oil-based coatings and are described in the literature.

By the term "urethane coating" as used hereinafter is meant a conventional liquid coating based on Type I urethane resins, typically a paint, clear coating, or stain. Urethane coatings typically contain the reaction product of a polyisocyanate, usually toluene diisocyanate, and a polyhydric alcohol ester of drying oil acids. Urethane coatings are classified by ASTM D-1 into five categories. Type I urethane coatings contain a pre-reacted autoxidizable binder as described in Surface Coatings Vol. I, previously cited. These are also known as uralkyds, urethane-modified alkyds, oil-modified urethanes, urethane oils, or urethane alkyds, are the largest volume category of polyurethane coatings and include paints, clear coatings, or stains. The cured coating is formed by air oxidation and polymerization of the unsaturated drying oil residue in the binder.

By the term "unsaturated polyester coating" as used hereinafter is meant a conventional liquid coating based on unsaturated polyester resins, dissolved in monomers and containing initiators and catalysts as needed, typically as a paint, clear coating, or gel coat formulation. Unsaturated polyester resins contain as the unsaturated prepolymer the product obtained from the condensation polymerization of a glycol such as 1,2- propylene glycol or 1,3-butylene glycol with an unsaturated acid such as maleic (or of maleic and a saturated acid, e.g., phthalic) in the anhydride form. The unsaturated prepolymer is a linear polymer containing unsaturation in the chain. This is dissolved in a suitable monomer, for instance styrene, to produce the final resin. The film is produced by copolymerization of the linear polymer and monomer by means of a free radical mechanism. The free radicals can be generated by heat, or more usually by addition of a peroxide, such as benzoyl peroxide, separately packaged and added before use. Such coating compositions are frequently termed "gel coat" finishes. For curing coatings at room temperature, the decomposition of peroxides into free radicals is catalyzed by certain metal ions, usually cobalt. The solutions of peroxide and cobalt compound are added separately to the mix and well stirred before application. The unsaturated polyester resins that cure by a free radical mechanism are also suited to irradiation curing using, for instance, ultraviolet light. This form of cure, in which no heat is produced, is particularly suited to films on wood or board. Other radiation sources, for instance electron-beam curing, are also used.

By the term "water-dispersed coatings" as used herein is meant coatings intended for the decoration or protection of a substrate composed of water as an essential dispersing component such as an emulsion, latex, or suspension of a film-forming material dispersed in an aqueous phase. "Water-dispersed coating" is a general classification that describes a number of formulations and includes members of the above described classifications as well as members of other classifications. Water-dispersed coatings in general contain other common coating ingredients. Water-dispersed coatings are exemplified by, but not limited to, pigmented coatings such as latex paints, unpigmented coatings such as wood sealers, stains, and finishes, coatings for masonry and cement, and water-based asphalt emulsions. A water dispersed coating optionally contains surfactants, protective colloids and thickeners, pigments and extender pigments, preservatives, fungicides, freeze-thaw stabilizers, antifoam agents, agents to control pH, coalescing aids, and other ingredients. For latex paints the film forming material is a latex polymer of acrylate acrylic, vinyl-acrylic, vinyl, or a mixture thereof. Such water-dispersed coating compositions are described by C. R. Martens in "Emulsion and Water-Soluble Paints and Coatings" (Reinhold Publishing Corporation, New York, NY, 1965).

By the term "dried coating" as used herein is meant the final decorative and/or protective film obtained after the coating composition has dried, set or cured. Such a final film can be achieved by, for non-limiting example, curing, coalescing, polymerizing, interpenetrating, radiation curing, UV curing or evaporation. Final films can also be applied in a dry and final state as in dry coating.

When used as additives to a coating base in the method of the present invention the compounds of Formula (I) as defined above are effectively introduced to the coating base or other composition by thoroughly stirring it in at room or ambient temperature. More elaborate mixing can be employed such as using a mechanical shaker or providing heat or other methods. Such methods are not necessary and do not substantially improve the final composition. When used as an additive to latex paints, the compositions of the invention generally are added at about 0.001% by weight to about 5% by weight by dry weight of the compound of formula (I) in the wet paint. Preferably about from about 0.01% by

weight to about 1% by weight, and more preferably from about 0.1% by weight to about 0.5% by weight is used.

Floor waxes, polishes, or finishes (hereinafter "floor finishes") are generally water based or solvent based polymer emulsions. The method of the present invention is suitable for use for such floor finishes. Commercially available floor finish compositions typically are aqueous emulsion-based polymer compositions comprising one or more organic solvents, plasticizers, coating aides, anti-foaming agents, surfactants, polymer emulsions, metal complexing agents, and waxes. The particle size range and solids content of the polymer are usually controlled to control the product viscosity, film hardness and resistance to deterioration. Polymers containing polar groups function to enhance solubility and may also act as wetting or leveling agents providing good optical properties such a high gloss and distinctness of reflected image.

Preferred polymers for use in floor finishes include acrylic polymers, polymers derived from cyclic ethers, and polymers derived from vinyl substituted aromatics. Acrylic polymers include various poly(alkyl acrylates), poly(alkyl methacrylates), hydroxyl substituted poly(alkyl acrylates) and poly(alkyl methacrylates). Commercially available acrylic copolymers used in floor finishes include, for example, methyl methacrylate/butyl acrylate/methacrylic acid (MMA/BA/MAA) copolymers; methyl methacrylate/butyl acrylate/acrylic acid (MMA/BA/AA) copolymers, and the like. Commercially available styrene-acrylic copolymers include styrene/methyl methacrylate/butyl acrylate/methacrylic acid (S/MMA/BA/MMA) copolymers; styrene/methyl methacrylate/butyl acrylate/acrylic acid (S/MMA/BA/AA) copolymers; and the like. Polymers derived from cyclic ethers usually contain 2 to 5 carbon atoms in the ring with optional alkyl groups substituted thereon. Examples include various oxiranes, oxetanes, tetrahydrofurans, tetrahydropyrans, dioxanes, trioxanes, and caprolactone. Polymers derived from vinyl substituted aromatics include for example those made from styrenes, pyridines, conjugated dienes, and copolymers thereof. Polyesters, polyamides, polyurethanes and polysiloxanes are also used in floor finishes.

The waxes or mixtures of waxes that are used in floor finishes include waxes of a vegetable, animal, synthetic, and/or mineral origin. Representative

waxes include, for example, carnuba, candelilla, lanolin, stearin, beeswax, oxidized polyethylene wax, polyethylene emulsions, polypropylene, copolymers of ethylene and acrylic esters, hydrogenated coconut oil or soybean oil, and the mineral waxes such as paraffin or ceresin. The waxes typically range from 0 to
5 about 15 weight percent and preferably from about 2 to about 10 weight percent based on the weight of the finish composition.

When used as additives to a floor finish the compounds of formula (I) as defined above are effectively introduced to the composition by thoroughly stirring it in at room or ambient temperature. More elaborate mixing can be employed
10 such as using a mechanical shaker or providing heat or other methods. When used as an additive to floor finishes, the compounds of formula (I) generally are added at about 0.001% by weight to about 5% by weight by dry weight of the compound of formula (I) in the wet composition. Preferably about from about 0.01% by weight to about 1% by weight, and more preferably from about 0.1% by
15 weight to about 0.5% by weight is used.

Floor waxes or polishes are water based, solvent based and polymer. The method of the present invention is suitable for use with any of these. Water-based and polymer waxes dry to a high gloss without buffing; solvent-based wax requires vigorous buffing. Water-based wax is recommended for asphalt, vinyl,
20 vinyl asbestos and rubber-tiled floors; solvent-based waxes produce a hard, shiny finish and are best for wood, cork and terrazzo floors. Self-polishing waxes, such as polymer or resin, will yellow or discolor and wear off in heavy traffic areas; they should be stripped off and reapplied after three or four coats.

In another embodiment of the present invention the methods of the present
25 invention are useful in gas and oil field applications. Herein a hydrocarbon is either a gas or oil product which is produced or recovered from a subterranean zone. A well or well bore is drilled and created to penetrate such a hydrocarbon containing subterranean zone. The method of the present invention is useful to provide a surfactant or foaming agent to modify and improve the wettability and
30 surface conditions, such as the surface tension of the subterranean formation around the well bore, and is also useful to improve the permeability and flow rate to enhance oil well or gas well recovery and productivity.

The term "drill fluids" as used herein means those liquids that are added to a well or well bore penetrating a subterranean zone containing hydrocarbon or gas prior to or during a drilling operation. Examples can include water, brine, solvent, hydrocarbons, surfactants, oils, kerosene, fracturing fluids, stimulating fluids, oil-based drill muds, clay stabilizers, treatment fluids, and mixtures thereof.

The term "well fluids" as used herein means those liquids that occur in or are added to a well or well bore penetrating a subterranean zone containing hydrocarbon or gas. Examples can include drill fluids, water, brine, solvent, hydrocarbons, surfactants, oils, kerosene, fracturing fluids, stimulating fluids, oil-based drill muds, clay stabilizers, treatment fluids, and mixtures thereof.

The term "liquid treatment stream or gas treatment stream" as used herein means a liquid composition or gas composition, or a combination thereof, injected into a well penetrating a subterranean zone containing hydrocarbon or gas, or into a well bore area, in the operation of extracting the hydrocarbon or gas. Examples can include steam, drill fluids, well fluids, stimulating fluids, water, brine, solvent, hydrocarbons, surfactants, fracturing fluids, oil-based drill muds, clay stabilizers, treatment fluids, and mixtures thereof.

The method of the present invention provides a compound of formula (I), which acts as a surfactant or foaming agent for oil field and gas field applications. In this embodiment the compound of formula (I) is typically used in an aqueous medium or solvent medium selected from the group consisting of water, saline solution, KCl solution, HCl solution, hydrocarbon, halocarbon, drill fluids, well fluids, liquid treatment stream, gas treatment stream, and a mixture thereof. The method of the present invention is useful to provide an additive in drill fluids, well fluids, and other treatment fluids for subterranean formations, to enhance gas or oil recovery by altering surface tension, wettability, or viscosity of the fluids, oils, condensates, and muds employed or encountered in such operations. The surfactant can be used for foaming porous rock or soil medium of a subterranean formation, or for other known well or well bore treatments.

The present invention provides a surfactant or foaming fluid which comprises the compounds of formula (I) and a medium, wherein the compound of formula (I) is present at a concentration range of from about 0.001% to about 50% by weight, preferably a range of from about 0.01% to about 30% by weight, and

more preferably a range of from about 0.05% to about 20% by weight in the medium.

The present invention comprises a method of lowering the surface tension within a subterranean formation containing hydrocarbons comprising adding a
5 compound of formula (I) as described above to a medium which is a carrier contacted with the subterranean formation. One method of contacting is injection of the carrier or medium into the subterranean formation, for example by using a downhole, well, or well bore. The compound of formula (I) is added to a carrier or medium such as a fluid or gas which will be in contact with the subterranean
10 formation during operations to remove oil or gas from the formation. Examples include drill fluids, well fluids, stimulation fluids, liquid treatment stream, gas treatment stream, fractionating fluids, clay stabilizers, or other liquids or gases employed when extracting the hydrocarbons from the formation. The methods of the present invention employing compounds of formula (I) can be used in one or
15 more of a pretreatment stage of injection of a pre-flush of various liquids, or in matrix or stimulation activities; in the main stage in various carrier fluids, or in a soaking of the formation for a specific time period; or in a post treatment stage for displacement operation to achieve better placement of the fluids containing the surfactant composition. The compound of formula (I) is used in the media in the
20 form of a liquid, emulsion, dispersion, or foaming agent.

Foaming is a desirable property of the surfactants used in the method of the present invention when used as additives to drill fluids, well fluids, and other fluids in oil and/or gas field applications for enhanced production and recovery. The aqueous or solvent based drilling fluids, well fluids, liquid or gas treatment
25 streams, or other carrier compositions which contain the compound of formula (I) foam during drilling or well treatment processes, and therefore provide advantages for enhanced production and recovery. Examples of such advantages from the surfactant and foaming properties include aiding in the removal of fines from the well around the drill-bit and wellbore treatment area, and adjusting the
30 permeability and wettability properties where the fluids contact around the drill-bit and wellbore treatment area. The addition of the surfactant using the method of the present invention boosts the foaming properties of the oil/gas well drilling fluids and treatment fluids. If these fines are not efficiently removed, they can

result in damage to the drill-bit head, costing time and money to replace or repair. In addition the method of the present invention is useful to reduce the viscosity of the hydrocarbon to permit easier extraction.

Another advantage of contacting a subterranean formation containing hydrocarbons with the surfactant of formula (I) as defined above, is providing a method for stimulating production of hydrocarbons during operations to extract hydrocarbons from a subterranean formation. The method of the present invention employs the surfactant compounds of formula (I) as stimulation fluid additives for stimulation activities, such as hydraulic fracturing and acidizing. In these situations the stable foams of the surfactants improve the wetting of the stimulation fluid on the formation surface (rock) to allow for deeper penetration and better stimulation of the well bore region. The low surface tension of these additives permit the stimulation fluids to be more efficiently and easily recovered from downhole using the method of the present invention. As a result, the well will be able to more effectively produce gas and oil.

The method of the present invention is further useful to provide an aid to prevent and remedy water blocks or condensate blocks in wells and well bore areas. It is known that water can accumulate near the well bore of an oil or gas well and decrease productivity by decreasing the relative permeability of the oil or gas, which is called water block. In addition liquid hydrocarbons can also accumulate and cause a decrease in productivity in gas wells near or far from the well bore region known as condensate block. The compounds used in the method of the present invention can be used to help in removal of at least a portion of such accumulations of liquids in a water block or condensate block, or for reducing or preventing the formation of the accumulation of liquids in such blocks. The surfactant employed in the method of the present invention is useful as a surfactant additive in drill fluids, well fluids and treatment fluids for subterranean formation to alter the wettability and permeability by its surface active properties. Such surfactants, for example, are used within the porous rock medium of subterranean formation and can result in pressure changes or as foams can block the gas drain paths and result in the oil/gas recovery increases.

The methods of the present invention have several uses and advantages as detailed above. The methods provide surface effects to media and substrates, such

a lowering of surface tension, leveling and wetting, and foaming. The compounds of formula (I) employed in the methods of the present invention do not precipitate out of formulations commonly used in oilfield applications or other applications. The compounds employed in the methods of the present invention have a shorter
5 terminal perfluoroalkyl group present, which is more economical than longer chain perfluoroalkyls due to the reduction in fluorine present, but still provide comparable or superior performance.

Test Methods and Materials

The following test methods and materials (intermediates) were used in the
10 Examples herein. Proton and ^{19}F NMR as well as electrospray mass spectroscopy was used to confirm compositions of the intermediates and Examples.

Test Methods

Test Method 1-Surface Tension Measurement

15 The surface tension of the examples was measured via a Kruss Tensiometer, K11 Version 2.501, in accordance with instructions with the equipment. The Wilhelmy Plate method was used. A vertical plate of known perimeter was attached to a balance, and the force due to wetting was measured. Ten replicates were tested of each dilution, and the following machine settings
20 were used: Plate Method SFT, 1.0 sec interval, 40.2 mm wetted length, 10 reading limit, 2 dynes/cm min Standard Deviation, and 9.80665 m/s^2 Gr. Acc. Lower surface tension indicated superior performance.

A stock solution was prepared for the highest concentration of fluorosurfactant example to be analyzed. The concentration of the solutions was
25 by percent active ingredient, weight percent or fluorine content. This stock solution was prepared in deionized water, in a floor polish (RHOPLEX® 3829, Formulation N-29-1 available from Rohm & Haas, Philadelphia, PA), in 2% KCl in water, or in 15% HCl in water depending on the desired application for which the surface tension was being measured. The stock solution was stirred overnight
30 (for approximately 12 hours) to ensure complete mixing. Additional concentrations of the fluorosurfactant example for analysis were made by diluting the stock solution according to the equation $M_i V_i = M_f V_f$, where M_i is the

concentration of the stock solution, M_f is the concentration of the final solution, V_f is the final volume of the sample, and V_i is the volume of the stock solution that is needed in order to formulate the final sample. The concentration dilution samples were shaken thoroughly and then left to sit undisturbed for 30 minutes.

5 These samples were then mixed and poured into a small container. Solutions of 2% KCl and 15% HCl were typically used in the surface tension measurements for oilfield applications because they mimic the stimulation fluid types that are pumped down hole into wells. The 2% KCl solution was similar to the salinity of the fracture fluids that are used to hydraulically fracture a well. The 15% HCl

10 solution emulated the acidizing stimulation treatment fluid that is used to help dissolve the formation rock in wells. The floor polish was used for applications in the consumer, institutional, and industrial segments for demonstration of providing surface effects to substrates. The surface tension was measured using a Kruss Tensiometer, K11 Version 2.501 in accordance with instructions with the

15 equipment as described above. Lower surface tension indicated superior performance.

Test Method 2- Leveling and Wetting

To test the performance of the samples in their wetting and leveling ability, the following examples were added to a floor polish (RHOPLEX 3829,

20 Formulation N-29-1, available from Rohm & Haas, Philadelphia, PA) and applied to half of a thoroughly cleaned 12 inch X 12 inch (30.36 cm X 30.36 cm) vinyl tile (available from Interfuse Vinyl Tiles by Estrie, Sherbrooke, QC Canada). The tiles were thoroughly cleaned by wetting the tiles, adding a powdered oxygen bleach cleanser and scrubbing using a green SCOTCH-BRITE scouring pad,

25 available from 3M Company, St. Paul MN). This scrubbing procedure was used to remove the pre-existing coating on the tiles. The tiles initially had a uniform shiny finish; a uniform dull finish indicated coating removal. The tiles were then air-dried overnight. A 1 % by weight solution of the surfactant to be tested was prepared by dilution in deionized water. Following the resin manufacturer

30 protocols, a 100 g portion of the RHOPLEX 3829 formulation was prepared, followed by addition of 0.75 g of the 1 % by weight surfactant solution, to provide a test floor polish.

The test floor polish was applied to the tile by placing 3 mL portion of the test polish in the center of the tile, and spreading from top to bottom using a cheesecloth applicator, and finally placing a large “X” across the tile, using the applicator. The “X” subsequently provided visual evidence of leveling at the rating step. The applicator was prepared from a two-layer 18 x 36 inch (46 x 91

5 cm) sheet of cheesecloth (from VWR, West Chester PA), folded twice into an eight-layer pad. One corner of the pad was then used as the applicator. The tile was allowed to dry for 30 min. and a total of 5 coats (Coating #s 1 - 5) were applied and dried, with the X test performed after each coating had been dried.

10

Table 1

Visual Tile Rating Scale for Leveling

Score	Description
1	Uneven surface coverage of the film, significant streaking and surface defects
2	Numerous surface defects and streaks are evident but, generally, film coats entire tile surface
3	Visible streaking and surface defects, withdrawal of the film from the edges of the tile
4	Minor surface imperfections or streaking
5	No visible surface defects or streaks

Test Method 3-Foaming

The test procedure used to evaluate the foaming was a modified version of the blender foaming test ASTM D3519-88. A blender, graduated cylinder, glass sample bottles and a stop watch were employed. First, stock solutions of the testing base solutions were made. These solutions were hard water, tap water, de-ionized water, or artificial sea water. Samples of 100 mL of the fluorosurfactant at 0.1 % active ingredient in the desired base testing solution were prepared and

20 stirred overnight to ensure complete mixing. The blender was cleaned with de-ionized water, then acetone, and then de-ionized water again. Once clean, the blender was assembled for use. The test fluid sample of 100 mL was poured into the blender jar. The temperature of the test fluid was measured with a

thermometer and recorded. The blender was then run for 20 seconds at 50-60% power. After 20 seconds, the liquid and foam were immediately poured into a 500 mL graduated cylinder. The initial liquid and foam height were measured in mL. The liquid and foam height were again measured at 5, 10 and 15 minutes. During
5 this time, any observations of the foam were recorded such as its density or persistency. The blender foaming test was used to measure the amount of foam produced and the persistency of the foam. A difference in foam height of up to 10 mL is produced by variation in this method.

Materials

10 Intermediate 1

$C_3F_7OCF_2CF_2I$ (100 g, 0.24 mol) and benzoyl peroxide (3 g) were charged to a pressure vessel under nitrogen. A series of three vacuum/nitrogen gas sequences was then executed at $-50\text{ }^\circ\text{C}$ and ethylene (18 g, 0.64 mol) was introduced. The vessel was heated for 24 hour at $110\text{ }^\circ\text{C}$. The autoclave was
15 cooled to $0\text{ }^\circ\text{C}$ and opened after degassing. Then the product was collected in a bottle. The product was distilled resulting in 80 g of $C_3F_7OCF_2CF_2CH_2CH_2I$ in 80% yield. The boiling point was $56\sim 60\text{ }^\circ\text{C}$ at 25 mm Hg (3333 Pa).

Potassium thiocyanate (21.34 g, 0.22 mol) was added to a mixture of $C_3F_7OCF_2CF_2CH_2CH_2I$ (50 g, 0.11 mol) and trioctylmethylammonium chloride
20 (0.2222 g) in 50 g of water. The reaction was heated overnight at $90\text{ }^\circ\text{C}$. After phase separation, the product $C_3F_7OCF_2CF_2CH_2CH_2SCN$ was distilled as a colorless liquid (32 g, 78%).

Chlorine gas (132 g, 1.86 mol) and water (47 g, 2.6 mol) were fed into a mixture of $C_3F_7OCF_2CF_2CH_2CH_2SCN$ (231 g, 0.62 mol) and acetic acid (130 g,
25 2.17 mol) over 10 hours at $45\sim 50\text{ }^\circ\text{C}$ in an autoclave. A further 10 g of chlorine was added over 3 hours at $45\text{ }^\circ\text{C}$ and heated at this temperature for 1 hour. The product was heated in a flask with a stir bar at $70\text{ }^\circ\text{C}$ and 149 mL of hot water ($70\text{ }^\circ\text{C}$) was added. The organic layer was separated, followed by adding of toluene (125 g). The product in toluene was washed with 3.5% solution of brine
30 (149 mL) at $70\text{ }^\circ\text{C}$ twice. After the second wash, a Dean-Stark trap was set up to strip off water. The final product was 70% of $C_3F_7OCF_2CF_2CH_2CH_2SO_2Cl$ (228 g, 90%) by weight in toluene.

$C_3F_7OCF_2CF_2CH_2CH_2SO_2Cl$ (100 g, 0.242 mol, 66.8% in toluene) was added dropwise to a mixture of dimethylaminopropylamine (DMAPA) at 45 °C. After the addition, the reaction was heated at 75 °C overnight. The reaction mass was filtered and the wet cake was washed with 60 °C toluene. After stripping off the toluene, the concentrated organic product was washed with 200 mL of 95 °C deionized water. The product Intermediate 1, $C_3F_7OCF_2CF_2CH_2CH_2SO_2N(H)CH_2CH_2CH_2N(CH_3)_2$ (101 g, 87.2%) was obtained as an amber colored solids after removing water under reduced pressure.

Intermediate 2

Ethylene (25 g, 0.53 mol) was introduced to an autoclave charged with $C_4F_9CH_2CF_2I$ (217 g, 0.87 mol) and d-(+)-limonene (1 g), and then the reactor was heated at 240 °C for 12 hours. The product, $C_4F_9CH_2CF_2CH_2CH_2I$, was obtained via vacuum distillation 81~91 °C at 19~24 mmHg in 62 % yield. Potassium thiocyanate (21.34 g, 0.22 mol) was added to a mixture of $C_4F_9CH_2CF_2CH_2CH_2I$ (50 g, 0.11 mol) and trioctylmethylammonium chloride (0.2222 g) in 50 g of water. The reaction was heated overnight at 90 °C. After phase separation, the product $C_4F_9CH_2CF_2CH_2CH_2SCN$ was distilled as a colorless liquid (38 g, 95%).

Chlorine gas (118 g, 1.66 mol) and water (40 g, 2.22 mol) were fed into a mixture of $C_4F_9CH_2CF_2CH_2CH_2SCN$ (205 g, 0.56 mol) and acetic acid (109 g, 1.82 mol) over 10 hours at 45~50 °C in an autoclave. The product was heated in a flask with a stir bar at 70 °C and hot water (70 °C) was added. The organic layer was separated, followed by adding of toluene (216.25 g). The product in toluene was washed with 3.5% solution of brine at 70 °C twice. After the second wash, a Dean-Stark trap was set up to strip off water. The final product was 70% of $C_4F_9CH_2CF_2CH_2CH_2SO_2Cl$ (228 g, 39%) by weight in toluene.

$C_4F_9CH_2CF_2CH_2CH_2SO_2Cl$ (100 g, 0.23 mol, 70.3% in toluene) was added dropwise to a mixture of dimethylaminopropylamine (DMAPA) at 45 °C. After the addition, the reaction was heated at 75 °C overnight. The reaction mass was filtered and the wet cake was washed with 60 °C toluene. After stripping off the toluene, the concentrated organic product was washed with 200 mL of 95 °C

deionized water. The product Intermediate 2, $C_4F_9CH_2CF_2CH_2CH_2SO_2N(H)CH_2CH_2CH_2N(CH_3)_2$ (106 g, 96.8%) was obtained as a brown colored solids after removing water under reduced pressure.

Intermediate 3

5 $C_4F_9(CH_2CF_2)_2I$ (327 g, 0.69 mol) was charged to a Hastalloy C shaker tube reactor followed by a series of three vacuum/ N_2 gas sequences. Ethylene (35 g, 2.57 mol) was introduced and the vessel heated to 240 °C for 3 hours, maintaining a pressure of 250 psig. Vacuum distillation of 2 combined runs provided 572 g (83%) of product, $C_4F_9(CH_2CF_2)_2CH_2CH_2I$, with boiling point
10 111~120 °C at 16~20 mmHg.

The flask was charged with $C_4F_9(CH_2CF_2)_2CH_2CH_2I$ (500 g, 0.996 mol), potassium thiocyanate (194 g, 1.99 mol) and trioctylmethylammoniumchloride (ALIQAT 336) (4.02 g, 0.00995 mol) under nitrogen. Deionised water (500 g, 27.8 mol) was added and the reaction mixture
15 was heated to 90 °C for 18 hours. The organic layer was separated in a glass separating funnel and washed with hot (70 °C) deionised water. The product was distilled on a high vacuum system resulting in 407 g (94.3%) of
 $C_4F_9(CH_2CF_2)_2CH_2CH_2SCN$.; bp 129~133 °C/ 1.0 mmHg.

An autoclave was charged with $C_4F_9(CH_2CF_2)_2CH_2CH_2SCN$
20 (269 g, 0.62 mol) and acetic acid (130 g, 2.17 mol) under nitrogen and heated to 45~50 °C. Chlorine gas (132 g, 1.86 mol) was fed at an estimated rate for 10 hours and deionised water (47 g, 2.60 mol) was fed at an estimated rate for 8 hours. After feeding, the reaction was left to stir at 45~50 °C for 1 hour. A second addition of chlorine gas (25 g, 0.352 mol) was fed over 2.5 hours at 45~50
25 °C and left to stir for 1 hour. The crude product was heated at 70 °C and washed with deionised water (149 g, 8.28 mol). The organic layer was separated in a glass separating funnel and added to toluene (125 g, 1.36 mol), then washed twice with a 3.5% solution of sodium chloride (149 g). A Dean Stark trap was used to strip off excess solvent and the product was set to 70.2% active ingredient in
30 toluene resulting in 359 g (85.6%) of $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2Cl$.

Dimethylaminopropylamine (41 g, 0.401 mol) and toluene (62.6 g, 0.679 mol) were charged to a 3-neck round-bottom flask equipped with a reflux

condenser, nitrogen inlet, addition funnel, magnetic stirrer and temperature probe. The mixture was heated to 45 °C followed by the drop wise addition of $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2Cl$ (100 g, 0.211 mol) resulting in an exotherm. The reaction mixture was heated to 75 °C for 24 hours, filtered through a fritted glass filter with a slight vacuum and the wet cake washed with warm (60 °C) toluene (89.5 g, 0.971 mol). The solvent was evaporated under reduced pressure and the organic product was washed with warm (95 °C) deionised water (200 g, 11.1 mol), separated in a glass separating funnel and re-washed with a 4% solution of sodium chloride (200 g). Any remaining solvent was evaporated under reduced pressure to give 100 g (87.7%) of Intermediate 3, $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$; mp 52~58 °C.

EXAMPLES

Example 1

Intermediate 1, $C_3F_7OCF_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (7 g, 0.0146 mol), was added to a mixture of ethanol (5.4 g), deionized water (0.193 g, 0.0107 mol), sodium chloroacetate (1.74 g, 0.0149 mol) and celite (2.75 g). The reaction was refluxed overnight and filtered. The filtrate, $C_3F_7OCF_2CF_2CH_2CH_2SO_2-N(H)CH_2CH_2CH_2N(CH_3)_2^+CH_2C(O)O^-$, was diluted to a 27% active ingredient with ethanol and water. The product was tested using Test Methods 1 to 3. Results are listed in Tables 2-7.

Example 2

A mixture of Intermediate 1, $C_3F_7OCF_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (20 g, 0.0418 mol), and ethanol (16.7 g, 0.320 mol) was charged to a 3-neck round bottom flask equipped with a reflux condenser, nitrogen inlet, addition funnel, magnetic stirrer and temperature probe and heated to 50 °C. Hydrogen peroxide (1.75 g, 0.514 mol) was added drop wise and maintained at 50 °C for 56 hours. A second addition of hydrogen peroxide (1.75 g, 0.514 mol) was added to the reaction and maintained at 50 °C for an extra 12 hours Manganese (IV) oxide (0.004 g, 0.0000460 mol) was added gradually and held at 50 °C for an additional 16 hours. The reaction mixture was then filtered through a fritted glass filter with a slight vacuum and excess solvent was

evaporated. This yielded 11.8 g (51.0%) of $C_3F_7OCF_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N^+(CH_3)_2O^-$ that was diluted with ethanol (8.9 g, 0.193 mol) and deionised water (8.9 g, 0.494 mol) to give a 40% active ingredient concentrated solution. The product was tested using Test Methods 1 to 3. Results are listed in
5 Tables 2-7.

Example 3

Intermediate 2, $C_4F_9CH_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (7 g, 0.0147 mol), was added to a mixture of ethanol (5.4 g), deionized water (0.193 g, 0.0107 mol), sodium chloroacetate (1.74 g, 0.0149 mol) and celite
10 (2.75 g). The reaction was refluxed overnight and filtered. The filtrate, $C_4F_9CH_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2^+CH_2C(O)O^-$, was diluted to a 27% active ingredient with ethanol and water. The product was tested using Test Methods 1 to 3. Results are listed in Tables 2-7.

Example 4

A 3-neck round-bottom flask equipped with a reflux condenser, nitrogen inlet, addition funnel, magnetic stirrer and temperature probe was charged with Intermediate 3, $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (20 g, 0.0370 mol), ethanol (13.6 g, 0.296 mol), deionised water (0.5 g, 0.0270 mol)
20 and sodium chloroacetate (4.4 g, 0.0377 mol). The reaction mixture was heated to 78 °C for 24 hours, filtered through a fritted glass filter with a slight vacuum and the wet cake washed with warm (75 °C) ethanol (150 g, 3.26 mol). The solvent was then evaporated under reduced pressure to give 9 g (40.7%) of product $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2N(H)CH_2CH_2CH_2N(CH_3)_2^+CH_2C(O)O^-$. The
25 final product was diluted with ethanol (11.7 g, 0.254 mol) and deionised water (12.7 g, 0.704 mol) to give a 27% active ingredient concentrated solution. The product was tested using Test Methods 1 to 3. Results are listed in Tables 2-7.

Example 5

30 A mixture of Intermediate 2, $C_4F_9CH_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (20 g, 0.0420 mol), and ethanol (16.7 g, 0.363 mol) was

charged to a 3-neck round bottom flask equipped with a reflux condenser, nitrogen inlet, addition funnel, magnetic stirrer and temperature probe and heated to 50 °C. Hydrogen peroxide (4.4 g, 0.129 mol) was added drop wise and maintained at 50 °C for 17 hours. Manganese (IV) oxide (0.0102 g, 0.000118 mol) was added gradually and held at 50 °C for an additional 16 hours. The reaction mixture was then filtered through a fritted glass filter with a slight vacuum and excess solvent was evaporated under reduced pressure. This yielded 14.3 g (69.0%) of $C_4F_9CH_2CF_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N^+(CH_3)_2O^-$, which was then diluted with ethanol (10.7 g, 0.233 mol) and deionised water (10.7 g, 0.594 mol) to give a 40% active ingredient concentrated solution. The product was tested using Test Methods 1 to 3. Results are listed in Tables 2-7.

Example 6

A mixture of Intermediate 3, $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ (20 g, 0.0370 mol), and ethanol (14.7 g, 0.320 mol) was charged to a 3-neck round bottom flask equipped with a reflux condenser, nitrogen inlet, addition funnel, magnetic stirrer and temperature probe and heated to 50 °C. Hydrogen peroxide (3.9 g, 0.114 mol) was added drop wise and maintained at 50 °C for 24 hours. Manganese (IV) oxide (0.009 g, 0.000104 mol) was added gradually and held at 50 °C for an additional 16 hours. The reaction mixture was then filtered through a fritted glass filter with a slight vacuum and excess solvent was evaporated. This yielded 15.2 g (74.1%) of $C_4F_9(CH_2CF_2)_2CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N^+(CH_3)_2O^-$ that was diluted with ethanol (11.4 g, 0.248 mol) and deionised water (11.4 g, 0.633 mol) to give a 40% active ingredient concentrated solution. The product was tested using Test Methods 1 to 3. Results are listed in Tables 2-7.

Comparative Example A

The procedure of the Intermediate 1 was repeated, but a perfluoroalkylethyl iodide of the formula $F(CF_2)_nCH_2CH_2I$ was used, wherein n ranged from 6 to 8 as the fluorinated iodide. The typical mixture was as follows: 0.68% of n=4, 67.8% of n=6, 19.5% of n=8, 7.2% of n=10, 2.4% of n=12, 0.79%

of n=14, 0.23% of n=16, 0.07% of n=18 and 0.02% of n=20. The resulting product, $F(CF_2)_nCH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2$ was tested according to Test Method 1. Results are in Table 2.

5 Comparative Example B

The procedure for Intermediate 1 was repeated but used a perfluoroalkylethyl iodide of the formula $F(CF_2)_6CH_2CH_2I$. The resulting product intermediate was then reacted similar to Example 1. The resulting product, $F(CF_2)_6CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N(CH_3)_2^+CH_2C(O)O^-$, was
10 according to Test Methods 1 to 3. Results are in Tables 3 to 7.

Comparative Example C

The procedure for Intermediate 1 was repeated but used a perfluoroalkylethyl iodide of the formula $F(CF_2)_6CH_2CH_2I$. The resulting
15 intermediate was then reacted similar to Example 2. The resulting product $F(CF_2)_6CH_2CH_2SO_2N(H)-CH_2CH_2CH_2N^+(CH_3)_2O^-$ was tested for leveling and wetting according to the procedure of Test Methods 1 to 3. Results are in Tables 3 to 7.

20 Table 2 - Surface Tension in Deionized Water (dynes/cm) at 23 °C

Example*	1%	0.5%	0.2%	0.1%	0.05%	0.01%	0.005%
Example 1	18.2	15.2	15.6	17.3	17.9	20.7	20.3
Example 2	15.8	15.7	17.1	16.1	16.5	20.0	21.4
Example 3	17.7	18.9	15.9	18.4	22.6	25.3	24.4
Example 4	18.3	17.9	16.9	19.2	16.7	20.6	27.5
Example 5	16.1	18.4	16.9	17.6	21.2	19.4	25.1
Example 6	16.8	17.8	16.6	17.9	17.2	19.4	19.7
Comparative Example A	17.3	17.3	17.5	18.0	18.5	18.1	20.9

*Example was added to deionized water by weight based on solids of the additive in deionized water.

Normal surface tension of deionized water is 72 dyne/cm. When the above surfactants were added at a specified rate, the surface tension of each aqueous solution was reduced significantly. All the Examples 1 to 6 used in the method of the invention containing 4 or less fully fluorinated carbons showed comparable or better performance at higher concentrations to Comparative Example A containing a mixture of perfluoroalkyls of 4 to 20 carbons.

Table 3 - Leveling in RHOPLEX Floor Finish

Examples	Reading*
Example 1	3.1
Example 2	3.1
Example 3	3
Example 4	3
Example 5	3.1
Example 6	3.2
Blank	1.2
Comparative Example B	3.1
Comparative Example C	3.2

*Average of 5 coats

The fluorosurfactants of Examples 1 to 6 used in the method of the present invention containing an intervening CH₂ or O in the perfluoroalkyl chain and exhibited excellent wetting ability in a floor finish (RHOPLEX) formulation. Examples 1, 3 and 4 performed equally to Comparative Example B, and Examples 2, 5 and 6 performed equally to Comparative Example C. The comparative Examples B and C each contained a perfluoroalkyl of 6 carbons, while those of the examples 1 to 6 contained 4 perfluoroalkyls of 4 carbons or less.

Table 4

Surface Tension in 2% KCl Aqueous Solution (dynes/cm) at 23 °C

Example*	0%	0.001%	0.01%	0.1%	0.5%
1	72.8	51.2	29.0	16.1	16.0
2	73.3	52.9	26.6	17.8	15.1
3	72.8	62.3	39.2	19.4	19.3
4	74.0	50.2	22.3	19.0	16.8
5	72.8	56.8	38.0	19.6	17.6
6	73.5	40.2	18.7	16.9	16.8
Comparative Example B	72.3	45.3	21.3	18.0	17.5
Comparative Example C	73.0	41.0	18.7	16.5	15.5

*Example was added to 2% KCl aqueous solution by weight based on solids of the surfactant.

5

Table 5

Surface Tension in 15% HCl Aqueous Solution (dynes/cm) at 23 °C

Example*	0%	0.001%	0.01%	0.1%	0.5%
1	76.0	53.5	32.5	17.2	16.9
3	76.1	59.0	40.0	19.1	18.5
4	76.5	50.5	25.6	19.0	18.8
Comparative Example B	76.0	52.8	22.1	19.0	18.8
2	76.0	50.8	27.2	16.4	16.3
5	76.1	61.1	38.1	18.5	18.0
6	76.3	51.0	25.0	16.9	16.3
Comparative Example C	76.6	42.4	17.0	16.5	16.3

*Example was added to 15% HCl aqueous solution by weight based on solids of the surfactant.

10 Normal surface tension of deionized water, 2% KCl aqueous solution and 15% HCl aqueous solution is about 72-76 dyne/cm. When Examples 1 - 6 were added at a specified rate using the method of the present invention, the surface

tension of each aqueous solution was reduced significantly. Better performance was obtained at higher concentrations. At the higher concentrations the fluorosurfactants of Examples 1, 3 and 4, and Examples 2, 5 and 6, used in the method of the present invention containing an intervening CH₂ or O in the perfluoroalkyl chain performed comparably to or better than Comparative Examples B and C, respectively, containing a perfluoroalkyl of 6 carbons.

Table 6 - Foaming in Tap Water

Example*	Foam Volume (mL)			
	Initial	t=5 min	t=10 min	t=15 min
1	325	255	228	205
3	255	170	155	140
4	225	135	117	115
Comparative Example B	225	130	120	120
2	295	215	185	180
5	270	185	155	145
6	165	60	55	50
Comparative Example C	175	80	70	65

*Example was added to tap water by weight based on solids of the surfactant to make 100 mL 0.1% solution

Table 7 - Foaming in Artificial Sea Water

Example*	Foam Volume (mL)			
	Initial	t=5 min	t=10 min	t=15 min
1	300	225	195	175
2	275	195	175	155
4	200	125	100	55
Comparative Example B	160	80	60	60
2	175	75	70	65
5	250	150	135	127
6	150	60	60	60
Comparative Example C	160	65	50	40


*Example was added to artificial sea water by weight based on solids of the surfactant to make 100 mL 0.1% solution.

Foaming is an important desirable property for oilfield applications. A
 5 difference in foam height of up to 10 mL is produced by variation in the test
 method employed. Examples 1-6 containing an intervening CH₂ or O in the
 perfluoroalkyl chain showed substantially equivalent or superior performance to
 Comparative Examples B and C containing a perfluoroalkyl of 6 carbons. The
 Examples demonstrated generation of equivalent or more foam initially, and
 10 sustained the foam over time.

CLAIMSWhat is claimed is:

1. A method of providing a surface effect to a medium or substrate comprising contacting the medium or substrate with a compound of formula (I):

5

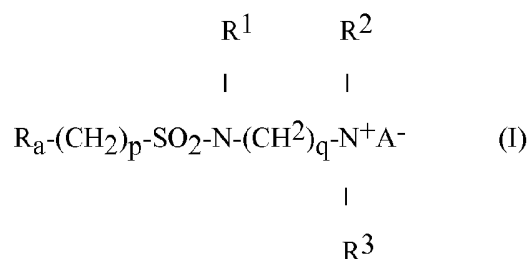

10

wherein

R_a is linear or branched $F(CF_2)_n(CH_2CF_2)_m-$, or linear or branched $F(CF_2)_r-O-B-$;

15

B is (C_sF_{2s}) optionally interrupted by 1 to 2 catenary oxygen atoms, each oxygen bonded to two carbon atoms,

n is 2 to 4, m is 1 to 4, r is 1 to 4, s is 1 to 4, provided that $(r + s)$ is a maximum of 7,

A is O or $(CH_2)_k-COO$,

20

R^1 is hydrogen or a methyl,

R^2 and R^3 are each independently alkyl having 1 to 6 carbon atoms, and

p, q and k are each independently integers from 1 to 10.

2. The method of claim 1 wherein R_a is $F(CF_2)_n(CH_2CF_2)_m-$

wherein n is 2 to 4 and m is 2, or wherein R_a is $F(CF_2)_r-O-B-$ wherein r is 3 or 4.

25

3. The method of claim 1 wherein the surface effect is lowering the surface tension.

4. The method of claim 3 wherein the surface tension of the medium is less than about 25 milli-newtons per meter at a concentration of the compound of formula (I) in the medium of less than about 0.5% by weight.

30

5. The method of claim 3 wherein the medium is selected from the group consisting of water, saline solution, KCl solution, HCl solution, drill fluids,

well fluids, liquid treatment or gas treatment stream for subterranean formation and well bore areas, hydrocarbon, halocarbon system, coating composition, latex, polymer, floor finish, floor polish, fire fighting agent, ink, emulsifying agent, foaming agent, release agent, repellency agent, flow modifier, film evaporation
5 inhibitor, wetting agent, penetrating agent, cleaner, grinding agent, electroplating agent, corrosion inhibitor, etchant solution, soldering agent, dispersion aid, microbial agent, pulping aid, rinsing aid, polishing agent, personal care composition, drying agent, antistatic agent, and bonding agent.

6. The method of claim 1 wherein the surface effect is selected from
10 the group consisting of wetting, penetration, spreading, leveling, flowing, emulsifying, dispersing, repelling, releasing, lubricating, etching, bonding, and stabilizing.

7. The method of claim 6 wherein the leveling and wetting are provided to a coated substrate by adding the compound of formula (I) to a coating
15 base prior to deposition of the coating base on the substrate.

8. The method of claim 7 wherein the coating base is a water dispersed coating, alkyd coating, Type I urethane coating, unsaturated polyester coating, a floor polish, or a floor finish.

9. The method of claim 1 wherein the compound of formula (I) is
20 added to a medium to be contacted with a hydrocarbon-bearing subterranean formation.

10. The method of claim 9 wherein the medium is selected from the group consisting of water, saline solution, KCl solution, HCl solution, hydrocarbons, halocarbons, drill fluids, well fluids, stimulating fluids, and liquid
25 treatment or gas treatment stream for subterranean formation and well bore areas.

11. The method of claim 10 wherein the compound of formula (I) is present in the medium at a concentration of from about 0.001% to about 50% by weight.