



(43) International Publication Date
6 October 2016 (06.10.2016)

(51) International Patent Classification:
G02B 27/01 (2006.01)

(21) International Application Number:
PCT/EP2016/057192

(22) International Filing Date:
1 April 2016 (01.04.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
EP15465508 2 April 2015 (02.04.2015) EP

(71) Applicant: **CONTINENTAL AUTOMOTIVE GMBH**
[DE/DE]; Vahrenwalder Straße 9, 30165 Hannover (DE).

(72) Inventors: **PASCA, Andrei**; Str. Rusu Sirianu, Nr. 37, SC.
A. ap. 9, 300487 Timisoara (RO). **MARKUS, Ferenc**; Str.
Victor Hugo Nr. 115, 300439 Timisoara (RO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: HEAD-UP DISPLAY

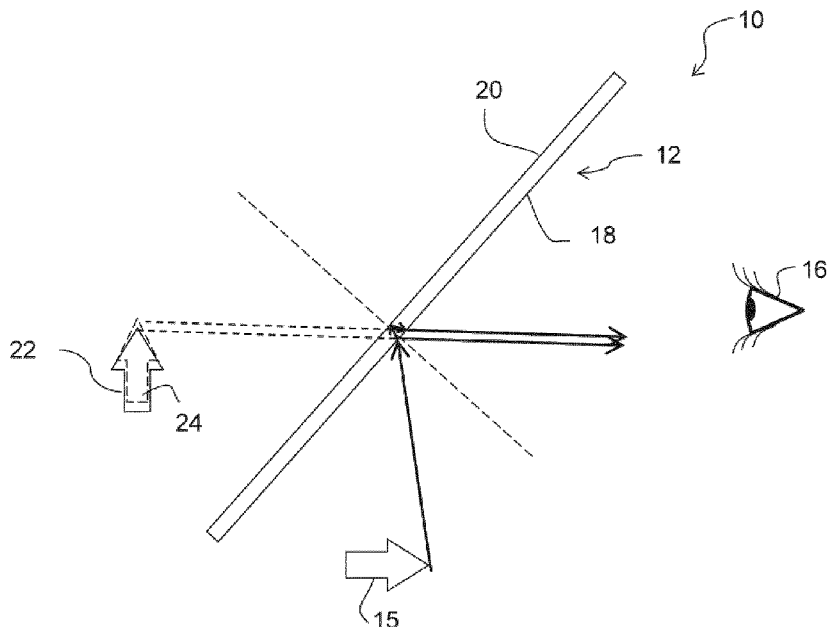


Fig. 1

(57) Abstract: The present invention relates to a combiner, to a head-up display module and to a vehicle. In order to improve the image quality of a head-up display, a combiner (10) is provided that comprises a transparent sheet (12). The transparent sheet is configured to reflect a projected image (15) toward a user (16). The transparent sheet has a thickness less than 1 mm.

Description

Head-up display

5 Field of the invention

The present invention relates to the field of automotive applications. In particular, this invention relates to a combiner, to a head-up display module, and to a vehicle.

10

Background

Head-up displays are used in a vehicle to visualize information, such as speed and warning signals. A head-up display may comprise a transparent screen placed in front of an end-user, which screen serves to reflect a projected image and aids the formation of a virtual image containing the information in front of the end-user. An important performance aspect of the head-up displays is the quality of the virtual image provided by the transparent screen.

20

Summary of the Invention

It is an object of the present invention to provide a head-up display with improved image quality.

25

The object of the present invention is solved by the subject-matter of the independent claims, wherein further embodiments are incorporated in the dependent claims. It should be noted that the following described aspects of the invention apply for the combiner, for the head-up display module, and for the vehicle.

30

According to a first aspect of the invention, there is provided a combiner for a head-up display module for a vehicle. The combiner comprises a transparent sheet. The transparent sheet is

35

configured to reflect a projected image toward a user. The transparent sheet has a thickness of less than 1 mm.

As an advantage, the projected double image effect - a brighter
5 main image and a "ghost image" with less brightness - as a result
of the reflection of two parallel surfaces of the combiner may
be reduced, thus increasing the legibility of the projected
image, such as symbols, presented to a viewer, e.g. a driver. This
is because the reduction of the thickness of the transparent sheet
10 (or screen) can move the ghost image in the same position as the
main image (or at least move the ghost image closer to the main
image) as seen from the viewer's position. In other words, the
offset between the main image and the ghost image is reduced such
that the main image and the ghost image (or at least a large part
15 of the two images) overlap. Additionally, since the thickness of
the combiner screen is small, even in the presence of process
variability, the distance between the ghost image and the main
image may still be below the discernability threshold. This leads
to increased allowable process tolerances, and hence, in high
20 process yield and low cost.

As a further advantage, by using less material during the
fabrication of the head-up display screen, the costs of the screen
may be decreased.

25 According to an embodiment of the invention, the thickness is
constant across the transparent sheet.

As an advantage, the combiner has a simple geometry with constant
30 thickness. Other specific geometries, e.g. an increasing
thickness along the vertical direction of the screen, may be more
difficult to manufacture.

As a further advantage, the constant thickness of the screen
35 enables the combiner to be formed with the aid of a punching
process. Individual screens can be obtained from a large mother
sheet that is cut according to the required shapes. On the other

hand, if the screen would have a special geometry, such as an increasing thickness, the application of a punching process may not be possible, since different parts obtained from the same sheet would have a different average thickness, and would shift
5 the ghost image in different positions as seen from a driver.

As a still further advantage, the flat geometry may also reduce the manufacturing and assembly costs given by the increased allowable process tolerances.

10 According to an embodiment of the invention, the combiner further comprises a support structure. The transparent sheet is mounted on the support structure such that the support structure provides mechanical support for the transparent sheet. Also, this
15 structure may give the transparent sheet a curvature to further enhance the optical behaviour, or may leave it flat.

As an advantage, the support structure provides mechanical support or mechanical strength for the transparent sheet.

20 According to an embodiment of the invention, the support structure comprises a first pin and a second pin. The first and second pins are disposed on opposing sides of the transparent sheet.

25 According to an embodiment of the invention, the support structure is a frame surrounding the transparent sheet.

30 Advantageously, the frame defines the shape of the combiner screen and provides mechanical support to the transparent sheet. The shape of the transparent sheet (or screen) may be square, rectangular, circular, oval, and any other desired geometry. The frame may be made from any suitable material. Contemplated materials include metal, wood, plastics, and other compositions
35 that provide sufficient stiffness for supporting the transparent sheet. The transparent sheet may also be mounted on the frame in many ways including, for example, attaching and fastening.

According to an embodiment of the invention, the frame and the transparent sheet are formed of the same material and in a single piece.

5

As an advantage, the same material, such as plastics, is used to provide the mechanical support as well as the required low thickness of the combiner screen, i.e. the transparent sheet.

10 According to an embodiment of the invention, the support structure is provided as a part of a vehicle dashboard module.

As an advantage, no additional separate mechanical support may be required. The transparent sheet may be integrated or removably
15 mounted on the vehicle dashboard module.

According to an embodiment of the invention, the transparent sheet comprises a first surface and a second surface for reflecting the projected image. The first and second surfaces are
20 configured to have different reflectivity.

As an advantage, by adjusting the reflectivity of the first and second surfaces, the brightness of the main virtual image may be increased and the brightness of the ghost image may be reduced.
25 This may further increase the quality of the main virtual image and enhance the legibility of the symbols presented to the driver.

According to a second aspect of the invention, a head-up display module for a vehicle is provided. The head-up display module
30 comprises an image projector and a combiner according to one of the embodiments described above and in the following. The image projector is configured to project an image toward the combiner. The combiner is configured to reflect the projected image toward a user.

35

According to a third aspect of the invention, a vehicle is provided that comprises a head-up display module according to the second aspect, or its embodiments.

- 5 According to a fourth aspect of the invention, a cockpit display for an airplane is provided that comprises a head-up display module according to the second aspect, or its embodiments.

10 In the following application, the term "head-up display", also referred to as a "HUD", may concern a means for providing information to a vehicle driver optically, without the driver having to move his field of view from the road significantly. The HUD may be projected directly onto the car windscreen, or alternatively it may be projected onto a combiner screen resting
15 on top of the car dashboard, for example.

The term "combiner", or combiner HUD, may refer to a transparent screen, e.g. a small plastic screen, between the steering wheel and the windscreen for reflecting a projected image to a user,
20 such as a driver. The combiner may blend the data displayed with the scenery in a way that it appears as a virtual image in a distance of about e.g. 2 meters in front of the driver. It is noted that the combiner as outlined in the following description relates to a separate combiner, in contrast to windshield HUDs,
25 which project the virtual image to the windscreen, i.e. the windshield.

The term "projected image" relates to the image projected to the combiner screen, which image may contain navigation information
30 and the vehicle's current speed. In addition, projected image may incorporate current speed limits and other local traffic regulations, provided optionally by a camera-based traffic sign recognition system.

35 The term "transparent", or translucent, means that the transparent sheet is clear, or transparent enough to allow light to pass through, or to allow the viewer to see through.

Therefore, it may be seen as a gist of the invention that the thickness of combiner HUDs is reduced, which allows the double image effect (due to the reflection of the two parallel surfaces of combiner HUDs) to be reduced or even cancelled. Further, 5 combiner HUDs have a simple geometry of constant thickness, which may allow a high throughput fabrication process and reduced manufacturing and assembly costs.

10 These and other aspects of the present invention will become apparent from and elucidated with reference to the embodiments described hereinafter.

Exemplary embodiments of the present invention will now be 15 described in the following, with reference to the following drawings.

Brief description of the drawings

20 Fig. 1 shows a side-view of an exemplary embodiment of a combiner.

Fig. 2 shows a schematic view of an exemplary embodiment of a combiner with a mechanical support in form of pins.

25 Fig. 3A shows a schematic view of an exemplary embodiment of a combiner with a mechanical support in form of a frame.

Fig. 3B shows a side-view of Fig. 3A.

30 Fig. 4 shows a schematic view of an exemplary embodiment of a combiner with a mechanical support in form of a vehicle dashboard module.

Fig. 5 shows a schematic view of an exemplary embodiment of a 35 head-up display module.

Fig. 6 shows a schematic view of an exemplary embodiment of a vehicle.

Detailed description of the embodiments

Fig. 1 shows a side-view of an exemplary embodiment of a combiner 10. The combiner comprises a transparent sheet 12. The transparent sheet 12 is configured to reflect a projected image, indicated with a white arrow 15, to a user 16, e.g. a driver.

The transparent sheet 12 has a thickness of less than 1 mm. In a further example, the thickness is less than 500 µm. In a still further example, the thickness is less than 250 µm.

The required thickness of the transparent sheet 12 is dependent on the desired image quality. Based on the desired quality factor Q , given D , the distance between the user 16 and the projected double image 22 or 24, n_1 , the refractive index of the combiner 12, n_0 , the refractive index of air and α , the incidence angle of the light beams coming from the image 15 towards the combiner 12, the combiner thickness t is upper-bounded by the following inequality:

$$t < D \cdot \frac{\pi}{180} \cdot Q \cdot \frac{n_1}{n_0} \cdot \frac{\sqrt{1 - \left(\frac{n_0}{n_1}\right)^2 \cdot \sin^2(\alpha)}}{\sin(2 \cdot \alpha)}$$

The quality factor Q is defined as the size of the minimum details that can be correctly perceived by the human eye. In an embodiment, the quality factor Q has a value of 1/60, which is 60 individual elements per one degree of field of view. In a further example, the quality factor Q has a value of 1/90. In yet another example, the quality factor Q has a value of 1/120.

The transparent sheet 12 comprises two parallel surfaces, i.e. a first surface 18 and a second surface 20. During operation, an image 15 (see also Fig. 5) incorporating e.g. general driving

information like speed limits and navigation directions and urgent warning signals, is projected to the first surface 18 of the combiner screen (also the second surface 20), which in turn reflects the projected image toward the user 16, or the so-called eye box - the area where the eyes of the drivers are located. The user 16 thus observes the projected image 15 in such a way that it appears to be about e.g. two meters away - or, in other words, a virtual image. However, as both surfaces 18 and 20 take part in the reflection process, the user 16 will observe two virtual images - a main virtual image 22 (brighter image) and a ghost virtual image 24 with a reduced brightness. For illustration purposes, the main virtual image 22 is indicated with a solid white arrow, while the ghost virtual image 24 is indicated with a dotted white arrow. The presence of the ghost virtual image 24 reduces the legibility of the information in the main virtual image 22 presented to the user 16.

The distance between the main virtual image 22 and the ghost virtual image 24 depends on the thickness of the transparent sheet 12. By reducing the thickness of the transparent sheet 12, the ghost virtual image 24 moves toward to the main virtual image 22. If the thickness is small enough, the main virtual image 22 and the ghost virtual image 24 overlap with each other and the distance between them is small enough to be indiscernible from the nominal viewing distance, i.e. in the driving position. For example, for a viewing distance of 2 meters between the virtual image projected by the combiner and the viewer, a person with a very good visual acuity of, for example, 20/10 may not be able to make a distinction between the main and the ghost virtual images, if they are separated by less than 290 μm . If the combiner is placed at half this distance, i.e. 1 meter, and the angle between the combiner and the line of sight is 45 degrees, the required thickness for the transparent sheet of the combiner is around 190 μm . It is noted that these values are merely exemplary. Any other values that meet the quality criteria for double image suppression imposed by the application are still in the spirit of the present invention.

As an option, as shown in Fig. 1, the thickness is constant across the transparent sheet 12. In other words, the combiner 10 has a simple geometry of constant thickness.

5

The thin, flat geometry of the transparent sheet, i.e. the combiner screen, of the combiner provides a high image quality by suppressing double virtual images with increased allowable process tolerances, thus allowing for the use of a high throughput fabrication process and low manufacturing and assembly costs.

10

It will be appreciated that the transparent sheet can be made from a thin sheet of transparent material having certain rigidity or from a plastic transparent foil. It is noted that the term "plastic" is used to denote the physical properties of the material - that is, it's the behavior under mechanical forces - and may not refer to the chemical composition of the material. The transparent sheet is fabricated in an appropriate manner. For example, individual combiners may be produced from a large foil by a blade cutting process or from an initial mother sheet, from which individual pre-shaped screens are punched and then hot pressed to the desired thickness.

15

20

Since the mechanical strength of such a thin structure may not be well suited for in-vehicle applications, a support structure may be provided for providing the desired mechanical performances.

25

Fig. 2 shows an example of providing the desired mechanical performances, in which the combiner 10 further comprises a support structure 26. The transparent sheet 12 is mounted on the support structure 26 such that the support structure 26 provides mechanical support for the transparent sheet 12.

30

"Mounting" the transparent sheet to the support structure may refer to securely attaching, affixing, fastening or any other

35

suitable ways to fix the transparent sheet to the support structure.

In an example, shown in Fig. 2 as an option, the support structure 26 comprises a first pin 28 and a second pin 30. The first 28 and second 30 pins are disposed on opposing sides of the transparent sheet 12. In other words, the transparent sheet 12, i.e. the display or screen, is maintained in its position with the aid of the two pins 28, 30 placed on the sides of the display.

The term "pin" may refer to a component or a device for assisting in holding or supporting the transparent sheet. For example, Fig. 2 shows two rod-shaped mechanical pins.

Although not shown in Fig. 2, the support structure 26 may further comprise a third, a fourth, or more pins.

Fig. 3A shows a further example, in which the support structure 26 is a frame 32 surrounding the transparent sheet 12.

The frame 32 defines the shape of the transparent sheet 12, or screen. Although the transparent sheet 12 has a square shape in Fig. 2, it is to be appreciated that the shape of the screen may also be rectangular, circular, oval, or have any other desired geometry.

As an option, the frame 32 and the transparent sheet 12 are formed of the same material and in a single piece. For example, as illustrated in Fig. 3B (cross-sectional view of Fig. 3A), the central area - i.e. the transparent sheet 12 or the screen - is recessed with respect to the sides of the combiner 10. In this way, the central part, i.e. the transparent sheet 12, of the combiner 10 provides the needed thickness to produce the single virtual image, while the external, thicker frame 32 of the same material provides the required rigidity.

The single piece structure may be fabricated with the aid of a punching process that cuts pre-shaped combiners from a larger mother sheet, followed by another processing step of hot stamping or pressing, in which the recessed area is formed.

5

Fig. 4 shows a still further example, in which the support structure 26 is provided as a part of a vehicle dashboard module 34.

10 For example, as shown in Fig. 4, the transparent sheet 12 of the combiner 10 is integrated in the decorative elements of the vehicle dashboard module 34. In this way, the transparent sheet 12 provides the screen for the HUD, while the decorative elements provide the required mechanical strength.

15

It will be appreciated that transparent sheet 12 can, of course, be mounted to the vehicle dash board module. For example, the transparent sheet may be obtained by blade cutting from a large roll and then it may be attached to the vehicle dashboard module 20 34 with the aid of a gluing process.

As a further option to the above-mentioned embodiments, surface treatment steps are applied to the transparent sheet 12, such as increasing the reflectivity of the first surface 18 and/or 25 decreasing the reflectivity of the second surface 20 in order to increase the brightness of the main virtual image and to reduce the brightness of the ghost virtual image.

Fig. 5 shows an example of a head-up display module 40. The head-up display module 40 comprises an image projector 36 and the combiner 10 according to one of the above-mentioned embodiments. The image projector 36 is configured to project an image 15 toward the combiner 10. The combiner 10 is configured to reflect the projected image 15 toward a user 16.

35

Also illustrated in Fig. 5 is a generic optical arrangement 38, such as a series of folding mirrors 14, which is provided to

deflect light and in turn to project the image 15 to the combiner 10.

Fig. 6 shows an example of a vehicle 100 comprising the head-up display module 40.

As an option, the combiner 10 of the head-up display module 40 is mounted on the vehicle dashboard module 34.

It will be appreciated that the head-up display module 40 may be disposed in any suitable position. The head-up display module 40 may also be adjusted horizontally or vertically for optimal viewing.

Further, it is to be appreciated that the combiner may have different dimensions to meet different requirements, e.g. a small combiner for deployment in compact cars. The dimensions as illustrated in the Figures are merely for the purposes of illustration.

According to a further embodiment (not shown), a cockpit display for an airplane is provided that comprises a head-up display module according to the second aspect, or its embodiments.

The preceding detailed description is merely exemplary in nature, and is not intended to limit the application and uses.

Furthermore, there is no intention to be bound by any theory presented in the preceding background or summary or the preceding detailed description.

It should be noted that the term "comprising" does not rule out a plurality of elements. It is further noted that features described with reference to one of the above exemplary embodiments can also be used in combination with other features of other exemplary embodiments described above.

Moreover, while at least one exemplary embodiment has been presented in the foregoing summary and detailed description, it should be appreciated that a vast number of variations exist.

- 5 The exemplary embodiments outlined are examples, and are not intended to limit the scope, applicability or configuration in any way.

10 Rather, the foregoing summary and detailed description will provide those skilled in the art with a convenient teaching for implementing an exemplary embodiment, it being understood that various changes may be made in the function and arrangement of the elements described in the exemplary embodiment without departing from the scope as set forth in the appended claims and
15 their legal equivalents.

Claims

1. A combiner (10) for a head-up display module for a vehicle,
comprising:
 - 5 a transparent sheet (12);
wherein the transparent sheet is configured to reflect
a projected image (14) toward a user (16); and
wherein the transparent sheet has a thickness of less
than 1 mm.
- 10 2. Combiner according to claim 1, wherein the thickness is
constant across the transparent sheet (12).
3. Combiner according to claim 1 or 2, further comprising:
 - 15 a support structure (26);
wherein the transparent sheet (12) is mounted on the
support structure such that the support structure provides
mechanical support for the transparent sheet.
- 20 4. Combiner according to claim 3, wherein the support structure
(26) comprises:
 - a first pin (28); and
 - a second pin (30);
 - wherein the first and second pins are disposed on
- 25 opposing sides of the transparent sheet (12).
5. Combiner according to claim 3, wherein the support structure
(26) is a frame (32) surrounding the transparent sheet (12).
- 30 6. Combiner according to claim 5, wherein the frame (32) and
the transparent sheet (12) are formed of the same material
and in a single piece.
7. Combiner according to one of the claims 3 to 6, wherein the
35 support structure (26) is provided as a part of a vehicle
dashboard module (34).

8. Combiner according to any one of the preceding claims,
wherein the transparent sheet (12) comprises a first
surface (18) and a second surface (20) for reflecting the
projected image; and
5 wherein the first and second surfaces are configured
to have different reflectivity.
9. A head-up display module (40) for a vehicle, comprising:
an image projector (36); and
10 a combiner (10) according to one of the preceding
claims;
wherein the image projector is configured to project
an image toward the combiner; and
wherein the combiner is configured to reflect the
15 projected image toward a user.
10. A vehicle (100), comprising a head-up display module (40)
according to claim 9.
- 20 11. A cockpit display for an airplane, comprising a head-up
display module (40) according to claim 9.

1/4

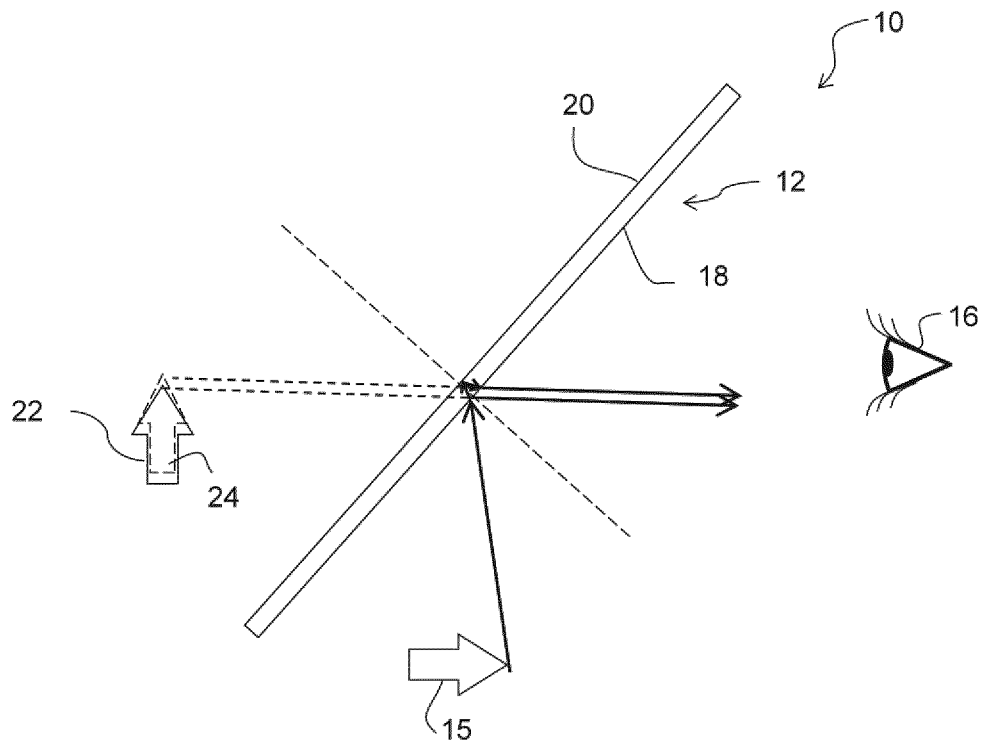


Fig. 1

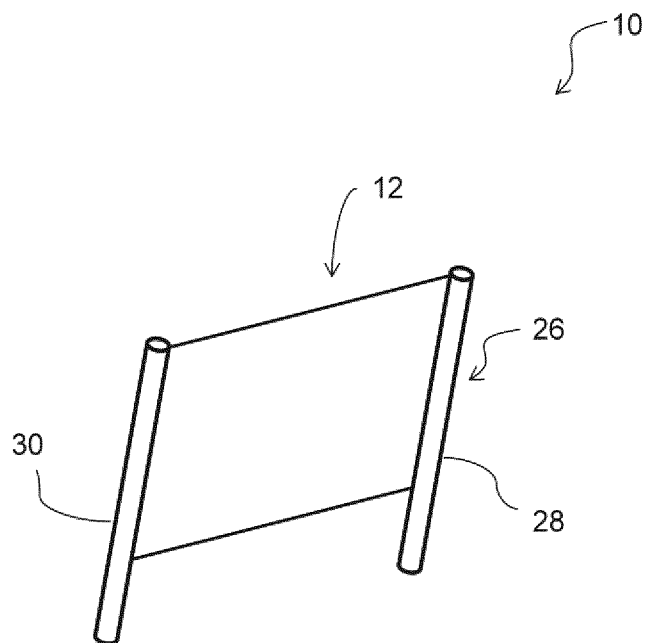


Fig. 2

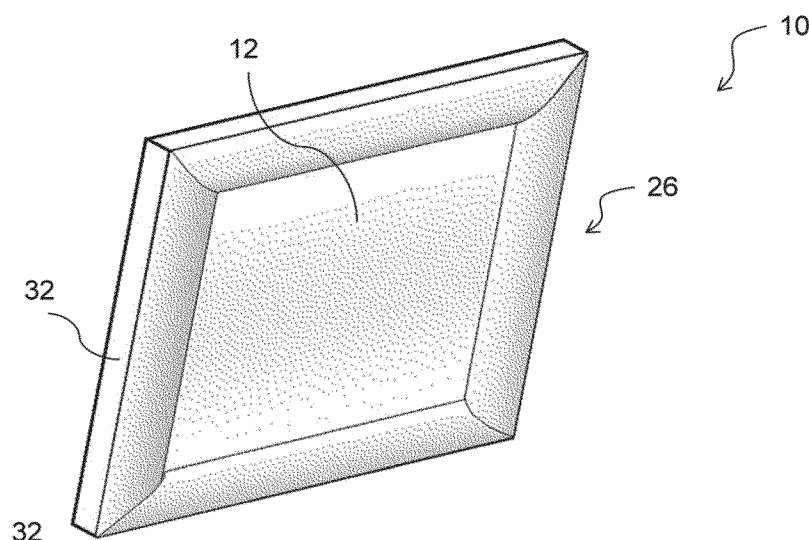


Fig. 3A

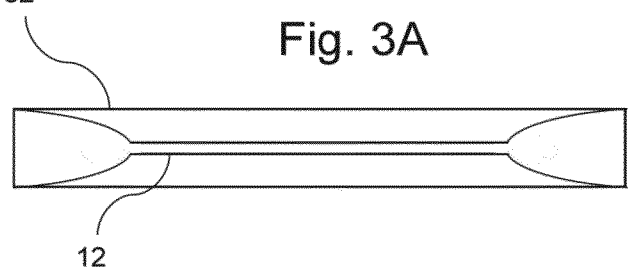


Fig. 3B

3/4

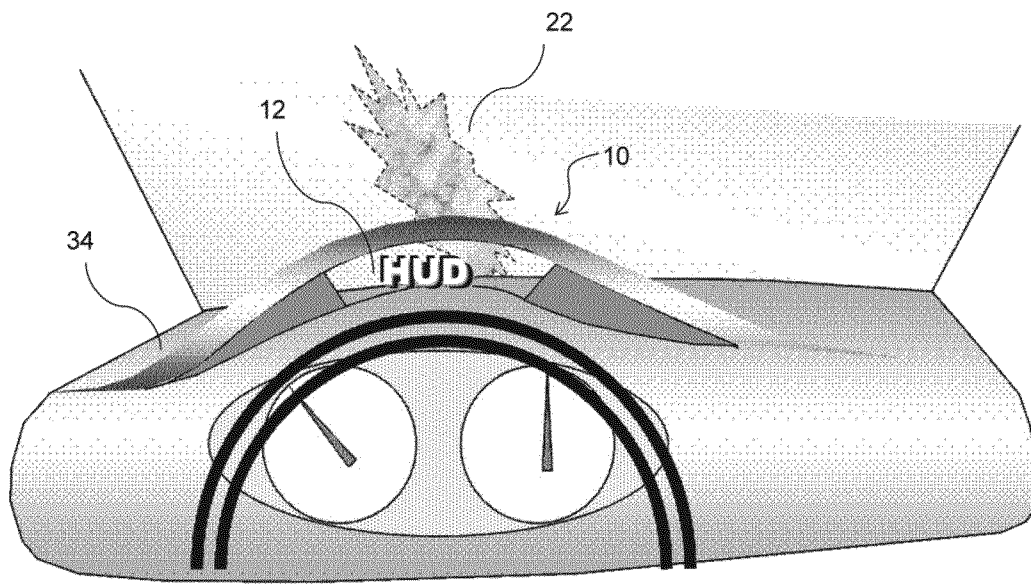


Fig. 4

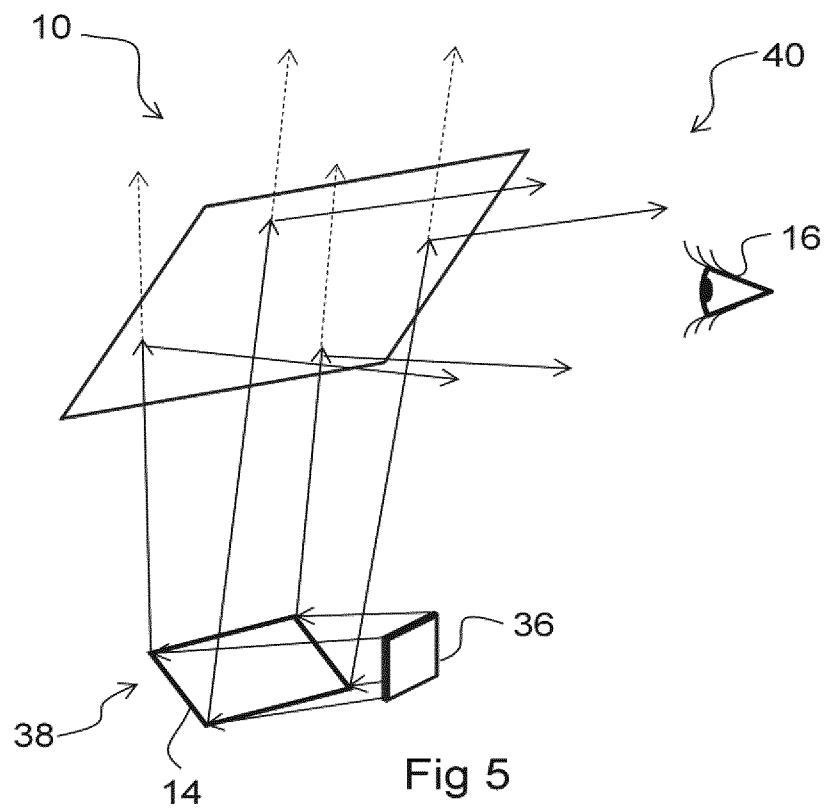


Fig 5

4/4

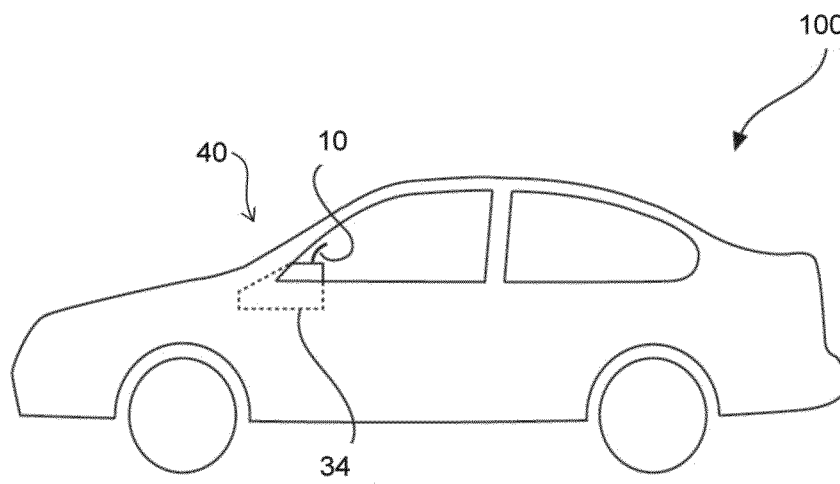


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/057192

A. CLASSIFICATION OF SUBJECT MATTER
INV. G02B27/01
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 689 651 A1 (RENAULT [FR]) 8 October 1993 (1993-10-08) page 2, line 19 - page 6, line 27; figures 3-5	1,2,8-11
X	----- US 5 194 989 A (FERRANTE RONALD A [US] ET AL) 16 March 1993 (1993-03-16) column 3 - column 4; figures 1,2 -----	1,2,11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 July 2016

Date of mailing of the international search report

09/09/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Feeney, Orla

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2016/057192

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1, 2, 8-11

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1, 2, 8-11

relating to optical design of a combiner for a head-up
display module for a vehicle

2. claims: 3-7

relating to mechanical design of a combiner for a head-up
display module for a vehicle

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/057192

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2689651	A1	08-10-1993	NONE

US 5194989	A	16-03-1993	NONE
