



(86) Date de dépôt PCT/PCT Filing Date: 2010/11/23
(87) Date publication PCT/PCT Publication Date: 2011/10/13
(85) Entrée phase nationale/National Entry: 2012/04/02
(86) N° demande PCT/PCT Application No.: US 2010/057920
(87) N° publication PCT/PCT Publication No.: 2011/126517
(30) Priorités/Priorities: 2009/11/23 (US61/263,807);
2009/12/14 (US61/286,340)

(51) Cl.Int./Int.Cl. *B29C 70/88* (2006.01),
B29B 15/10 (2006.01), *B29C 70/06* (2006.01),
B82Y 30/00 (2011.01), *C04B 14/38* (2006.01),
C08J 5/06 (2006.01), *C22C 47/02* (2006.01)
(71) Demandeur/Applicant:
APPLIED NANOSTRUCTURED SOLUTIONS, LLC, US
(72) Inventeurs/Inventors:
SHAH, TUSHAR K., US;
ALBERDING, MARK R., US;
MALECKI, HARRY C., US;
MARKKULA, SAMUEL J., US;
HUGHES, JOHN ANTHONY, US;
KLINE, SHAWN C., US
(74) Agent: MBM INTELLECTUAL PROPERTY LAW LLP

(54) Titre : STRUCTURES COMPOSITES TERRESTRES SPECIFIQUEMENT ADAPTEES A DES NANOTUBES DE CARBONE
(54) Title: CNT-TAILORED COMPOSITE LAND-BASED STRUCTURES

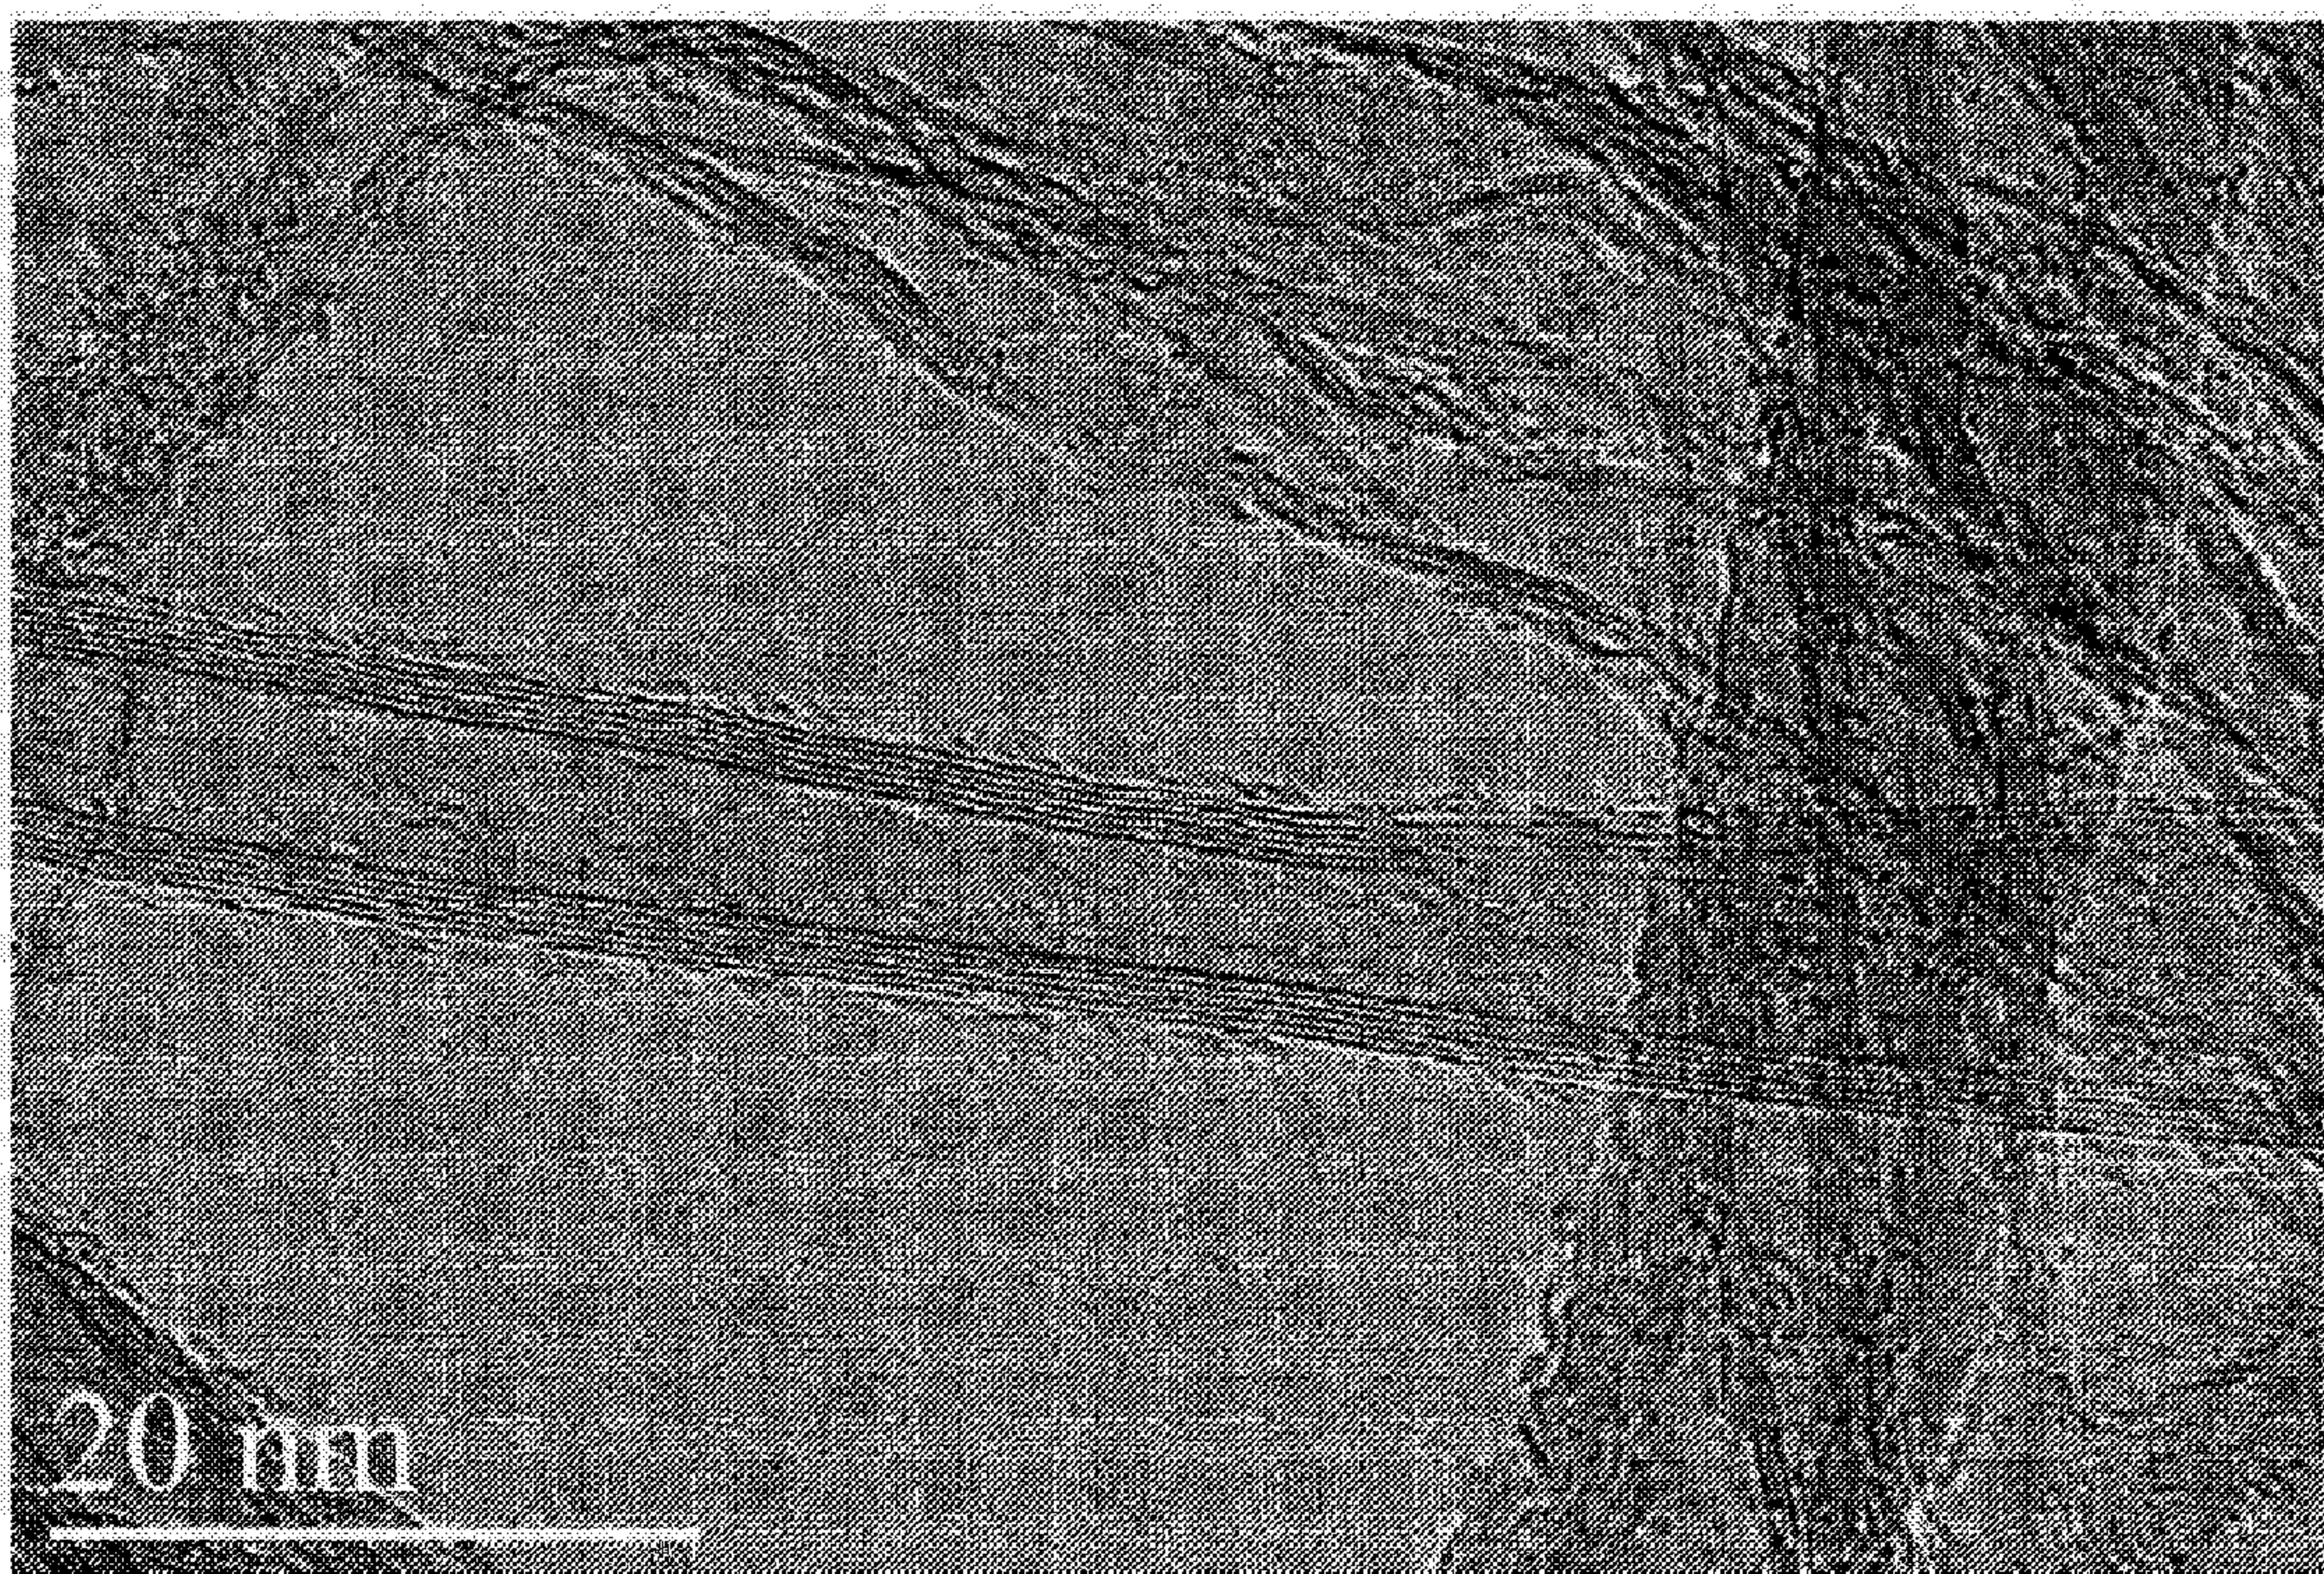


FIG. 1

(57) Abrégé/Abstract:

An apparatus having a composite land-based structure with a first carbon nanotube infused material and a second carbon nanotube infused material. The first and second carbon nanotube infused materials each having a range of carbon nanotube loading selected to provide different functionalities.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
13 October 2011 (13.10.2011)



(10) International Publication Number
WO 2011/126517 A3

(51) International Patent Classification:
B64C 11/16 (2006.01)

21001 (US). **KLINE, Shawn, C.** [US/US]; 2201 N St. NW, Apt 304, Washington, D.C. 20037 (US).

(21) International Application Number:
PCT/US2010/057920

(74) Agent: **ITRI, Mark, J.**; McDermott Will & Emery LLP, 18191 Von Karman Avenue, Suite 500, Irvine, CA 92612 (US).

(22) International Filing Date:
23 November 2010 (23.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/263,807 23 November 2009 (23.11.2009) US
61/286,340 14 December 2009 (14.12.2009) US

(71) Applicant (for all designated States except US): **APPLIED NANOSTRUCTURED SOLUTIONS, LLC** [US/US]; 2323 Eastern Blvd., Baltimore, MD 21220 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHAH, Tushar, K.** [US/US]; 6417 River Run, Columbia, MD 21044 (US). **ALBERDING, Mark, R.** [US/US]; 5607 Sharon Drive, Glen Arm, MD 21057 (US). **MALECKI, Harry, C.** [US/US]; 3304 Meadow Valley Drive, Abingdon, MD 21009 (US). **MARKKULA, Samuel, J.** [US/US]; 1819 Principio Road, Rising Sun, MD 21911 (US). **HUGHES, John, Anthony** [US/US]; 89 Baker Street, Aberdeen, MD

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CNT-TAILORED COMPOSITE LAND-BASED STRUCTURES

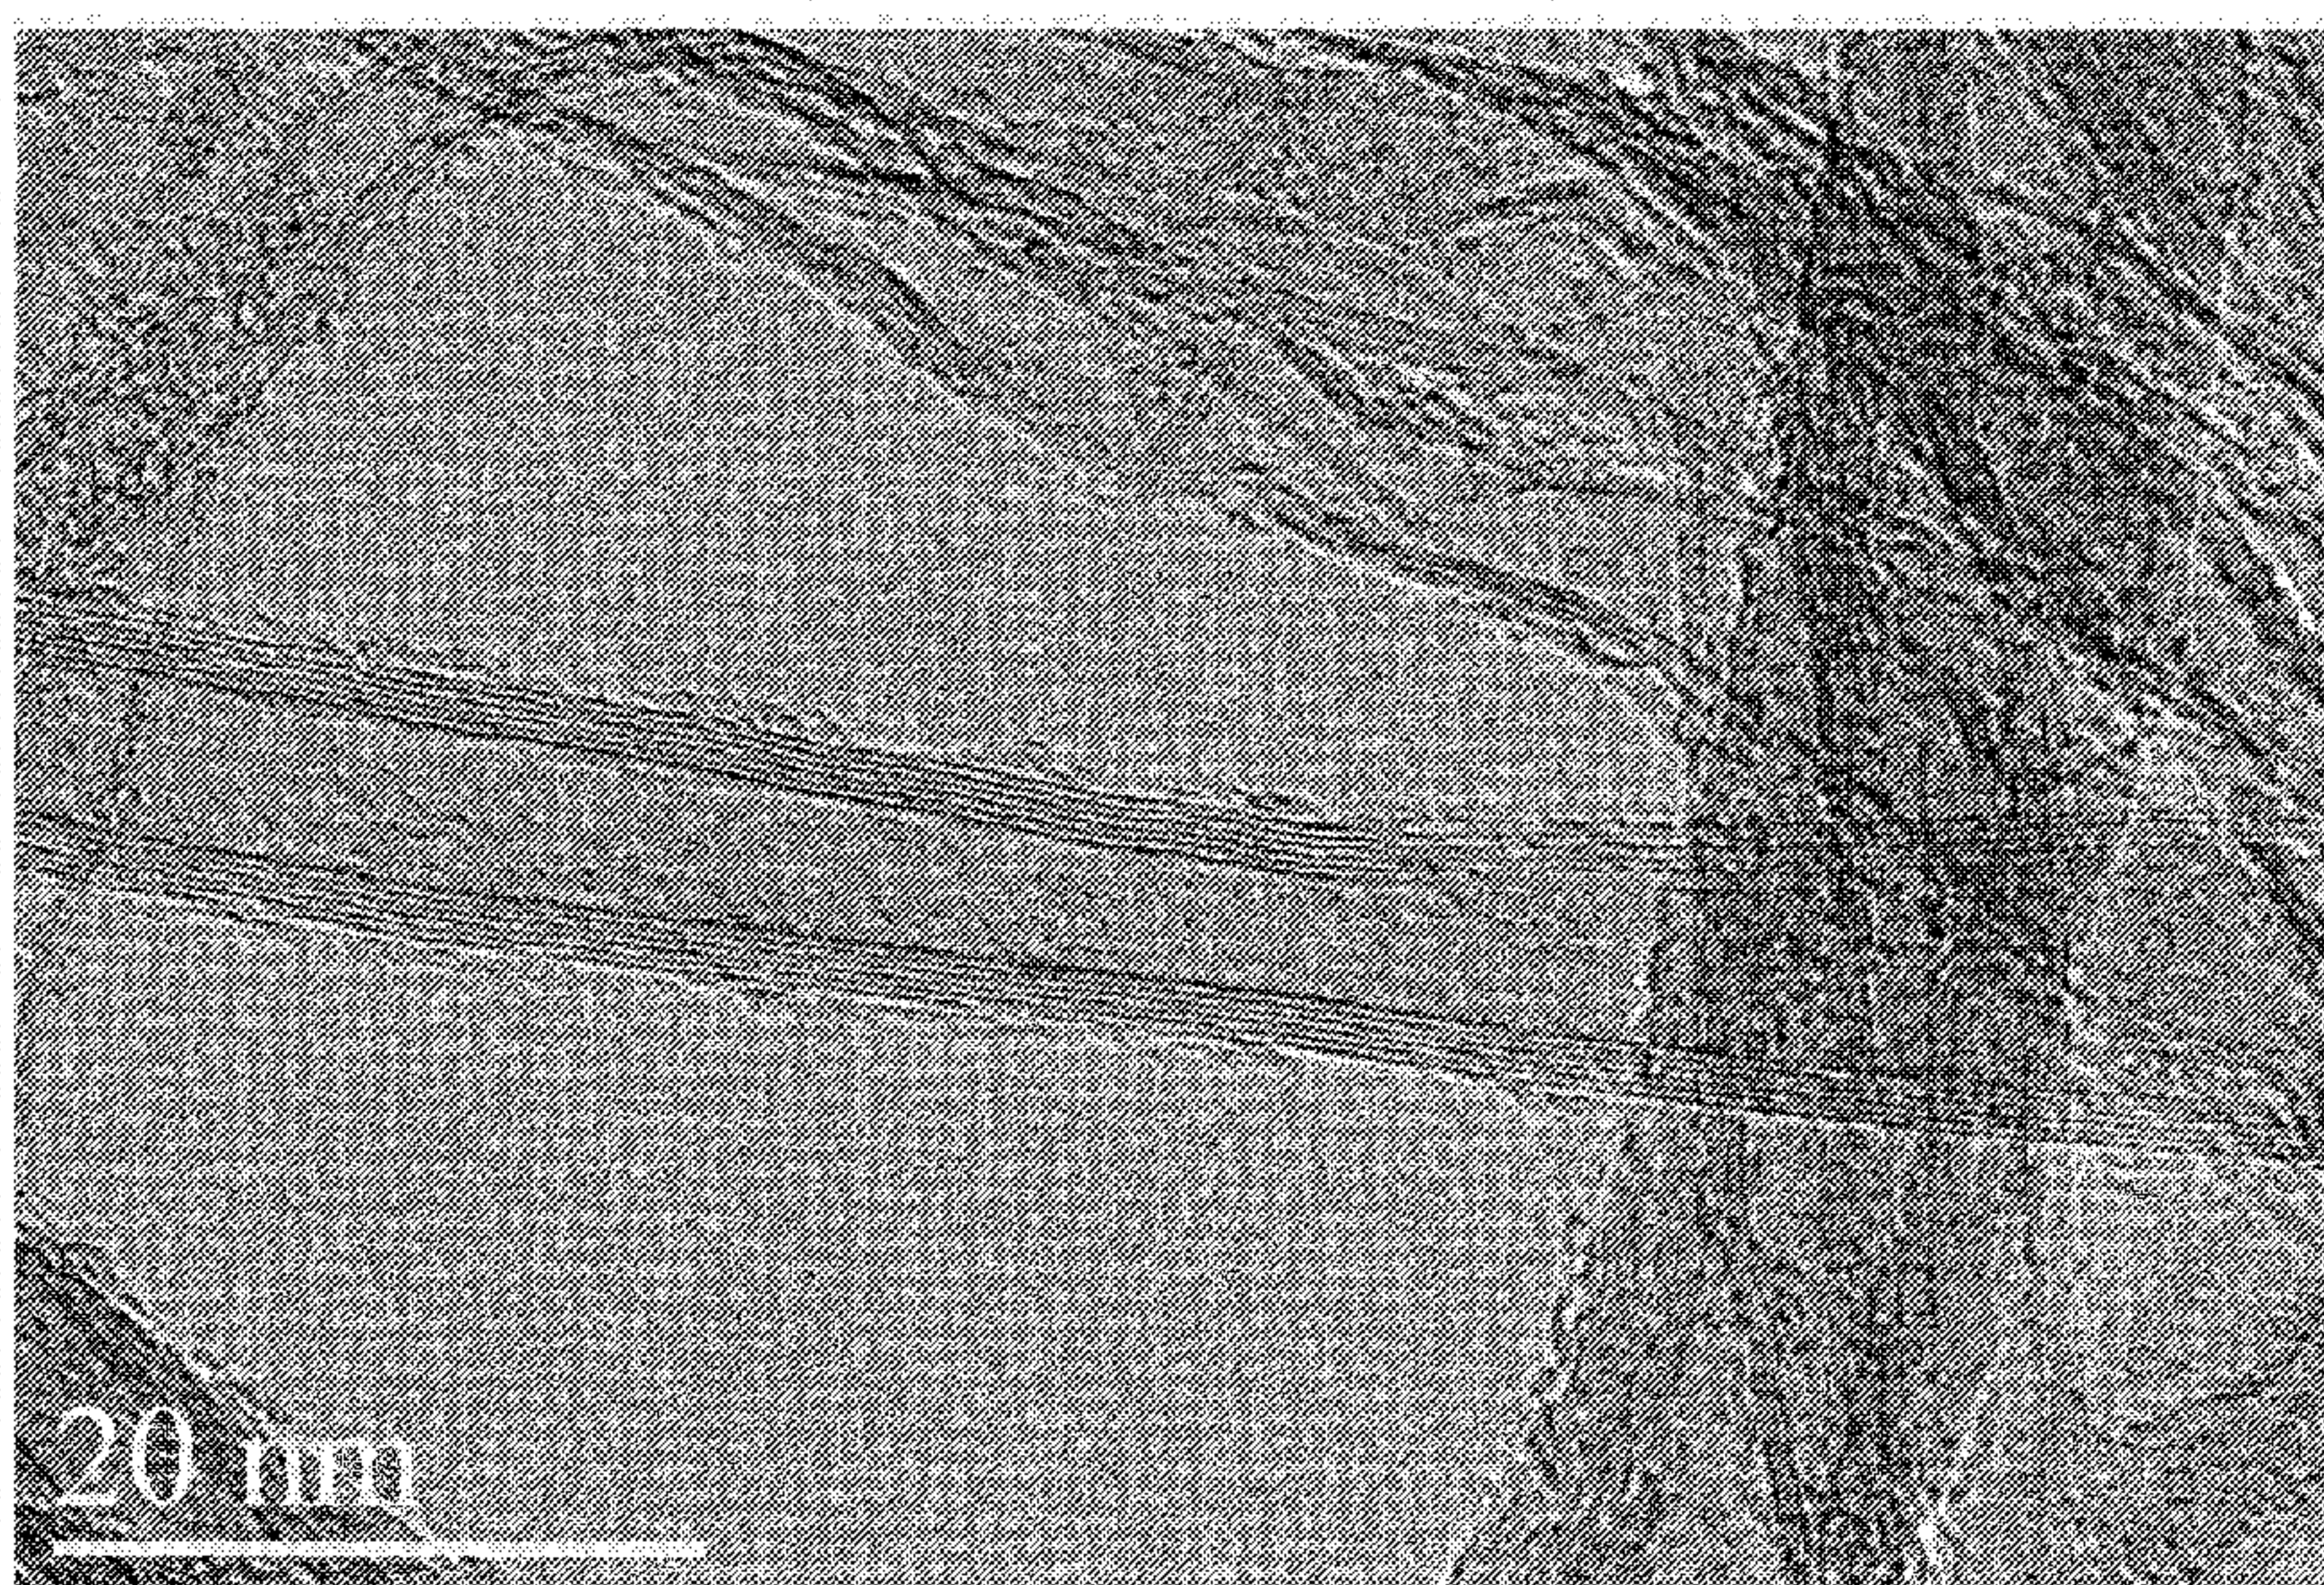


FIG. 1

(57) Abstract: An apparatus having a composite land-based structure with a first carbon nanotube infused material and a second carbon nanotube infused material. The first and second carbon nanotube infused materials each having a range of carbon nanotube loading selected to provide different functionalities.

WO 2011/126517 A3



Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
26 January 2012

CNT-TAILORED COMPOSITE LAND-BASED STRUCTURES

[0001] This application claims priority from U.S. Provisional Patent Application Nos. 61/263,807, filed November 23, 2009, and 61/286,340, filed December 14, 2009, both of which are incorporated herein by reference in their entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Not applicable.

BACKGROUND AND FIELD OF THE INVENTION

[0003] The present invention generally relates to carbon nanotubes (CNTs), and more specifically to CNTs incorporated in composite materials and structures.

[0004] Hybrid composites have been used with varying degrees of success. The use of two or three different reinforcements within a composite has been accomplished along with the addition of aggregates and fillers used for various purposes including mechanical strengthening, cost reduction, smoke prevention, chemical resistance, and the like.

[0005] Land-based structures are subject to a number of demands on operability and efficiency. Structures housing electrical circuits can be prone to exposure to electromagnetic conduction or electromagnetic radiation, which can impair operation without adequate protection. Structures that are relatively tall as compared to surrounding structures or objects can be prone to lightning strikes, which can severely damage or even destroy the structures without electrical conductivity or added means to carry the electrical load. Minor or reparable structural damage to structures can quickly progress to serious or even complete failure without prompt detection. Shear, tensile, and compressive forces at critical locations on structures can cause failure over time without adequate structural integrity. Crack propagation can cause serious or even complete failure, if not prevented when micro-cracks initially form. Variations in temperature or other factors can affect the structure with inadequate thermal conductivity. Structures can experience detection by radar waves without

appropriate radar absorbing materials. These and additional demands placed on land-based structures result in difficulty in selecting materials suitable to address each demand.

SUMMARY

[0006] In some aspects, embodiments disclosed herein relate to tailored composite materials that include a matrix material and a CNT-infused fiber material having particular functionalities.

[0007] In some aspects, embodiments disclosed herein relate to an apparatus including a structure supported by land having a composite structure having at least (1) a first carbon nanotube infused material imparting a first functionality to the structure, and (2) a second carbon nanotube infused material imparting a second functionality to the structure. In some embodiments, the composite structure has additional carbon nanotube infused materials imparting additional functionalities to the structure.

[0008] In some aspects, embodiments disclosed herein relate to methods including providing a structure supported by land having a composite structure having at least (1) a first carbon nanotube infused material imparting a first functionality to the structure, and (2) a second carbon nanotube infused material imparting a second functionality to the structure. In some embodiments, the composite structure has additional carbon nanotube infused materials imparting additional functionalities to the structure. Carbon nanotube loading of the carbon nanotube infused materials can be selected based on the corresponding functionalities.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Figure 1 shows a transmission electron microscope (TEM) image of a multi-walled CNT (MWNT) grown on PAN-BASED carbon fiber via a continuous chemical vapor disposition (CVD) process.

[0010] Figure 2 shows a TEM image of a double-walled CNT (DWNT) grown on PAN-BASED carbon fiber via a continuous CVD process.

[0011] Figure 3 shows a scanning electron microscope (SEM) image of CNTs growing from within the barrier coating where the CNT-forming nanoparticle catalyst was mechanically infused to the fiber material surface.

[0012] Figure 4 shows a SEM image demonstrating the consistency in length distribution of CNTs grown on a fiber material to within 20% of a targeted length of about 40 microns.

[0013] Figure 5 shows a low magnification SEM of CNTs on carbon fiber demonstrating the uniformity of CNT density across the fibers within about 10%.

[0014] Figure 6 shows a cross-sectional view of a wind turbine blade of a land-based apparatus, in accordance with one embodiment of the present disclosure.

[0015] Figure 7 shows a detailed view of a junction of Figure 7, in accordance with a particular embodiment of the present disclosure.

[0016] Figure 8 shows a perspective view of a wind turbine blade of a land-based apparatus, in accordance with an embodiment of the present disclosure.

[0017] Figure 9 shows a cross section of an outer shell of a wind turbine blade of a land-based apparatus, in accordance with one embodiment of the present disclosure.

DETAILED DESCRIPTION

[0018] Tailored multiscale composites have been developed utilizing CNT-infused fibers. CNTs can be grown directly onto the surface of glass and carbon fibers in a continuous, in line process utilizing a modified CVD process, such as the one described in Applicant's co-pending applications, U.S. Publication Nos. 2010/0279569 and 2010/0178825, both of which are incorporated herein by reference in their entirety. Composite structures made with CNT-infused fiber materials have shown increased mechanical properties, specifically in shear - interlaminar and in-plane. Additionally these composite structures have improved electrical and thermal conductivity, based on the CNT loading and orientation. These CNT-infused fiber materials can be used in composite structures in various orientations and locations to provide custom tailored properties, including properties not available to current fiber materials.

[0019] The CNT-infused fiber composite can employ any type of fiber substrate, including, for example, carbon, glass, alumina, silicon carbide, or Kevlar. Moreover, since many fiber-types are used in mechanical strengthening applications, the infused CNTs can perform an additional role in enhancing mechanical strength. A range of CNT loading in CNT-infused fiber materials can be specified to afford the functionality required for a given composite part. More specifically, the CNT loading can be varied based on the location of a particular CNT-infused fiber material within each composite structure for custom tailoring and

optimization. Depending on functionality desired at particular points on a structure, the structure can have different CNT loading ranges at different locations within the CNT-infused fiber material, different CNT loading ranges in different layers (or gradients) of a given CNT-infused fiber material, or different CNT loading ranges for different CNT-infused fiber materials. CNT loading on the fiber and in the overall composite can be selected from a variety of ranges. For example, CNT loading in the composite can be divided into four ranges. In some embodiments, the “low” range can be from 0.01% to 2%. The “low” range can be from approximately 0% to approximately 2%, including loadings such as 0%, 1%, 2%, and fractions thereof. The “mid” range can be from approximately 2% to approximately 5%, including loadings such as 2%, 3%, 4%, 5%, and fractions thereof. The “high” range can be from approximately 5% to approximately 40%, including loadings such as 5%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, and fractions thereof. The “ultra-high” range may be greater than approximately 40%.

[0020] Fiber reinforced composite structures are used in advanced land-based applications since their properties can be tailored to fulfill a given set of requirements. For example, a particular lamina stacking sequence can be used to optimize a composite beam for flexural stiffness or another sequence can be used to optimize for torsional rigidity. Hybrid composites, which utilize two different types of reinforcement fiber, benefit from the positive contributions of each fiber towards overall composite properties whether mechanical, thermal, electrical, etc.

[0021] A wide range of functionality applicable for land-based composite structures is available through different levels of CNT loading in CNT-infused fiber materials. Such CNT-infused fiber materials can include continuous fiber, chopped fiber, or woven fabrics.

[0022] Such functionality can include electromagnetic interference (EMI) shielding, lightning strike protection, damage sensing, mechanical properties including but not limited to interlaminar and in-plane shear strength and modulus, tensile strength and modulus, compressive strength and modulus, flexural strength and modulus, crack and propagation resistance, thermal conductivity improvements, radar absorption and/or flame resistance.

[0023] In some applications, high levels of CNT loading can provide EMI shielding and/or lightning strike protection functionality. Such functionality can prevent undesirable effects of electromagnetic conduction or electromagnetic radiation on sensitive electrical circuits, or

provide a mechanism through which the current can pass without significant degradation to the matrix surrounding the base fibers, as described in Applicant's co-pending application, U.S. Publication No. 2010/0270069, which is incorporated herein by reference in its entirety. EMI shielding composites and/or lightning strike protection composites can have CNT-infused fiber materials disposed in a portion of a matrix material. The composite can be capable of absorbing electromagnetic (EM) radiation, reflecting EM radiation, or combinations thereof in a frequency range from between about 0.01 MHz to about 18 GHz. The EM shielding capacity of the composite, measured as EMI shielding effectiveness (SE), is in a range from between about 40 decibels (dB) to about 130 dB. CNTs have desirable electromagnetic absorption properties due to their high aspect ratio. The CNTs in the composites can be capable of absorbing a broad range of EM radiation frequencies, and dissipating the absorbed energy to an electrical ground and/or as heat, for example. Mechanistically, the CNTs can also reflect EM radiation. Moreover, for EMI shielding applications, any combination of absorption and reflectance can be useful as long as transmittance of the electromagnetic radiation is minimized. Regardless of the actual operable mechanism, and without being bound by theory, composites can operate by reducing and/or preventing substantial electromagnetic interference. The EMI shielding composites can improve the shielding characteristics of materials already employed in EMI shielding applications. CNT-infused fibers can impart improved EMI shielding of dielectric as well as conductive composites, resulting in the ability to use low weight, high strength composites. Some such composites may have been previously limited in application due to their inherently poor EMI shielding capabilities. EMI shielding composites can provide an absorbent surface that is nearly a black body across different sections of the electromagnetic spectrum including visible, infrared (IR) and other portions of various radar bands. In order to achieve black body-like behavior, the CNT density on the fiber material can be controlled. Thus, for example, the refractive index of the CNT-infused fiber material can be tuned to closely match the refractive index of air. According to Fresnel's law, this is when reflectance would be minimized. Although minimizing reflection can be useful to optimize EM absorption, the composites can also be designed to minimize transmittance through the EMI shielding layer. In other words, absorption is useful to the extent that it can provide EMI shielding. For a particular wavelength that is not effectively absorbed by the CNT-infused fiber material, it is beneficial to provide reflectance or provide a secondary structure capable absorbing the radiation not absorbed by the CNT-infused fiber material. In this regard, it can be beneficial to provide progressive layering of different CNT-infused fiber materials to

provide alternate absorption characteristics. Alternatively, or in addition to multiple-layered materials, it can also be useful to incorporate a reflecting material, which can also be a CNT-infused fiber material. Thus, for example, a composite of the present invention can have multiple absorbing and/or reflecting layers comprising CNT-infused fiber materials. The fiber material itself can act as a scaffold that organizes the CNTs in an array that provides an overall composite with sufficient CNT density to create effective percolation pathways for dissipation of the energy upon EM radiation absorption or lightning strike. The infused CNTs can be tailored to have a uniform length, density, and controlled orientation on the fiber material and in the overall composite to maximize EM radiation absorption and/or lightning strike protection. By relying on CNTs for EM shielding properties and/or lightning strike protection, the composites can utilize fiber materials and/or matrices that are either conducting or insulating. Moreover, the EMI shielding and/or lightning strike protection composites can be integrated as part of the surface structure of the article in which it is used. In some embodiments, an entire article can function as an EMI shield and/or lightning rod, not just the surface. In some embodiments, CNT-infused fiber materials can be employed as a coating for pre-fabricated composites for use in EMI shielding and/or lightning strike protection applications. Methods of manufacturing an EMI shielding and/or lightning strike protection composite can include disposing a CNT-infused fiber material in a portion of a matrix material with a controlled orientation of the CNT-infused fiber material within the matrix material, and curing the matrix material. The controlled orientation of the CNT-infused fiber material can control the relative orientation of CNTs infused thereon within the overall composite structure. The manufacturing process to create CNT-infused fibers can be amenable to large scale continuous processing. In the process, CNTs are grown directly on carbon, glass, ceramic, or similar fiber materials of spoolable dimensions, such as tows or rovings. The nature of the CNT growth is such that a dense forest is deposited at lengths that can be tuned between about 5 microns to about 500 microns long, the length being controlled by various factors as described below. This forest can be oriented such that the CNTs are perpendicular to the surface of each individual filament of a fiber material thus providing radial coverage. The CNTs can be further processed to provide an orientation that is parallel to the axis of the fiber material. The resulting CNT-infused fiber materials can be employed in the as-manufactured form, or can be woven into fabric goods for use in producing the EMI shielding and/or lightning strike protection composites used in EMI shielding and/or lightning strike protection applications. A panel can include the EMI shielding and/or lightning strike protection composite and can be adaptable to interface with a device for use

in EMI shielding and/or lightning strike protection applications. Such a panel can be further equipped with an electrical ground.

[0024] In some applications, low levels of CNT loading can provide damage sensing functionality. The CNTs can provide a percolation network that can be instrumented to measure changes in resistance or signal transmission. Such measured changes can provide information on the amount of damage the composite has sustained. Such damage sensing functionality can be in the form of a skin or structure, either fabric, or multi-directional tow-based or chopped fiber, as described in Applicant's co-pending application, Serial No. 12/900,405, filed October 7, 2010, which is incorporated herein by reference in its entirety. Damage sensing composites can include CNT-infused fibers in at least a portion of a matrix material. The composites can be utilized in any platform for monitoring the integrity of composite materials in structural components. Such damage sensing composites can utilize a variable source signal, while taking advantage of a scalable manufacturing process, to create a damage detection system having a high degree of control and sensitivity. Composites can be tailored to a specific applications and can be used to 1) detect types of damage to the composite through in situ monitoring, including monitoring of stresses on the materials prior, during, and/or after use; and 2) reduce the likelihood of catastrophic failure by providing structural enhancement and real time assessment of structural integrity. One component of the composite materials is the CNT-infused fiber. Having CNTs infused on a fiber carrier facilitates manufacturing of large composite structures using conventional fiber-reinforced composite manufacture techniques to incorporate the CNT element throughout the composite or in strategic portions of a composite article. Because CNT density and distribution is tightly controlled with CNT-infused fibers compared to loose CNTs, the amount of CNTs can be substantially reduced. Moreover, having the CNTs on fibers allows for synergistic mechanical strength enhancement due to the CNT-fiber organizational hierarchy, allowing the CNTs to perform a dual role in both sensing damage as well as contributing to structural integrity by assisting in redistribution of load bearing stresses. The fiber carrier also facilitates strategic placement of CNTs throughout an entire 3-dimensional article or in a 2-dimensional "skin." This strategic placement allows control of conductivity along the fiber axis and the transverse direction. The properties of the composite can be modulated by control of CNT density, length, placement, and alignment, for example. Thus, composites can be tailored to a specific application and/or to detect any type of damage, as well as reduce the likelihood of damage. The infused CNTs can affect the electrical properties of the

composite and can serve to create percolation pathways that allow continuous, non-continuous, or intermittent monitoring of the stress on the composite material. The resting state of a composite can have associated percolation pathways with measurable electrical properties such as resistance, for example, that can be monitored by an appropriately positioned pair of sensors, such as an electrode pair. As the material experiences strain, some of the CNT to CNT contacts are broken resulting in fewer operable percolation pathways. Consequently, the resistance increases across the composite while it is experiencing this strain load, which can be reversible or not. Composites made using the CNT-infused fibers bearing CNTs tailored for improved electrical properties can be used in damage sensing applications. Composites can also be used to improve composite strength. In a particular application, a CNT-infused fiber can be used in specific locations to improve composite strength as well as provide a means for damage detection at important structural components. One such application is in composite lap joints where one composite structure is bound to another composite structure (one structure can be perpendicular or parallel to the other). The bounded interface between the structures is of particular interest because it is considered the weak part of the structure. Utilizing the CNT-infused structure at this location allows for improved Interlaminar Shear Strength (ILSS) as well as the ability to provide damage detection. Composites can be used in a method of detecting stresses within the composite material that includes monitoring modulated electrical signals (waveform along with amplitude and frequency) and assessing structural integrity with improved detection resolution and sensitivity. Amplitude measurements can be used to measure strain. Phase can be used to monitor crack propagation. Frequency can be used to identify crack size. A network of electrodes can be engaged or otherwise integrated with sensing circuitry that can be used to measure and map location of strain, fatigue, damage, and cracks in the composite. Composites, systems, and methods integrating damage sensing functionality can be used in a variety of industries, for example, from the commercial airplane industry to ballistic armor damage detection on tanks and other military armored vehicles.

[0025] In some applications, mid-range levels of CNT loading can provide shear strength functionality. The CNTs can afford greater shear strength of the matrix, as well as improve the load transfer between filaments. The composite can be comprised of unidirectional fibers, chopped fibers, or fabric.

[0026] Some structures can include a composite structure to handle high shear loading in the central planes, but can be electrically insulated through the thickness. CNT-infused fiber materials can be used for the central lamina of a tailored composite to improve the maximum shear strength characteristics. Unmodified fibers can be used as the surface layers to provide the electrical insulation properties.

[0027] In certain applications, low levels of CNT loading can provide tensile strength functionality. Thus, the baseline filament strength can be augmented with the strength of the CNTs themselves. The low CNT loading can accommodate high fiber packing, leading to a stronger composite given that the tensile strength of a composite in the fiber direction is directly proportional to the amount of fibers. Close packing of the filaments can also enhance the entanglement between the CNTs, which can increase the effectiveness of the interfilament load transfer. Additionally, advanced processing of the CNT material can align the CNTs in the direction of the substrate filaments, to directly utilize the strength of the CNTs to increase overall tensile strength of the composite in the fiber direction.

[0028] Low levels of CNT loading can provide compressive strength functionality in some applications. Thus, the baseline filament strength is augmented with the strength of the CNTs themselves. The low CNT loading can accommodate high fiber packing, leading to a stronger composite given that the compressive strength of a composite in the fiber direction is directly proportional to the amount of fibers. Close packing of the filaments can also enhance the entanglement between the CNTs, which can increase the effectiveness of the interfilament load transfer. Additionally, the CNTs can increase the shear stiffness and strength of the matrix and thus help prevent micro-buckling of the filaments.

[0029] In some applications, mid-range levels of CNT loading can provide crack resistance functionality. The CNTs can toughen the matrix, which is commonly the weak link. A crack generally travels more easily through the matrix than through the filaments. Thus, the CNTs can function as crack-arresting mechanisms.

[0030] High levels of CNT loading can provide thermal conductivity functionality in some applications. In such applications, the CNTs can provide an interconnecting pathway through which heat can be transferred, as described in Applicant's co-pending application, Serial No. 12/767,719, filed April 26, 2010, which is incorporated herein by reference in its entirety. Thermally conductive composites can have a matrix material and a carbon nanotube CNT-

infused fiber material. The CNT-infused fiber material can be disposed throughout a portion of the matrix material and the composite structure adapted for application of a current via the CNT-infused fiber material to provide thermal conductivity of the matrix material. Without being bound by theory, the CNTs of the CNT-infused fiber can alter the conductance of the bulk matrix material by providing percolation conductivity. The percolation conductance of the composite structures can be the result of CNT-to-CNT point contact, CNT interdigitation/overlap, or combinations thereof. While the CNTs provide percolation conductance pathways, the fiber carrier to which they are fused provides control of 1) CNT orientation and degree of anisotropy, 2) CNT concentration, and 3) CNT location within the bulk matrix material. Incorporation of CNTs infused to a fiber, within the composite materials allows for the use of the composite structure itself as a thermally conductive element. CNTs are introduced at the fiber level where mass percentages of greater than 3% can be achieved. The CNT-infused fiber material can be used with conventional matrices and can be optionally doped with additional CNTs that are not infused to the fiber to create composite structures. By tailoring the CNT mass percentage present, the resistivity of the structure can be adjusted and controlled to provide the appropriate thermal/conductive properties for using the material as a thermally conductive element. The CNT-based composite material can be used as either a surface layer for targeted areas of a structure or over the entire composite structure, where it can be used to make any article for use in thermal applications. The CNT-infused fiber composite can be a composite material that is itself a resistive heating element. The use of metal as the resistive heating element brings the risk of galvanic corrosion (which is addressed by using glass layers - a weak interface within the structure), and after repeated use the risk of structure failures. Finally, since the metal coating is not a similar material within the composite structure, it can act as a weak point within the composite structure. The incorporation of CNTs in composite structures reduces or eliminates each of these problems. Since traditional composite materials are used with CNTs, the methods for manufacturing the composite structures remain virtually unchanged. Methods used to incorporate CNTs on composite fibers have also been developed that result in low cost material solutions, which combined with the similar manufacturability result in a simple low cost solution (with no weight increase -- in fact, weight could be reduced if CNT/fiber materials were used as the structural component as well). Since metals are not used to provide the electrical path, galvanic corrosion and difference in thermal expansion can be avoided using CNTs. Finally, since the material used to incorporate the CNTs in a fiber, if used as a resistive thermally conductive layer, it will not result in a weakening in the

overall structure. Thus, a large circuit can be created when an electrical potential is applied, such that the CNTs act as a large thermal conductor. Such thermally conductive formulations can be in the form of one or more patches of fabric with CNT coated leads, or can be simply embedded tows providing the current pathway.

[0031] High levels of CNT loading can provide embedded circuitry functionality in particular applications. In such applications, the CNTs can provide the electrical pathway through which signals can be transferred.

[0032] In some applications, a gradient of CNT loading can provide radar absorbent material (RAM) functionality. Increasing CNT loading from the surface of the structure toward the interior of the structure allows radar waves to penetrate and be trapped between the exterior and the interior of the structure via internal reflection, as described in Applicant's co-pending application, U.S. Publication No. 2010/0271523, which is incorporated herein by reference in its entirety. Some composite materials are RAMs. Radar absorbing composite materials can have CNT-infused fiber materials disposed in a portion of a matrix material. The composite can be capable of absorbing radar in a frequency range from between about 0.10 Megahertz to about 60 Gigahertz. CNTs have desirable electromagnetic absorption properties due to their high aspect ratio, high conductivity, and when infused to a fiber material can be tailored for specific surface coverage densities. The CNTs in the overall composite can be capable of absorbing radar and dissipating the absorbed energy as heat, for example. The radar absorbing composite materials can improve the absorption characteristics of already low observable surfaces. CNT-infused fibers can impart improved signature control of dielectric (insulative—transparent to radar) as well as conductive (significantly reflective to radar) composite materials, resulting in the ability to use low weight, high strength composites. Radar absorbing composite materials can provide an absorbent surface that is nearly a black body across different sections of the electromagnetic spectrum including the visible region and various radar bands. CNTs infused on fibers allow tailored arrangement of particular CNT densities in various layers to create a radar absorbing structure. That is, the radar absorbing capacity can be achieved by providing varying CNT density across the depth of the material. The CNT-infused fiber material can form a first layer that reduces radar reflectance and a second layer that dissipates the energy of the absorbed radar. The fiber material can act as a scaffold that organizes the CNTs in an array that provides an overall composite with appropriate CNT density at different depths to provide internal reflection in some layers and

effective percolation pathways for dissipation of the energy upon radar absorption in other layers. Still other layers can provide a combination of internal reflection and percolation pathways to dissipate the absorbed radar energy. The infused CNTs can be tailored to have a uniform length, density, and controlled orientation on the fiber material based on a continuous CNT infusion process. The CNT-infused fiber thus obtained is then disposed within a composite structure to maximize radar absorption. In particular, near the surface of a composite, CNT densities can be relatively low, creating a material that has a dielectric constant similar to air or a refractive index close to air creating a black body-like structure where radar reflectance is substantially minimized. That is, in order to suppress reflection, the refractive index of the object can be close to that of air. This solution to minimize reflectance is evident from Fresnel's law: $R = (n - n_0)^2 / (n + n_0)^2$, where R is reflectance, n is the refractive index of the object, and n_0 is the refractive index of air. The CNT density on the fiber material can be modulated in the continuous process described herein below such that the CNT-infused fiber material can be tuned to exhibit a CNT density such that the refractive index, n , in a layer of CNT-infused fiber within a composite structure approximates that of air, n_0 . By relying on CNTs for radar absorption, the composite materials can utilize either conducting or insulating fiber materials and/or matrices. Moreover, the radar absorbing composite materials can be integrated as part of the surface and/or the overall structure of the low observable. In some embodiments, the entire structure can function as a RAM, obviating the issues of wear, chipping and the like associated with coated RAM paints, for example. Significantly, unlike the urethane-type foams, the composite RAMS can be structural, allowing for substantial weight reductions to be achieved relative to their foam counterpart. In some embodiments, CNT-infused fiber materials can be employed as a coating while avoiding the problems associated with chipping/wear, and the like due to the extended lengths of fiber material employed. Methods of manufacturing a radar absorbing composite can include disposing a CNT-infused fiber material in a portion of a matrix material with a controlled orientation of the CNT-infused fiber material within the matrix material, and curing the matrix material. The controlled orientation of the CNT-infused fiber material can control the relative orientation of CNTs infused thereon. The manufacturing process to create CNT-infused fibers for the aforementioned radar absorbing materials can be amenable to large scale continuous processing. In the process, CNTs can be grown directly on carbon, glass, ceramic, or similar fiber materials of spoolable dimensions, such as tows or rovings. The nature of the CNT growth is such that a dense forest can be deposited at lengths that can be tuned between about 100 nanometers to about 500 microns long, the length being

controlled by various factors as described below. This forest can be oriented such that the CNTs are perpendicular to the surface of each individual filament of a fiber material thus providing radial coverage. The CNTs can be further processed to provide an orientation that is parallel to the axis of the fiber material. The resulting CNT-infused fiber materials can be wound as manufactured or can be woven into fabric goods for use in producing the radar absorbing composite materials used in low observable structures. Significantly, the continuous process can allow for the production of sections of CNT-infusion with varied CNT density. This readily allows for the manufacture of multi-layered structures which, when assembled, contribute to the overall radar absorbing capability. A panel can include the radar absorbing composite and can be adaptable to interface as a structural component of, for example, a transport vessel, projectile, or missile for use in stealth applications.

[0033] Flame resistant composite materials can include carbon nanotube-infused fibers in a matrix material. The flame resistant composite material can be a textile. Such flame resistant textiles can include carbon nanotube-infused fibers in a matrix material. CNT-infused textiles CNTs can be infused on a variety of fiber reinforcements at the tow or roving level prior to textile weaving. Alternatively CNT infusion can occur after weaving the textile to the specified weave architecture. The CNTs can occupy intra-tow and inter-tow space to achieve high-volume CNT loading. Flame resistant textiles can be used as a primary material and in fiber reinforced composite structures with resin systems that are not inherently flame resistant. Textiles of CNT-infused fiber do not require additional coatings to protect from flame exposure. Without being bound by theory, the CNT-infused fiber reinforcement is itself flame resistant due to the density and thermo-oxidative stability of CNTs throughout the composite, which can act as a barrier and allow decomposition of the surface resin only and will not allow penetration of thermal decomposition of the composite. In some embodiments, alignment of the CNTs along the axial direction of the fiber can allow thermal transport along the surface of the textile but limit conductivity through the thickness, which can further promote flame resistance. Alignment of infused CNTs on fiber substrates can be achieved by mechanical means, by employing a plasma, or other methods known in the art.

[0034] Some land-based systems can incorporate the above-mentioned functionality into composite structures in varying combinations. For example, land-based communication systems, radar systems, mine sweeper hulls, helmets, radomes, rocket nozzles, rescue stretchers, and engine components, and building and construction features such as structural

enhancement of exterior features including columns, pediments, domes, cornices, and formwork, and interior building structures such as blinds, sanitary-ware, window profiles, and the like can incorporate one or more composite structures to provide enhanced functionality. CNT-infused fiber materials can also be used in the heavy transportation industry in large panels for trailer walls, floor panels for railcars, truck cabs, exterior body molding, bus body shells, and cargo containers, for example. In automotive applications, CNT-infused fiber materials can be used in interior parts, such as trimming, seats, and instrument panels. Exterior structures such as body panels, openings, underbody, and front and rear modules can all benefit from the use of CNT-infused fiber materials. Even automotive engine compartment and fuel mechanical area parts, such as axles and suspensions, fuel and exhaust systems, and electrical and electronic components can all utilize CNT-infused fiber materials. Other applications of CNT-infused fiber materials include, bridge construction, reinforced concrete products, such as dowel bars, reinforcing bars, post-tensioning and pre-stressing tendons, stay-in-place framework, electric power transmission and distribution structures such as utility poles, transmission poles, and cross-arms, highway safety and roadside features such as sign supports, guardrails, posts and supports, noise barriers, and in municipal pipes and storage tanks. CNT-infused fiber materials can also be used in a variety of leisure equipment such as water and snow skis, kayaks, canoes and paddles, snowboards, golf club shafts, golf trolleys, fishing rods, and swimming pools. Other consumer goods and business equipment include gears, pans, housings, gas pressure bottles, components for household appliances, such as washers, washing machine drums, dryers, waste disposal units, air conditioners, and humidifiers. CNT-infused conductive fiber materials can be used in various energy and electrical applications. For example, CNT-infused fiber materials can be used in wind turbine blades, solar structures, electronic enclosures, such as laptops, cell phones, computer cabinets, where such CNT-infused fiber materials can be used in EMI shielding, for example. Other applications include power lines, cooling devices, light poles, circuit boards, electrical junction boxes, ladder rails, optical fiber, power built into structures such as data lines, computer terminal housings, and business equipment, such as copiers, cash registers and mailing equipment.

[0035] Depending on the structure or the portion of the structure, various functionalities can be selected. As a structural example, a composite component can be subjected to a variety of loadings. The component can have a joint that carries a shear load while another portion

supports a compressive load. The portion subject to shear and susceptible to delamination failure can be made mid-range CNT loaded material, while the portion supporting tensile load can utilize low CNT loaded material.

[0036] The CNT-infused fiber materials can be produced in a continuous fashion with precise control of the CNT loading, CNT length, and CNT orientation. Other hybrid composite systems incorporating nanoscale reinforcement require additional processing steps to properly disperse the nanoparticles of nanotubes into the matrix. In addition, the ability to create a lamina with specific CNT loading different from the next layer can be achieved through a CNT-infusion process. The CNT-infused fiber materials can be incorporated into a composite using the same manufacturing techniques used for un-processed glass and carbon filaments without the need for extra processing steps including, for example, orienting the CNTs or sectional layering in multilayered composites. Moreover, because the CNTs are infused to a fiber carrier, the issues associated homogeneous incorporation of CNTs, CNT bundling, agglomeration, and the like, are alleviated. CNT-infused fiber materials allow the composite structure to have larger CNT loading than can be achieved by simply mixing CNTs directly with the composite matrix material.

[0037] In structural composites, it is typical to have roughly a 60% fiber to 40% matrix ratio; however, the introduction of a third element, that is the infused CNTs, allows these ratios to be altered. For example, with the addition of up to about 25% CNTs by volume, the fiber portion can vary between about 35% to about 60% with the matrix range changing to about 40% to about 65%. The various ratios can alter the properties of the overall composite, which can be tailored to target one or more desired characteristics. The properties of CNTs lend themselves to fibers that are reinforced with them. Utilizing these enhanced fibers in tailored composites similarly imparts increases that will vary according to the fiber fraction, but can still greatly alter the properties of tailored composites compared to those known in the art.

[0038] Figures 1-5 show TEM and SEM images of fiber materials. Figures 1 and 2 show TEM images of MWNTs and DWNTs, respectively, that were prepared on an PAN-BASED carbon fiber in a continuous process. Figure 3 shows a scanning electron microscope (SEM) image of CNTs growing from within the barrier coating after the CNT-forming nanoparticle catalyst was mechanically infused to a fiber material surface. Figure 4 shows a SEM image demonstrating the consistency in length distribution of CNTs grown on a carbon fiber

material to within 20% of a targeted length of about 40 microns. Figure 5 shows a low magnification SEM of CNTs on carbon fiber demonstrating the uniformity of CNT density across the fibers within about 10%.

[0039] CNT-infused fiber materials can be used in a myriad of applications. For example, but not by way of limitation, land-based apparatus, such as windmills can include land-based structures, such as wind turbine blades. Referring to Figure 6, a wind turbine blade **10** shown in cross-section includes several features, each with a specific function and specific requirements. Wind turbine blades can vary in length from a few meters to over 40 meters. Different locations along the length of the blades serve various purposes and have specific strength and functionality requirements. The blade **10** can have an outer shell **20** substantially formed from low CNT loading composite to provide tensile strength and stiffness. The root **12** (illustrated in Figure 8) of the blade **10**, or the portion which is closest the generator (not illustrated), is generally round or oval in cross-section. This portion typically requires a thick layering of composite material to provide the strength required to support the tensile, compressive, and shear strength requirements of the spinning blade. This region can employ low CNT loading to provide the compressive and tensile strength required, as well as low to mid-range CNT loading on the skin **14** (illustrated in Figure 8) to detect damage. This region naturally is subjected to heightened stress and thus is a likely location for damage to become evident. The damage sensing functionality can provide an early alert and damage monitoring for maximum efficiency and longevity of the blade **10** so that a maintenance schedule can be augmented by real-time feedback.

[0040] Blade **10** can be constructed with shear webs **16** in a hollow interior portion **18** of the blade **10**. The shear webs **16** can transfer shear and torsional loads between the outer shell **20** as the blade **10** flexes. These shear webs **16** can be bonded to the outer shell **20** using an adhesive, or can be incorporated into the blade **10** as part of the composite structure. Referring now to Figure 7, if incorporated as part of the composite structure, the junction **22** between the shear web **16** and the outer shell **20** can use mid-range CNT loaded fabric, for example to increase the shear strength. The interlaminar and in-plane shear strength of composite parts is a point of weakness and CNTs can improve this functionality while decreasing the overall weight of the blade **10** since a high fiber volume is not necessarily required.

[0041] The blade **10** can be covered with a thin coating **24** of high CNT loading material. This material, with its high thermal and electrical conductivity, can provide a pathway for high voltage and current associated with a lightning strike. When lightning strikes a conventional wind turbine blade, the resultant local super-heating of the part causes delamination, which leads to crack propagation as the blade spins, frequently resulting in catastrophic failure of the whole system. The coating **24** or skin can prevent failure by providing an electrical path that is isolated from the structural material.

[0042] Referring now to Figures 8 and 9, the damage sensing function can be performed by the skin **14** described above, or can be incorporated as a damage sensing layer **26** of low CNT loading material within the composite in critical locations where a lightning strike can be expected to cause damage. Such damage-sensing layer **26** can be provided in areas near locations of built-up layers for fastener location. At these critical locations where the part is prone to delamination, layers of mid-range CNT loaded material can be used to arrest the movement of cracks.

[0043] Near the end spar **28** of the blade **10**, one or more layers **30** of mid-range CNT loaded material can be used for reduced weight and structural strength. Layer **30** can additionally provide shear strength for structural integrity of material transition.

[0044] Any of a number of different land-based structures can be constructed of composites and CNT-infused fiber materials designed or chosen based on CNT loading associated with various functionalities. Such functionalities can include, but are not limited to EMI shielding, lightning strike protection, damage sensing, mechanical properties including but not limited to interlaminar and in-plane shear strength and modulus, tensile strength and modulus, compressive strength and modulus, flexural strength and modulus, crack and propagation resistance, thermal conductivity improvements, embedded circuitry capabilities, and radar absorption.

[0045] The location for application of the CNT-infused fiber material to a particular location on the land-based structure can be selected based on the specific conditions of the structure. CNT-infused fiber material with high CNT loading can be used certain locations on the structure. More particularly, high CNT loading can be useful (1) in locations prone to exposure to EMI, because high CNT loading provides EMI shielding, (2) in locations prone to lightning strikes, because high CNT loading provides lightning strike protection, (3) in

locations where thermal conductivity is desired, because high CNT loading enhances thermal conductivity, and/or (4) in locations proximate electric circuitry, because high CNT loading facilitates transfer of electric signals.

[0046] Similarly, CNT-infused fiber material with mid-range CNT loading can be used in particular locations on the structure, such as (1) in locations prone to exposure to shear forces, because mid-range CNT loading enhances shear strength, and/or (2) in locations prone to cracking, because mid-range CNT loading enhances crack resistance.

[0047] Likewise, CNT-infused fiber material with low CNT loading can be used in certain locations on the structure, such as (1) in locations prone to damage, because low CNT loading facilitates damage sensing, (2) in locations prone to tensile forces, because low CNT loading enhances tensile strength, and/or (3) in locations prone to compressive forces, because low CNT loading enhances compressive strength.

[0048] Finally, CNT-infused fiber material with a gradient of CNT loading can be used in locations where radar absorption is desired. A gradient allows the radar waves to be absorbed in the outermost layer, while reflecting the radar waves from the innermost layer, preventing the waves from entering the structure, but also preventing the radar waves from being reflected off the structure.

[0049] Another example would be a telephone pole. This pole, especially when located in areas where it is the highest structure, is susceptible to lightning strikes and strong weather conditions such as high winds. The pole can incorporate a high CNT content outer skin to provide a pathway for the electricity to ground. Low CNT material can be used to construct the inner core to provide high tensile and compressive strength. If the pole is to have a cross-beam for mounting additional lines, the junction will be subjected to shear forces and cyclic loading. Mid-range CNT material can be used to increase both the shear strength as well as providing crack resistance. Other functionalities can be incorporated into a telephone pole as well.

[0050] An additional example would be a communications station. This could incorporate composite walls to perform several functionalities. These walls could contain high CNT content material to protect equipment from incident electromagnetic interference. A high CNT skin could be used to provide lightning strike protection. If the communication station has antennas, these can be constructed with composite support structures. Low CNT material

would provide the tensile and compressive strength requirements, while midrange CNT content would be used in locations of higher shear loading. A low CNT skin can be used selectively in locations of where damage might occur to monitor the progression of damage. The functionalities listed are not exhaustive and represent only some of the possible functionalities which could be incorporated into the composite structure.

[0051] In some embodiments, methods of designing, selecting, constructing, or otherwise ensuring particular functionalities of a land-based structure can involve selecting the structure and identifying the desired functionalities. Once the desired functionalities have been determined, CNT-infused fiber materials with CNT loading ranges can be selected based on the corresponding desired functionalities. Providing a land-based structure comprising a composite material can involve purchase, fabrication, or other means. If the structure is being fabricated, CNT-infused fiber materials can be formed as part of the structure. In other instances, CNT-infused fiber materials can be applied to the pre-formed composite structure. In either scenario, a first CNT-infused fiber material and a second CNT-infused fiber material are provided. The first CNT-infused fiber material has a first range of CNT loading and is selected to provide the structure with a first functionality. Similarly, the second CNT-infused fiber material has a second range of CNT loading and is selected to provide the structure with a second functionality. The first CNT-infused fiber material is applied to the structure at a first location and the second CNT-infused fiber material is applied to the structure at a second location. In some instances, the first location and the second location are remote from each other, but still part of the structure. In other instances, the first location and the second location can be very close, overlap, or even occupy the same location of the structure. For example, the first CNT-infused fiber material can have a high CNT loading useful for EMI shielding and the second CNT-infused fiber material can have a low CNT loading useful for damage sensing. In such scenario, the second material can be applied directly to the structure, with the first material being applied to the second material as a separate layer.

[0052] In one embodiment, a land-based structure has flame resistance, electrical resistance, damage sensing, mechanical properties including but not limited to interlaminar and in-plane shear strength and modulus, tensile strength and modulus, compressive strength and modulus, flexural strength and modulus, crack and propagation resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption functionalities. In other embodiments, a land-based structure has fewer than

all of these functionalities. For example, some land-based structures have electromagnetic interference shielding, damage sensing, and strength functions or radar absorption, crack resistance, and lightning strike protection functionalities. In some embodiments, a land-based structure can have any one, two, three, four, five, six, seven, eight, nine, ten, eleven, or twelve functionalities selected from the following: flame resistance, electrical resistance, damage sensing, interlaminar and in-plane shear strength and modulus, tensile strength and modulus, compressive strength and modulus, flexural strength and modulus, crack and propagation resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption functionalities. A land-based structure may have additional functionalities not listed above.

[0053] In some embodiments, the first amount and second amount of CNTs are different in different areas of a particular structure. This can be accompanied by a change in the CNT type or not. Thus, varying the density of CNTs can be used to alter the properties of the original fiber material, even if the CNT type remains unchanged. CNT type can include CNT length and the number of walls, for example. In some embodiments, the first amount and the second amount are the same. If different properties are desirable in this case along the two different stretches of the spoolable material, then the CNT type can be changed, such as the CNT length. For example, longer CNTs can be useful in electrical/thermal applications, while shorter CNTs can be useful in mechanical strengthening applications.

[0054] In light of the aforementioned discussion regarding altering the properties of the fiber materials, the first type of CNT and the second type of CNT can be the same, in some embodiments, while the first type of CNT and the second type of CNT can be different, in other embodiments. Likewise, the first property and the second property can be the same, in some embodiments. For example, the EMI shielding property can be the property of interest addressed by the first amount and type of CNTs and the second amount and type of CNTs, but the degree of change in this property can be different, as reflected by differing amounts, and/or types of CNTs employed. Finally, in some embodiments, the first property and the second property can be different. Again, this can reflect a change in CNT type. For example, the first property can be mechanical strength with shorter CNTs, while the second property can be electrical/thermal properties with longer CNTs. One skilled in the art will recognize the ability to tailor the properties of the fiber material through the use of different CNT

densities, CNT lengths, and the number of walls in the CNTs, such as single-walled, double-walled, and multi-walled, for example.

[0055] In some embodiments, a first amount of CNTs on a fiber material exhibits a group of properties that differs from a first group of properties exhibited by the fiber material itself. That is, selecting an amount that can alter one or more properties of the fiber material, such as tensile strength. The first group of properties and second group of properties can include at least one of the same properties, thus representing enhancing an already existing property of the fiber material. In some embodiments, CNT infusion can impart a second group of properties to the CNT-infused fiber material that is not included among the first group of properties exhibited by the fiber material itself.

[0056] CNT-infused carbon and glass fiber materials have been described in Applicant's co-pending applications, U.S. Publication Nos. 2010/0279569 and 2010/0178825, both of which are incorporated herein by reference in their entirety. Such CNT-infused fiber materials are exemplary of the types that can be used as a reinforcing material in a tailored composite. Other CNT-infused fiber materials can include metal fibers, ceramic fibers, and organic fibers, such as aramid fibers. In the CNT-infusion processes disclosed in the above-referenced applications, fiber materials are modified to provide a layer (typically no more than a monolayer) of CNT-initiating catalyst nanoparticles on the fiber. The catalyst-laden fiber is then exposed to a CVD-based process used to grow CNTs continuously, in line. The CNTs grown are infused to the fiber material. The resultant CNT-infused fiber material is itself a composite architecture.

[0057] The CNT-infused fiber material can be tailored with specific types of CNTs on the surface of fiber material such that various properties can be achieved. For example, the electrical properties can be modified by applying various types, diameter, length, and density CNTs on the fiber. CNTs of a length that can provide proper CNT to CNT bridging are needed for percolation pathways that improve composite conductivity. Because fiber spacing is typically equivalent to or greater than one fiber diameter, from about 5 to about 50 microns, CNTs can be at least this length to achieve effective electrical pathways. Shorter length CNTs can be used to enhance structural properties.

[0058] In some embodiments, a CNT-infused fiber material includes CNTs of varying lengths along different sections of the same fiber material. When used as a tailored

composite reinforcement, such multifunctional CNT-infused fiber materials enhance more than one property of the composite in which they are incorporated.

[0059] In some embodiments, a first amount of CNTs is infused to the fiber material. This amount is selected such that the value of at least one property selected from the group consisting of tensile strength, Young's Modulus, shear strength, shear modulus, toughness, compression strength, compression modulus, density, Electromagnetic wave absorptivity/reflectivity, acoustic transmittance, electrical conductivity, and thermal conductivity of the CNT-infused fiber material differs from the value of the same property of the fiber material itself. Any of these properties of the resultant CNT-infused fiber material can be imparted to the final composite.

[0060] Tensile strength can include three different measurements: 1) Yield strength which evaluates the stress at which material strain changes from elastic deformation to plastic deformation, causing the material to deform permanently; 2) Ultimate strength which evaluates the maximum stress a material can withstand when subjected to tension, compression or shearing; and 3) Breaking strength which evaluates the stress coordinate on a stress-strain curve at the point of rupture. Composite shear strength evaluates the stress at which a material fails when a load is applied perpendicular to the fiber direction. Compression strength evaluates the stress at which a material fails when a compressive load is applied.

[0061] MWNTs, in particular, have the highest tensile strength of any material yet measured, with a tensile strength of 63 GPa having been achieved. Moreover, theoretical calculations have indicated possible tensile strengths of CNTs of about 300 GPa. Thus, CNT-infused fiber materials are expected to have substantially higher ultimate strength compared to the parent fiber material. As described above, the increase in tensile strength will depend on the exact nature of the CNTs used as well as the density and distribution on the fiber material. CNT-infused fiber materials can exhibit a two to three times increase in tensile properties, for example. Exemplary CNT-infused fiber materials can have as high as three times the shear strength as the parent unfunctionalized fiber material and as high as 2.5 times the compression strength. Such increases in the strength of the reinforcing fiber material translate to increased strength in a composite in which the CNT-infused fiber material is incorporated.

[0062] Young's modulus is a measure of the stiffness of an isotropic elastic material. It is defined as the ratio of the uniaxial stress over the uniaxial strain in the range of stress in which Hooke's Law holds. This can be experimentally determined from the slope of a stress-strain curve created during tensile tests conducted on a sample of the material.

[0063] Electrical conductivity or specific conductance is a measure of a material's ability to conduct an electric current. CNTs with particular structural parameters such as the degree of twist, which relates to CNT chirality, can be highly conducting, thus exhibiting metallic properties. A recognized system of nomenclature (M. S. Dresselhaus, et al. Science of Fullerenes and CNTs, Academic Press, San Diego, CA pp. 756-760, (1996)) has been formalized and is recognized by those skilled in the art with respect to CNT chirality. Thus, for example, CNTs are distinguished from each other by a double index (n,m) where n and m are integers that describe the cut and wrapping of hexagonal graphite so that it makes a tube when it is wrapped onto the surface of a cylinder and the edges are sealed together. When the two indices are the same, $m=n$, the resultant tube is said to be of the "arm-chair" (or n,n) type, since when the tube is cut perpendicular to the CNT axis only the sides of the hexagons are exposed and their pattern around the periphery of the tube edge resembles the arm and seat of an arm chair repeated n times. Arm-chair CNTs, in particular single-walled CNTs (SWNTs), are metallic, and have extremely high electrical and thermal conductivity. In addition, such SWNTs have-extremely high tensile strength.

[0064] In addition to the degree of twist, CNT diameter also effects electrical conductivity. As described above, CNT diameter can be controlled by use of controlled size CNT-forming catalyst nanoparticles. CNTs can also be formed as semi-conducting materials. Conductivity in MWNTs can be more complex. Interwall reactions within MWNTs can redistribute current over individual tubes non-uniformly. By contrast, there is no change in current across different parts of metallic SWNTs. CNTs also have very high thermal conductivity, comparable to diamond crystal and in-plane graphite sheet.

[0065] CNTs infused on the fibers can be any of a number of cylindrically-shaped allotropes of carbon of the fullerene family including SWNTs, DWNTs, and MWNTs. CNTs can be capped by a fullerene-like structure or open-ended. CNTs include those that encapsulate other materials.

[0066] As used herein, the term "land-based" means generally capable of being supported by land while in an operational state. Certain structures are considered land-based, but are also

considered sea-based, air-based, or space-based. For example, a cargo container can be land-based, sea-based, air-based, and space-based. Likewise, certain structures can be considered land-based despite apparent interaction with the sea, air, or space. For example, because it is supported by land, a bridge is considered land-based, despite the fact that it crosses a body of water, even if that body of water is considered a sea.

[0067] As used herein, the term “infused” means bonded and “infusion” means the process of bonding. Such bonding can involve direct covalent bonding, ionic bonding, pi-pi, and/or van der Waals force-mediated physisorption. For example, in some embodiments, the CNTs can be directly bonded to the fiber material. Bonding can be indirect, such as the CNT infusion to the fiber material via a barrier coating and/or an intervening transition metal nanoparticle disposed between the CNTs and fiber material. In the CNT-infused fiber materials disclosed herein, the CNTs can be “infused” to the fiber material directly or indirectly as described above. The particular manner in which a CNT is “infused” to a fiber material is referred to as a “bonding motif.”

[0068] The CNTs infused on portions of the fiber material are generally uniform in length. As used herein “uniform in length” refers to length of CNTs grown in a reactor. “Uniform length” means that the CNTs have lengths with tolerances of plus or minus about 20% of the total CNT length or less, for CNT lengths varying from between about 1 micron to about 500 microns. At very short lengths, such as 1-4 microns, this error can be in a range from between about plus or minus 20% of the total CNT length up to about plus or minus 1 micron, that is, somewhat more than about 20% of the total CNT length.

[0069] The CNTs infused on portions of the fiber material are generally uniform in distribution as well. As used herein, “uniform in distribution” refers to the consistency of density of CNTs on a fiber material. “Uniform distribution” means that the CNTs have a density on the fiber material with tolerances of plus or minus about 10% coverage defined as the percentage of the surface area of the fiber covered by CNTs. This is equivalent to ± 1500 CNTs/ μm^2 for an 8 nm diameter CNT with 5 walls. Such a figure assumes the space inside the CNTs as fillable.

[0070] The present disclosure is directed, in part, to CNT-infused fiber materials. The infusion of CNTs to the fiber material can serve many functions including, for example, as a sizing agent to protect against damage from moisture, oxidation, abrasion, and compression.

A CNT-based sizing can also serve as an interface between the fiber material and a matrix material in a composite. The CNTs can also serve as one of several sizing agents coating the fiber material.

[0071] Moreover, CNTs infused on a fiber material can alter various properties of the fiber material, such as thermal and/or electrical conductivity, and/or tensile strength, for example. The processes employed to make CNT-infused fiber materials provide CNTs with substantially uniform length and distribution to impart their useful properties uniformly over the fiber material that is being modified. Some such processes are suitable for the generation of CNT-infused fiber materials of spoolable dimensions.

[0072] The present disclosure is also directed, in part, to CNT-infused fiber materials. Various processes can be applied to nascent fiber materials generated *de novo* before, or in lieu of, application of a typical sizing solution to the fiber material. Alternatively, the processes can utilize a commercial fiber material, for example, a carbon tow, that already has a sizing applied to its surface. In such embodiments, the sizing can be removed to provide a direct interface between the fiber material and the synthesized CNTs, although a barrier coating and/or transition metal particle can serve as an intermediate layer providing indirect infusion, as explained further below. After CNT synthesis further sizing agents can be applied to the fiber material as desired.

[0073] Some processes allow for the continuous production of CNTs of uniform length and distribution along spoolable lengths of tow, tapes, fabrics, and other 3D woven structures. While various mats, woven and non-woven fabrics and the like can be functionalized by certain processes, it is also possible to generate such higher ordered structures from the parent tow, yarn or the like after CNT functionalization of these parent materials. For example, a CNT-infused woven fabric can be generated from a CNT-infused carbon fiber tow.

[0074] As used herein the term “fiber material” refers to any material that has filaments or bundles of filaments as its elementary structural component. The term encompasses fibers, filaments, yarns, tows, tapes, woven and non-woven fabrics, plies, mats, and the like.

[0075] As used herein the term “spoolable dimensions” refers to fiber materials having at least one dimension that is not limited in length, allowing the material to be stored on a spool or mandrel. Fiber materials of “spoolable dimensions” have at least one dimension that indicates the use of either batch or continuous processing for CNT infusion as described

herein. One fiber material of spoolable dimensions that is commercially available is exemplified by AS4 12k carbon fiber tow with a tex value of 800 (1 tex = 1 g/1,000m) or 620 yard/lb (Grafil, Inc., Sacramento, CA). Commercial carbon fiber tow, in particular, can be obtained in 5, 10, 20, 50, and 100 lb. (for spools having high weight, usually a 3k/12K tow) spools, for example, although larger spools may require special order. Certain processes operate readily with 5 to 20 lb. spools, although larger spools are usable. Moreover, a pre-process operation can be incorporated that divides very large spoolable lengths, for example 100 lb. or more, into easy to handle dimensions, such as two 50 lb spools.

[0076] As used herein, the term “carbon nanotube” (CNT, plural CNTs) refers to any of a number of cylindrically-shaped allotropes of carbon of the fullerene family including single-walled carbon nanotubes (SWNTs), double-walled carbon nanotubes (DWNTs), multi-walled carbon nanotubes (MWNTs). Carbon nanotubes can be capped by a fullerene-like structure or open-ended. Carbon nanotubes include those that encapsulate other materials.

[0077] As used herein, the term “transition metal” refers to any element or alloy of elements in the d-block of the periodic table. The term “transition metal” also includes salt forms of the base transition metal element such as oxides, carbides, nitrides, and the like.

[0078] As used herein, the term “nanoparticle” or NP (plural NPs), or grammatical equivalents thereof refers to particles sized between about 0.1 to about 100 nanometers in equivalent spherical diameter, although the NPs need not be spherical in shape. Transition metal NPs, in particular, serve as catalysts for CNT growth on the fiber materials.

[0079] As used herein, the term “sizing agent,” “fiber sizing agent,” or just “sizing,” refers collectively to materials used in the manufacture of fibers as a coating to protect the integrity of the fibers, provide enhanced interfacial interactions between a fiber and a matrix material in a composite, and/or alter and/or enhance particular physical properties of a fiber. In some embodiments, CNTs infused to fiber materials behave as a sizing agent.

[0080] As used herein, the term “matrix material” refers to a bulk material than can serve to organize sized CNT-infused fiber materials in particular orientations, including random orientation. The matrix material can benefit from the presence of the CNT-infused fiber material by imparting some aspects of the physical and/or chemical properties of the CNT-infused fiber material to the matrix material.

[0081] As used herein, the term “material residence time” refers to the amount of time a discrete point along a fibrous material of spoolable dimensions is exposed to CNT growth conditions during a CNT infusion process. This definition includes the residence time when employing multiple CNT growth chambers.

[0082] As used herein, the term “linespeed” refers to the speed at which a fiber material of spoolable dimensions can be fed through the CNT infusion process, where linespeed is a velocity determined by dividing CNT chamber(s) length by the material residence time.

[0083] In some embodiments, the present disclosure provides a composition that includes a CNT-infused fiber material. The CNT-infused fiber material includes a fiber material of spoolable dimensions, a barrier coating conformally disposed about the fiber material, and CNTs infused to the fiber material. The infusion of CNTs to the fiber material can include a bonding motif of direct bonding of individual CNTs to the fiber material or indirect bonding via a transition metal NP, barrier coating, or both.

[0084] Without being bound by theory, transition metal NPs, which serve as a CNT-forming catalyst, can catalyze CNT growth by forming a CNT growth seed structure. In one embodiment, the CNT-forming catalyst can remain at the base of the fiber material, locked by the barrier coating, and infused to the surface of the fiber material. In such a case, the seed structure initially formed by the transition metal nanoparticle catalyst is sufficient for continued non-catalyzed seeded CNT growth without allowing the catalyst to move along the leading edge of CNT growth, as often observed in the art. In such a case, the NP serves as a point of attachment for the CNT to the fiber material. The presence of the barrier coating can also lead to further indirect bonding motifs. For example, the CNT forming catalyst can be locked into the barrier coating, as described above, but not in surface contact with fiber material. In such a case, a stacked structure with the barrier coating disposed between the CNT forming catalyst and fiber material results. In either case, the CNTs formed are infused to the fiber material. In some embodiments, some barrier coatings will still allow the CNT growth catalyst to follow the leading edge of the growing nanotube. In such cases, this can result in direct bonding of the CNTs to the fiber material or, optionally, to the barrier coating. Regardless of the nature of the actual bonding motif formed between the CNTs and the fiber material, the infused CNT is robust and allows the CNT-infused fiber material to exhibit CNT properties and/or characteristics.

[0085] Again, without being bound by theory, when growing CNTs on fiber materials, the elevated temperatures and/or any residual oxygen and/or moisture that can be present in the reaction chamber can damage the fiber material. Moreover, the fiber material itself can be damaged by reaction with the CNT-forming catalyst itself. That is the fiber material can behave as a carbon feedstock to the catalyst at the reaction temperatures employed for CNT synthesis. Such excess carbon can disturb the controlled introduction of the carbon feedstock gas and can even serve to poison the catalyst by overloading it with carbon. The barrier coating employed in the present disclosure is designed to facilitate CNT synthesis on fiber materials. Without being bound by theory, the coating can provide a thermal barrier to heat degradation and/or can be a physical barrier preventing exposure of the fiber material to the environment at the elevated temperatures. Alternatively or additionally, it can minimize the surface area contact between the CNT-forming catalyst and the fiber material and/or it can mitigate the exposure of the fiber material to the CNT-forming catalyst at CNT growth temperatures.

[0086] Compositions having CNT-infused fiber materials are provided in which the CNTs are substantially uniform in length. In the continuous process, the residence time of the fiber material in a CNT growth chamber can be modulated to control CNT growth and ultimately, CNT length. This provides a means to control specific properties of the CNTs grown. CNT length can also be controlled through modulation of the carbon feedstock and carrier gas flow rates and reaction temperature. Additional control of the CNT properties can be obtained by controlling, for example, the size of the catalyst used to prepare the CNTs. For example, 1 nm transition metal nanoparticle catalysts can be used to provide SWNTs in particular. Larger catalysts can be used to prepare predominantly MWNTs.

[0087] Additionally, the CNT growth processes employed are useful for providing a CNT-infused fiber material with uniformly distributed CNTs on fiber materials while avoiding bundling and/or aggregation of the CNTs that can occur in processes in which pre-formed CNTs are suspended or dispersed in a solvent solution and applied by hand to the fiber material. Such aggregated CNTs tend to adhere weakly to a fiber material and the characteristic CNT properties are weakly expressed, if at all. In some embodiments, the maximum distribution density, expressed as percent coverage, that is, the surface area of fiber covered, can be as high as about 55% assuming about 8 nm diameter CNTs with 5 walls. This coverage is calculated by considering the space inside the CNTs as being “fillable”

space. Various distribution/density values can be achieved by varying catalyst dispersion on the surface as well as controlling gas composition and process speed. Typically, for a given set of parameters, a percent coverage within about 10% can be achieved across a fiber surface. Higher density and shorter CNTs are useful for improving mechanical properties, while longer CNTs with lower density are useful for improving thermal and electrical properties, although increased density is still favorable. A lower density can result when longer CNTs are grown. This can be the result of the higher temperatures and more rapid growth causing lower catalyst particle yields.

[0088] The compositions of the disclosure having CNT-infused fiber materials can include a fiber material such as an individual filament, a fiber yarn, a fiber tow, a tape, a fiber-braid, a woven fabric, a non-woven fiber mat, a fiber ply, and other 3D woven structures. Filaments include high aspect ratio fibers having diameters ranging in size from between about 1 micron to about 100 microns. Fiber tows are generally compactly associated bundles of filaments and are usually twisted together to give yarns.

[0089] Yarns include closely associated bundles of twisted filaments. Each filament diameter in a yarn is relatively uniform. Yarns have varying weights described by their 'tex,' expressed as weight in grams of 1000 linear meters, or denier, expressed as weight in pounds of 10,000 yards, with a typical tex range usually being between about 200 tex to about 2000 tex.

[0090] Tows include loosely associated bundles of untwisted filaments. As in yarns, filament diameter in a tow is generally uniform. Tows also have varying weights and the tex range is usually between 200 tex and 2000 tex. They are frequently characterized by the number of thousands of filaments in the tow, for example 12K tow, 24K tow, 48K tow, and the like.

[0091] Tapes are materials that can be assembled as weaves or can represent non-woven flattened tows. Tapes can vary in width and are generally two-sided structures similar to ribbon. Process for formation can be compatible with CNT infusion on one or both sides of a tape. CNT-infused tapes can resemble a "carpet" or "forest" on a flat substrate surface. Again, such processes can be performed in a continuous mode to functionalize spools of tape.

[0092] Fiber-braids represent rope-like structures of densely packed fibers. Such structures can be assembled from yarns, for example. Braided structures can include a hollow portion or a braided structure can be assembled about another core material.

[0093] In some embodiments, a number of primary fiber material structures can be organized into fabric or sheet-like structures. These include, for example, woven fabrics, non-woven fiber mat, and fiber ply, in addition to the tapes described above. Such higher ordered structures can be assembled from parent tows, yarns, filaments or the like, with CNTs already infused in the parent fiber. Alternatively, such structures can serve as the substrate for the CNT infusion process.

[0094] There are three types of carbon fiber, which are categorized based on the precursors used to generate the fibers, any of which can be used in the disclosure: Rayon, Polyacrylonitrile (PAN) and Pitch. Carbon fiber from rayon precursors, which are cellulosic materials, has relatively low carbon content at about 20% and the fibers tend to have low strength and stiffness. Polyacrylonitrile (PAN) precursors provide a carbon fiber with a carbon content of about 55%. Carbon fiber based on a PAN precursor generally has a higher tensile strength than carbon fiber based on other carbon fiber precursors due to a minimum of surface defects.

[0095] Pitch precursors based on petroleum asphalt, coal tar, and polyvinyl chloride can also be used to produce carbon fiber. Although pitches are relatively low in cost and high in carbon yield, there can be issues of non-uniformity in a given batch.

[0096] CNTs useful for infusion to fiber materials include SWNTs, DWNTs, MWNTs, and mixtures thereof. The exact CNTs to be used depends on the application of the CNT-infused fiber material. CNTs can be used for thermal and/or electrical conductivity applications, or as insulators. In some embodiments, the infused CNTs are SWNTs. In some embodiments, the infused CNTs are MWNTs. In some embodiments, the infused CNTs are a combination of SWNTs and MWNTs. There are some differences in the characteristic properties of SWNTs and MWNTs that, for some end uses of the fiber, dictate the synthesis of one or the other type of nanotube. For example, SWNTs can be semi-conducting or metallic, while MWNTs are metallic.

[0097] CNTs lend their characteristic properties such as mechanical strength, low to moderate electrical resistivity, high thermal conductivity, and the like to the CNT-infused fiber material. For example, in some embodiments, the electrical resistivity of a CNT-infused fiber material is lower than the electrical resistivity of a parent fiber material. More generally, the extent to which the resulting CNT-infused fiber material expresses these

characteristics can be a function of the extent and density of coverage of the fiber by the CNTs. Any amount of the fiber surface area, from 0-55% of the fiber can be covered assuming an 8 nm diameter, 5-walled MWNT (again, this calculation counts the space inside the CNTs as fillable). This number is lower for smaller diameter CNTs and more for greater diameter CNTs. 55% surface area coverage is equivalent to about 15,000 CNTs/ μm^2 . Further CNT properties can be imparted to the fiber material in a manner dependent on CNT length, as described above. Infused CNTs can vary in length ranging from between about 1 micron to about 500 microns, including 1 micron, 2 microns, 3 microns, 4 micron, 5, microns, 6, microns, 7 microns, 8 microns, 9 microns, 10 microns, 15 microns, 20 microns, 25 microns, 30 microns, 35 microns, 40 microns, 45 microns, 50 microns, 60 microns, 70 microns, 80 microns, 90 microns, 100 microns, 150 microns, 200 microns, 250 microns, 300 microns, 350 microns, 400 microns, 450 microns, 500 microns, and all values in between. CNTs can also be less than about 1 micron in length, including about 0.5 microns, for example. CNTs can also be greater than 500 microns, including for example, 510 microns, 520 microns, 550 microns, 600 microns, 700 microns, and all values in between.

[0098] Compositions of the disclosure can incorporate CNTs have a length from about 1 micron to about 10 microns. Such CNT lengths can be useful in application to increase shear strength. CNTs can also have a length from about 5 to about 70 microns. Such CNT lengths can be useful in applications for increased tensile strength if the CNTs are aligned in the fiber direction. CNTs can also have a length from about 10 microns to about 100 microns. Such CNT lengths can be useful to increase electrical/thermal properties as well as mechanical properties. CNTs can have a length from about 100 microns to about 500 microns, which can also be beneficial to increase electrical and thermal properties. Such control of CNT length is readily achieved through modulation of carbon feedstock and inert gas flow rates coupled with varying linespeeds and growth temperature.

[0099] In some embodiments, compositions that include spoolable lengths of CNT-infused fiber materials can have various uniform regions with different lengths of CNTs. For example, it can be desirable to have a first portion of CNT-infused fiber material with uniformly shorter CNT lengths to enhance shear strength properties, and a second portion of the same spoolable material with a uniform longer CNT length to enhance electrical or thermal properties.

[0100] Certain processes for CNT infusion to fiber materials allow control of the CNT lengths with uniformity and in a continuous process allowing spoolable fiber materials to be functionalized with CNTs at high rates. With material residence times between 5 to 300 seconds, linespeeds in a continuous process for a system that is 3 feet long can be in a range anywhere from about 0.5 ft/min to about 36 ft/min and greater. The speed selected depends on various parameters as explained further below.

[0101] In some embodiments, a material residence time of about 5 to about 30 seconds can produce CNTs having a length between about 1 micron and about 10 microns. In some embodiments, a material residence time of about 30 to about 180 seconds can produce CNTs having a length between about 10 microns to about 100 microns. In still further embodiments, a material residence time of about 180 to about 300 seconds can produce CNTs having a length between about 100 microns to about 500 microns. One skilled in the art will recognize that these ranges are approximate and that CNT length can also be modulated by reaction temperatures, and carrier and carbon feedstock concentrations and flow rates.

[0102] CNT-infused fiber materials of the disclosure include a barrier coating. Barrier coatings can include for example an alkoxysilane, methylsiloxane, an alumoxane, alumina nanoparticles, spin on glass and glass nanoparticles. As described below, the CNT-forming catalyst can be added to the uncured barrier coating material and then applied to the fiber material together. In other embodiments, the barrier coating material can be added to the fiber material prior to deposition of the CNT-forming catalyst. The barrier coating material can be of a thickness sufficiently thin to allow exposure of the CNT-forming catalyst to the carbon feedstock for subsequent CVD growth. In some embodiments, the thickness is less than or about equal to the effective diameter of the CNT-forming catalyst. In some embodiments, the thickness of the barrier coating is in a range from between about 10 nm to about 100 nm. The barrier coating can also be less than 10 nm, including 1nm, 2 nm, 3nm, 4 nm, 5 nm, 6 nm, 7nm, 8nm, 9 nm, 10 nm, and any value in between.

[0103] Without being bound by theory, the barrier coating can serve as an intermediate layer between the fiber material and the CNTs and serves to mechanically infuse the CNTs to the fiber material. Such mechanical infusion still provides a robust system in which the fiber material serves as a platform for organizing the CNTs while still imparting properties of the CNTs to the fiber material. Moreover, the benefit of including a barrier coating is the

immediate protection it provides the fiber material from chemical damage due to exposure to moisture and/or any thermal damage due to heating of the fiber material at the temperatures used to promote CNT growth.

[0104] The infused CNTs disclosed herein can effectively function as a replacement for conventional fiber “sizing.” The infused CNTs are more robust than conventional sizing materials and can improve the fiber-to-matrix interface in composite materials and, more generally, improve fiber-to-fiber interfaces. Indeed, the CNT-infused fiber materials disclosed herein are themselves composite materials in the sense the CNT-infused fiber material properties will be a combination of those of the fiber material as well as those of the infused CNTs. Consequently, embodiments of the present disclosure provide a means to impart desired properties to a fiber material that otherwise lack such properties or possesses them in insufficient measure. Fiber materials can be tailored or engineered to meet the requirements of specific applications. The CNTs acting as sizing can protect fiber materials from absorbing moisture due to the hydrophobic CNT structure. Moreover, hydrophobic matrix materials, as further exemplified below, interact well with hydrophobic CNTs to provide improved fiber to matrix interactions.

[0105] Despite the beneficial properties imparted to a fiber material having infused CNTs described above, the compositions of the present disclosure can include further conventional sizing agents. Such sizing agents vary widely in type and function and include, for example, surfactants, anti-static agents, lubricants, siloxanes, alkoxysilanes, aminosilanes, silanes, silanols, polyvinyl alcohol, starch, and mixtures thereof. Such secondary sizing agents can be used to protect the CNTs themselves or provide further properties to the fiber not imparted by the presence of the infused CNTs.

[0106] Compositions of the present disclosure can further include a matrix material to form a composite with the CNT-infused fiber material. Such matrix materials can include, for example, an epoxy, a polyester, a vinylester, a polyetherimide, a polyetherketoneketone, a polyphthalamide, a polyetherketone, a polytheretherketone, a polyimide, a phenol-formaldehyde, and a bismaleimide. Matrix materials useful in the present disclosure can include any of the known matrix materials (see Mel M. Schwartz, Composite Materials Handbook (2d ed. 1992)). Matrix materials more generally can include resins (polymers), both thermosetting and thermoplastic, metals, ceramics, and cements.

[0107] Thermosetting resins useful as matrix materials include phthalic/maelic type polyesters, vinyl esters, epoxies, phenolics, cyanates, bismaleimides, and nadic end-capped polyimides (e.g., PMR-15). Thermoplastic resins include polysulfones, polyamides, polycarbonates, polyphenylene oxides, polysulfides, polyether ether ketones, polyether sulfones, polyamide-imides, polyetherimides, polyimides, polyarylates, and liquid crystalline polyester.

[0108] Metals useful as matrix materials include alloys of aluminum such as aluminum 6061, 2024, and 713 aluminum braze. Ceramics useful as matrix materials include carbon ceramics, such as lithium aluminosilicate, oxides such as alumina and mullite, nitrides such as silicon nitride, and carbides such as silicon carbide. Cements useful as matrix materials include carbide-base cermets (tungsten carbide, chromium carbide, and titanium carbide), refractory cements (tungsten-thoria and barium-carbonate-nickel), chromium-alumina, and nickel-magnesia iron-zirconium carbide. Any of the above-described matrix materials can be used alone or in combination.

[0109] Although the invention has been described with reference to the disclosed embodiments, those skilled in the art will readily appreciate that these only illustrative of the invention. It should be understood that various modifications can be made without departing from the spirit of the invention.

What is claimed is:

1. An apparatus comprising:
a structure supported by land comprising a composite structure that comprises at least:
a first carbon nanotube infused material imparting a first functionality to the structure, the first functionality selected from electrical resistance, damage sensing, tensile strength, compressive strength, shear strength, flexural strength, crack resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption;
a second carbon nanotube infused material imparting a second functionality to the structure, the second functionality selected from electrical resistance, damage sensing, tensile strength, compressive strength, shear strength, flexural strength, crack resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption.
2. The apparatus of claim 1, wherein the composite structure comprises a third carbon nanotube infused material.
3. The apparatus of claim 1, wherein a carbon nanotube loading of the first carbon nanotube infused material is between 0% and 2%.
4. The apparatus of claim 3, wherein the first carbon nanotube infused material is located on the structure so as to be prone to damage, and wherein the first functionality is damage sensing.
5. The apparatus of claim 3, wherein the first carbon nanotube infused material is located on the structure so as to be prone to tension, and wherein the first functionality is tensile strength.
6. The apparatus of claim 3, wherein the first carbon nanotube infused material is located on the structure so as to be prone to compression, and wherein the first functionality is compressive strength.
7. The apparatus of claim 1, wherein a carbon nanotube loading of the first carbon nanotube infused material is between 2% and 5%.

8. The apparatus of claim 7, wherein the first carbon nanotube infused material is located on the structure so as to be prone to shear, and wherein the first functionality is shear strength.

9. The apparatus of claim 7, wherein the first carbon nanotube infused material is located on the structure so as to be prone to cracking, and wherein the first functionality is crack resistance.

10. The apparatus of claim 1, wherein a carbon nanotube loading of the first carbon nanotube infused material is between 5% and 40%.

11. The apparatus of claim 10, wherein the first carbon nanotube infused material is located on the structure so as to be prone to exposure to electromagnetic interference, and wherein the first functionality is electromagnetic interference shielding.

12. The apparatus of claim 10, wherein the first carbon nanotube infused material is located on the structure so as to be prone to exposure to lightning strikes, and wherein the first functionality is lightning strike protection.

13. The apparatus of claim 10, wherein the first carbon nanotube infused material is located on the structure so as to provide thermal conductivity, and wherein the first functionality is thermal conductivity.

14. The apparatus of claim 10, wherein the first carbon nanotube infused material is located on the structure proximate electric circuitry, and wherein the first functionality is transfer of electric signals.

15. The apparatus of claim 1, wherein a carbon nanotube loading of the first carbon nanotube infused material is a gradient.

16. The apparatus of claim 15, wherein the first carbon nanotube infused material is located on the structure so as to provide radar absorption, and wherein the first functionality is absorption of radar waves.

17. A method comprising:

providing a structure supported by land comprising a composite structure that comprises at least:

a first carbon nanotube infused material imparting a first functionality to the structure, the first functionality selected from electrical resistance, damage sensing, tensile strength, compressive strength, shear strength, flexural strength, crack resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption;

a second carbon nanotube infused material imparting a second functionality to the structure, the second functionality selected from electrical resistance, damage sensing, tensile strength, compressive strength, shear strength, flexural strength, crack resistance, electromagnetic interference shielding, lightning strike protection, thermal conductivity, transfer of electric signals, and radar absorption.

18. The method of claim 17, wherein the first carbon nanotube infused material and the second carbon nanotube infused material overlap.

19. The method of claim 17, further comprising:

determining the first functionality; and

selecting a first carbon nanotube loading of the first carbon nanotube infused material based on the first functionality.

20. The method of claim 19, further comprising:
determining the second functionality; and
selecting a second carbon nanotube loading of the second carbon nanotube infused material based on the second functionality.

1/9

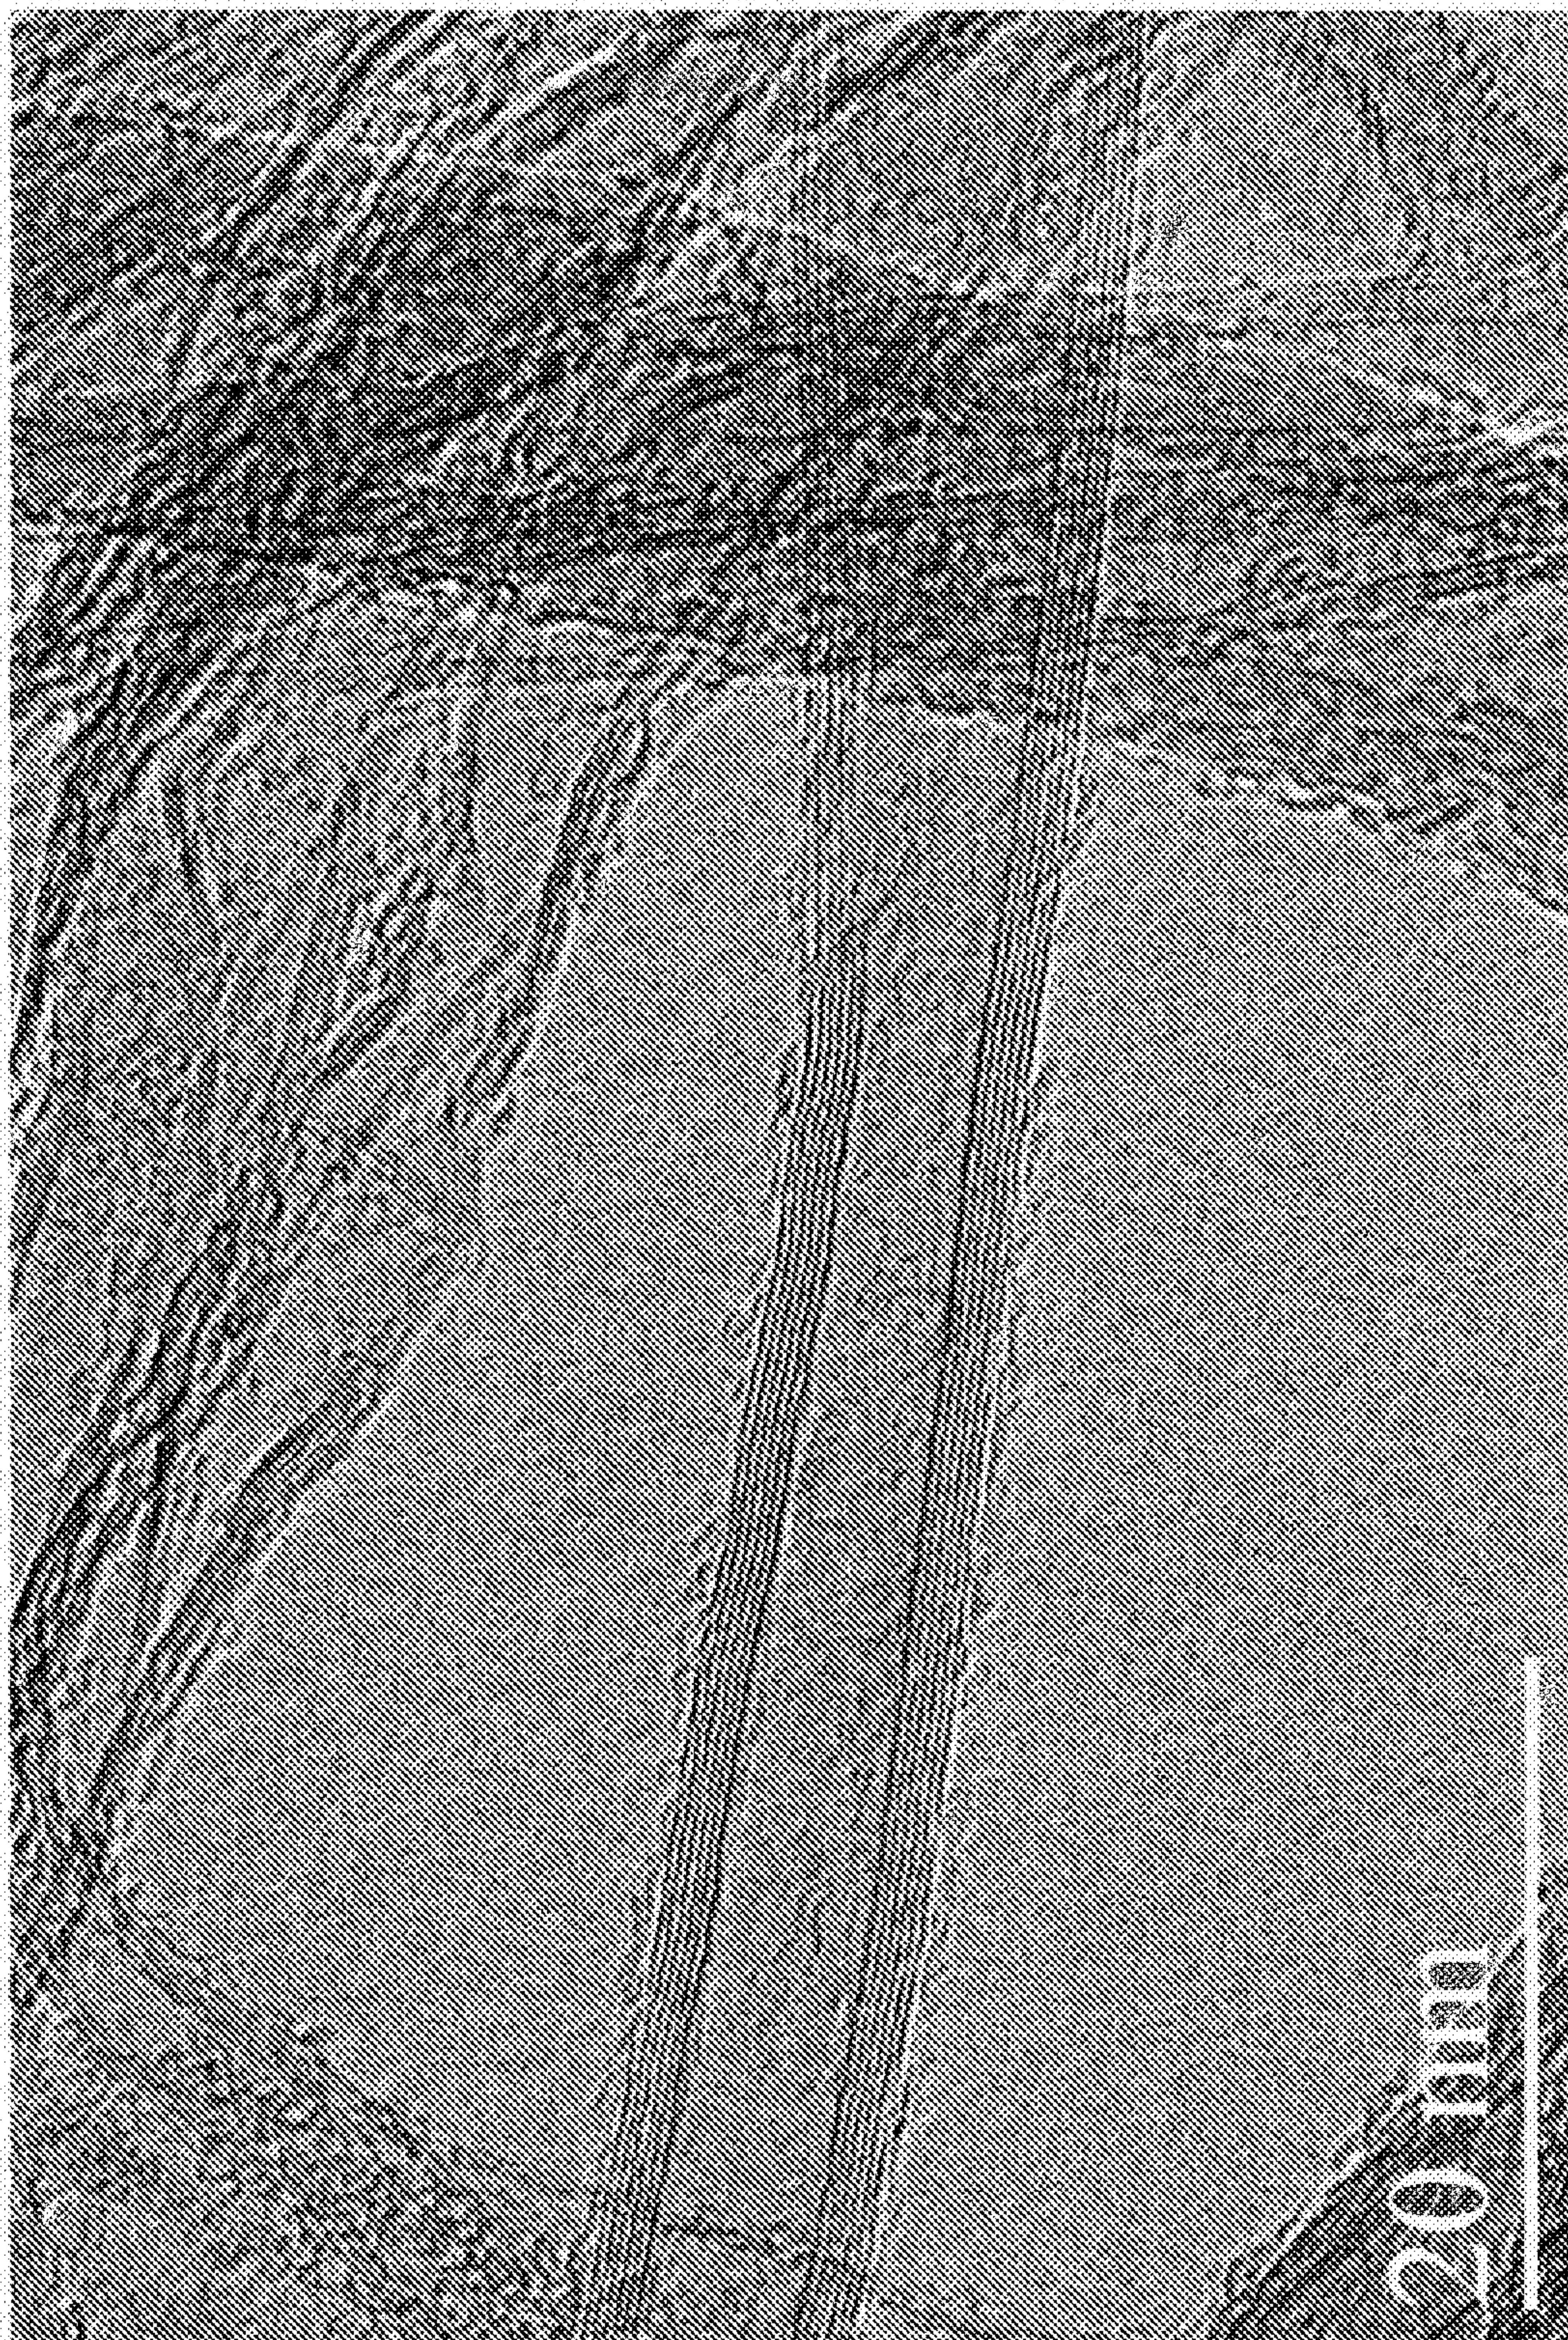


FIG. 1

2/9

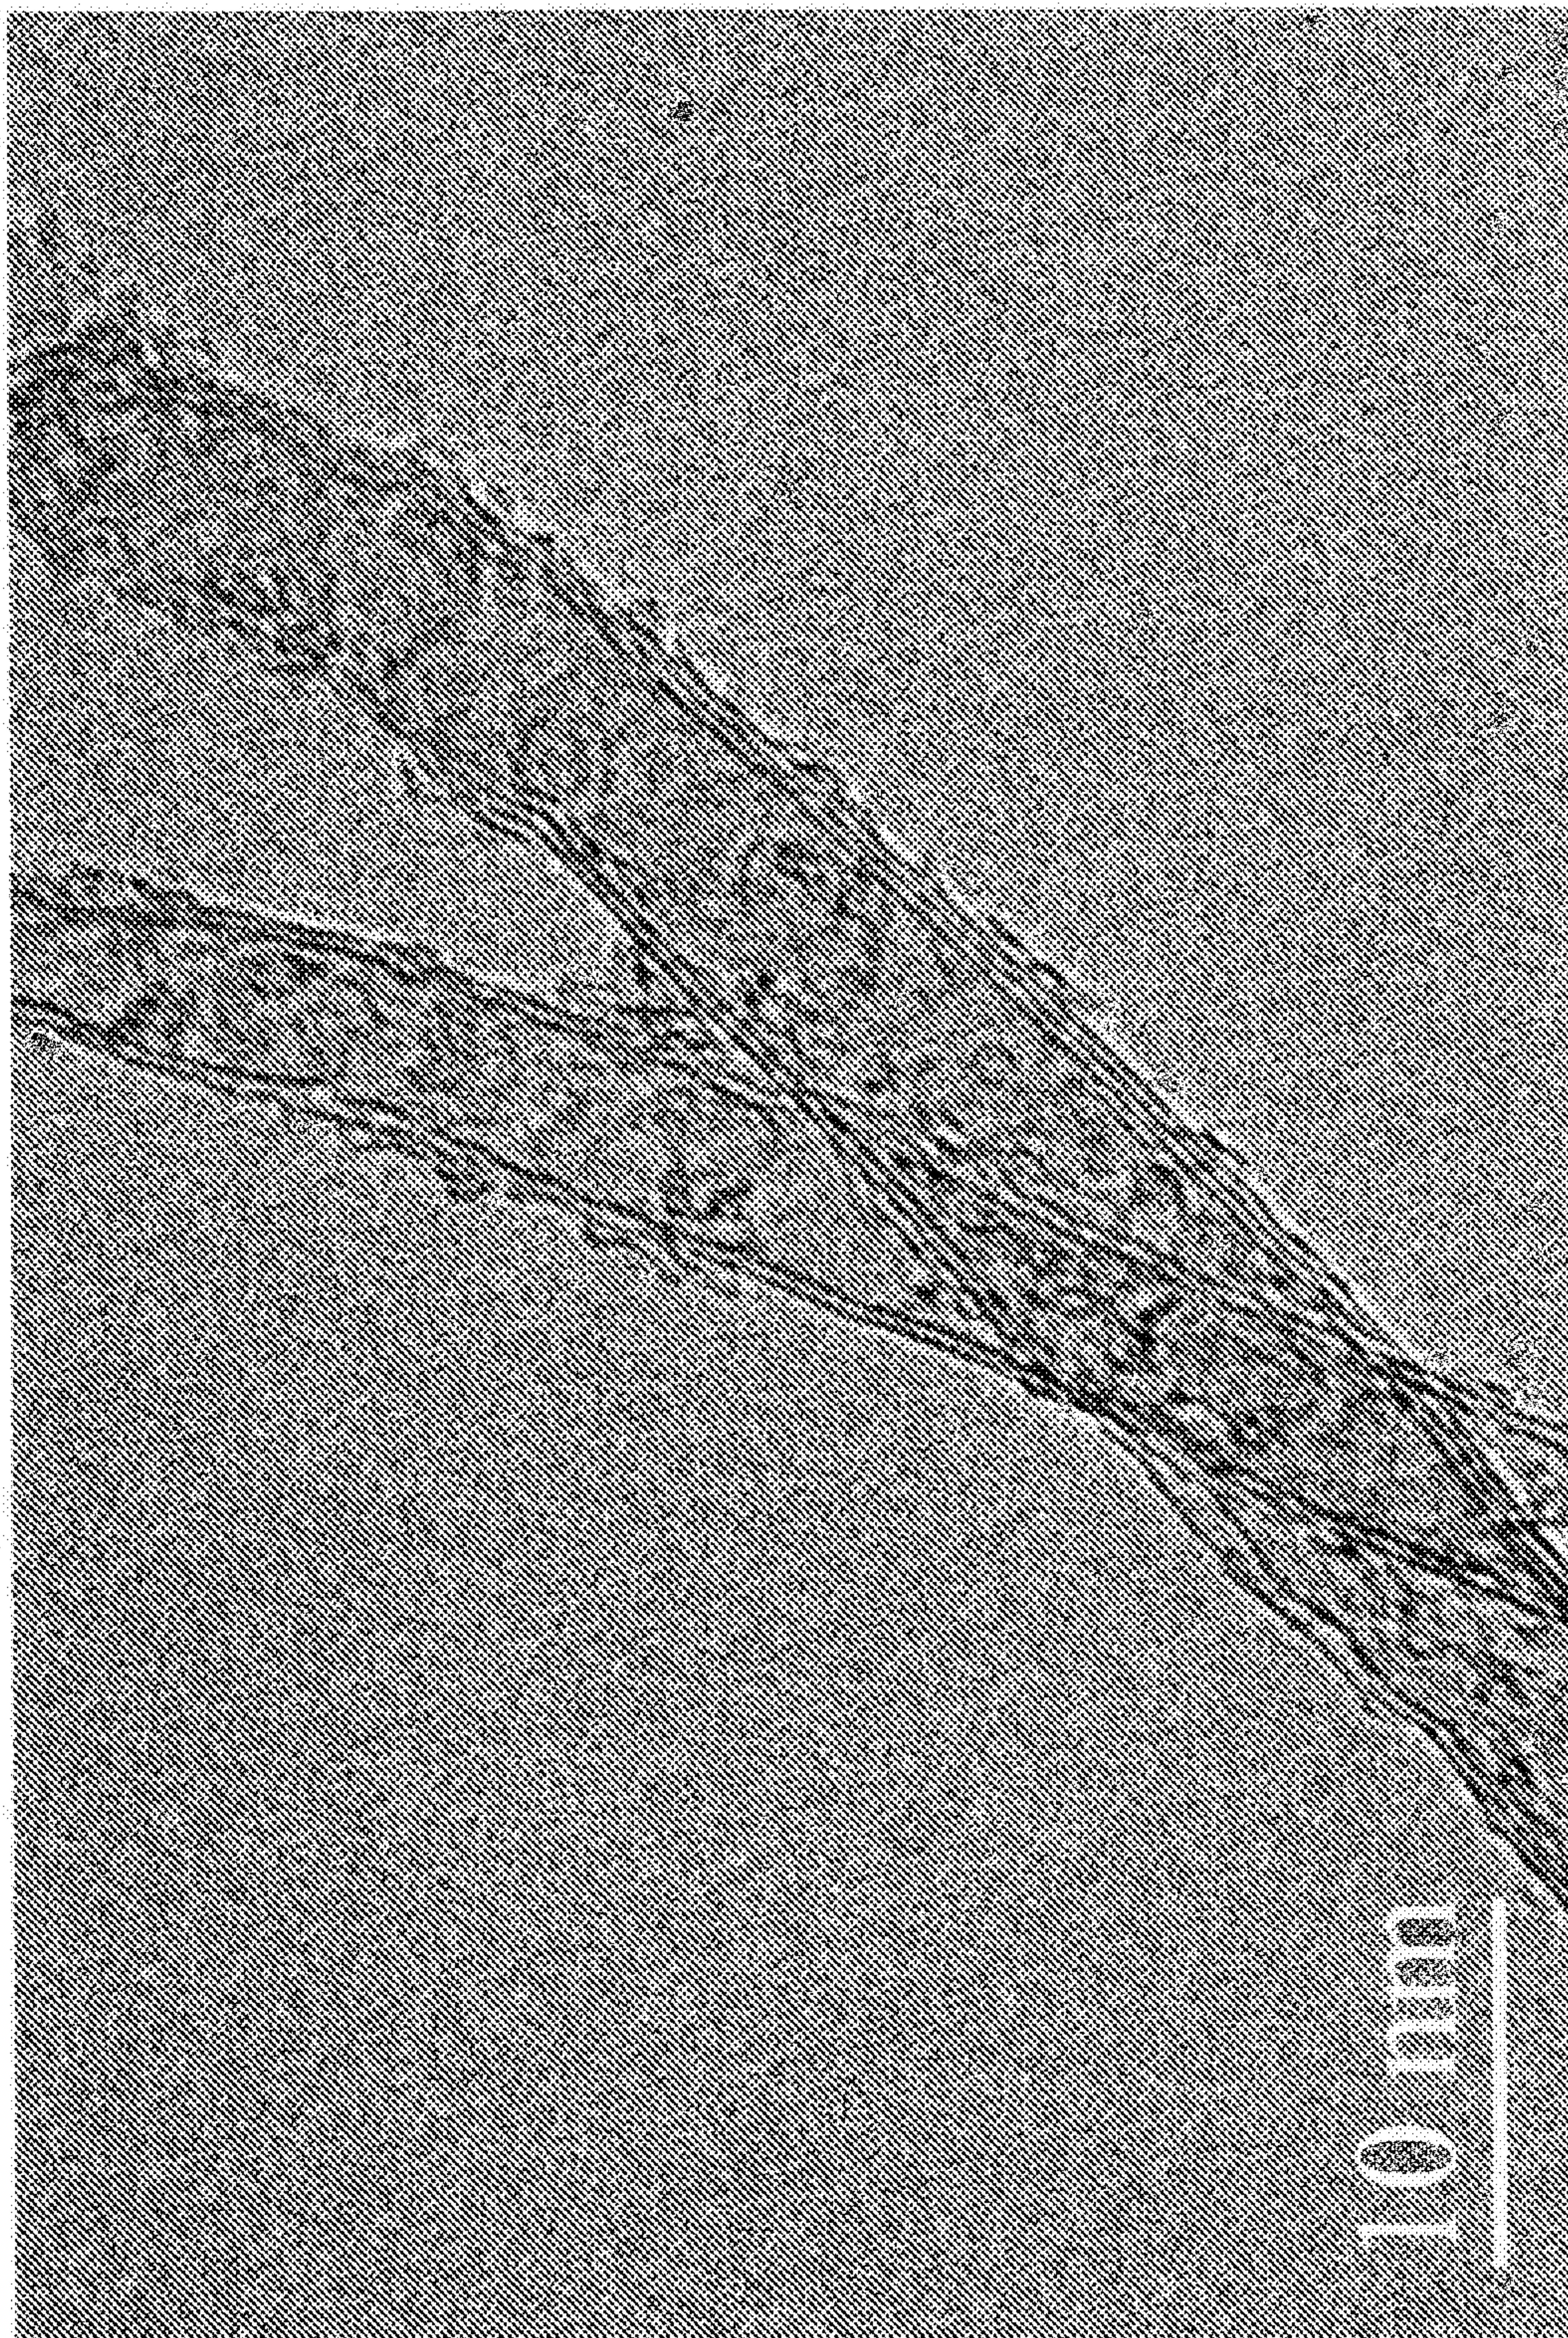



FIG. 2

3/9



FIG. 3

4/9

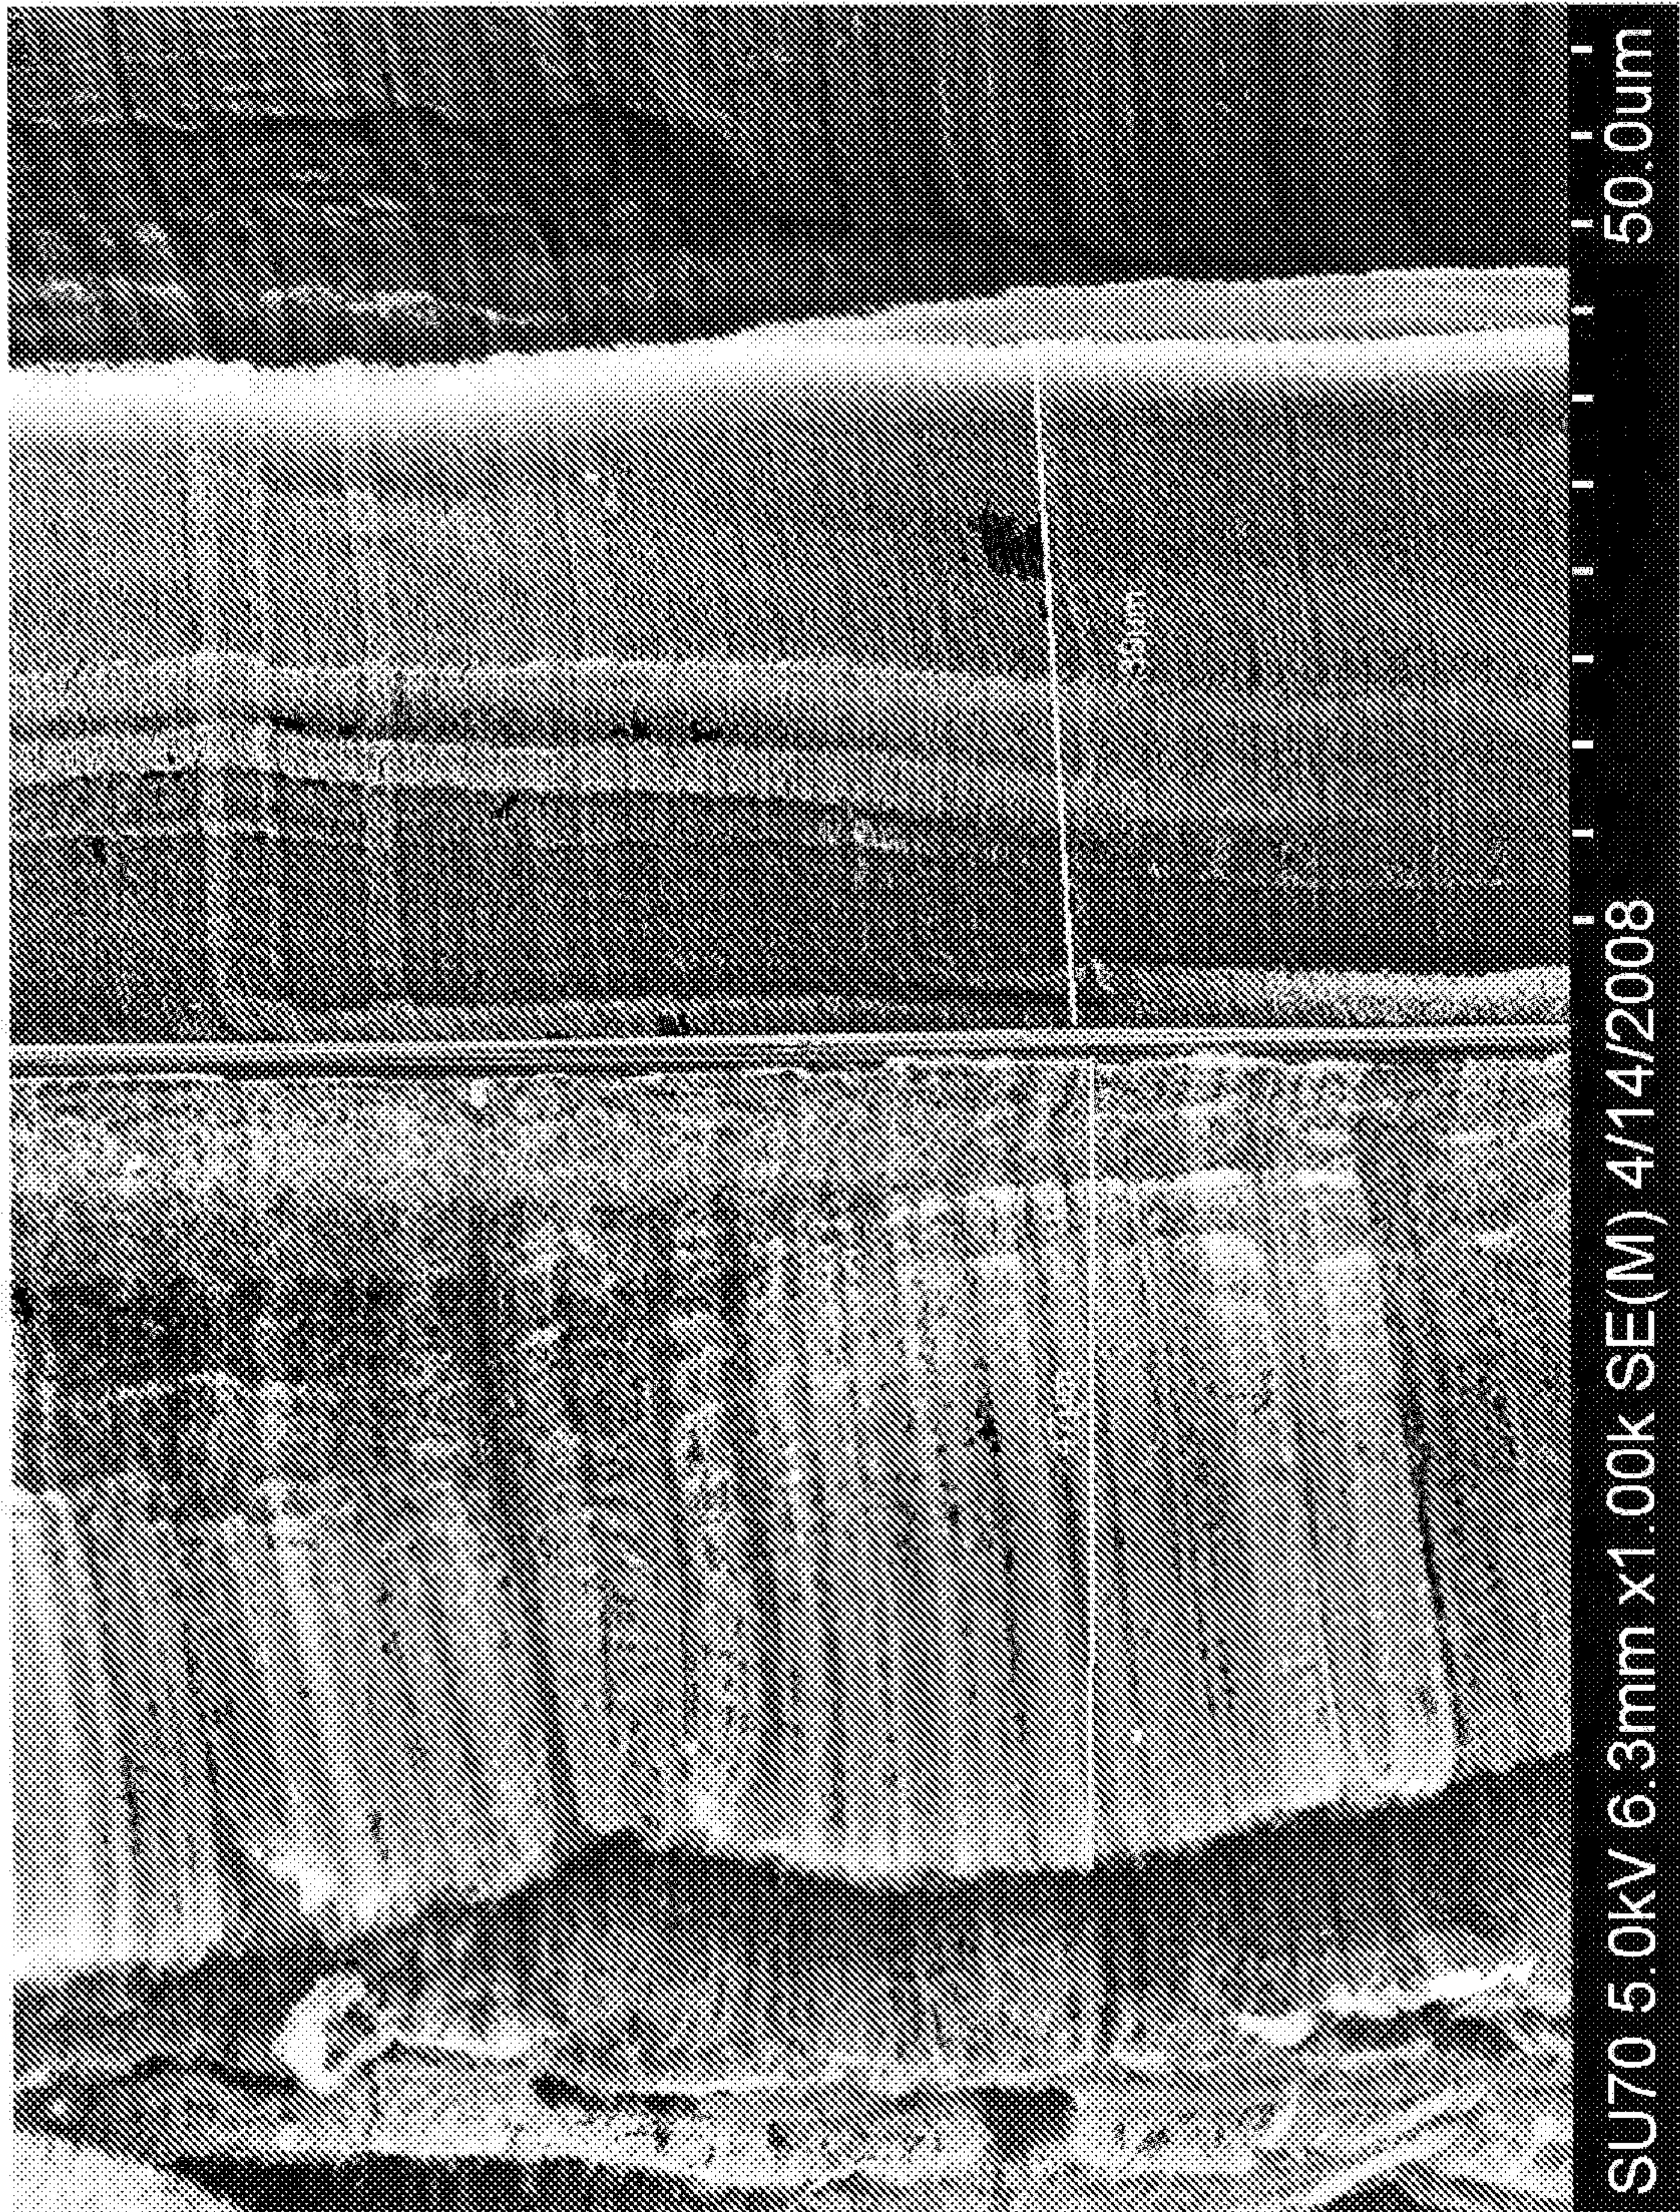**FIG. 4**

5/9

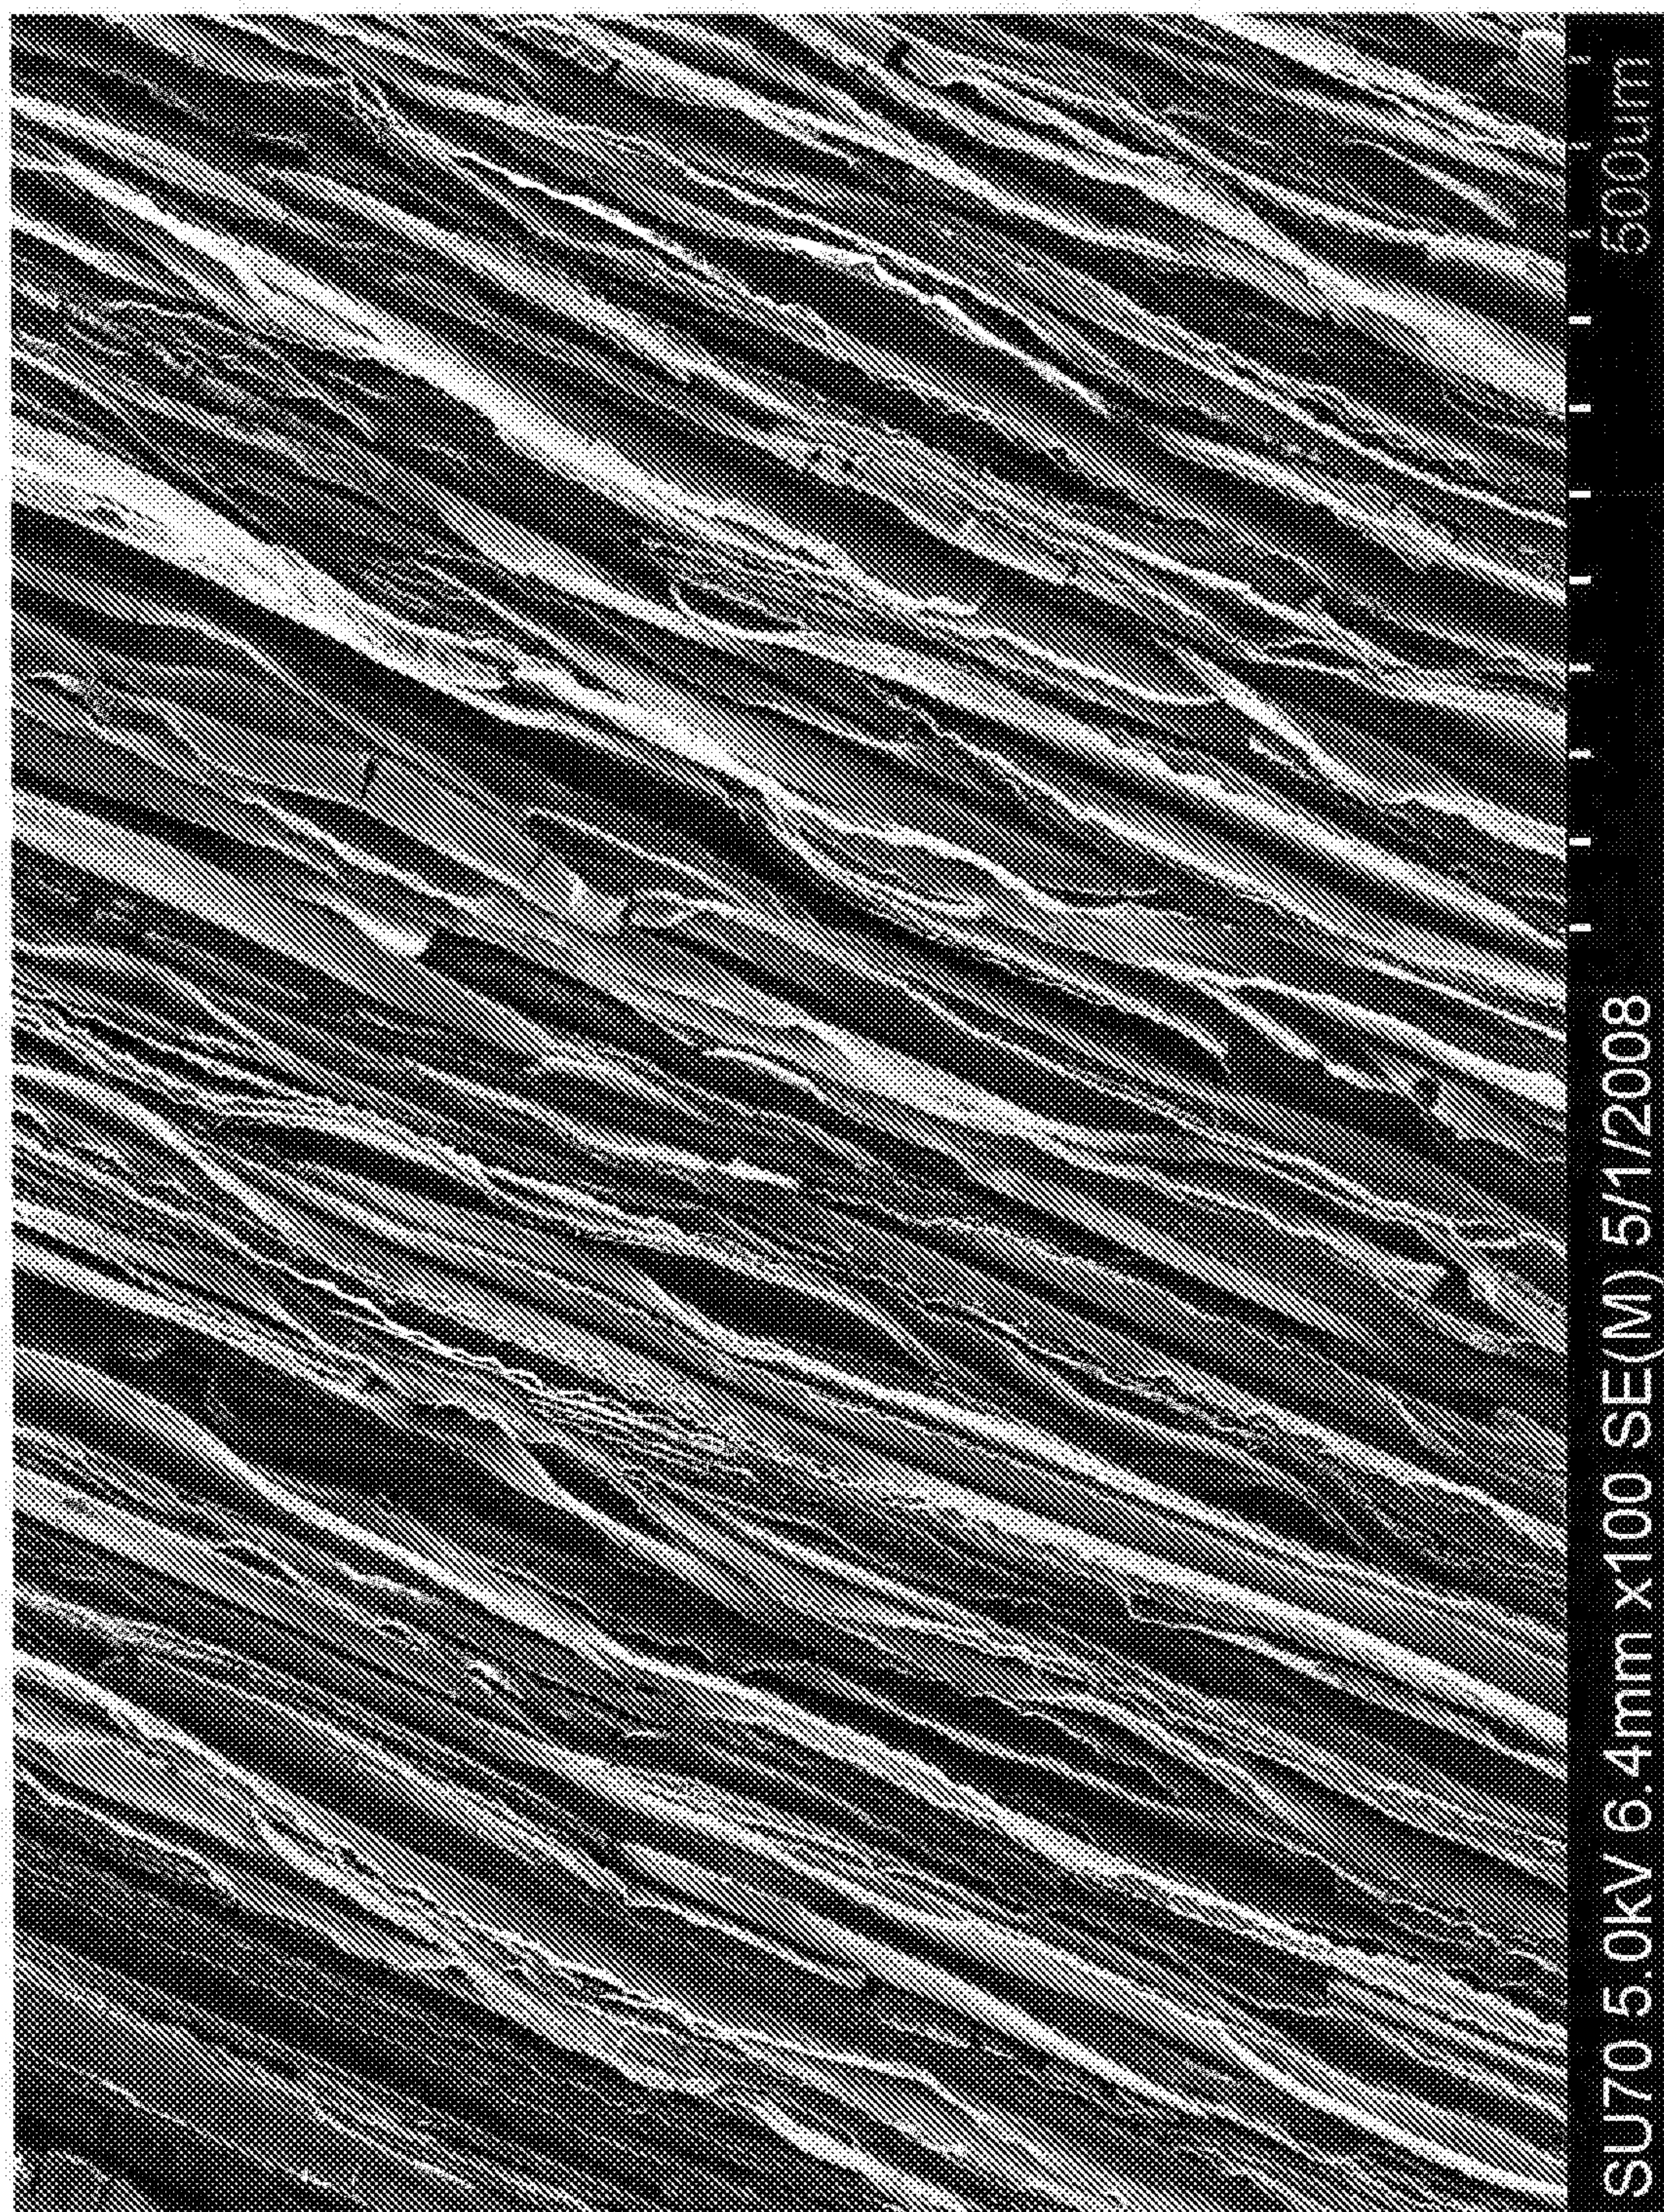
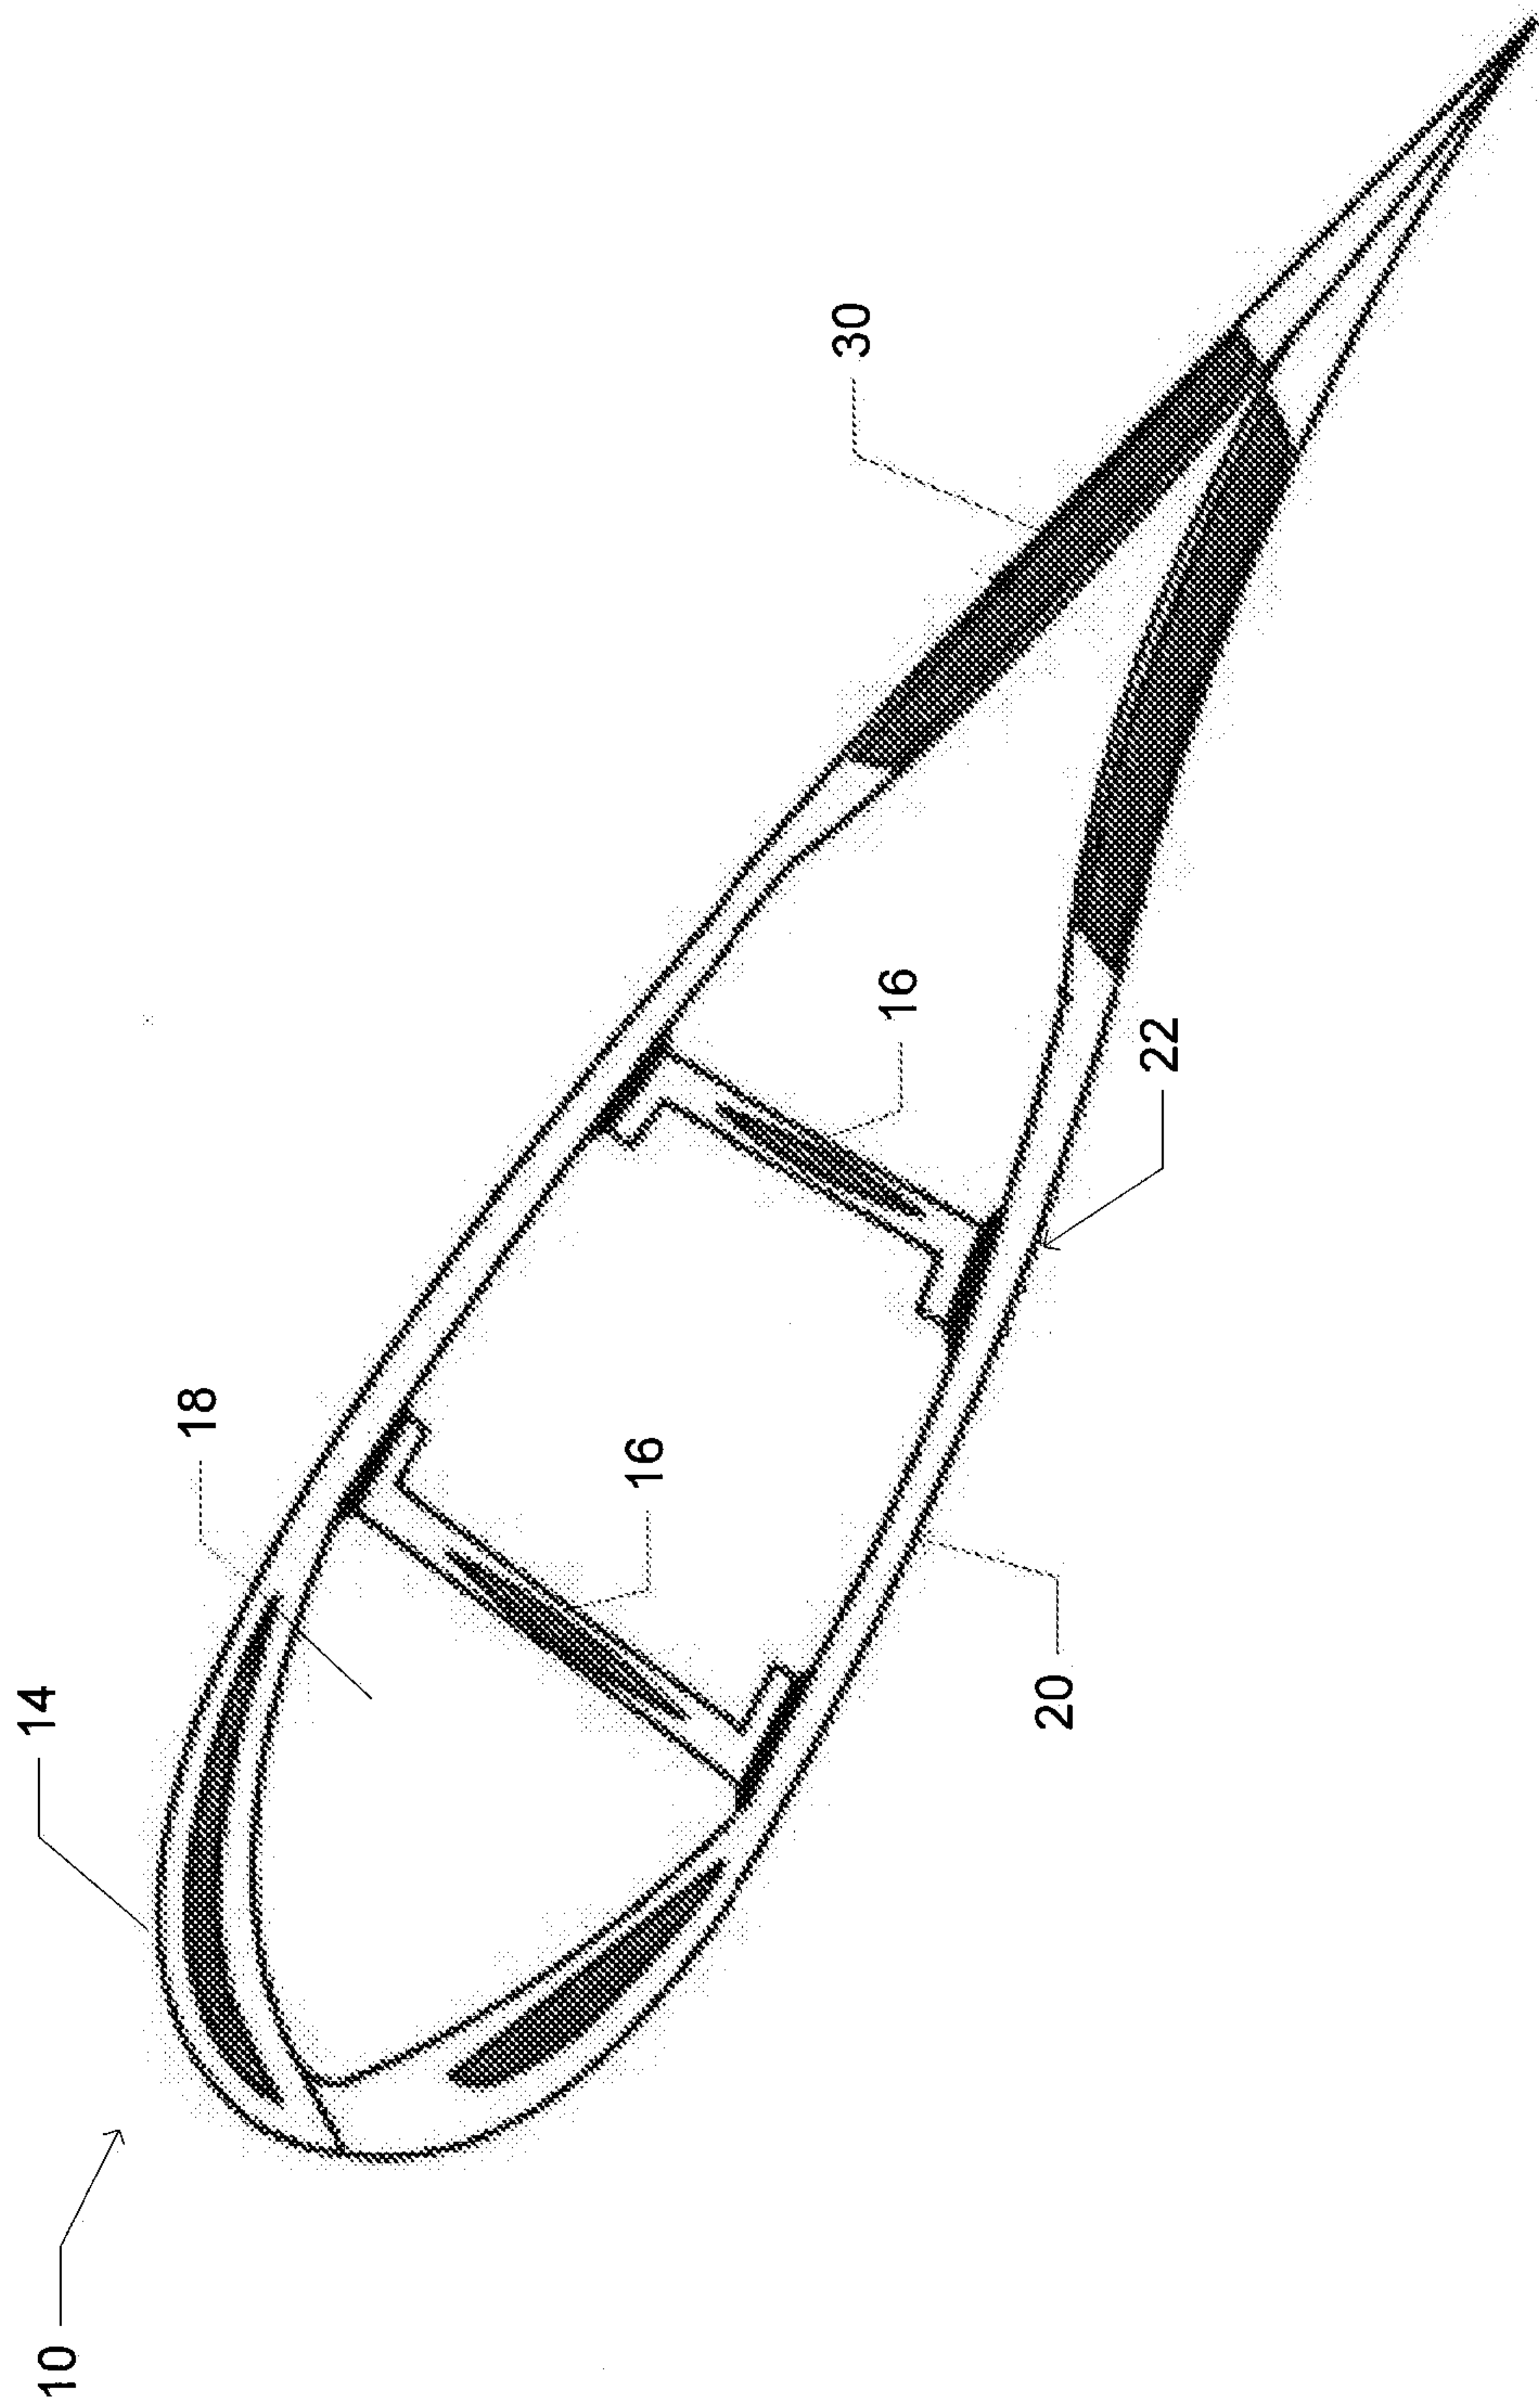


FIG. 5

6/9

**FIG. 6**

7/9

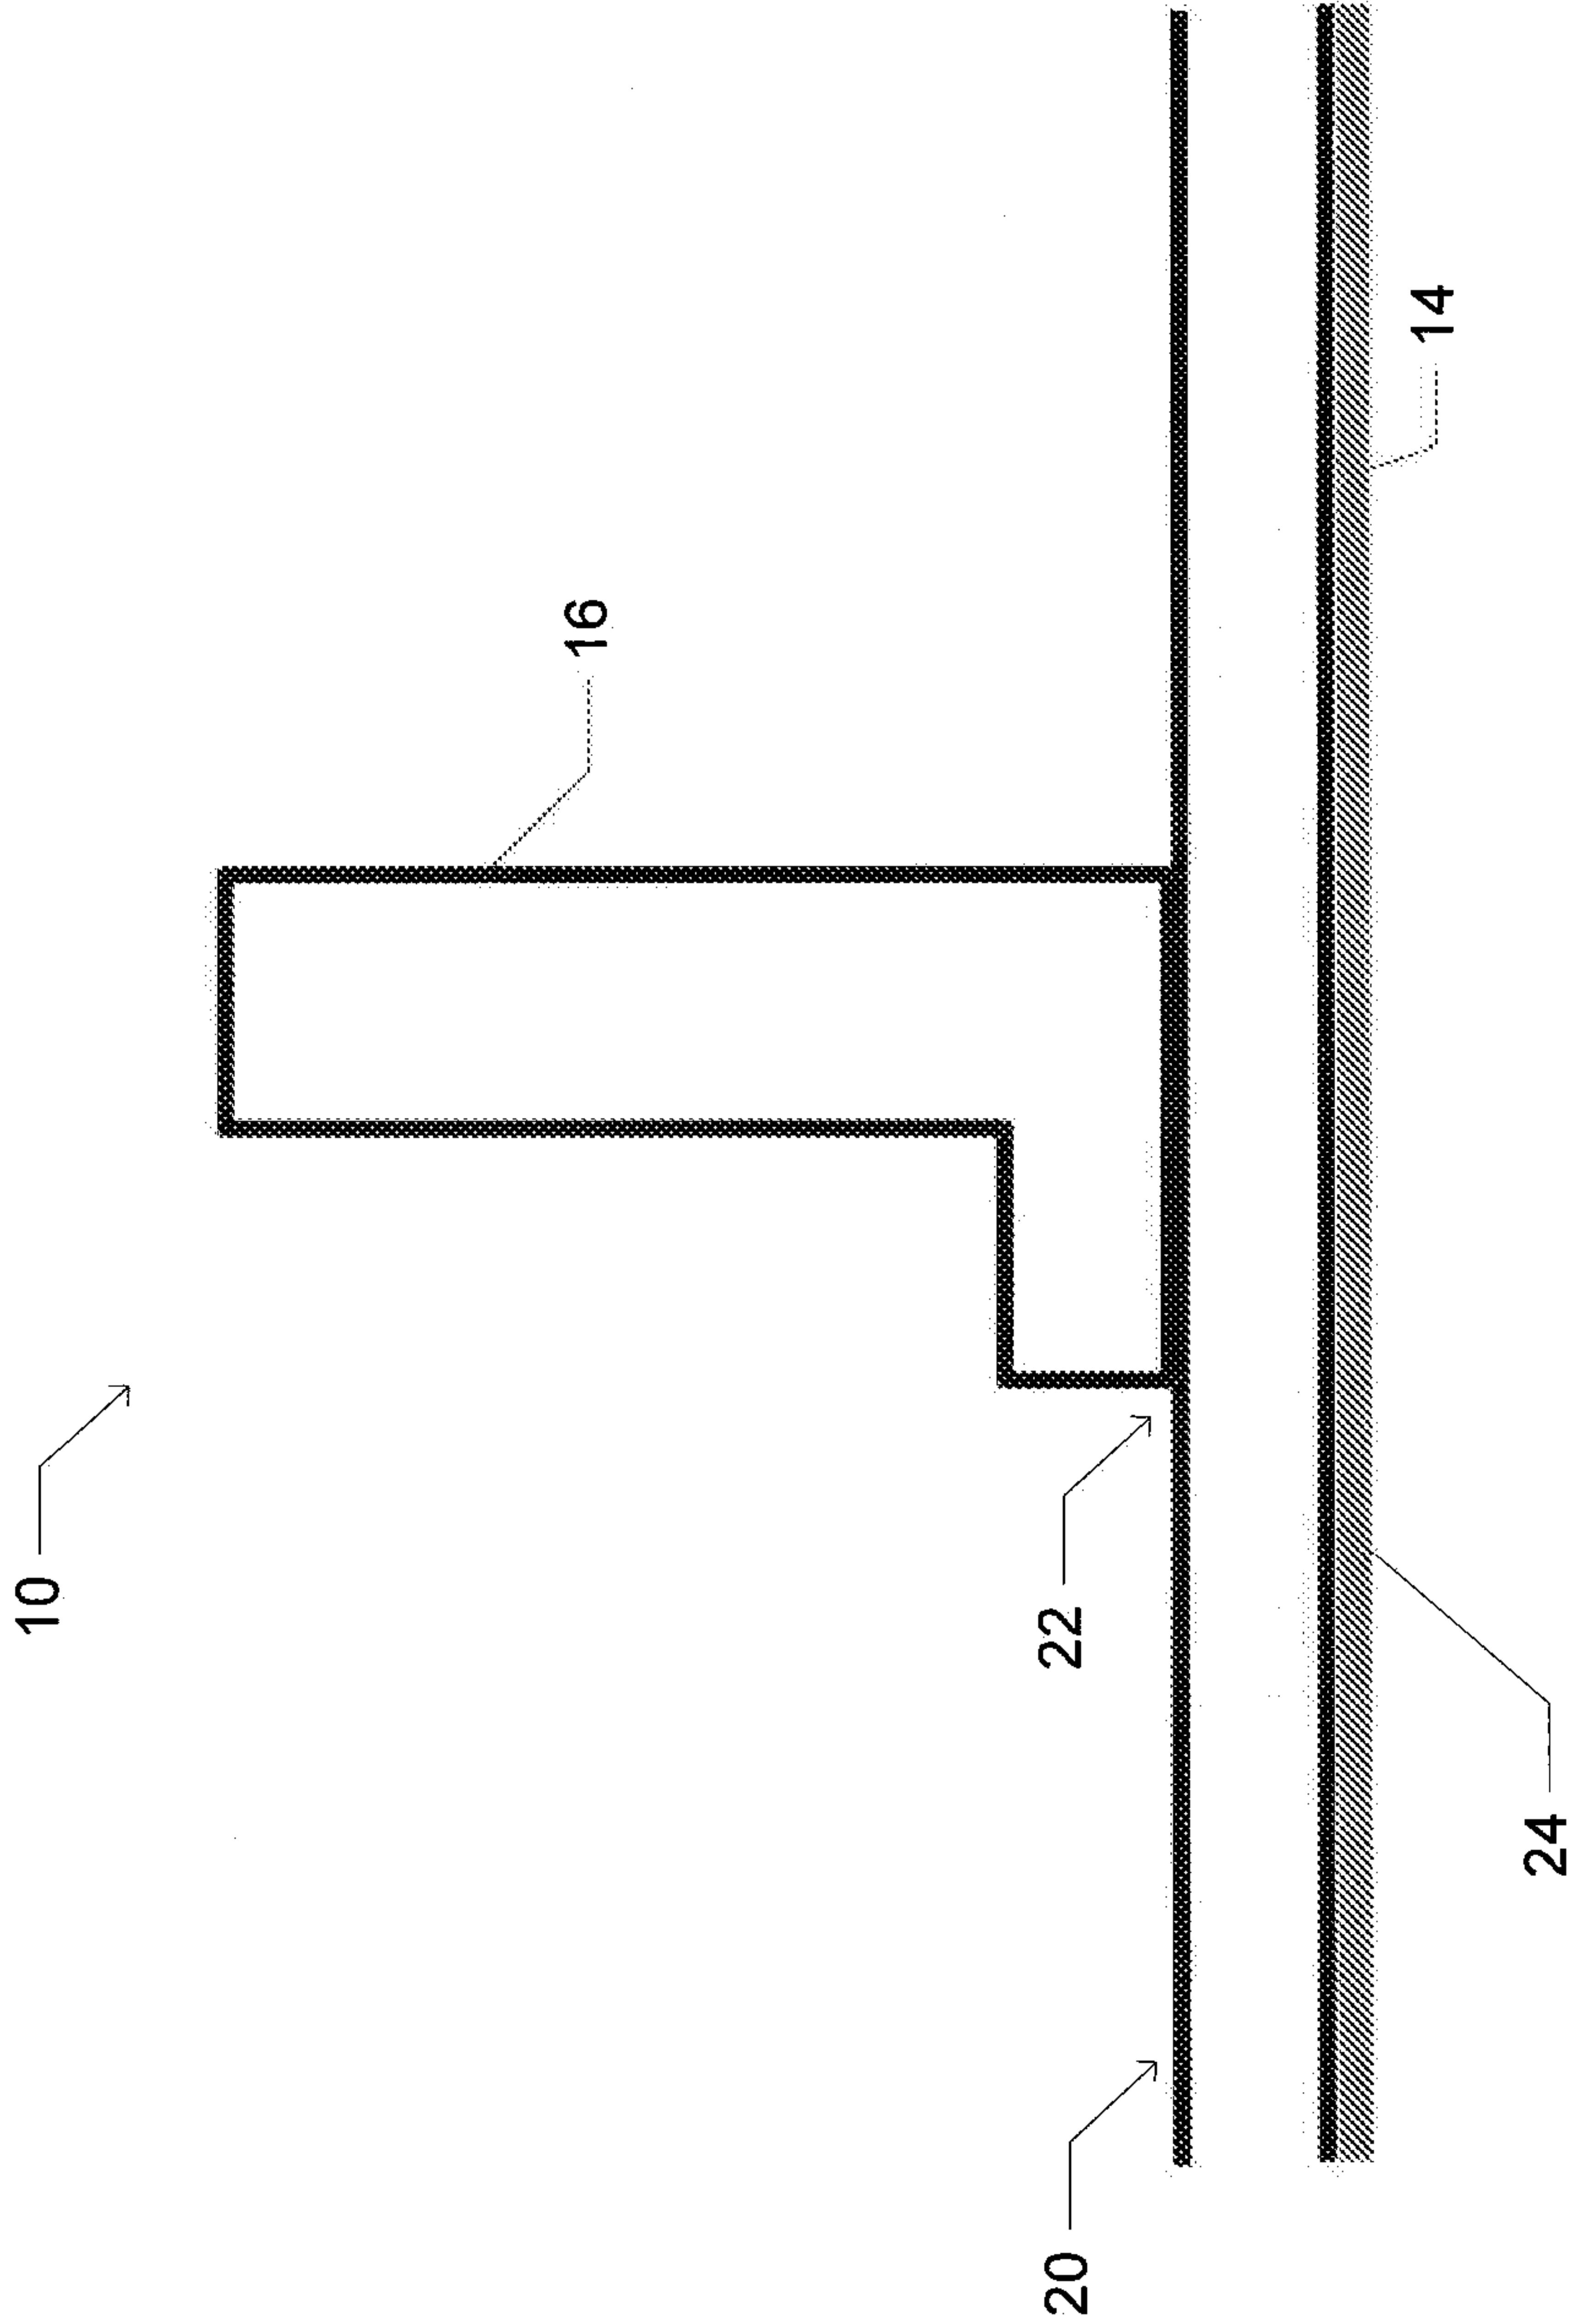
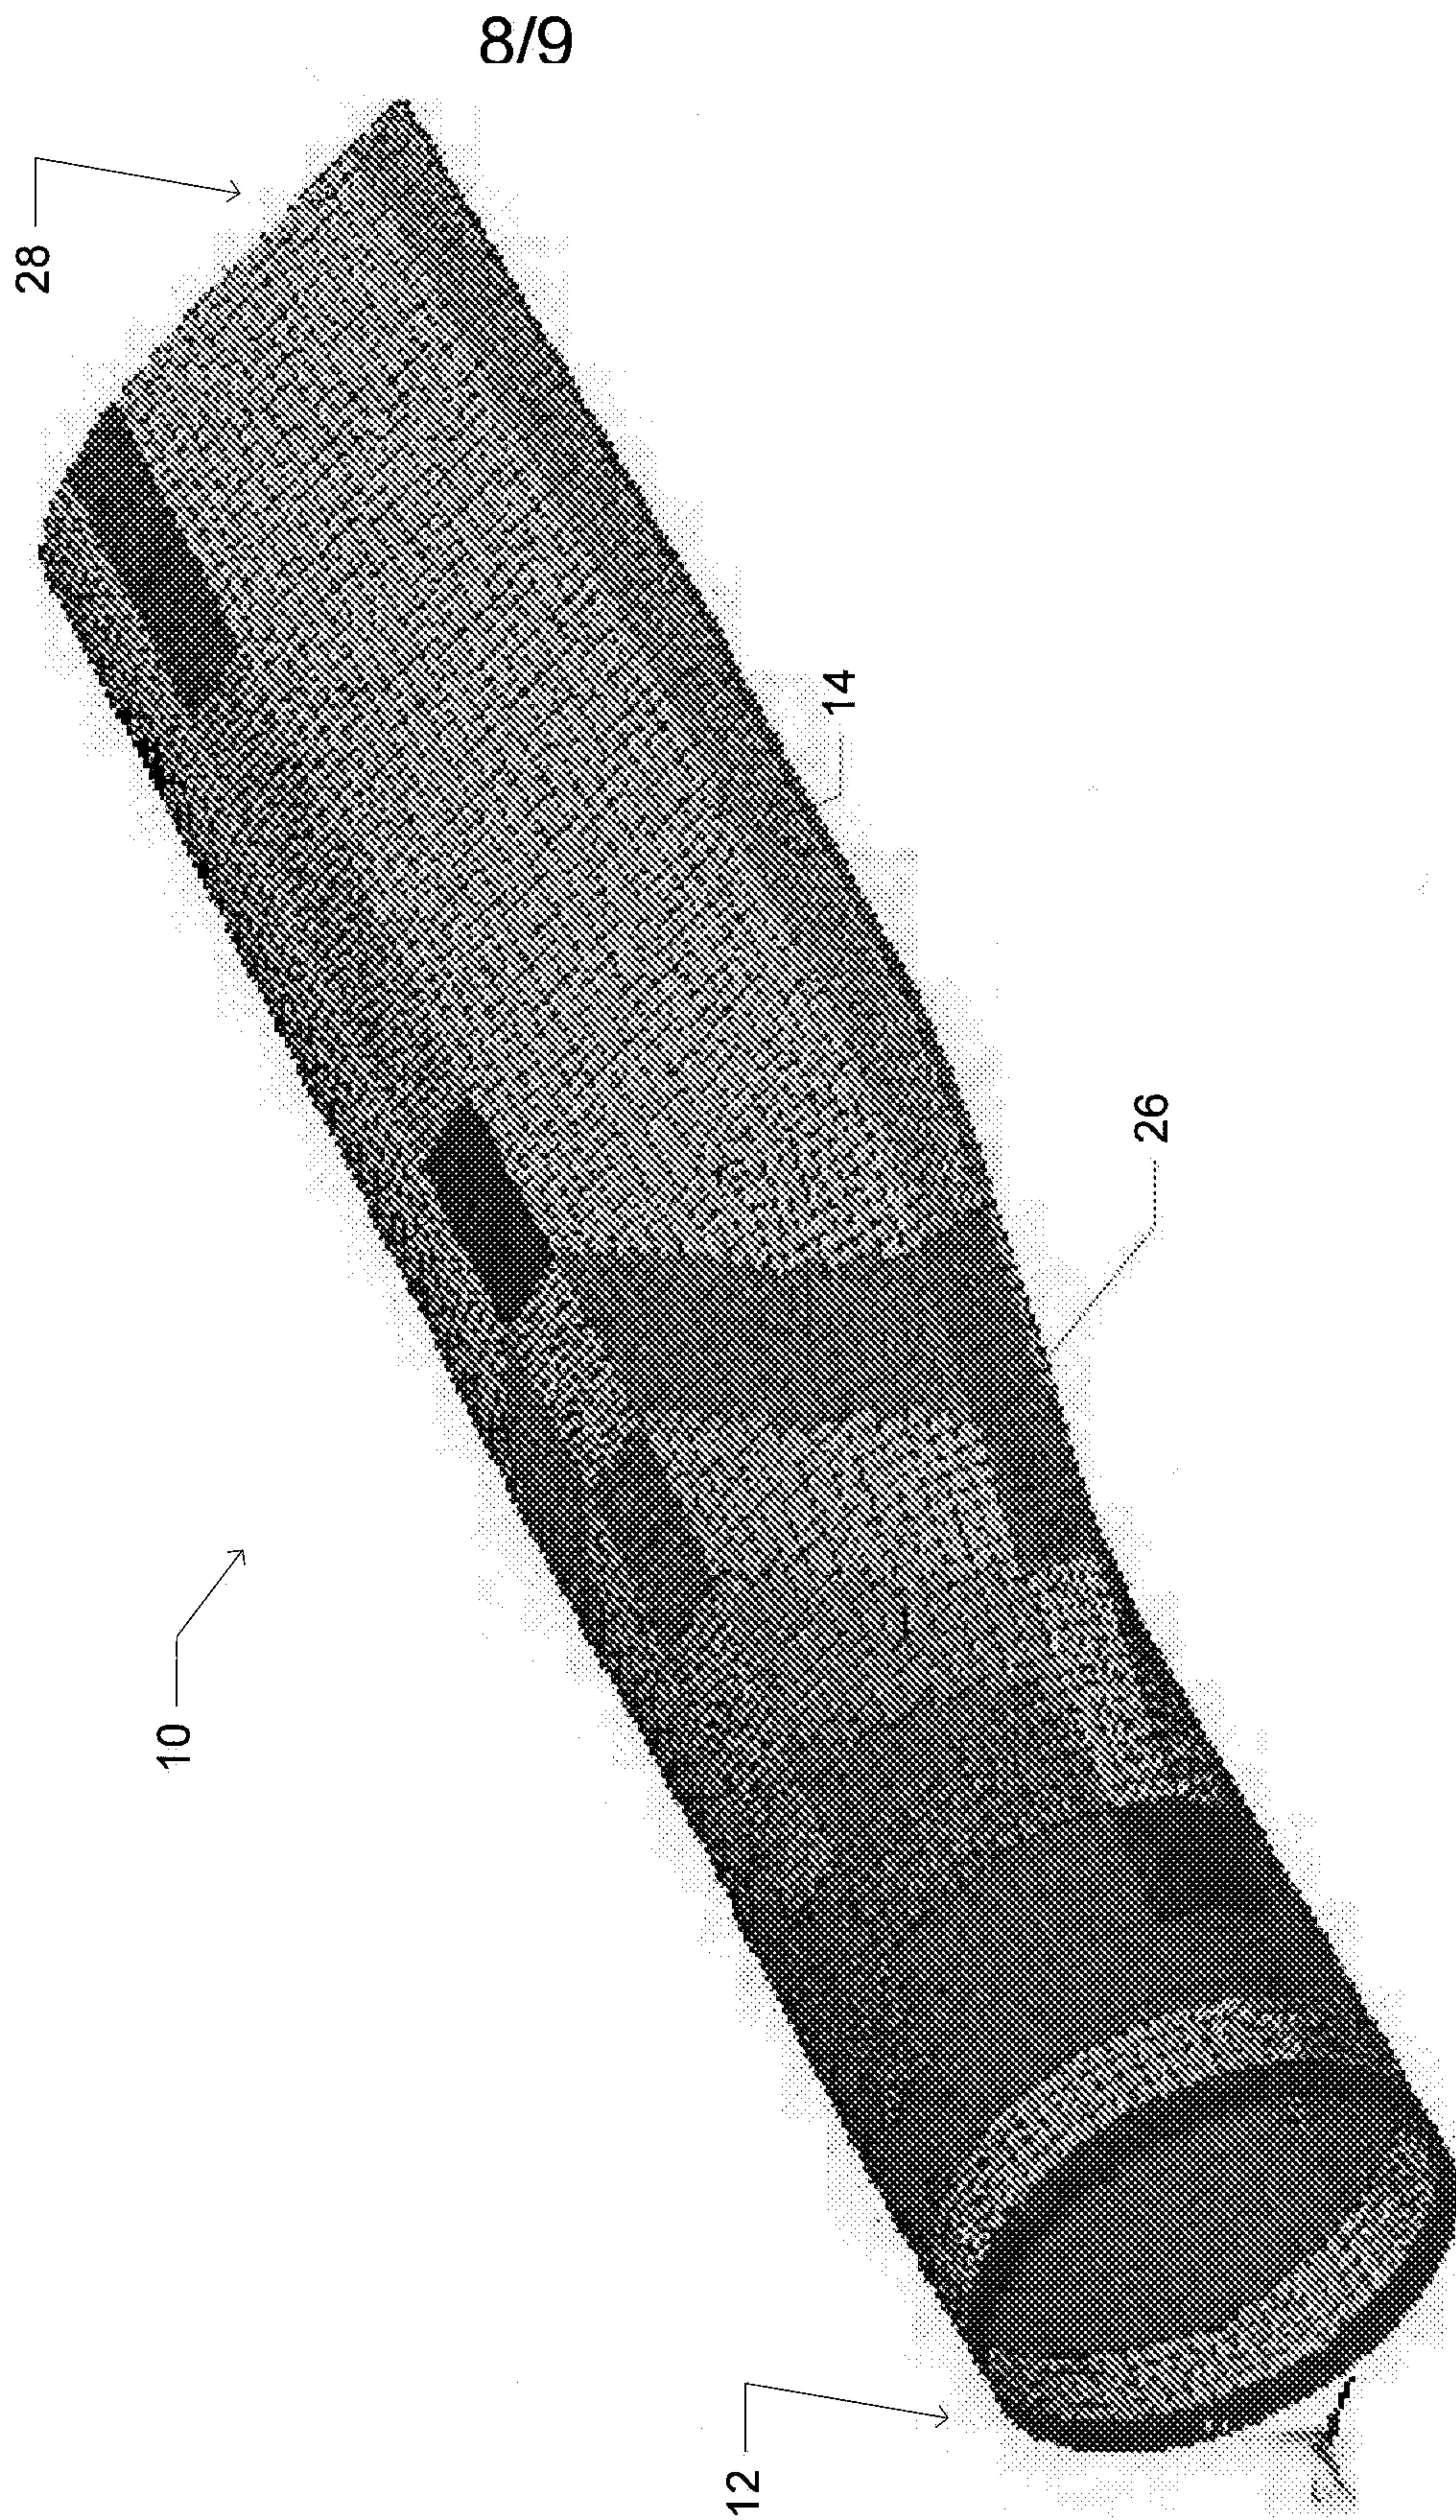
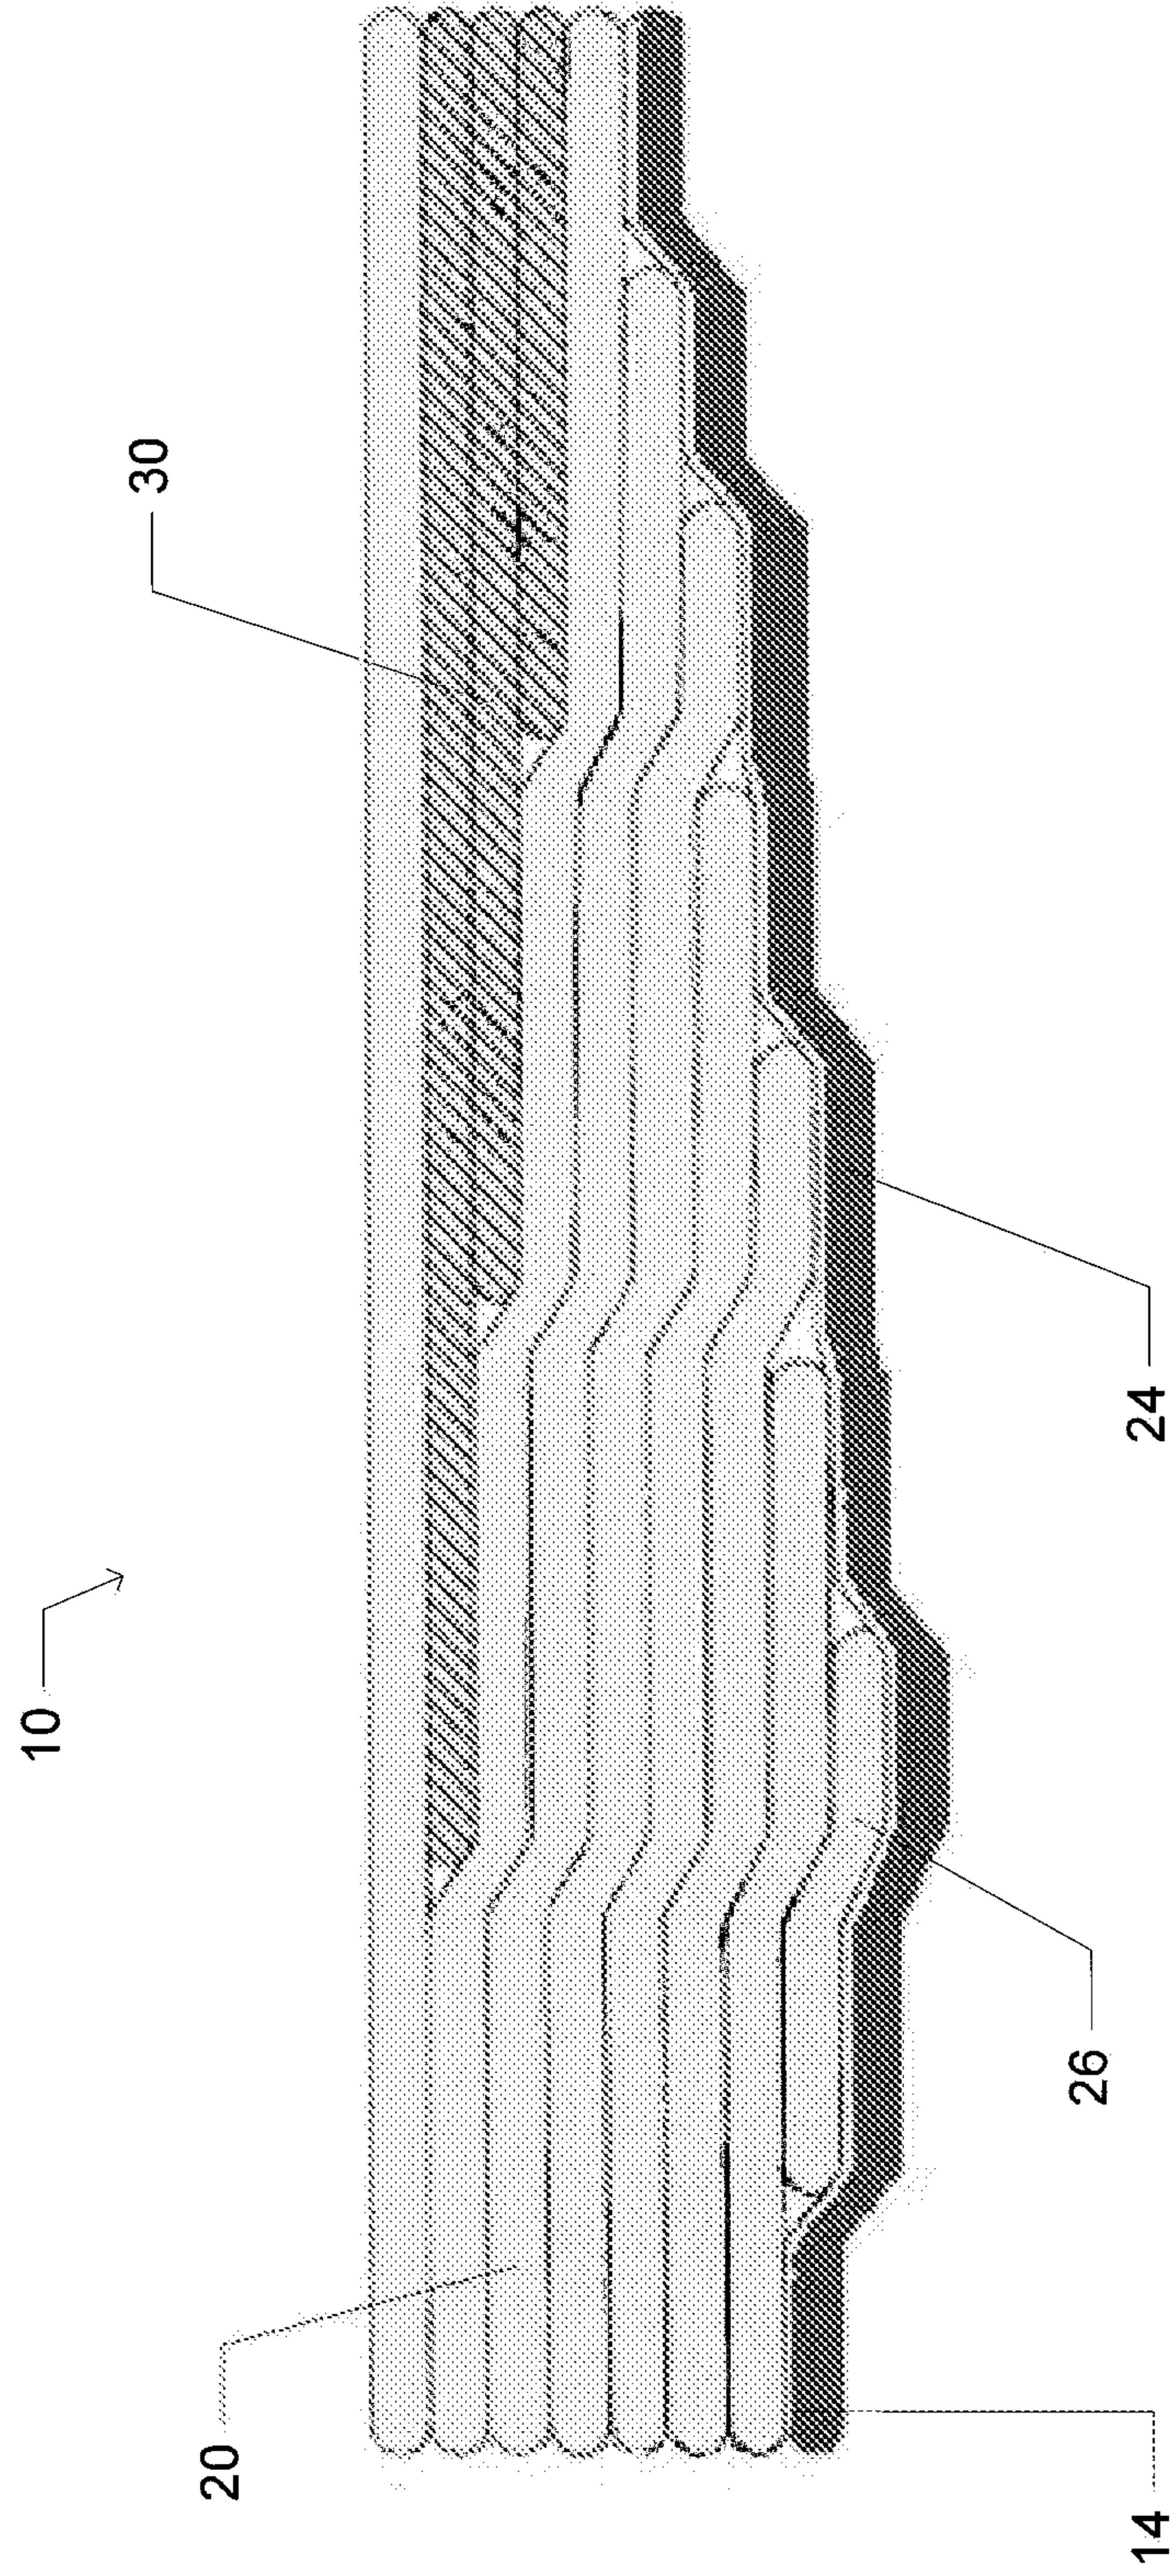


FIG. 7

**FIG. 8**

9/9

**FIG. 9**

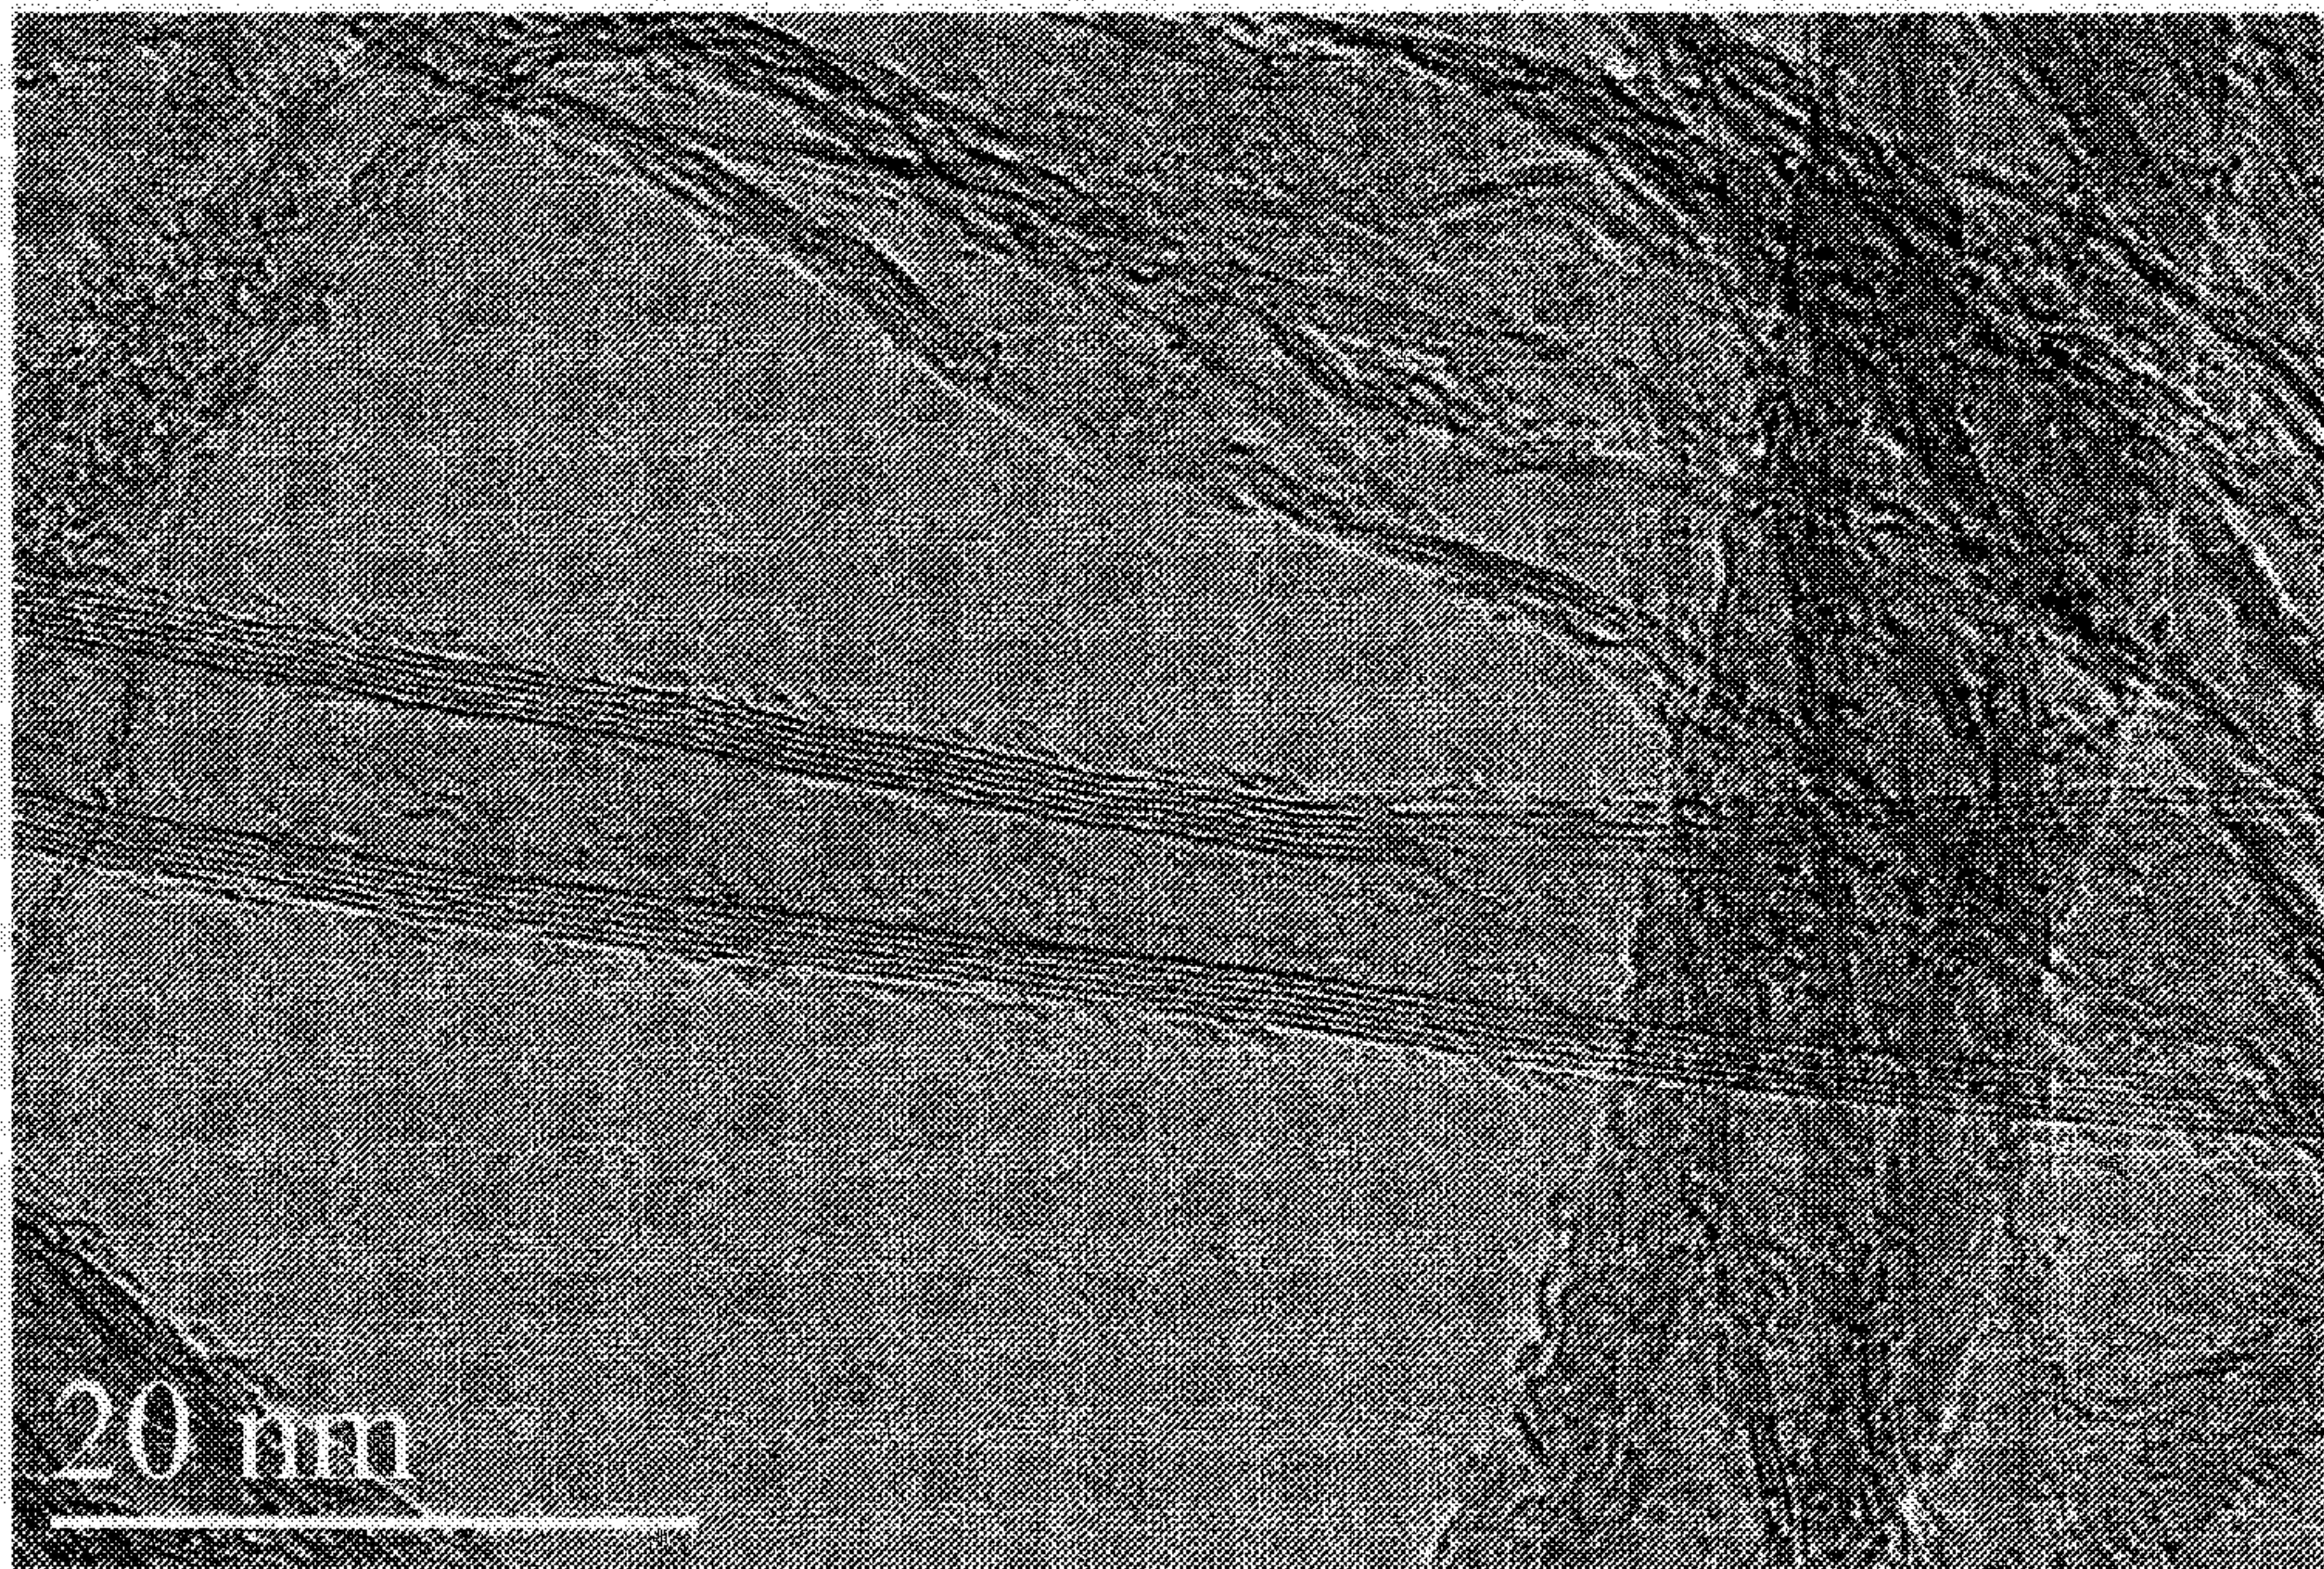


FIG. 1