



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.05.2019 Bulletin 2019/18

(51) Int Cl.:
B01F 5/06 (2006.01) B01F 13/00 (2006.01)

(21) Application number: **17198862.9**

(22) Date of filing: **27.10.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **Hack, Mathias**
8404 Winterthur (CH)
• **Schoeck, Joachim**
8404 Winterthur (CH)

(74) Representative: **Manitz Finsterwald**
Patent- und Rechtsanwaltspartnerschaft mbB
Martin-Greif-Strasse 1
80336 München (DE)


(71) Applicant: **Sulzer Mixpac AG**
9469 Haag (Rheintal) (CH)

(54) **STATIC MIXER, DISPENSING ASSEMBLY AND METHOD OF DISPENSING MULTICOMPONENT MATERIAL**

(57) The present invention relates to a static mixer comprising a plurality of mixing segments for mixing a multi-component material. The static mixer (2) comprises:

a plurality of mixing segments (12, 12') arranged in series one after another along a longitudinal axis (A) of the static mixer (2); wherein at least some of the plurality of mixing segments (12, 12') comprise at least three elongate inlets (13) arranged at least substantially in parallel to one another and at least three elongate outlets (14) arranged at least substantially in parallel to one another, with a respective elongate inlet (13) being connected to a respective elongate outlet (14) via a respective passage (15), wherein the elongate outlets (14) are arranged such that an elongate extent thereof is rotated by an angle of rotation of at least 45°, preferably of at least substantially 90°, about the longitudinal axis (A) with respect to an elongate extent of the elongate inlets (13); wherein the elongate outlets (14) of one mixing segment (12, 12') are arranged next to the elongate inlets (13) of the next mixing segment (12, 12') of the series; wherein the respective passages (15) are configured to form flow paths that direct a part flow of the multi-component material (M, M') from the elongate inlet (13) to the elongate outlet (14) of the mixing segment (12, 12'); and wherein at least some of the passages (15) of the mixing segment (12, 12') comprise at least one deflector plate (26, 26') arranged in the flow path, preferably in a central part of said passage (15), in a region of the elongate inlet (13) and/or in a region of the elongate outlet (14).

Fig.2

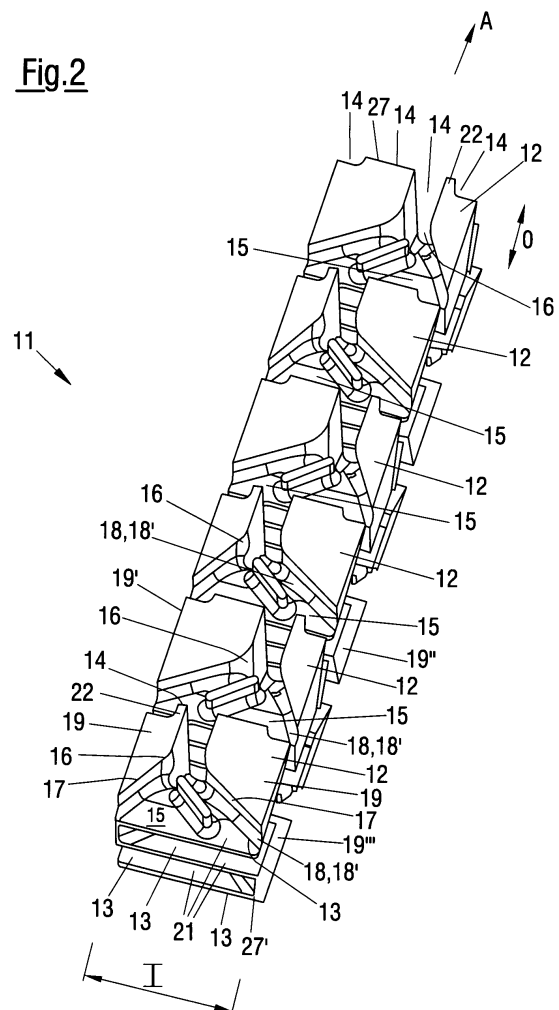

Description

[0001] The present invention relates to a static mixer comprising a plurality of mixing segments for mixing a multi-component material. The invention further relates to a dispensing assembly comprising a static mixer and a multi-component cartridge filled with respective materials, as well as to a method of dispensing multi-component material from a dispensing assembly.

[0002] Static mixers respectively mixing tips, as they are also known as, are used to mix multi-component material dispensed from a multi-component cartridge. Such static mixers are used in a plethora of fields of application ranging from industrial applications, such as the use of adhesives to bond structural components one to another, or as protective coatings for buildings or vehicles, to medical and dental applications, for example, to make dental molds.

[0003] The multi-component material is, for example, a two-component adhesive comprising a filler material and a hardener. In order to obtain the best possible mixing result, e.g. an adhesive having the desired bond strength, the multi-component material has to be thoroughly mixed.

[0004] For this purpose the static mixers comprise several mixing segments arranged one after the other that repeatedly divide and re-combine part flows of the multi-component material to thoroughly mix the multi-component material.

[0005] On mixing the multi-component material, the material remaining in the static mixer after the dispensing process is generally discarded as it remains in the static mixer. Depending on the field of application the multi-component material can be comparatively expensive and may only be used for one application at a time. This is particularly true, for example in the dental field, where only part of the multi-component material stored in the cartridge is used for one application/patient at a time with the remaining multi-component material being stored in the multi-component cartridge for future applications. Thus, the excessive use of large volumes of multi-component material remaining in a static mixer after a single use leads to unnecessary cost.

[0006] For this reason it is an object of the present invention to provide a static mixer that guides respective part flows of the multi-component material efficiently through individual mixing segments for a thorough mixing of the multi-component material, that enables a reduction in the amount of mixing material left behind in a static mixer and that can be produced in an as facile manner as possible.

[0007] This object is satisfied by a static mixer having the features of claim 1.

[0008] Such a static mixer for mixing a multi-component material comprises:

a plurality of mixing segments arranged in series one after another along a longitudinal axis of the static mixer;

wherein at least some of the plurality of mixing segments comprise at least three elongate inlets arranged at least substantially in parallel to one another and at least three elongate outlets arranged at least substantially in parallel to one another, with a respective elongate inlet being connected to a respective elongate outlet via a respective passage, wherein the elongate outlets are arranged such that an elongate extent thereof is rotated by an angle of rotation of at least 45°, preferably of at least substantially 90°, about the longitudinal axis with respect to an elongate extent of the elongate inlets;

wherein the elongate outlets of one mixing segment are arranged next to the elongate inlets of the next mixing segment of the series;

wherein the respective passages are configured to form flow paths that direct a part flow of the multi-component material from the elongate inlet to the elongate outlet of the mixing segment; and

wherein at least some of the passages of the mixing segment comprise at least one deflector plate arranged in the flow path, preferably in a central part of said passage, in a region of the elongate inlet and/or in a region of the elongate outlet.

[0009] The use of at least three elongate inlets and elongate outlets provides a plurality of part flow paths along which the multi-component material can flow and be mixed. Increasing the number of flow paths within a mixing segment leads to an improvement of the mixing results achieved, since the respective part flows of the multi-component material are divided and re-combined more frequently into different part flow paths.

[0010] Thus, the static mixer is generally designed in order to achieve the best possible mixing results while using as small a volume of the respective material of the multi-component material as possible in order to limit the waste of multi-component material.

[0011] The changes in direction of extent of the part flows about the angle of rotation within the respective mixing segment lead to a distribution of flow components being present in each part flow of the multi-component material. Some of these flow components flow in a direction directed at least substantially in the direction of the longitudinal axis and hence arrive faster than other flow components also present in each respective passage of the respective mixing segment at the next mixing segment, since they travel the shortest distance along the respective passage.

[0012] In this connection it should be noted that the flows of multi-component material generally have the same speed and that the terms fast, faster, slow and slower are used in the context of the present invention to indicate part flows that arrive faster or slower at certain points within the mixing segments than other part flows. The difference in times of

the part flows arriving at points within the mixing segment are due to the different path lengths present for the multi-component material within the passages of the respective mixing segment.

[0013] The at least one deflector plate is arranged and configured to deflect the faster flowing components present in each passage in such a way that they are forced to slow down and have a speed that matches those of the initially slower flowing components. The deflector plates also aid in avoiding small fractions of possibly unmixed multi-component material from flowing through the static mixer in an unhindered manner and consequently from being dispensed and thereby leading to e.g. an adhesive not having the desired bond strength.

[0014] This is achieved by deflecting at least some of faster flowing components away from the longitudinal axis and hence reducing the speed of at least some of the faster flowing components present in each part flow and especially that of an outer flow component flowing at the boundary between a housing of the static mixer and an outer side of the mixing segments. This reduction in speed is preferably brought about in such a manner that, on exiting each elongate outlet, all flow components present in each passage exit the respective elongate outlet at the same point in time and such that they are present at the same height within each elongate outlet.

[0015] It should be noted that the undesirable outer flow components are generally present in a direction directed at least substantially in the direction of the longitudinal axis and that hence flow faster than other flow components also present in each respective passage. The provision of the deflector plates also aids in reducing and possibly preventing such outer flow components from being present.

[0016] In this connection it should be noted that it is preferred if the at least one deflector plate is arranged in the passage within the flow path such that it directs at least some of the flow of multi-component material away from the direction directed in the direction of the longitudinal axis such that it slows down at least some of the faster flowing components present in each part flow of the multi-component material passing through the respective passage.

[0017] Preferably a first extent of the respective passage in a direction in parallel to the elongate extent of the elongate inlet gradually reduces in size between the elongate inlet and a constriction of the passage and a second extent of the respective passage in a direction in parallel to the elongate extent of the elongate outlet gradually increases in size between the constriction and the elongate outlet; wherein the changes in size of the first and second extents lead to a distribution of flow components being present in the part flow of the multi-component material, wherein one of these components is an outer flow component that comprises flow components flowing in a direction directed at least substantially in the direction of the longitudinal axis of the static mixer; and

wherein the at least one deflector plate is configured to deflect at least some of said outer flow component of the part flow of the multi-component material in the region of the elongate inlet and/or in the region of the elongate outlet away from the direction of flow directed at least substantially in the direction of the longitudinal axis.

[0018] In this connection it should be noted that the mixing of material present in each flow path is further facilitated by compressing the size of the flow path in the first extent and by the subsequent increase in size of the flow path in the second extent. In this way the part flow is not only forced to compress and relax in one respective direction of flow only, but due to the deflector plate is additionally guided in a plurality of directions of flow in the respective elongate inlet and outlet to further improve the mixing result.

[0019] Advantageously the at least one deflector plate is, preferably only, provided in a passage of the mixing segment arranged at an outer side of the mixing segment. It has hitherto been found that the passages arranged within the mixing segment do not comprise single part flows that are directed generally along the longitudinal axis that may not be mixed on the passage through the static mixer, but rather only the passage present at the outer side of the mixing segments comprise such part flows. In this way the deflector plates are arranged in those regions of the static mixer which require further improvement of the mixing to take place. Moreover, the provision of the deflector plates only at the outer sides of the respective mixing segments makes the respective static mixer more simple to manufacture, e.g. in an injection molding process.

[0020] It is preferred if at least one of the mixing segments of the static mixer comprises two deflector plates in the region of its elongate inlets and two-deflector plates in the region of its elongate outlets. By providing a deflector plate on each of the outer elongate inlets and outlets ensures a thorough mixing in each mixing segment.

[0021] Preferably the passages within the respective mixing segment comprise walls and the at least one deflector plate is arranged to extend from one of the walls of said passage. In this way the flow of multi-component material can be further improved and tailored to the precise application. Moreover, the stability of the respective deflector plates can be enhanced by attaching these to one of the walls of the passage, in particular if they are fixedly connected to one another and/or integrally formed.

[0022] It should be noted in this connection that each passage can comprises a constriction between the elongate inlet and the elongate outlet, and wherein each deflector plate is arranged to extend from one of the walls forming at least a part of the constriction of an adjacent mixing segment. Arranging the deflector plate in the region of a constriction further improves the guide function of the deflector plate and hence the achievable mixing results.

[0023] It is preferred if the deflector plate arranged in the region of the elongate inlet of one mixing segment is connected to one of the walls of one of the directly adjacent elongate outlets. In this way the guide function of the at least one

deflector plate and hence the achievable mixing results can be further improved.

[0024] It is further preferred if the deflector plate arranged in the region of the elongate outlet of one mixing segment is connected to one of the walls of one of the directly adjacent elongate inlets of the next mixing segment. In this way the guide function of the at least one deflector plate and hence the achievable mixing results can be further improved.

[0025] Advantageously the deflector plate is integrally formed with the wall of the passage. If the static mixer is e.g. manufactured in an injection molding process the deflector plate can be formed with the mixing segment in one process. Moreover, the integral formation leads to improved material strength of the deflector plate and hence prevents an accidental snapping off of the deflector plate if a fluid having a comparatively high viscosity is directed through the static mixer.

[0026] Preferably the change in size of at least one of the first and second extents of the passage between the elongate inlet and the constriction and/or between the constriction and the elongate outlet is either step like or gradual. The deflector plate can thus be used in a plethora of designs of static mixers.

[0027] It is preferred if the at least one deflector plate is arranged inclined with respect to the longitudinal axis in the region of the elongate inlet and/or in the region of the elongate outlet. Arranging the at least one deflector plate such that it is inclined with respect to the longitudinal axis further improves the guide and mixing functions achievable therewith. In this connection it is preferable if the at least one deflector plate is arranged such that it is inclined in the direction of the respective elongate outlet. It is however also possible to arrange the at least one deflector plate such that it is inclined in the direction of the respective elongate inlet.

[0028] Preferably a length of the at least one deflector plate amounts to 20 to 70 % of a length of one of the mixing segments along the longitudinal axis of the static mixer. Such lengths have been found desirable to achieve improved mixing results.

[0029] Advantageously the static mixer further comprises a housing accommodating said plurality of mixing segments, an outlet for dispensing mixed multi-component material, and inlets that are configured to be coupled to outlets of a multi-component cartridge.

[0030] In this connection it should be noted that an inner surface of the housing is complementary shaped to the outer shape of the mixing segments of the static mixer in such a way that the inner surface forms an at least substantially planar boundary of the passages present at the outer sides of the mixing segments.

[0031] According to a further aspect the present invention further relates to a dispensing assembly. The dispensing assembly comprises:

- a static mixer as discussed herein,
- the multi-component cartridge filled with multi-component material; and/or
- a dispensing device that can be actuated to dispense said multi-component material via said static mixer.

[0032] The advantages discussed in the foregoing in relation to the static mixer likewise hold true for the dispensing assembly in accordance with the invention.

[0033] The multi-component cartridge can thus be filled with materials selected from the group of members consisting of topical medications, medical fluids, wound care fluids, cosmetic and/or skin care preparations, dental fluids, veterinary fluids, adhesive fluids, disinfectant fluids, protective fluids, paints and combinations of the foregoing.

[0034] Such fluids and hence the dispensing assembly can therefore be expediently used in the treatment of target areas such as the nose (e.g. anti-histaminic creams etc.), ears, teeth (e.g. molds for implants or buccal applications (e.g. aphtas, gum treatment, mouth sores etc.), eyes (e.g. the precise deposition of drugs on eyelids (e.g. chalazion, infection, anti-inflammatory, antibiotics etc.), lips (e.g. herpes), mouth, skin (e.g. anti-fungal, dark spot, acne, warts, psoriasis, skin cancer treatment, tattoo removal drugs, wound healing, scar treatment, stain removal, anti-itch applications etc.), other dermatological applications (e.g. skin nails (for example anti-fungal applications, or strengthening formulas etc.) or cytological applications.

[0035] Alternatively the fluids and hence the dispensing assembly can also be used in an industrial sector, e.g. in the building industry, the automotive industry etc., for example, as adhesives, paints, and/or as protective coatings.

[0036] According to a further aspect the present invention further relates to a method of dispensing multi-component material from a dispensing assembly in accordance with the teaching presented herein. The method comprises the step of:

- actuating the dispensing device to urge the multi-component material stored in said multi-component cartridge into the static mixer and mixing the multi-component material in said static mixer, wherein at least some of one of the part flows of the multi-component material mixed in said static mixer is deflected away from the longitudinal axis by means of the at least one deflector plate.

[0037] Further embodiments of the invention are described in the following description of the Figures. The invention will be explained in the following in detail by means of embodiments and with reference to the drawing in which is shown:

- Fig. 1 a perspective view of a dispensing assembly;
 Fig. 2 a perspective view of a mixing element of a static mixer;
 Figs. 3a to 3d respective side views of the mixing element of Fig. 2; and
 Fig. 4 a perspective view of a further mixing element.

[0038] In the following the same reference numerals will be used for parts having the same or equivalent function. Any statements made having regard to the direction of a component are made relative to the position shown in the drawing and can naturally vary in the actual position of application.

[0039] Fig. 1 schematically shows a dispensing assembly 1 comprising a static mixer 2 and a multi-component cartridge 3. The multi-component cartridge 3 shown in Fig. 1 is a two-component cartridge 3' that is filled with respective two-component materials M, M', for example, a hardener and a binder material.

[0040] The static mixer 2 comprises two inlets 4, 4' at a first end 5 thereof. The two inlets 4, 4' connect to outlets 6, 6' of the two-component cartridge 3'. In the present example the inlets 4, 4' receive the outlets 6, 6' of the two-component cartridge 3'. It should be noted in this connection that other forms of interaction between the inlets 4, 4' and the outlets 6, 6' are possible.

[0041] A housing 7 of the schematically illustrated static mixer 2 further comprises alignment means 8, 8' that enable a correct alignment of the inlets 4, 4' of the static mixer 2 relative to the outlets 6, 6' of the two-component cartridge 3'. The alignment means 8, 8' can for example be configured as bayonet-like connection means (not shown) and hence also act as a kind of attachment means (not shown) to attach the static mixer 2 to the two-component cartridge 3'. Other kind of attachment means (also not shown) such as a locking ring can also be used and are well known to the person skilled in the art.

[0042] The housing 7 further has a dispensing outlet 9 at a second end 10 of the static mixer 2. The mixed multi-component material M, M' is dispensed via the dispensing outlet 9 following its passage through the static mixer 2. The dispensing outlet 9 is arranged at a longitudinal axis A of the static mixer 2. The longitudinal axis A extends from the inlets 4, 4' of the static mixer 2 to the dispensing outlet 9 of the static mixer 2.

[0043] Fig. 2 shows a perspective view of a mixing element 11 of the static mixer 2. The mixing element 11 is composed of six mixing segments 12. The six mixing segments 12 are arranged in series one after another along the longitudinal axis A of the static mixer 2. Each mixing segment 12 comprises four elongate inlets 13 and four elongate outlets 14. The elongate outlets 14 of one mixing segment 12 are arranged next to the elongate inlets 13 of the next mixing segment 12 of the series.

[0044] In the present example each two types of mixing segments 12 are provided that each have a very similar design. The difference being that the respective elongate inlet 13 present at the outer side 19 of the first mixing segment leads to the left hand inner elongate outlet 14 and the elongate inlet 13 present at the outer side 19" leads to the right hand inner elongate inlet 14 of the mixing segment 12. With regard to the second mixing segment 12 of the series the respective elongate inlet 13 present at the outer side 19 of the first mixing segment leads to the right hand inner elongate outlet 14 and the elongate inlet 13 present at the outer side 19" leads to the left hand inner elongate inlet 14 of the mixing segment 12.

[0045] In the same way the inner elongate inlet 13 closest to the side 19 of the first mixing segment 12 leads to the elongate outlet 14 present at the outer side 19'" whereas the inner elongate inlet 13 closest to the side 19" of the first mixing segment 12 leads to the elongate outlet 14 present at the outer side 19' and the inner elongate inlet 13 closest to the side 19 of the second mixing segment 12 leads to the elongate outlet 14 present at the outer side 19' whereas the inner elongate inlet 13 closest to the side 19" of the second mixing segment 12 leads to the elongate outlet 14 present at the outer side 19'''.

[0046] In this connection the difference between the configuration and arrangement of the first and second types of mixing segments 12 of the mixing element 11 is that the elongate outlets 14 of each second type of mixing segment 12 are rotated by 180° relative to the elongate outlets 14 of the first type of mixing segment 12 and the respective second type of mixing segment is then mirror imaged at a plane comprising the longitudinal axis A and the normal thereto extending from the side 19 of the drawing of Fig 2.

[0047] The design of the mixing segments will be discussed in the following. It should be noted that the design of every second mixing segment 12 in the series of mixing segments is identical. The use of two types of mixing segments 12 that are of similar design ensures an improved mixing of the multi-component materials M, M' by way of the corresponding mixing element 11.

[0048] The elongate inlets 13 of the six mixing segments 12 are arranged in parallel to one another. Likewise the elongate outlets 14 of the six mixing segments 12 are arranged in parallel to one another. In this connection it should be noted that slight deviations from a parallel arrangement are possible, for example, deviations by $\pm 5^\circ$ to 10° are possible.

[0049] A respective elongate inlet 13 of one mixing segment 12 is connected to a respective elongate outlet 14 of the same mixing segment 12 via a respective passage 15 to deflect respective part flows of the multi-component material from said elongate inlet 13 to said elongate outlet 14.

[0050] The elongate outlets 14 are arranged such that an elongate extent thereof is rotated by an angle of rotation of 90° about the longitudinal axis A with respect to an elongate extent of the elongate inlets 13. In this connection it should be noted that the longitudinal axis A extends from the elongate inlets 13 to the elongate outlets 14. In this connection it should be noted that slight deviations from an arrangement at exactly 90° are possible, for example, deviations by $\pm 5^\circ$ are possible.

[0051] A double headed arrow indicates a first extent I of the respective passage 15 in a direction in parallel to the elongate extent of the elongate inlet 13. The first extent I gradually reduces in size between the elongate inlet 13 and a constriction 16 of the passage 15. A second double headed arrow indicates a second extent O of the respective passage 15 in a direction in parallel to the elongate extent of the elongate outlet 14. The second extent O gradually increases in size between the constriction 16 and the elongate outlet 14.

[0052] In this connection it should be noted that the constriction 16 can be considered as a single point like transition between the first and second extents I, O in a plane extending in parallel to the elongate inlets 13 and elongate outlets 14 in which plane the first and second extents I, O have their respective smallest size.

[0053] Alternatively the constriction 16 can be configured as an overlap region in which both the first extent I and the second extent O respectively change in size in order to reduce and expand the respective part flows of materials M, M' in the different directions corresponding to the elongate extents of the respective elongate inlets 13 and elongate outlets 14.

[0054] The gradual change in size of the first and second extents I, O of the respective passage 15 is formed by two walls 17 of the respective passage 15 that are inclined with respect to one another and with respect to the longitudinal axis A of the mixing segment 12. Moreover, the two walls 17 inclined with respect to one another are arranged opposite one another in order to directly face one another.

[0055] In this connection it can also be conceived that the constriction 16 is formed by walls that extend in parallel to the first and second extents I, O rather than the inclined walls 17 shown in the Figures. In this case the change in size of the respective passage 15 is not gradual, but rather step like.

[0056] When multi-component material M, M' is guided in the respective passage 15, the material M, M' present in each flow path is urged together between the respective elongate inlet 13 and the respective constriction 16 in the first extent I decreasing towards the respective constriction 16. Subsequently the material M, M' present in each flow path is permitted to relax by the subsequent increase in size of the flow path in the direction of the second extent O. This constriction and expansion of the multi-component materials M, M' takes place in different directions relative to the longitudinal axis A to improve the through mixing of the multi-component materials M, M'.

[0057] The first extent I and the second extent O are rotated by the same angle of rotation about the longitudinal axis A as is present between each respective elongate extent of the inlet 13 and elongate extent of the elongate outlet 14.

[0058] A transition 18 can further be seen in each passage 15 which is present between walls 17 of the passages 15 directly adjacent to further walls 21, 22 (see also Figs. 3a to 3d in this regard). The transition 18 can be formed by a curved part surface 18' or as a recess (not shown). It has namely been found that the provision of a curved part surface 18' or a recess as a transition has beneficial effects on mixing and guiding the part flows of multi-component material M, M' between the respective elongate inlets 13 and elongate outlets 14.

[0059] It should further be noted that an imaginary sleeve enveloping each mixing segment 12 at least generally has the shape of a cuboid. In this way each mixing segment 12 and hence the mixing element 11 has four sides 19, 19', 19'', 19''', as well as a top and a bottom side 27, 27'.

[0060] Figs. 3a to 3d show respective views of the four sides 19, 19', 19'', 19''' of the mixing element 11 of Fig. 2. The walls 17 comprise curved part surfaces 17' forming guide walls that are configured to direct the part flows of the multi-component material M, M' from the respective elongate inlet 13 via the respective constriction 16 to the respective elongate outlet 14 of the respective mixing segment 12.

[0061] The changes in size of each passage 15 lead to a distribution of flow components being present in each part flow of the multi-component material M, M' along the length of each of the six mixing segments 12 of the mixing element 11. One of these components is a flow component that flows faster through the respective passage than others. An outer flow component 20 is indicated in Figs. 3a to 3d that comprises flow components flowing in a direction directed at least substantially in the direction of the longitudinal axis A of the static mixer 2.

[0062] In this connection it should be noted that the mixing segments 12 shown in Fig. 2 and the following are generally rectangular cuboids in which the height to side length ratios of the sides 19, 19', 19'', 19''' can be selected in the range of 0.7 to 0.9, i.e. for a mixing segment of 8 mm width the height in the longitudinal direction A can be 6.4 mm.

[0063] Figs. 3a to 3d respectively indicate the outer flow component 20 for each of the part flows present at an outer side of the mixing element 11 by means of a dashed line. The outer flow component 20 is one of the faster flowing components present in each mixing segment 12. The respective outer flow component 20 extends essentially along the inner wall of the housing 7 at the outer side 19, 19', 19'', 19''' of the mixing element 11 and is less likely to be subjected to the mixing than the flow components extending through passages 15 present within other parts of the mixing segment 12.

[0064] Faster flowing components are also present in the other passages 15 of the same mixing segment 12. This distribution of flow components arises due to the geometry of the respective mixing segment 12. The faster flowing components exit the respective elongate outlet 14 at an earlier point in time and thus arrive at the adjoining elongate inlets 13 faster than the slower flowing components. Since the static mixer is initially filled with air it can occur that air bubbles are trapped between faster flowing components and the slower flowing components arriving at the same elongate inlet 13 at a later point in time. These air bubbles can lead to the mixing result being less than ideal.

[0065] In order to prevent small fractions of unmixed multi-component material M, M' e.g. the outer flow component 20 from flowing between the inlets 4, 4' and the outlet 9 of the static mixer 2 and to prevent such air bubbles from arising and consequently from non-ideal mixing results from being dispensed, the respective passages 15 comprise a deflector plate 26 arranged in the flow path either in the region of the elongate inlet 13 or in the region of the elongate outlet 14.

[0066] The deflector plate 26 is configured to deflect at least some of said outer flow component 20 of the part flow of the multi-component material M, M' in the region of the elongate inlet 13 or in the region of the elongate outlet 14 away from the direction of flow directed at least substantially in the direction of the longitudinal axis A in order to further improve the mixing results.

[0067] The deflector plate 26 is namely arranged within the respective passage 15 in order to ensure that each part flow of the multi-component material M, M' arrives at a respective elongate outlet 14 at approximately the same time, at approximately the same speed and with approximately the same surface area.

[0068] Due to the varying geometries present within the respective passage 15 of the mixing segment 12 each part flow comprises flow components that flow faster than others. The deflector plates 26 are configured and arranged to slow down the faster flow components such that they have approximately the same flow speed as the slower flow components in such a way that each respective part flow present in the respective passage 15 has a leading edge that extends at least approximately over the complete extent of the elongate outlet 14 and in parallel to the elongate outlet 14. Thus, in particular the outer flow component 20 of the part flow of the multi-component material M, M' is slowed down by the provision of the deflector plate 26. This is indicated in the respective Figures 3a to 3d where the dashed line is led away from a central flow path. The central flow path would be present if the deflector plates 26 were not present in the respective passage 15.

[0069] It should be noted that the deflector plates 26 are arranged at the outer sides 19, 19', 19'', 19''' of the mixing segments 12. As is visible from the views shown in Figs. 3a to 3d each mixing segment 12 of the mixing element 11' two deflector plates 26 in the region of its elongate inlets 13 and two-deflector plates 26 in the region of its elongate outlets 14.

[0070] The walls 21, 22 that separate the respective elongate inlets 13 and outlets 14 of each mixing segment 12 project from the body 24 of the mixing segment 12. In this connection it should be noted that an outer boundary of each elongate inlet 13 and elongate outlet 14 present at an outer side 19, 19', 19'', 19''' of the mixing segment 12 is formed by an internal wall (not shown) of the housing 7 of the static mixer 2.

[0071] It should further be noted that a thickness of each of the walls 21, 22 can be selected in the range of 0.12 to 1.5 mm, especially of 0.16 to 1.05 mm. In the examples shown in Figs. 3a to 3d the walls 21, 22 have a thickness that corresponds to 0.52 mm.

[0072] It should further be noted that the walls 21, 22 have a height that projects from the body with said height being able to be selected in the range of 0.4 to 3 mm. In the examples shown in Figs. 3a to 3d the walls 21, 22 have a height that corresponds to 0.8 mm.

[0073] In this connection it should be noted that each of the sides 19, 19', 19'', 19''' of the mixing segments 12 can have a width in the direction perpendicular to the longitudinal axis A selected in the range of 4 to 15 mm and in the example shown in Figs. 3a to 3d have a width that corresponds to 8 mm.

[0074] Preferably a wall thickness of each of the walls 21, 22 is selected to be 3 to 10%, preferably of 4 to 7% of the width of the sides 19, 19', 19'', 19'''.

[0075] In this connection it should be noted that each of the sides 19, 19', 19'', 19''' can have a height in the direction in parallel to the longitudinal axis A selected in the range of 4 to 15 mm and in the example shown in Figs. 3a to 3d have a height that corresponds to 8 mm.

[0076] As indicated in Figs. 3a to 3d the walls 17 forming the walls 17 inclined with respect to the longitudinal axis A respectively comprise a curved part surface 17'. The curved part surface 17' extends towards the constriction 16 and hence is present in the region of the constriction 16.

[0077] The walls 17 inclined with respect to the longitudinal axis A extend from the outer sides 19, 19', 19'', 19''' towards the longitudinal axis A as straight part surfaces until they reach the transition 23 formed by the curved part surface 17' that then leads to the planar surfaces 21', 22' formed by the respective walls 21, 22.

[0078] In this connection it should be noted that the radii of curvature of the curved part surface 17' can generally be selected in the range of 0.2 to 0.3 times the width of the mixing segment 12, i.e. for an 8 mm wide mixing segment 12 the radii is selected in the range of 1.6 to 2.4 mm and in the examples of Figs. 3a to 3d have a radius of curvature corresponding to at least approximately 2 mm.

[0079] It is further possible that the curved part surface 17' is formed by a plurality of curved part surfaces 17' each having different radii of curvature. In this event, the curved part surface 17' having the largest radius of curvature is that curved part surface 17' that is present within the respective constriction 16 and forms a transition 23 from the inclined wall 17 to a surface 21', 22' that extends at least substantially in parallel to the longitudinal axis A. The surfaces 21', 22' form part of one of walls 21, 22 of the respective elongate inlets and outlets 13, 14.

[0080] It should be noted in this connection that the walls 17 of the respective passage 15 inclined with respect to the longitudinal axis A can comprise at least two gradients if formed by respective straight part surfaces. The straight part surfaces then extend between one of the sides 19, 19', 19'', 19''' to the curved part surface 17'.

[0081] In this connection it should be noted that each of the gradients is selected in the range of 0.176 to 0.577, especially of 0.2 to 0.4. In this connection it should be noted that the gradient of the straight part surface of the wall 17 is defined as the change in height in the longitudinal direction A divided by the change in width of the respective side 19, 19', 19'', 19''' of the respective wall 17 and consequently is a dimensionless number.

[0082] The walls 21, 22 forming at least a part of one of the elongate outlets 14 and/or one of the elongate inlets 13 of the mixing segment 12 respectively project from a body 24 of the mixing segment 12. The walls 22 projecting from the body 24 and forming at least part of the elongate outlets 14 are arranged perpendicular to the walls 21 projecting from the body 24 that form at least part of the elongate inlets 13.

[0083] Some of the walls 21, 22 respectively projecting from the body 24 of the mixing segment 12 are connected to one another via a further wall 21'', 22'' at an outer side 19, 19', 19'', 19''' of the mixing segments. In this way some of the elongate inlets and outlets have three walls 21, 21'', 22, 22'' extending from the body 24. The further wall 21'', 22'' bridging the walls 21, 22 forming the respective planar surface 21', 22' each have a reduced wall thickness in comparison to the other walls 21, 22 of the same elongate inlet or outlet 13, 14. The walls 21'', 22'' bridging the walls 21, 22 are a part of the respective passage 15.

[0084] A cut-out 25 is respectively present in the region of the elongate inlets and outlets 13, 14 arranged at each of the outer sides 19, 19', 19'', 19''' of the mixing segment 12. The cut-out 25 is respectively provided in order to simplify a mold (not shown) that is used during the injection molding process used to manufacture the mixing element 11.

[0085] In this connection it should be noted that the cut-out 25 is present between the bodies 24 of directly adjacent mixing segments and the walls 21, 22 projecting from said bodies 24.

[0086] As discussed in the foregoing, the changes in size present in each of the passages 15 lead to a distribution of flow components being present in the part flow of the multi-component material M, M'.

[0087] Fig. 4 shows a perspective view of a further mixing element 11' that can be inserted into the housing 7 of the static mixer 2. In the design depicted in Fig. 4 each mixing segment 12' has four elongate inlets 13 and four elongate outlets 14. The respective deflector plate 26' is arranged to extend from one of the walls 21, 22 of the respective passage 15 of the directly adjacent mixing segment 12'. This is achieved by integrally forming the deflector plate 26' with said wall 21, 22 of the passage 15 of the adjacent mixing segment 12'.

[0088] In fact each deflector plate 26' is arranged to extend from one of the walls 21, 22 forming at least a part of the constriction 16 of an adjacent mixing segment 12'. In this way the deflector plate 26' arranged in the region of the elongate inlet 13 of one mixing segment 12' is connected to one of the walls 22 of one of the directly adjacent elongate outlets 14. Likewise the deflector plate 26' arranged in the region of the elongate outlet 14 of one mixing segment 12 is connected to one of the walls 21 of one of the directly adjacent elongate inlets 13 of the next mixing segment 12.

[0089] By connecting the respective deflector plate 26' to one of the walls 21, 22 of the directly adjacent mixing segment 12, the deflector plates 26' can be formed more stable than if they were not connected to the wall 21, 22. In this way the mixing element 11' can be used particularly well for highly viscous fluids.

[0090] The respective deflector plates 26, 26' are arranged inclined with respect to the longitudinal axis A in the region of the elongate inlet 13 and/or in the region of the elongate outlet 14 in order to deflect the outer flow component 20 away from the longitudinal axis A and to thereby improve the through mixing of the multi-component material M, M'. In this connection it should be noted that the angle of inclination of the respective deflector plate with regard to the longitudinal axis A is selected in the range of 15 to 70° and preferably as shown in Figs. 2 to 3d corresponds to 40° and in the embodiment shown in Fig. 4 corresponds to 65°.

[0091] In this connection it should be noted that a length of the at least one deflector plate 26, 26' is preferably selected in the range of 20 to 70 % of the height of one of the mixing segments 12 along the longitudinal axis A of the static mixer 2. In the embodiment depicted in Fig. 4 the deflector plate 26' has a length that corresponds to 2.8 mm. Whereas in the embodiment of Figs. 2 to 3d the deflector plate 26 has a length that corresponds to 2.6 mm.

[0092] In this connection it should be noted that a width of the at least one deflector plate 26, 26' is preferably selected in the range of 2 to 10% of the width of the mixing segment 12, preferably within the range of 4 to 7% of the width of the mixing segment 12.

[0093] Generally speaking the deflector plates 26, 26' are arranged such that at least one end thereof is arranged such that it is in axial alignment with a center of the constriction 16 arranged closest thereto.

[0094] In the embodiment of Fig. 4 the end remote from the end of the deflector plate 26' projecting from the wall 21,

22 of the passage 15 of the adjacent mixing segment 12' is in axial alignment with the center of the constriction 16 arranged closest thereto.

[0095] In the embodiment of Figs. 2 to 3d both ends of the deflector plate 26 are arranged such that they are in axial alignment with the center of the respective constriction 16 to which they are arranged closest.

[0096] In all of the embodiments shown the elongate inlets 13 and the elongate outlets 14 are arranged transverse to the longitudinal axis A. It should further be noted that in accordance with all of the depicted embodiments, all of the elongate inlets 13 and of the elongate outlets 14 are configured and arranged to deflect respective part flows of the multi-component material M, M' from an elongate inlet 13 arranged at an inner region of the mixing element 11 of the static mixer 2 to an elongate outlet 14 arranged at an outer region of the mixing element 11 of the static mixer 2 and from an elongate inlet 13 arranged at the outer region of the mixing element 11 of the static mixer 2 to an elongate outlet 14 arranged at an inner region of the mixing element 11 of the static mixer 2.

[0097] It should further be noted that each elongate inlet 13 and each elongate outlet 14 shown in the foregoing has an opening having an at least generally rectangular shape.

[0098] It is preferred if the respective mixing segments 12, 12' are formed in an injection molding process from a plastic material. Regardless of the method of manufacture of the mixing element 11, 11' respectively of the mixing segments 12, 12' the only space available within each of the mixing segments 12, 12' is part of a respective flow path for the multi-component material M, M' introduced into the static mixer 2 from the multi-component cartridge 3, 3' discussed in the foregoing.

[0099] In this way the volume of the multi-component materials M, M' remaining in the static mixer 2 after a dispensing process has taken place can be minimized as the dead space within the static mixers 2 are minimized in comparison to those available in the prior art. Moreover, the specific designs of the mixing segments 12, 12' have been chosen to bring about an optimized mixing of the multi-component materials M, M'.

[0100] In this connection it should be noted that the various mixing segments 12, 12' discussed in the foregoing to form the presented mixing elements 11, 11' can also be mixed to form a mixing element (not shown) comprising a mixture of the various mixing segments 12, 12' discussed and shown in the present application.

[0101] The mixing element 11, 11' may also comprise other forms of mixing segments differing in design to the ones shown in the present application. For example, wave like mixing segments, round mixing segments, rectangular mixing segments, mixing segments of static mixers sold under the trade name T-mixer or Quadro-mixer by Sulzer Mixpac can be used in combination with the mixing segments 12, 12' discussed in the foregoing to form the mixing element 11, 11'.

[0102] In this connection it should be noted that although the mixing segments 11, 11' described in the foregoing have a square cross-section perpendicular to the longitudinal axis A, other kinds of cross-sections can be envisaged, e.g. rectangular, oval, round, square with rounded off edges or rectangular with rounded off edges etc.

[0103] As is further visible in the view of the mixing element 11', the walls 21, 22 of the passages 15 separating the respective elongate inlets 13 and/or elongate outlets 14 at a side of the mixing segment 12, 12' have a convex shape in the direction of the longitudinal axis A. Such convex shapes enable a more simple tool to be used for the injection mold and hence facilitate the manufacture of the mixing segments 12, 12' respectively of the corresponding mixing element 11'.

List of reference numerals:

[0104]

1	dispensing assembly
2	static mixer
3, 3'	multi-component cartridge, two-component cartridge
4, 4'	inlet
5	first end
6, 6'	outlet
7	housing
8, 8'	alignment means
9	dispensing outlet
10	second end
11, 11'	mixing element
12, 12'	mixing segment
13	elongate inlet
14	elongate outlet
15	passage
16	constriction

17, 17'	wall, curved part surface
18, 18'	transition, recess
19, 19', 19", 19'''	side
20	outer flow component
5 21, 21', 21"	wall, surface, wall
22, 22', 22"	wall, surface, wall
23	transition
24	body
25	cut-out
10 26, 26'	deflector plate
27, 27'	top side, bottom side
A	longitudinal axis
I	first extent
15 M, M'	material
O	second extent

Claims

1. A static mixer (2) for mixing a multi-component material (M, M'), the static mixer (2) comprising:

a plurality of mixing segments (12, 12') arranged in series one after another along a longitudinal axis (A) of the static mixer (2);

wherein at least some of the plurality of mixing segments (12, 12') comprise at least three elongate inlets (13) arranged at least substantially in parallel to one another and at least three elongate outlets (14) arranged at least substantially in parallel to one another, with a respective elongate inlet (13) being connected to a respective elongate outlet (14) via a respective passage (15), wherein the elongate outlets (14) are arranged such that an elongate extent thereof is rotated by an angle of rotation of at least 45°,

preferably of at least substantially 90°, about the longitudinal axis (A) with respect to an elongate extent of the elongate inlets (13);

wherein the elongate outlets (14) of one mixing segment (12, 12') are arranged next to the elongate inlets (13) of the next mixing segment (12, 12') of the series;

wherein the respective passages (15) are configured to form flow paths that direct a part flow of the multi-component material (M, M') from the elongate inlet (13) to the elongate outlet (14) of the mixing segment (12, 12'); and

wherein at least some of the passages (15) of the mixing segment (12, 12') comprise at least one deflector plate (26, 26') arranged in the flow path,

preferably in a central part of said passage (15), in a region of the elongate inlet (13) and/or in a region of the elongate outlet (14).

2. A static mixer (2) in accordance with claim 1,

wherein a first extent (I) of the respective passage (15) in a direction in parallel to the elongate extent of the elongate inlet (13) gradually reduces in size between the elongate inlet (13) and a constriction (16) of the passage (15) and a second extent (O) of the respective passage (15) in a direction in parallel to the elongate extent of the elongate outlet (14) gradually increases in size between the constriction (16) and the elongate outlet (14); wherein the changes in size of the first and second extents (I, O) lead to a distribution of flow components being present in the part flow of the multi-component material (M, M'), wherein one of these components is an outer flow component (20) that comprises flow components flowing in a direction directed at least substantially in the direction of the longitudinal axis (A) of the static mixer (2); and

wherein the at least one deflector plate (26, 26') is configured to deflect at least some of said outer flow component (20) of the part flow of the multi-component material (M, M') in the region of the elongate inlet (13) and/or in the region of the elongate outlet (14) away from the direction of flow directed at least substantially in the direction of the longitudinal axis (A).

3. A static mixer (2) in accordance with claim 1 or claim 2,

wherein the at least one deflector plate (26, 26') is, preferably only, provided in a passage (15) of the mixing segment (12, 12') arranged at an outer side (19, 19', 19", 19''') of the mixing segment (12, 12').

4. A static mixer (2) in accordance with at least one of the preceding claims, wherein at least one of the mixing segments (12, 12') of the static mixer (2) comprises two deflector plates (26, 26') in the region of its elongate inlets (13) and two-deflector plates (26, 26') in the region of its elongate outlets (14).
5. A static mixer (2) in accordance with at least one of the preceding claims, wherein the passages (15) comprise walls (17, 21, 21", 22, 22") and the at least one deflector plate (26, 26') is arranged to extend from one of the walls (17, 21, 22) of said passage (15).
6. A static mixer (2) in accordance with claim 5, wherein each passage (15) comprises a constriction (16) between the elongate inlet (13) and the elongate outlet (14), and wherein each deflector plate (26') is arranged to extend from one of the walls (17, 21, 22) forming at least a part of the constriction (16) of an adjacent mixing segment (12, 12').
7. A static mixer (2) in accordance with claim 5 or claim 6, wherein the deflector plate (26') arranged in the region of the elongate inlet (13) of one mixing segment (12, 12') is connected to one of the walls (22) of one of the directly adjacent elongate outlets (14).
8. A static mixer (2) in accordance with claim 5 or claim 6, wherein the deflector plate (26') arranged in the region of the elongate outlet (14) of one mixing segment (12, 12') is connected to one of the walls (21) of one of the directly adjacent elongate inlets (13) of the next mixing segment (12, 12').
9. A static mixer (2) in accordance with at least one of the preceding claims 5 to 8, wherein the deflector plate (26') is integrally formed with the wall (21, 22) of the passage (15).
10. A static mixer (2) in accordance with at least one of the preceding claims 2 to 9, wherein the change in size of one of the first and second extents (I, O) of the passage (15) between the elongate inlet (13) and the constriction (16) and/or between the constriction (16) and the elongate outlet (14) is either step like or gradual.
11. A static mixer (2) in accordance with at least one of the preceding claims, wherein the at least one deflector plate (26, 26') is arranged inclined with respect to the longitudinal axis (A) in the region of the elongate inlet (13) and/or in the region of the elongate outlet (14).
12. A static mixer (2) in accordance with at least one of the preceding claims, wherein a length of the at least one deflector plate (26, 26') amounts to 20 to 70 % of a length of one of the mixing segments (12, 12') along the longitudinal axis (A) of the static mixer (2).
13. A static mixer (2) in accordance with at least one of the preceding claims, further comprising a housing (7) accommodating said plurality of mixing segments (12), an outlet (9) for dispensing mixed multi-component material (M, M'), and inlets (4, 4') that are configured to be coupled to outlets (6, 6') of a multi-component cartridge (3, 3').
14. A dispensing assembly (1) comprising:
 - the static mixer (2) in accordance with at least one of the preceding claims,
 - the multi-component cartridge (3, 3') filled with multi-component material (M, M'); and/or
 - a dispensing device that can be actuated to dispense said multi-component material (M, M') via said static mixer (2).
15. A method of dispensing multi-component material (M, M') from a dispensing assembly (1) in accordance with claim 14, the method comprising the step of:
 - actuating the dispensing device to urge the multi-component material (M, M') stored in said multi-component cartridge (3, 3') into the static mixer (2) and mixing the multi-component material (M, M') in said static mixer (2), wherein at least some of one of the part flows of the multi-component material (M, M') mixed in said static mixer (2) is deflected away from the longitudinal axis (A) by means of the at least one deflector plate (26, 26').

Fig.1

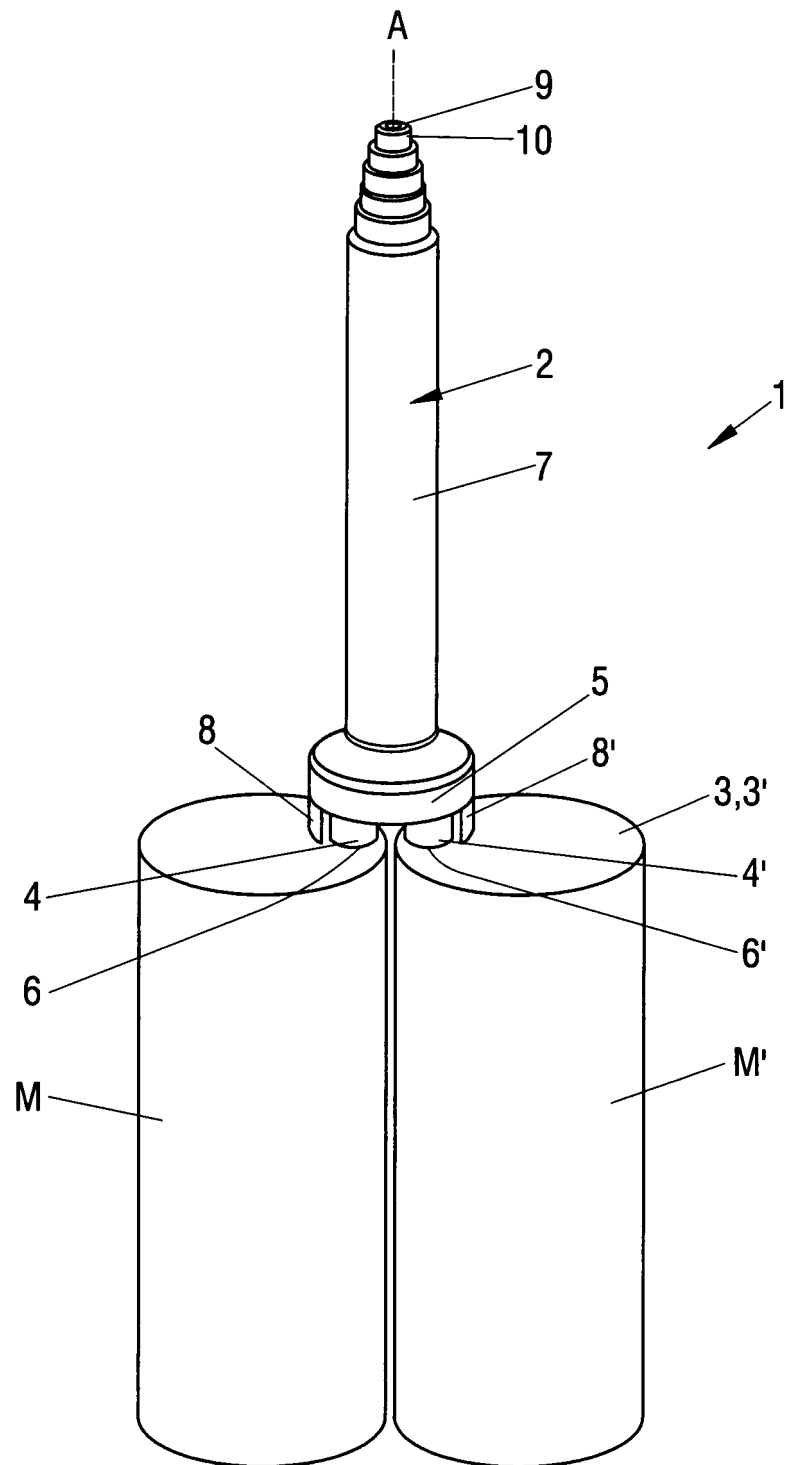


Fig.2

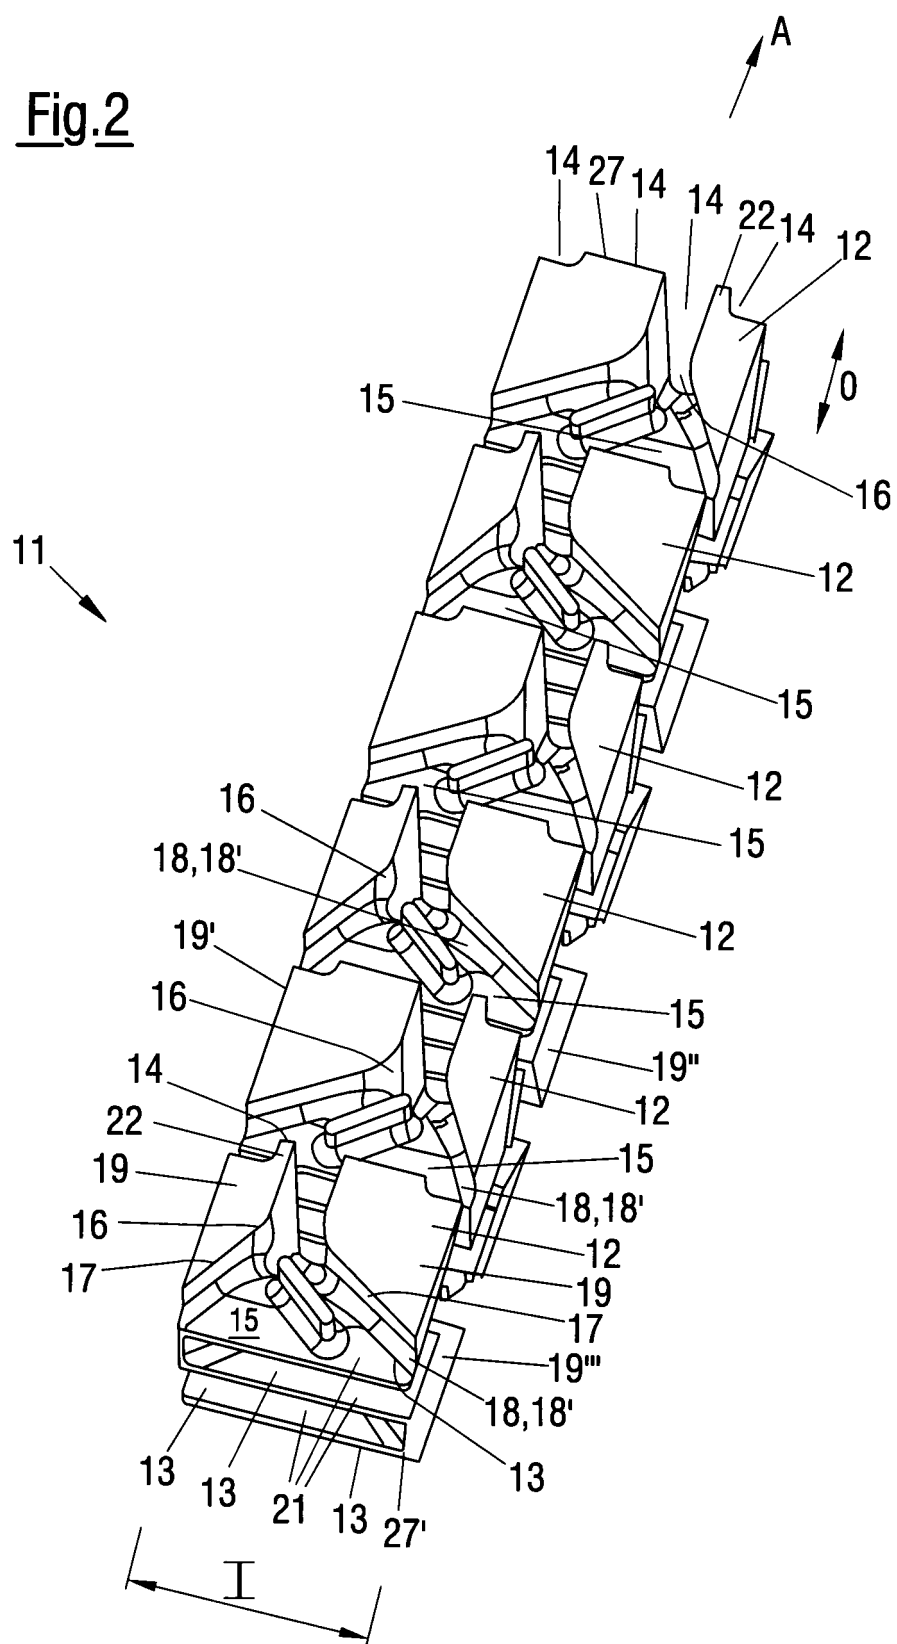


Fig.3a

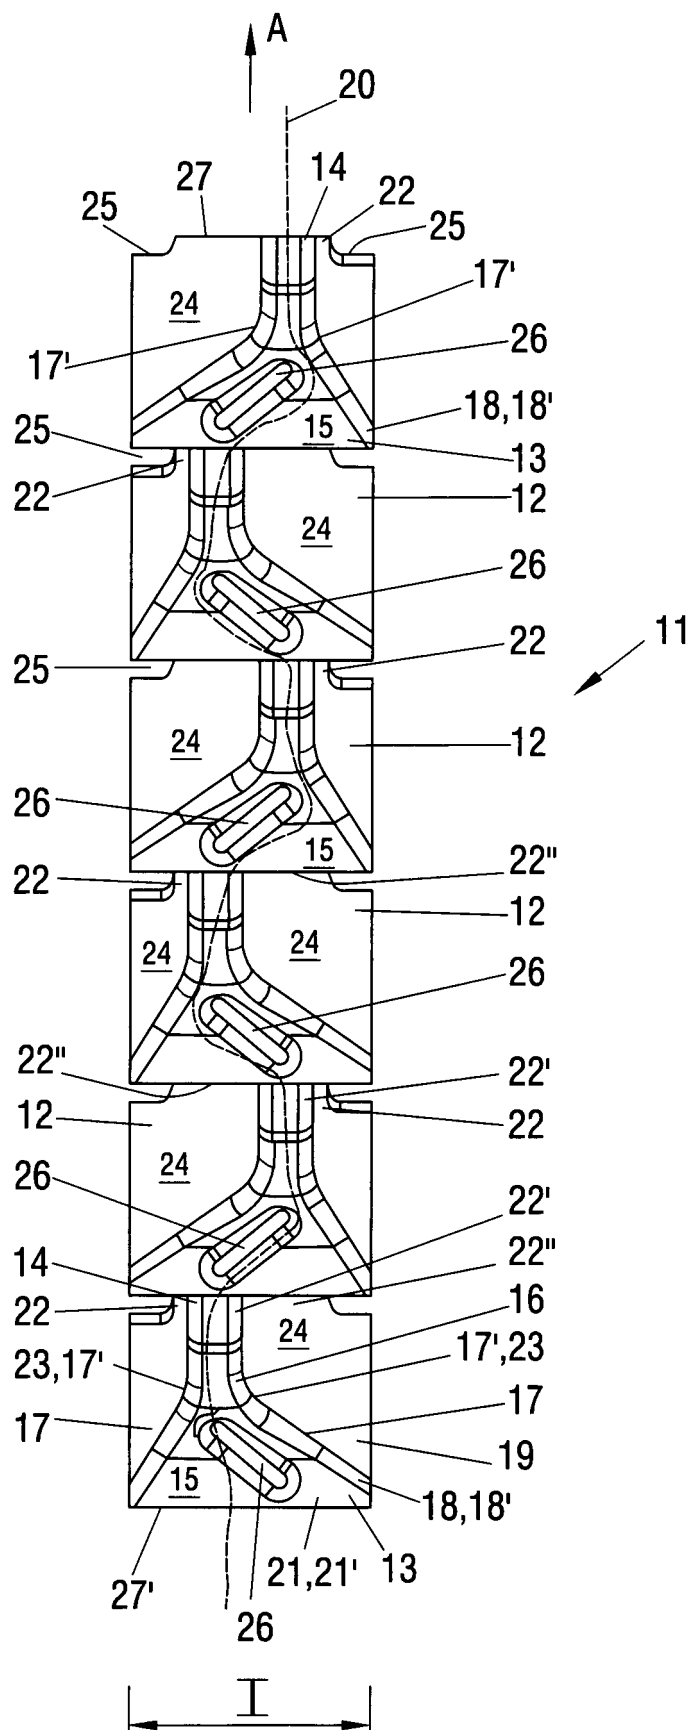


Fig.3b

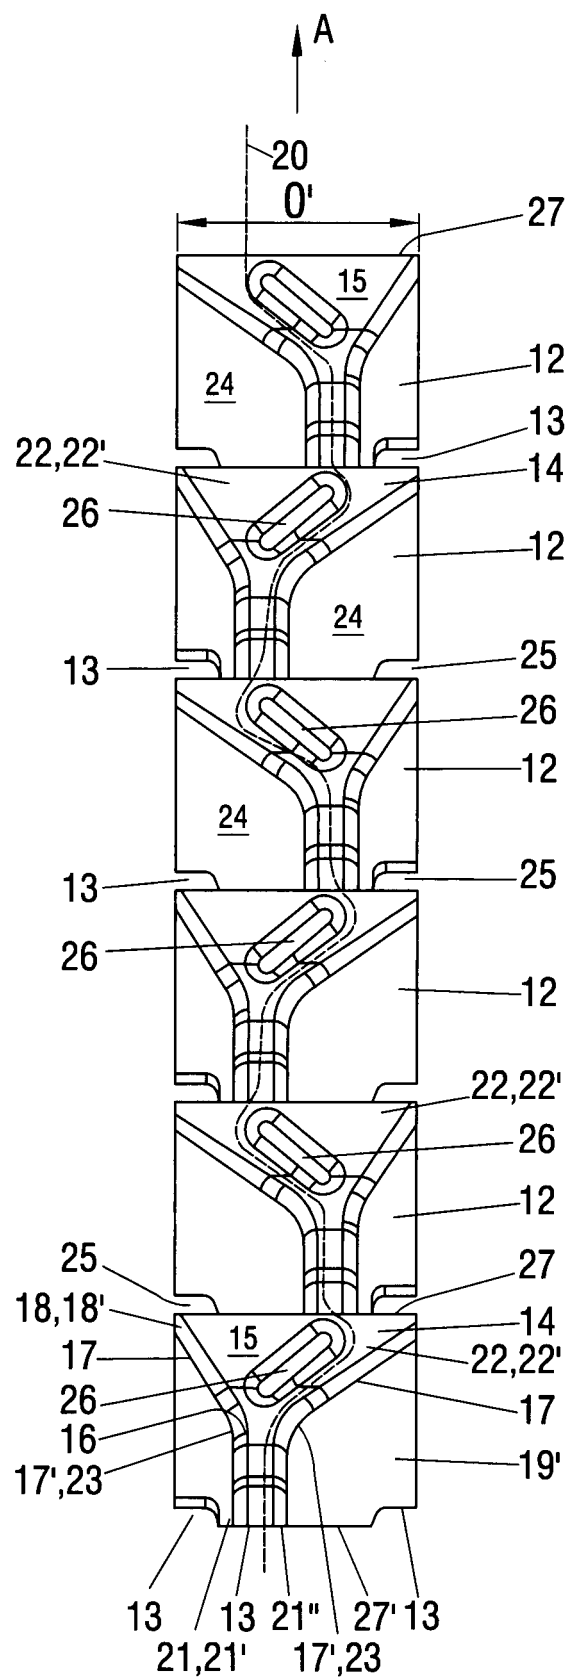


Fig.3c

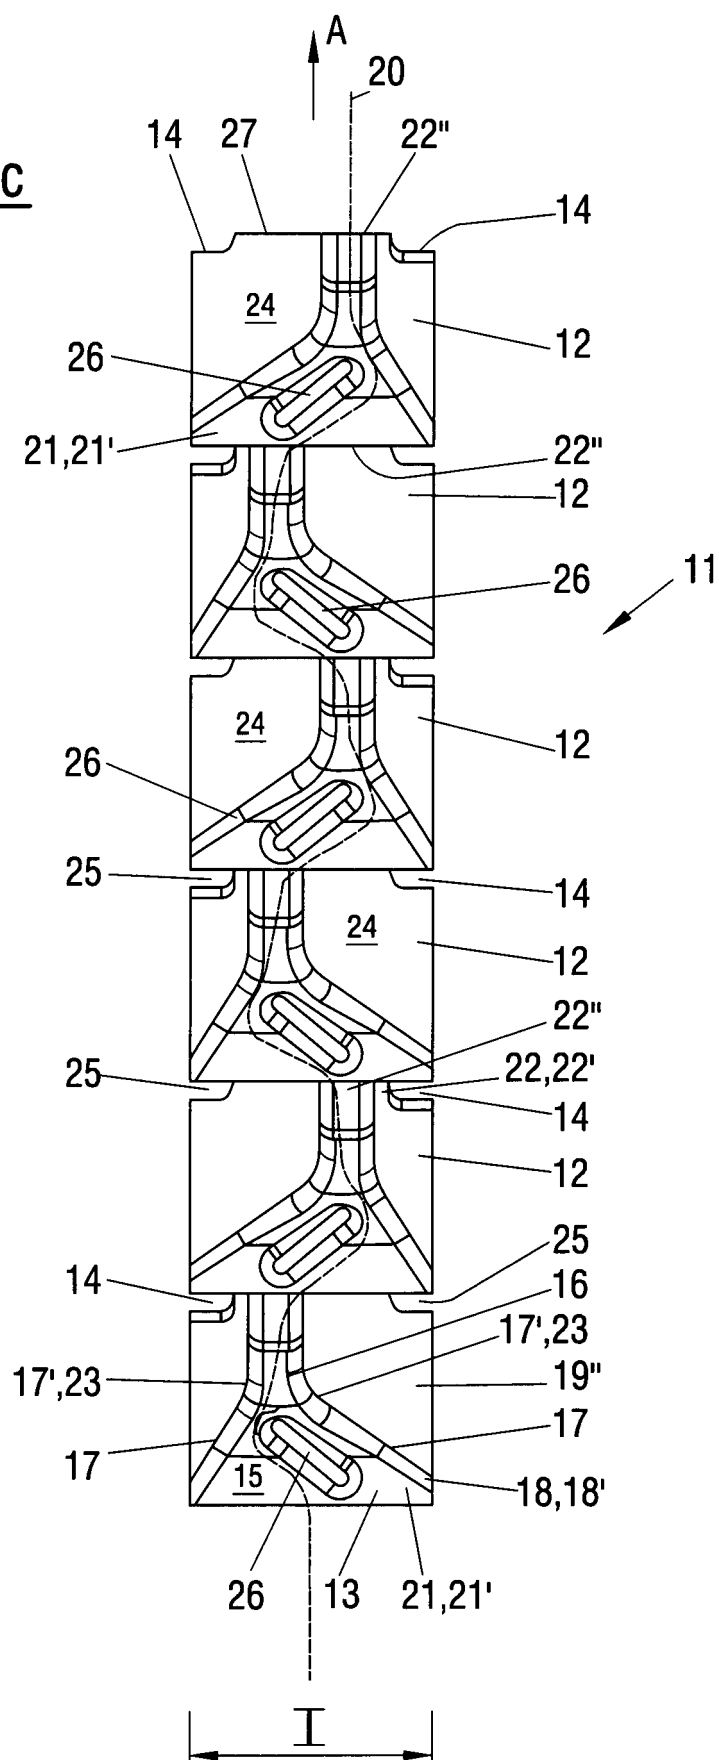


Fig.3d


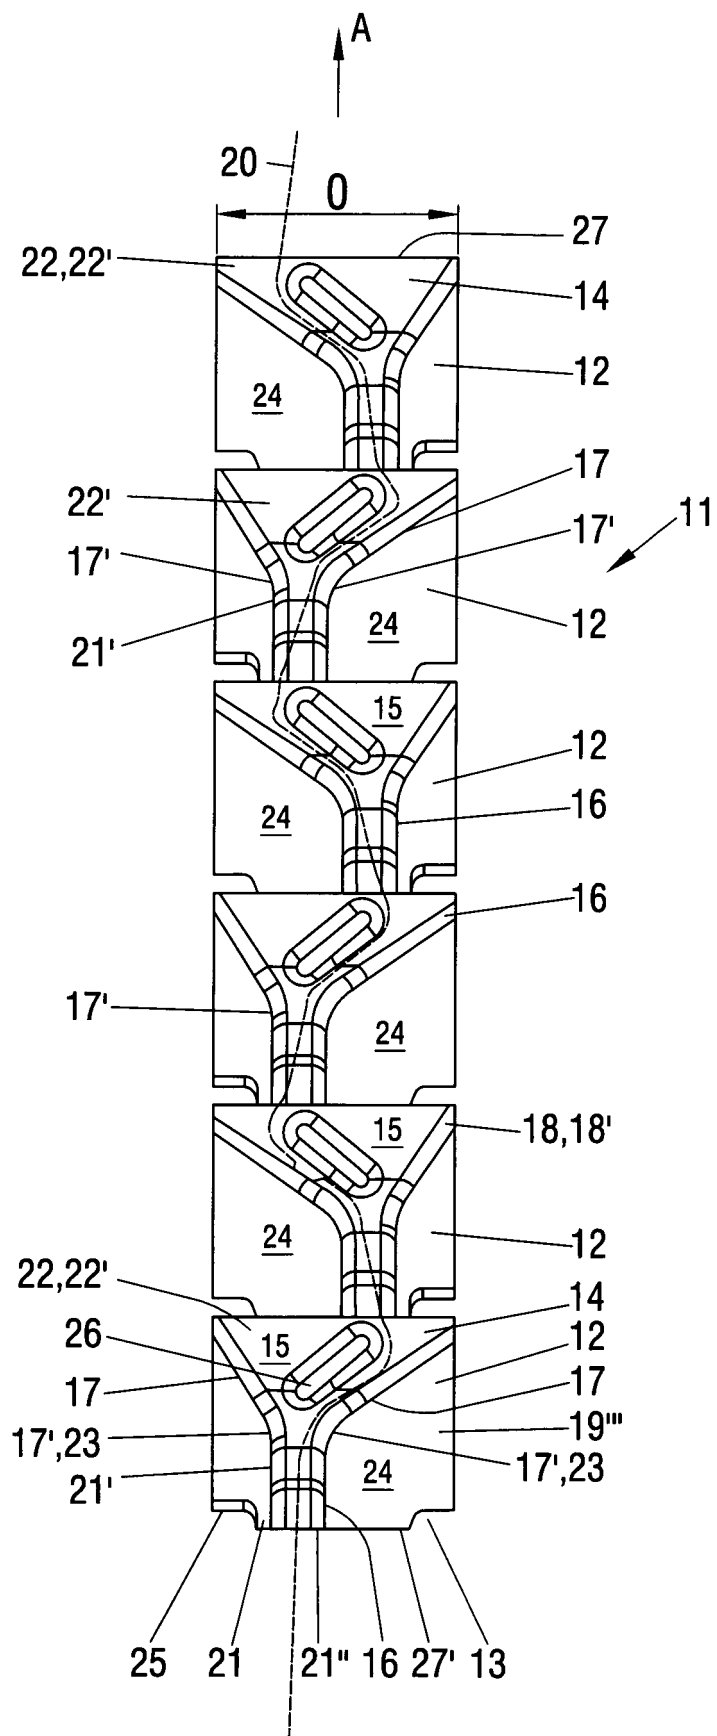


Fig.4



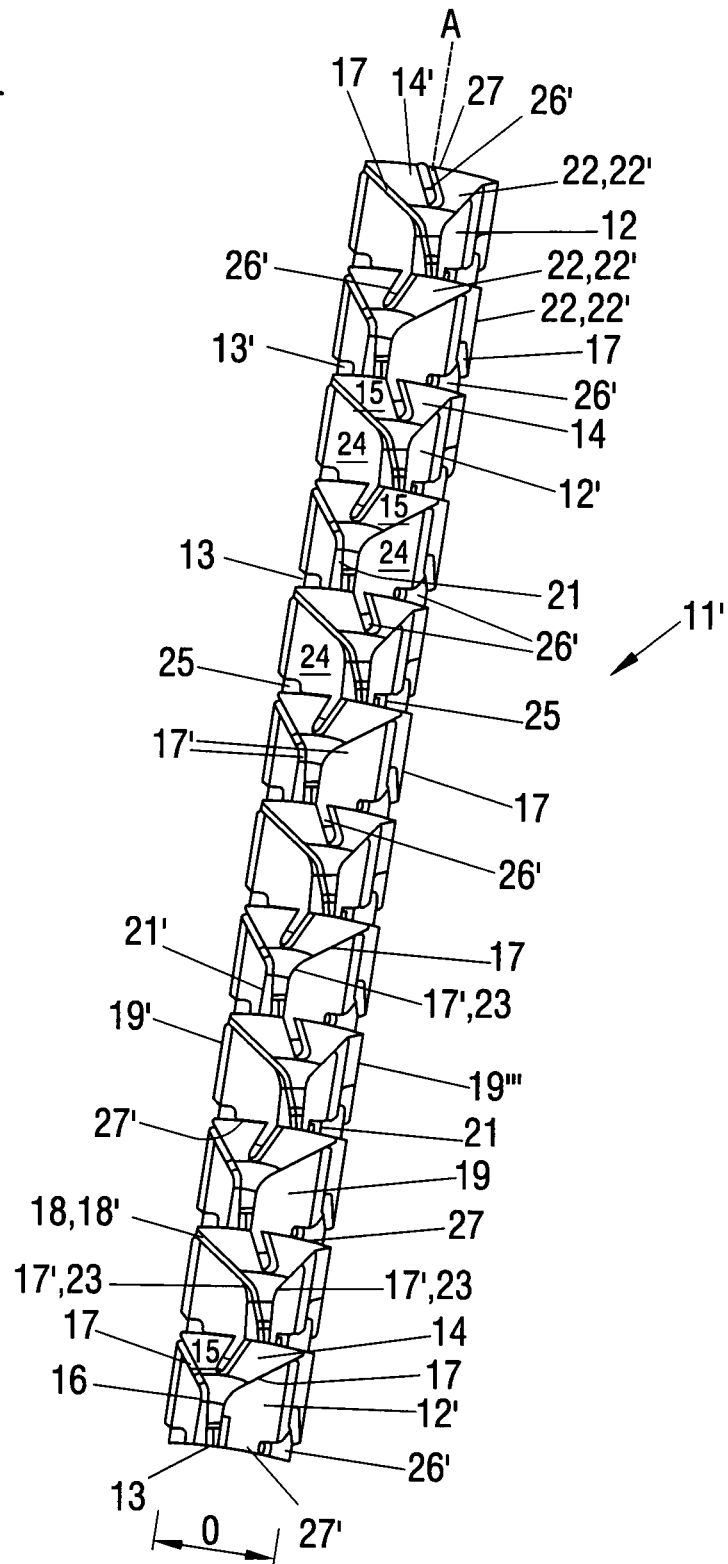

EUROPEAN SEARCH REPORT

Application Number
EP 17 19 8862

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 3 195 865 A (HARDER RICHARD E) 20 July 1965 (1965-07-20) * column 1, line 9 - line 14 * * column 3, line 41 - column 4, line 51 * * column 5, line 22 - line 45 * * figures * -----	1-15	INV. B01F5/06 B01F13/00
			TECHNICAL FIELDS SEARCHED (IPC)
			B01F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 26 April 2018	Examiner Real Cabrera, Rafael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 19 8862

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-04-2018

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
	US 3195865	A	20-07-1965	NONE
15	-----			
20				
25				
30				
35				
40				
45				
50				
55				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82