

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 June 2010 (17.06.2010)

PCT

(10) International Publication Number
WO 2010/068643 A1


- (51) **International Patent Classification:**
E21B 47/00 (2006.01)
- (21) **International Application Number:**
PCT/US2009/067248
- (22) **International Filing Date:**
9 December 2009 (09.12.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12/333,343 12 December 2008 (12.12.2008) US
- (71) **Applicant (for CA only):** SCHLUMBERGER CANADA LIMITED [CA/CA]; 525-3rd Avenue Southwest, Calgary, Alberta T2P 0G4 (CA).
- (71) **Applicant (for FR only):** SERVICES PETROLIERS SCHLUMBERGER [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) **Applicant (for GB, JP, NL only):** SCHLUMBERGER HOLDINGS LIMITED [NL/NL]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola (VG).
- (71) **Applicant (for AL, AM, AU, AZ, BF, BG, BJ, BY, CF, CG, CI, CM, CO, CZ, DE, DK, GA, GN, GQ, GR, GW, HU, ID, IE, IL, IT, KG, KP, KR, KZ, LT, MD, ML, MR, MX, MY, NE, NO, NZ, OM, PL, RO, RU, SI, SK, SN, TD, TG, TJ, TM, TN, TR, TT, UZ, ZA only):** SCHLUMBERGER TECHNOLOGY B.V. [NL/NL]; Parkstraat 83-89, NL-2414 JG The Hague (NL).

- (71) **Applicant (for all designated States except AL, AM, AU, AZ, BF, BG, BJ, BY, CA, CF, CG, CI, CM, CO, CZ, DE, DK, FR, GA, GB, GN, GQ, GR, GW, HU, ID, IE, IL, IT, JP, KG, KP, KR, KZ, LT, MD, ML, MR, MX, MY, NE, NL, NO, NZ, OM, PL, RO, RU, SI, SK, SN, TD, TG, TJ, TM, TN, TR, TT, US, UZ, ZA):** PRAD RESEARCH AND DEVELOPMENT LIMITED [NL/NL]; Craigmuir Chambers, Road Town, Tortola (VG).
- (71) **Applicant (for IS only):** SCHLUMBERGER TECHNOLOGY CORPORATION [US/US]; 300 Schlumberger Drive, Sugar Land, TX 77478 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** KIMMINAU, Stephen J. [GB/GB]; Elm Farm, Doctor's Lane, Ashen, Sudbury Suffolk CO10 8PW (GB). BROWN, George Albert [GB/GB]; 12 Woodlands Drive, Beaconsfield Buckinghamshire HP9 1JY (GB). LOVELL, John R. [GB/US]; 2603 Commonwealth Ave., Houston, Texas 77006 (US).
- (74) **Agents:** WRIGHT, Daryl R. et al; SCHLUMBERGER TECHNOLOGY CORPORATION, 14910 Airline Road, Legal - IP, Building 14, Rosharon, Texas 77583 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,

[Continued on next page]

(54) **Title:** COMBINING RESERVOIR MODELING WITH DOWNHOLE SENSORS AND INDUCTIVE COUPLING

FIG. 1

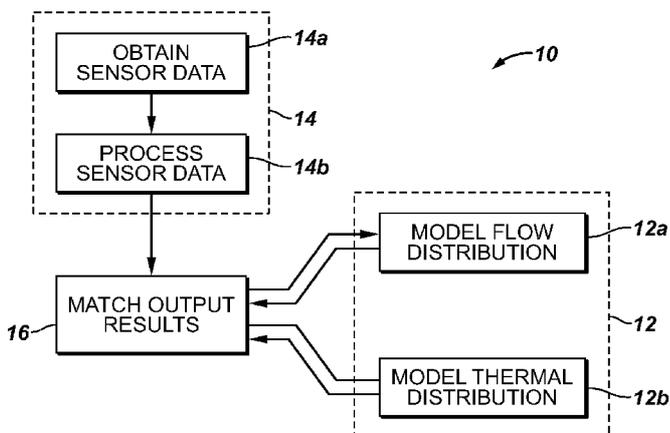

(57) **Abstract:** A method is disclosed of characterizing a well using a series of measurements taken along the sandface of that well in order to optimize a well model. The method may comprise providing a well model with a plurality of adjustable physical parameters, providing a data set made up of a plurality of sandface measurements, and running the well model with different combinations of adjustable physical parameters so that the results of the well model substantially match the results of the sandface measurements. In one embodiment, the method may comprise creating a communication pathway between the surface and the sandface including an inductive coupler. A further step may include pre-processing the plurality of the sandface measurements. In addition, a further step may be to establish or set at least one control device in order to change the flow characteristics of the production fluid in the well.

WO 2010/068643 A1

ME, MG, **MK**, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, **PH, PL, PT**, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, **TJ, TM, TN, TR, TT**, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TR), OAPI (BF, **BJ**, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, **TD**, TG).

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, **GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW**), Eurasian (AM, AZ, **BY, KG, KZ, MD, RU, TJ, TM**), European (**AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,**

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17C)

Published:

— with international search report (Art. 21(3))
— with information concerning incorporation by reference of missing parts and/or elements (Rule 20.6)

**COMBINING RESERVOIR MODELING WITH DOWNHOLE
SENSORS AND INDUCTIVE COUPLING**

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application is a continuation-in-part of U.S. Patent Application No. 12/333,343, filed December 12, 2008, which is continuation-in-part of 11/571,829, filed November 27, 2007, which is a 371 of PCT Application No. PCT/GB05/02110, filed May 27, 2005, (hereafter "the '829 Application"), which claims priority from GB Application No. 0416871.2, filed July 29, 2004, which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention generally relates to well characterization, and, more particularly, to characterization of a well using a series of measurements from sensors deployed along the sandface of that well to optimize a well model. Such a well may, for example, be a production well that can be exploited to produce oil and/or gas.

Description of the Prior Art

[0003] The following descriptions and examples are not admitted to be prior art by virtue of their inclusion in this section.

[0004] Substantial work has been undertaken by the oil and gas industry to obtain information that can be used to determine physical parameters that characterize wells. One such effort has resulted in monitoring equipment which can detect when problems occur during fluid extraction from a well and which warn an operator of an abnormal operating condition. Several types of monitoring equipment using various techniques for measuring physical parameters that characterize wells are known. For example, the temperature profile of a well is a physical parameter that can provide an operator with useful information to characterize the well. One technique to obtain a temperature profile employs a downhole optical fiber acting as a distributed temperature sensor.

[0005] A drawback to the use of monitoring equipment is that the equipment tends to provide an indication of the abnormal condition once the event has already occurred. This type of monitoring equipment only enables the operator to provide a reactive response to the abnormal operating condition and may not provide an accurate indication of exactly where in the well the cause of the abnormal condition lies.

[0006] In the '829 Application, a method is disclosed for characterizing a well using distributed temperature sensor data to optimize a well model. The method comprises the steps of providing a well model of thermal and flow properties of a well where the well model has a plurality of adjustable physical parameters. A data set made up of a plurality of distributed temperature sensor data profiles is provided where the profiles are taken at different times during the operation of the well. This method further comprises the step of running the well model with different combinations of the plurality of adjustable physical parameters to match the plurality of distributed temperature sensor data profiles.

[0007] It would be advantageous to provide a method of characterizing a well utilizing parameters other than downhole temperatures. This new and useful result is one of many stated and unstated results achieved by the method of the present invention.

SUMMARY OF THE INVENTION

[0008] In accordance with embodiments of the present invention, a method is provided for characterizing a well using a series of measurements deployed along the sandface of that well in order to optimize a well model. This method comprises the step of providing a well model with a plurality of adjustable physical parameters and providing a data set made up of a plurality of measurements along the sandface of a wellbore. A method according to an embodiment of the present invention further comprises the step of running the well model with different combinations of the plurality of adjustable physical parameters in order to match the plurality of sandface measurements.

[0009] In one embodiment of the present invention, the series of measurements may be distributed temperature measurements made along an optical fiber. In another embodiment of the present invention, the well may contain a communication device from the surface to the sandface and data regarding downhole parameters is transmitted to the surface by utilizing an inductive coupling technique. Such downhole parameters may, for example, include, but are not limited to, temperature, pressure, flow rate, fluid density, reservoir resistivity, oil/gas/water ratio, viscosity, carbon/oxygen ratio, acoustic parameters and chemicals sensing. In yet another embodiment of the present invention, the downhole measurements may be obtained by using a sensor string in combination with an optical fiber.

[0010] In another illustrative embodiment, a method according to aspects of the present invention may comprise the step of pre-processing the plurality of sandface measurements in order to make them consistent with one another. A method may, for example, but not limited

to, include the pre-processing step of depth correction or of noise reduction. In other embodiments, a noise reduction step may advantageously be carried out by using a median filter.

[0011] In another illustrative embodiment, a method according to aspects of the present invention may comprise combining sensor data, downhole flow control devices and a surface modeling package. In such an embodiment, the flow control devices may be activated in a way so as to change the flow along the wellbore. That change may provide additional information that can be used to further increase the understanding of the reservoir. In the case of a multilateral well, for example, only one of the branches may be allowed to flow at any given time. By way of further example different chokes settings could be applied to change the flow distribution along a long horizontal well, and the settings of the flow control devices would be passed to the modeling device.

[0012] The measured data may also be used to further enhance the wellbore or reservoir modeling. For example, given a series of different flow rates in a wellbore, an optimal match between synthetic and measured data may only be possible through the use of a particular choice of friction along the wellbore. That value of friction may then be used in subsequent modeling runs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Certain embodiments of the invention will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements. It should be understood, however, that the accompanying drawings illustrate only the various implementations described herein and are not meant to limit the scope of various technologies described herein. In the accompanying drawings:

FIG. 1 is a flow diagram that illustrates a method using distributed wellbore data to optimize a well model according to one embodiment of the present invention;

FIG. 2 is a pictorial diagram illustrating a system including communication apparatus and a sensor string for obtaining distributed wellbore data for use with a method in accordance with an embodiment of the present invention;

FIG. 3 is a pictorial drawing illustrating the combination of a sensor string and an optical fiber which are deployed downhole for obtaining distributed wellbore data for use with a method in accordance with an embodiment of the present invention; and

FIG. 4 is a flow diagram that illustrates using sandface sensor data to optimize a well model according to one embodiment of the present invention.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

[0014] It will be appreciated that the present invention may take many forms and embodiments. In the following description, some embodiments of the invention are described and numerous details are set forth to provide an understanding of the present invention. Those skilled in the art will appreciate, however, that the present invention may be practiced without those details and that numerous variations of and modifications from the described embodiments may be possible. The following description is thus intended to illustrate and not to limit the present invention.

[0015] As used here, the terms "up" and "down"; "upper" and "lower"; "upwardly" and "downwardly"; "below" and "above"; and other similar terms indicating relative positions above or below a given point or element may be used in connection with some implementations of various technologies described herein. However, when applied to equipment and methods for use in wells that are deviated or horizontal, or when applied to equipment and methods that when arranged in a well are in a deviated or horizontal orientation, such terms may refer to a left to right, right to left, or other relationships as appropriate. Additionally, the term "sandface" is utilized to refer to that part of the wellbore which penetrates through a hydrocarbon bearing zone.

[0016] Referring to FIG. 1, flow diagram 10 illustrates an embodiment of a method for characterizing a well using sandface sensor data in order to optimize a well model. The method comprises operating a well model 12 so as to model thermal and flow distributions in a well. The well may, for example, be a gas and/or oil producing well, such as that illustrated schematically in FIG. 16A of the '829 Application. The well model may be operated in either steady-state or transient conditions. In the first stage 12a, the flow distribution in the well is modeled using a steady-state model. During the second stage 12b, the thermal distribution in the well is modeled using a transient flow model.

[0017] The well model 12 may model the whole well, and not just a reservoir interval using a transient model. The well model 12 may perform a nodal pressure analysis to calculate fluid properties and use Joule-Thomson calculations to more accurately model temperature effects in the near well region.

[0018] In one embodiment, the information necessary to set-up the thermal and flow models is provided to a data processing apparatus by a user/operator via a GUI, such as that described in the ' 829 Application. The GUI may provide a sequence of data input screen images that the user can interact with in order to assign various values to various data fields. The GUI methodically guides the user through a data input process in order to obtain the necessary information. Use of such a GUI may simplify data entry and enable the user to apply an embodiment of a method of the invention without requiring detailed expert knowledge.

[0019] Once the thermal and flow distributions in the well have been modeled, sandface sensor data may be imported and conditioned, using the process at stage 14. Data may be obtained at stage 14a, for example, from real-time sandface sensor measurements and/or from one or more sandface sensor profiles that have already been acquired. One advantage of various embodiments of the present invention is that a plurality of sandface sensor profiles can be used to provide improved accuracy and to aid event prediction and parameter determination. Large amounts of historical sandface sensor data may be used in order to further improve the accuracy of the match between the sandface sensor profiles and the modeled thermal properties of the well.

[0020] The sandface sensor profile data may be pre-processed at stage 14b in order to make the sandface sensor profiles consistent with one another. The pre-processing may enable non-systematic noise variations, which may otherwise appear between the individual sandface sensor profiles, to be reduced. At stage 16, the output of the well model 12 may be matched with the sandface sensor profiles. This matching may, for example, be done by minimizing the root-mean-square difference between the modeled and sandface sensor-derived traces. However, any of a number of numerical techniques may be employed which are well known in the field of data analysis for parameter determination.

[0021] If it is detected that the output of the well model 12 does not adequately match the sandface sensor profiles, the physical parameters of the well model 12 may be adjusted and the well model run again in order to provide a new model of the thermal and flow properties of the well. The process of matching, adjusting the physical parameters, and running of the model may continue in an iterative manner until a sufficiently accurate match between the sandface sensor profiles and the output of the well model 12 is obtained, or until it is determined that no satisfactory match can be found.

[0022] When a match is obtained, the results of the sandface sensor profiles and the modeled thermal and/or flow data can be provided to a user. The matched data may indicate

to the user the location and magnitude of various physical parameters that characterize the well, and make it easier for the user to spot where any anomalies or unusual characteristics occur. Matched data can also be recorded, thereby enabling the monitoring of various physical parameters to be observed and compared over a period of time.

[0023] In one embodiment of the present invention, the sensor data may, for example, be obtained from a spoolable array of sensors such as those disclosed in U. S. Provisional Application No. 60/866,622 by Dinesh Patel, filed November 21, 2006, which is also incorporated herein by reference. Such a spoolable array of sensors may be deployed along the sandface, and the sensors may transmit data to the earth's surface via an inductive coupling technique. Data respecting such, but not limited to, downhole parameters as temperature, pressure, flow rate, fluid density, reservoir resistivity, oil/gas/water ratio, viscosity, carbon/oxygen ratio, acoustic parameters and chemical sensing may be communicated to the earth's surface.

[0024] With reference now to FIG. 2, in yet another embodiment the sensor data from a sandface in wellbore 22 may also be obtained by using a spoolable array 20 comprising a plurality of addressable temperature sensors 21 that are deployed downhole and which may be addressed by communication apparatus 23 located at the earth's surface. When addressed, an addressable temperature sensor 21 may provide information respecting the individual temperature sensor's 21 identity and the temperature at the sensor's location downhole to the communication apparatus 23. Such an array of spoolable temperature sensors is disclosed in U. S. Patent Application No. 11/767,908, by Pete Howard et al., filed June 25, 2007 which is also incorporated herein by reference.

[0025] With reference now to FIG. 3, in a further embodiment of the present invention, the sensor data from a sandface in a wellbore may be obtained by simultaneously deploying a fiber-optic cable 31 and sensor cable 32 into the wellbore. The sensor cable 32 may, for example, comprise a plurality of temperature sensors 33 and a plurality of pressure sensors 34 that are disposed at spaced intervals along the sensor cable 32. The spaced intervals for the pressure sensors 34 may, for example, be 20 meters. Distributed temperature sensor data may be obtained from fiber-optic cable 31 at one meter intervals, for example.

[0026] The sensor data obtained by sandface measurements may be preprocessed in a number of ways. For example, the sensor data received may include noise that must be reduced or otherwise removed. Such removal may, for example, be effected through the utilization of median and mean filters configured to remove spikes that may be present in the received sandface data. Such filtering techniques are well-known to those skilled in the art.

[0027] Yet another pre-processing step that may be required as one of depth control. Determination of the position of sensors deployed in the completion has been dependent upon surface measurements made as the completion is run into the ground. However, this measurement is sometimes incorrect. Even when correct, this surface measurement may not account for any compression or tension in the completion, potentially changing the length of the completion as it is deployed. In one embodiment of the present invention, sensors that are deployed downhole may be equipped with a small radioactive source. After deployment of the completion, a future run of wireline or coiled tubing can be made with a sensor configured to detect the presence of the radioactive source. The corrected depth of the sensor may then be established from the wireline or coiled tubing depth. Alternatively, radio frequency identification tags may be used, among other methods, and these tags may have an advantage of being coded with a serial number, etc. for further identification and confirmation of an individual sensor source position.

[0028] With reference now to FIG. 4, when a broader range of sensors beyond fiber optic cable is desired to be used, it may be necessary to use a more diverse modeling package than that described in FIG. 1. For example, rather than decoupling the flow properties in the wellbore from the thermal properties in the reservoir, as in an embodiment of the method illustrated in FIG. 1, a single modeling package such as wellbore flow model 22a may be used to model both properties. For example, one such package used to implement wellbore flow model 22a is the Eclipse program available from the Assignee of the present application.

[0029] Once the flow of distribution in the well has been modeled, sandface sensor data may be imported and conditioned using the process at stage 14, with data obtained at stage 14a from real-time sandface sensor measurements and/or from one or more sandface sensor profiles that have already been acquired. The sandface sensor profile data may be pre-processed at stage 24b so as to make the profiles consistent with one another. The pre-processing may utilize any of the pre-processing techniques described above, in addition to other equivalent techniques. At stage 26, the output of wellbore flow model 22a may be matched with the sandface sensor profiles. If it is determined that the output of wellbore flow model 22a does not adequately match the sandface sensor profiles, the physical parameters of the well model 22a may be adjusted and the well model run again to provide a new model of the flow properties of the well.

[0030] With reference still to FIG. 4, in one embodiment of a method of characterizing a well according to the present invention, a reservoir model 22b may be generated concerning the reservoir properties around the wellbore including but not limited to pressure, skin,

permeability, and porosity. In this embodiment, the downhole sensors may provide information concerning the reservoir properties. Once the reservoir model has been constructed, the reservoir data from the sensors may be imported, pre-processed and matched against the output of reservoir model 22b. If it is determined that the output of reservoir model 22b does not adequately match the reservoir profiles provided by the sensors, the parameters of the reservoir model 22b may be adjusted and the reservoir model run again. The process of matching, adjusting the physical parameters, and running the model may continue in an iterative manner until a sufficiently accurate match between the reservoir data from the sensors and the output of the reservoir model is obtained or until it is decided that no satisfactory match can be found.

[0031] While still referring to FIG. 4, an embodiment of a method according to the present invention may further comprise the step of establishing at least one control device 28 to change the flow characteristics of the production fluid in the well. Flow control device 28 may, for example, be set at the earth's surface and may comprise a choke, among other types of flow control devices. Alternatively, the flow control device 28 may be set in the wellbore with an active or adjustable flow control device. Active or adjustable flow control devices may be controlled through either well interventions such as with wireline or coil tubing or be interventionless and controlled automatically or through a well communication system. In the case of a multilateral well, for example, the flow control devices 28 may be set such that only one branch in the well is allowed to flow at any given time. By way of further example, different chokes settings could be applied to change the flow distribution along a long horizontal well. In such cases, the settings of the flow control devices 28 could be provided to the modeling device.

[0032] A method according to this embodiment may include the steps of providing a data set made up of a plurality of sandface measurements. In addition, a well model may be provided with a plurality of adjustable physical parameters. The method may further include running the well model with different combinations of the plurality of adjustable physical parameters in order to match the plurality of the sandface measurements. Thereafter, the setting of the flow control devices 28 may be changed resulting in the altering of the flow distribution of the production of the well. At which time, the steps of running the well model and comparing the well model results to the sandface data may be repeated and the process used to redefine the well model.

[0033] While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate

numerous modifications and variations there from. It is intended that the appended claims cover such modifications and variations as fall within the true spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A method of characterizing a well using a series of measurements along the sandface of said well to optimize a well model, comprising:
 - providing a well model with a plurality of adjustable physical parameters;
 - providing a data set made up of a plurality of sandface measurements; and
 - running the well model with different combinations of the plurality of adjustable physical parameters to match to the plurality of sandface measurements.
2. The method of claim 1 wherein the series of measurements are distributed temperature measurements made along an optical fiber.
3. The method of claim 1 further comprising:
 - establishing a communication pathway between the surface and the sandface via a communication device.
4. The method of claim 3 wherein the communication pathway includes at least one inductive coupler.
5. The method of claim 1 further comprising:
 - automated pre-processing of the plurality of sandface measurements.
6. The method of claim 5 wherein the automated pre-processing step includes correcting for depth.
7. The method of claim 5 wherein the automated pre-processing step includes reducing sandface measurement noise.
8. The method of claim 7 wherein the sandface measurement noise is reduced via a median filter.

103.0008A PCT

9. The method of claim 1 wherein the well model includes a model of temperature and flow properties.
10. The method of claim 1 wherein the step of providing a well model comprises providing a reservoir model.
11. The method of claim 1 wherein the well is one of multiple wells within a reservoir.
12. The method of claim 1 wherein the well contain devices which control or restrict the flow across a zone.
13. A method of characterizing a well using a series of measurements along the sandface of said well to optimize a well model, comprising the steps of:
 - (a) providing at least one control device configured to alter flow characteristics of a production fluid in the well;
 - (b) providing a well model with a plurality of adjustable physical parameters;
 - (c) acquiring a plurality of sandface measurements establishing a data set;
 - (d) running the well model with different combinations of the plurality of adjustable physical parameters until results from the well model substantially correlate to results from the data set;
 - (e) changing the setting of at least one flow control device and acquiring a new plurality of sandface measurements establishing a new data set; and
 - (f) repeating steps (d) and (e).
14. The method of claim 13, further comprising setting the at least one control device at the earth's surface.
15. The method of claim 14, wherein at least one of the at least one control device is a choke.

103.0008A PCT

16. The method of claim 13, further comprising setting the at least one control device in the well.
17. The method of claim 13, wherein the series of measurements are distributed temperature measurements made along an optical fiber.
18. The method of claim 13, further comprising:
automated pre-processing of the plurality of sandface measurements.
19. The method of claim 18, wherein the automated pre-processing step includes correcting for depth.
20. The method of claim 18, wherein the automated pre-processing step includes reducing sandface measurement data noise.

FIG. 1

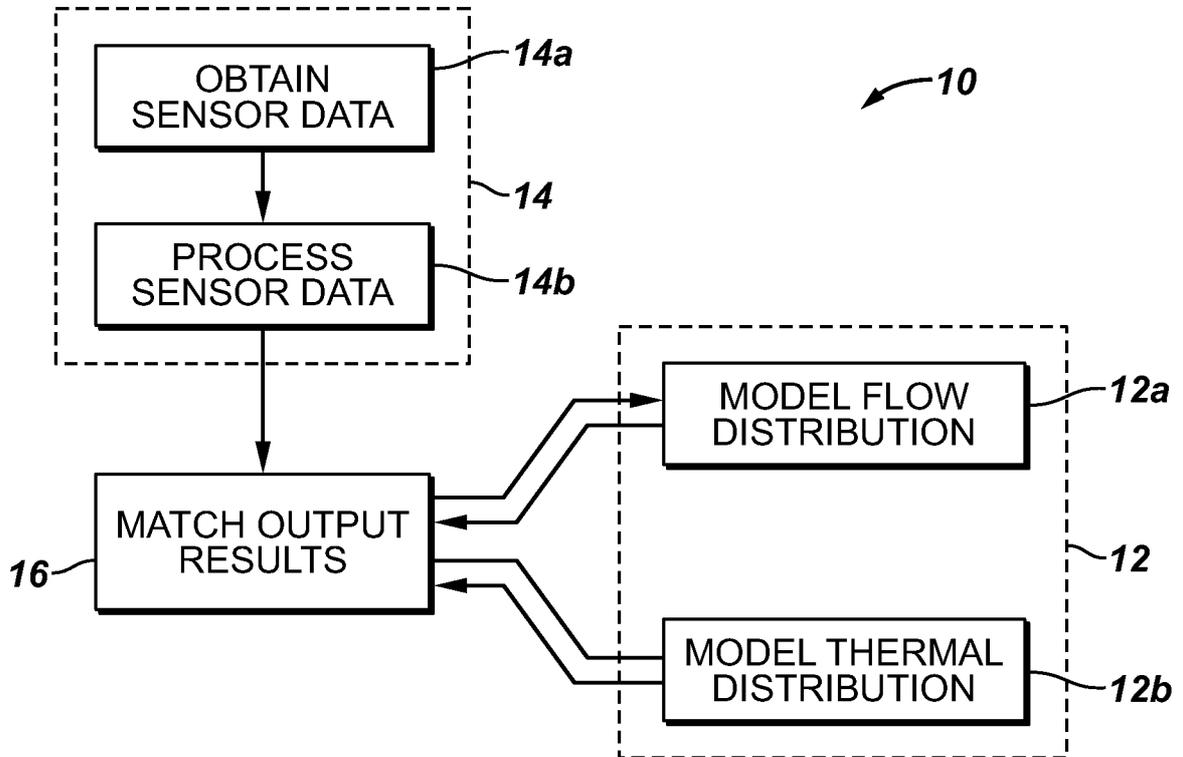


FIG. 2

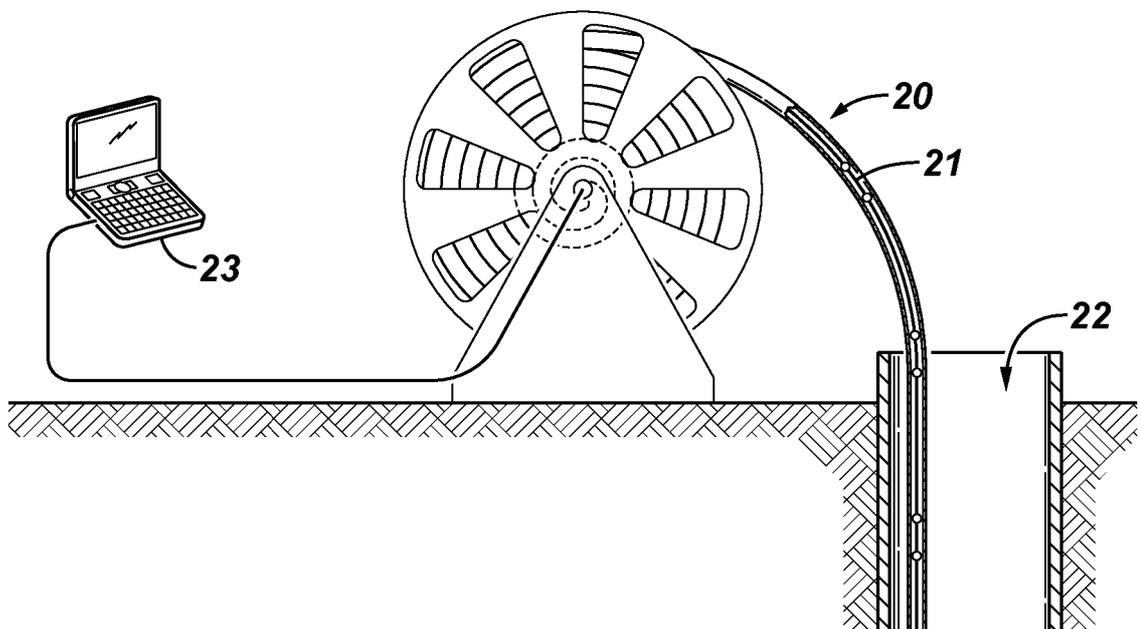


FIG. 3


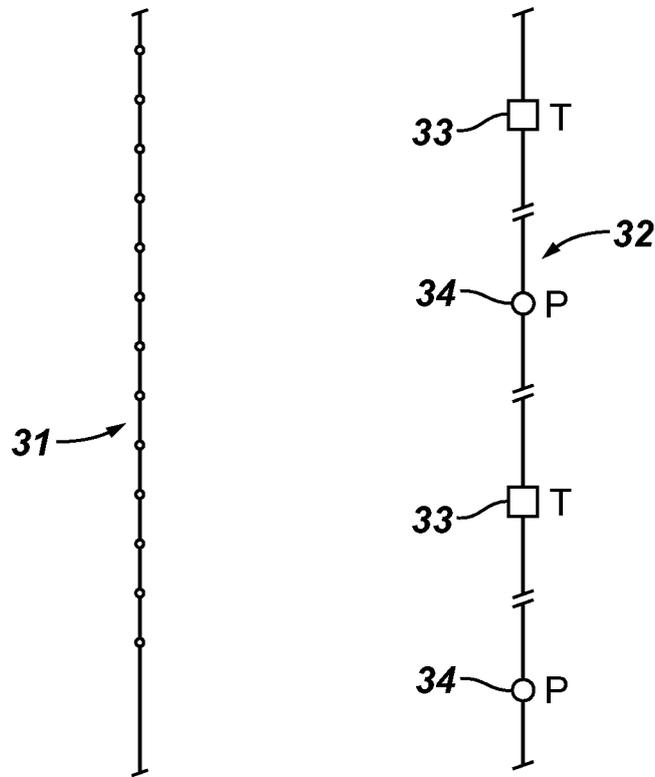


FIG. 4

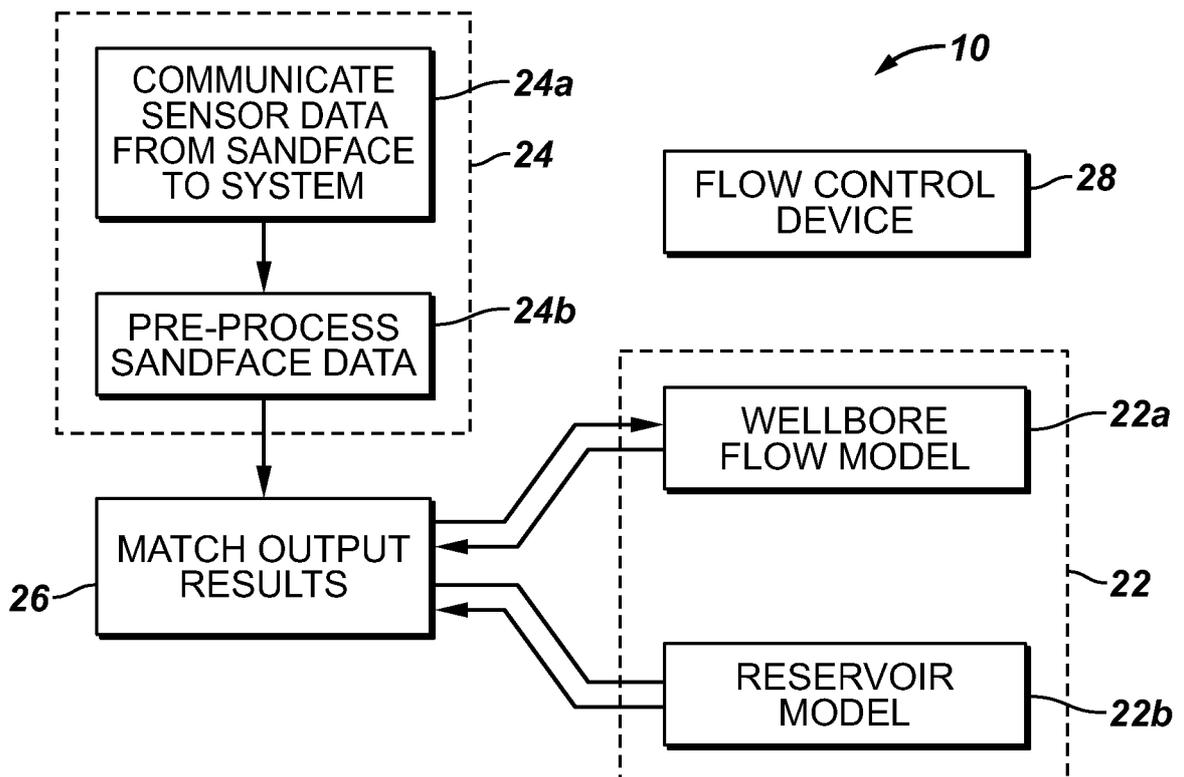

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/067248

A CLASSIFICATION OF SUBJECT MATTER IPC(8) - E21B 47/00 (2010.01) USPC - 175/50 According to International Patent Classification (IPC) or to both national classification and IPC		
B FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - E21B 47/00 (2010 01) USPC - 175/50 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) MicroPat βnt		
C DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	WO 2004/076815 A1 (JALALI et al) 10 September 2004 (10 09 2004) entire document	1-3, 9-11
Y		4-8, 12-20
Y	US 2005/01 15741 A1 (TERRY et al) 02 June 2005 (02 06 2005) entire document	5-8, 12-20
Y	US 2006/0077757 A1 (COX et al) 13 April 2006 (13 04 2006) entire document	4, 7-8, 20
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/>		
* Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 25 January 2010		Date of mailing of the international search report 22 FEB 2011
Name and mailing address of the ISA/US Mail Stop PCT, Attn ISA/US, Commissioner for Patents P O Box 1450, Alexandria, Virginia 22313-1450 Facsimile No 571-273-3201		Authorized officer Blaine R Copenheaver PCT Helpdesk 571 272-4300 PCTOSP 571-272-7774