

WO 2020/120499 A1

A CENTRIFUGAL SEPARATOR

Technical Field

The invention relates to a centrifugal separator for separating liquid food into a
5 light phase, a heavy phase, and an ejection phase that comprises solid impurities, and
to a method of separating liquid food.

Background

Separators for separating liquid food into different phases of varying density
10 under the influence of a centrifugal force are called centrifugal separators. The liquid
food is introduced in a rotating disc stack of the centrifugal separator. Under the
influence of the centrifugal force heavier sediment and lighter particles in the liquid food
begin to settle radially outwards respectively inwards in the separation channels
according to their density. Heavier solid impurities collect in a sediment space at the
15 periphery of the separator, and are intermittently ejected as an ejection phase from an
ejection port at the periphery.

Separators are typically utilized for separating raw milk into skim milk and
cream. A problem with previous separators is that the efficiency is reduced for the
separation of liquid food other than milk. For example, sub-optimal separation of liquid
20 food containing an increased ratio of fine particles and/or high-density particles may
result in a cloudy appearance in an otherwise clear liquid phase of the food product.
This may affect the perceived quality of the liquid food product. Furthermore, the
lowered performance may also lead to increased product losses.

25 Summary

It is an object of the invention to at least partly overcome one or more limitations
of the prior art. In particular, it is an object to provide an improved centrifugal separator
with increased performance for separating liquid food, in particular liquid food
containing an increased ratio of fine particles and/or high-density particles compared to
30 milk.

In a first aspect of the invention, this is achieved by a centrifugal separator for
separating liquid food into a light phase, a heavy phase, and an ejection phase that
comprises solid impurities, the separator comprising a centrifuge bowl, an inlet for the
liquid food at a bottom portion of the centrifuge bowl and outlets for the heavy phase
35 and the light phase at a top portion of the centrifuge bowl, an ejection port arranged at

a periphery of the centrifuge bowl to eject the ejection phase from the centrifuge bowl, a disc stack of conical discs arranged inside the centrifuge bowl, the disc stack comprising a first set of discs arranged in the bottom portion, and a second set of discs arranged in the top portion, wherein the liquid food passes the first set of discs before
5 passing the second set of discs when received through the inlet. The discs in the first set of discs define interspaces in between the disks, the interspaces extending from the periphery of the disc stack to an axial center portion of the disc stack and limiting the liquid food to flow between the periphery and the center portion of the disc stack. The discs in the second set of discs define interspaces in between the disks and comprise
10 distribution openings that are located between the periphery and the center portion of the disc stack for distributing a flow of the liquid food where the light phase flows from the distribution openings towards a center channel at the center portion and the heavy phase flows from the distribution openings towards the periphery.

In another aspect of the invention, this is achieved by a method for separating
15 liquid food into a light phase, a heavy phase and an ejection phase that comprises solid impurities in a separator, the method comprises distributing a flow of the liquid food through a first set of discs in a disc stack arranged in the separator so that the liquid food is limited to flow between a periphery and a center portion of the disc stack, and distributing a flow of the liquid food through a second set of discs in the disc stack so
20 that the light phase flows from distribution openings, located between the periphery and the center portion, towards a center channel at the center portion, and the heavy phase flows from the distribution openings towards the periphery.

Having a first set of discs to limit the liquid food to flow between a periphery and a center portion of the disc stack, and a second set of discs comprising distribution
25 openings for distributing a flow of the light phase from the distribution openings towards a center channel and a flow of the heavy phase from the distribution openings towards the periphery, provides for improved separation performance for liquid food containing particles of reduced size or increased density while minimizing product losses.

Still other objectives, features, aspects and advantages of the invention will
30 appear from the following detailed description as well as from the drawings.

Drawings

Embodiments of the invention will now be described, by way of example, with reference to the accompanying schematic drawings.

Fig. 1 is a cross-sectional side view of a centrifugal separator for separating liquid food into a light phase, a heavy phase, and an ejection phase that comprises solid impurities;

Fig. 2 is a diagram showing a time interval for the ejection of an ejection phase in relation to the timing of changes in flow through an inlet valve and a first outlet valve; and

Figs. 3a-c are flowcharts of methods for separating liquid food into a light phase, a heavy phase and an ejection phase.

10 Detailed Description

Embodiments of the invention will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all, embodiments of the invention are shown. The invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

15 Fig. 1 is a schematic illustration of a centrifugal separator 100 for separating liquid food (RP) into a light phase (LP), a heavy phase (HP), and an ejection phase (SI) that comprises solid impurities (SI). The separator 100 comprises a centrifuge bowl 101, and an inlet 102 for the liquid food (RP) at a bottom portion 103 of the centrifuge bowl 101. The separator 100 comprises outlets 104, 104', for the heavy phase (HP) and the light phase (LP) at a top portion 105 of the centrifuge bowl 101. An ejection port 106 is arranged at a periphery 107 of the centrifuge bowl 101 to eject the ejection phase (SI) from the centrifuge bowl 101. The ejection port 106 may be configured to open for a short period of time, and with a predefined frequency so that the impurities collected at the periphery 107, i.e. at the sediment space, are regularly emptied from the centrifuge bowl 101. The separator 100 comprises a disc stack 108 of conical discs 109 arranged inside the centrifuge bowl 101. The disc stack 108 comprises a first set of discs 110 arranged in the bottom portion 103, and a second set of discs 111 arranged in the top portion 105. The liquid food (RP) passes the first set of discs 110 before passing the second set of discs 111 when received through the inlet 102.

30 The discs 109 in the first set of discs 110 define interspaces 112 in between the disks 109. The interspaces 112 extend from the periphery 107 of the disc stack 108 to an axial center portion 113 of the disc stack 108 and limit the liquid food (RP) to flow between the periphery 107 and the center portion 113 of the disc stack 108. The discs 109 in the second set of discs 111 define interspaces 112' in between the disks 109

and comprise distribution openings 114 that are located between the periphery 107 and the center portion 113 of the disc stack 108. The distribution openings 114 distribute a flow of the liquid food (RP) so that the light phase (LP) flows from the distribution openings 114 towards a center channel 115 at the center portion 113 and the heavy phase (HP) flows from the distribution openings 114 towards the periphery 107. The light phase (LP) flows from the center channel 115 to the outlet 104' for the light phase (LP), and the heavy phase (HP) flows from the periphery 107 to the outlet 104 for the heavy phase (HP).

Having a first set of discs 110 to limit the liquid food (RP) to flow between the periphery 107 and the center portion 113 of the disc stack 108 provides for maximizing the radial distance along which the liquid food (RP) flows, which allows for an efficient separation of solid impurities (SI). The liquid food (RP) flows radially inwards through the interspaces 112 towards the center portion 113, and on the way through the disc stack 108 the solid impurities (SI) are separated and thrown back along the undersides of the discs 109 to the periphery 107 where they are collected and subsequently ejected through the ejection port 106. As the liquid food (RP) passes along the full radial width of the discs 109, the time of passage also allows very small particles to be separated. This is particularly advantageous in case the liquid food contains an increased ratio of fine particles, which may be the case for e.g. coconut water. While the first set of discs 110 provides for an efficient separation of small solid impurities (SI), the second set of discs 111 provides for a separation of the heavy phase (HP) and the light phase (LP) via the distribution of flow through the distribution openings 114 as described above. For example, fat particles of lower density flows radially inwards from the distribution openings 114, as opposed to the heavy phase (HP), and the fat can be extracted through the outlet for the light phase (104'). The separator 100 thus provides for an optimized removal of solid impurities (SI) of reduced size as well as efficient separation of the light phase (LP) and the heavy phase (HP) in a single compact disc stack 108. The amount of fine solid impurities (SI) and any portion of the light phase (LP), e.g. fat, in the separated heavy phase (HP) can thus be minimized. Providing such pure extraction of the heavy phase (HP) may be particularly advantageous in case the liquid food is coconut water. Any cloudiness caused by fine solid impurities and/or solid impurities of high density, such as fibres or coconut meat etc, or the coconut fat, may thus be minimized. The purity of the separated coconut water, i.e. the heavy phase (HP), may thus be increased. This also provides for an increased

perceived quality from the consumer perspective. Such improved separation efficiency and food quality may thus be provided by a single separator 100. This provides for minimizing cost and resources as well as a more compact and less complex production line.

5 The number of discs 109 in the first set of discs 110 may be higher than the number of discs 109 in the second set of discs 111. This provides for a further increase separation performance of solid impurities (SI) in the liquid food (RP).

 The separator 100 may comprise an inlet valve 116 that is arranged at the inlet 102 to reduce the flow of liquid food (RF) through the inlet 102 when the ejection phase (SI) is ejected through the ejection port 106. Reducing the flow of liquid food (RF) through the inlet 102 provides for reducing turbulence in the separator 100 as the ejection phase (SI) is ejected through the ejection port 106. The reduced turbulence of the flow of liquid food (RP) in the separator 100 provides for minimizing loss of liquid food (RP) other than the solid impurities (SI) through the ejection port 106. The
10 reduced losses allows for increasing the efficiency of the separator 100. The flow of liquid food (RF) through the inlet 102 may be reduced or completely stopped when the ejection phase (SI) is ejected through the ejection port 106. Completely stopping the flow of liquid food (RF) through the inlet 102 may provide for reducing the
15 aforementioned turbulence further.

20 The inlet valve 116 may be connected to a controller 117 configured to control the flow of liquid food (RF) through the inlet 102, as schematically shown in Fig. 1.

 The inlet valve 116 may be arranged to reduce the flow of liquid food (RF) through the inlet 102 for a defined first time interval (Δt_1). The first time interval (Δt_1) may start at a predetermined first time (t_s) before the ejection phase (SI) is ejected through the ejection port 106. Fig. 2 is a diagram showing the first time interval (Δt_1) in relation to the time interval, from t_1 to t_2 , during which the ejection phase (SI) is ejected through the ejection port 106. Starting the first time interval (Δt_1) at a predetermined first time (t_s) before the ejection phase (SI) is ejected through the ejection port 106 provides for further reducing any turbulence of the liquid food (RP) in the separator
25 100.
30 100.

 The first time interval (Δt_1) may end at a predetermined second time (t_e) after the ejection phase (SI) is ejected through the ejection port 106, as schematically illustrated in Fig. 2. This further provides for avoiding flushing out liquid food (RP) through the ejection port 106 as the ejection phase (SI) is ejected.

The separator 100 may comprise a first outlet valve 118 that is arranged at the outlet 104' for the light phase (LP) to increase the flow of the light phase (LP) through the outlet 104' for the light phase (LP) when the ejection phase (SI) is ejected through the ejection port 106. Increasing the flow of the light phase (LP) provides for reducing any backflow of the light phase (LP) as the ejection phase (SI) is ejected. I.e. the replacement of a certain volume of liquid which is ejected through the ejection port 106 may create a flow towards the ejection port 106. Increasing the flow of the light phase (LP) allows for compensating the backflow, which otherwise may risk mixing of the light phase (LP) and the heavy phase (HP). Avoiding such mixing provides for a more efficient separation. For example, in the case the liquid food is coconut water, the risk of having the coconut cream in the light phase (LP) mixing with the clear coconut water of the heavy phase (HP) is reduced. Any "cloudiness" of the extracted coconut water, caused by the coconut cream may thus be avoided to attain a pure high quality product.

The first outlet valve 118 may be connected to a controller 117 configured to control the flow of liquid food (RF) through the first outlet valve 118, as schematically shown in Fig. 1.

The first outlet valve 118 may be arranged to increase the flow of the light phase (LP) through the outlet 104' for the light phase (LP) for a defined second time interval (Δt_2). The second time interval (Δt_2) may start at a predetermined first time (t'_s) before the ejection phase (SI) is ejected through the ejection port (106), as schematically illustrated in Fig. 2. This provides for further avoiding the aforementioned backflow and mixing of the light phase (LP) and the heavy phase (HP).

The second time interval (Δt_2) may further end at a predetermined second time (t'_e) after the ejection phase (SI) is ejected through the ejection port 106.

In one example, the first outlet valve 118 increases the flow of the light phase (LP) through the outlet 104' for the light phase (LP) while the inlet valve 116 reduces the flow of liquid food (RF) through the inlet 102 when the ejection phase (SI) is ejected. I.e. the first time interval (Δt_1) overlaps with the second time interval (Δt_2) during a duration between t_1 and t_2 , as schematically illustrated in Fig. 2. It should however be understood that any of the inlet valve 116 and the first outlet valve 118 may be independently controlled to vary the flow as described above to provide for the mentioned advantageous benefits.

In one example, the first time interval (Δt_1) is equal to the second time interval (Δt_2). Hence, the flow of the light phase (LP) through the outlet 104' for the light phase (LP) is increased during the same time interval as the flow of the liquid food (RF) through the inlet 102 is reduced. This may provide for a particularly efficient separation.

5 It is however conceivable that in some examples the predetermined first times (t_s , t'_s) are equal, and that the predetermined second times (t_e , t'_e) are different, and vice versa, depending on the particular application while providing for the above mentioned advantageous benefits.

The predetermined first time (t_s) of the first time interval (Δt_1) may be in the
10 range of 1 to 4 seconds before the ejection phase (SI) is ejected through the ejection port 106. Alternatively or in addition, the predetermined second time (t'_s) of the second time interval (Δt_2) may be in the range of 1 to 4 seconds before the ejection phase (SI) is ejected through the ejection port 106. A range of 1 to 4 seconds may provide for a particularly efficient separation with reduced risk of mixing the light phase (LP) and the
15 heavy phase (HP) as well as minimized product losses.

The predetermined second time (t_e) of the first time interval (Δt_1) may be in the range of 1 to 6 seconds after the ejection phase (SI) is ejected through the ejection port 106. Alternatively or in addition, the predetermined second time (t'_e) of the second time interval (Δt_2) may be in the range of 1 to 6 seconds after the ejection phase (SI) is
20 ejected through the ejection port 106. A range of 1 to 6 seconds may provide for a particularly high separation performance and minimized product losses.

The separator 100 may comprise a second outlet valve 119 that is arranged at the outlet 104 for the heavy phase (HP) to reduce the flow of the heavy phase (HP) through the outlet 104 for the heavy phase (HP) when the ejection phase (SI) is ejected
25 through the ejection port 106. The extraction of the heavy phase (HP) may thus be reduced or avoided during the ejection of the solid impurities (SI). Any undesired turbulence or backflow as described above may thus not affect the heavy phase (HP) and the extraction thereof may be resumed as the ejection is completed. The flow of the heavy phase (HP) through the second outlet valve 119 may be reduced or
30 completely stopped when the ejection phase (SI) is ejected through the ejection port 106. Completely stopping the flow may be particularly advantageous in attaining a high separation performance. The second outlet valve 119 may be connected to a controller

117 configured to control the flow of liquid food (RF) through the second outlet valve 119, as schematically shown in Fig. 1.

Fig. 3a illustrates a flow chart of a method 200 for separating liquid food (RP) into a light phase (LP), a heavy phase (HP) and an ejection phase (SI) that comprises
5 solid impurities (SI) in a separator 100. The method 200 comprises distributing 201 a flow of the liquid food (RP) through a first set of discs 110 in a disc stack 108 arranged in the separator 100 so that the liquid food (RP) is limited to flow between a periphery 107 and a center portion 113 of the disc stack 108. The method 200 further comprises
10 distributing 202 a flow of the liquid food (RP) through a second set of discs 111 in the disc stack 108 so that the light phase (LP) flows from distribution openings 114, located between the periphery 107 and the center portion 113, towards a center channel 115 at the center portion 113, and the heavy phase (HP) flows from the distribution openings 114 towards the periphery 107. The method 200 thus allows for an efficient separation of liquid food (RP) containing an increased ratio of fine particles, which may be the
15 case of e.g. coconut water, as described above in relation to the separator 100 and Figs. 1 – 2.

Fig. 3b illustrates another flow chart of a method 200. The method 200 may comprise reducing 203 the flow of the liquid food (RP) into the separator 100 while
20 ejecting 204 the ejection phase (SI) from the separator 100. Turbulence in the separator 100 may thus be reduced, as described above.

Fig. 3c illustrates another flow chart of a method 200. The method 200 may comprise increasing 203' the flow of the light phase (LP) through an outlet 104' for the
light phase (LP) while ejecting 204 the ejection phase (SI) from the separator 100. Backflow of the light phase (LP) may thus be reduced, providing for a improved
25 separation and product quality, as described above.

Fig. 3d illustrates another flow chart of a method 200. The method 200 may comprise reducing 203'' the flow of the heavy phase (HP) through an outlet 104 for the
heavy phase (HP) while ejecting 204 the ejection phase (SI) from the separator 100. This further provides for an efficient separation of the heavy phase (HP), as described
30 above.

As mentioned, the liquid food (RP) may be coconut water. It is conceivable that the liquid food (RP) may comprise other food where separation of a light phase (LP), a heavy phase (HP), and solid impurities (IS) is desirable.

The method 200 may be carried out with a temperature of the liquid food (RP) in the range 4 - 15°C. This provides for facilitated separation of small solid impurities (SI) since the particles may form larger aggregates more easily in this temperature range. Hence, in case of separating coconut water, the coconut water may have a

5 temperature in the range 4 - 15°C.

From the description above follows that, although various embodiments of the invention have been described and shown, the invention is not restricted thereto, but may also be embodied in other ways within the scope of the subject-matter defined in the following claims.

10

CLAIMS

1. A centrifugal separator (100) for separating liquid food (RP) into a light phase (LP), a heavy phase (HP), and an ejection phase (SI) that comprises solid impurities (SI), the separator (100) comprising
- 5 a centrifuge bowl (101),
an inlet (102) for the liquid food (RP) at a bottom portion (103) of the centrifuge bowl (101) and outlets (104, 104') for the heavy phase (HP) and the light phase (LP) at a top portion (105) of the centrifuge bowl (101),
- 10 an ejection port (106) arranged at a periphery (107) of the centrifuge bowl (101) to eject the ejection phase (SI) from the centrifuge bowl (101),
a disc stack (108) of conical discs (109) arranged inside the centrifuge bowl (101), the disc stack (108) comprising a first set of discs (110) arranged in the bottom portion (103), and a second set of discs (111) arranged in the top portion (105),
- 15 wherein the liquid food (RP) passes the first set of discs (110) before passing the second set of discs (111) when received through the inlet (102), **characterized in that**
- discs (109) in the first set of discs (110) define interspaces (112) in between the disks (109), the interspaces (112) extending from the periphery (107) of the disc stack (108) to an axial center portion (113) of the disc stack (108) and limiting the liquid food (RP) to flow between the periphery (107) and the center portion (113) of the disc stack (108), and in that
- 20 discs (109) in the second set of discs (111) define interspaces (112') in between the disks (109) and comprise distribution openings (114) that are located between the periphery (107) and the center portion (113) of the disc stack (108) for distributing a flow of the liquid food (RP) where the light phase (LP) flows from the distribution openings (114) towards a center channel (115) at the center portion (113) and the heavy phase (HP) flows from the distribution openings (114) towards the periphery (107).
- 25
- 30
2. A separator according to claim 1, wherein the number of discs (109) in the first set of discs (110) is higher than the number of discs (109) in the second set of discs (111).

3. A separator according to claim 1 or 2, comprising
an inlet valve (116) that is arranged at the inlet (102) to reduce the flow of liquid
food (RF) through the inlet (102) when the ejection phase (SI) is ejected through the
ejection port (106).

5

4. A separator according to claim 3, wherein the inlet valve (116) is arranged to
reduce the flow of liquid food (RF) through the inlet (102) for a defined first time interval
(Δt_1), wherein the first time interval (Δt_1) starts at a predetermined first time (t_s) before
the ejection phase (SI) is ejected through the ejection port (106).

10

5. A separator according to claim 4, wherein the first time interval (Δt_1) ends at
a predetermined second time (t_e) after the ejection phase (SI) is ejected through the
ejection port (106).

15

6. A separator according to any of claims 1 - 5, comprising
a first outlet valve (118) that is arranged at the outlet (104') for the light phase
(LP) to increase the flow of the light phase (LP) through the outlet (104') for the light
phase (LP) when the ejection phase (SI) is ejected through the ejection port (106).

20

7. A separator according to claim 6, wherein the first outlet valve (118) is
arranged to increase the flow of the light phase (LP) through the outlet (104') for the
light phase (LP) for a defined second time interval (Δt_2), wherein the second time
interval (Δt_2) starts at a predetermined first time (t'_s) before the ejection phase (SI) is
ejected through the ejection port (106).

25

8. A separator according to claim 7, wherein the second time interval (Δt_2) ends
at a predetermined second time (t'_e) after the ejection phase (SI) is ejected through the
ejection port (106).

30

9. A separator according to claim 4 and 7, wherein the first time interval (Δt_1) is
equal to the second time interval (Δt_2).

10. A separator according to claim 4 and 7, wherein the predetermined first time t_s and/or t'_s is in the range of 1 to 4 seconds before the ejection phase (SI) is ejected through the ejection port (106).

5 11. A separator according to claim 5 and 8, wherein the predetermined second time t_e and/or t'_e is in the range of 1 to 6 seconds after the ejection phase (SI) is ejected through the ejection port (106).

10 12. A separator according to any of claims 1 - 11, comprising a second outlet valve (119) that is arranged at the outlet (104) for the heavy phase (HP) to reduce the flow of the heavy phase (HP) through the outlet (104) for the heavy phase (HP) when the ejection phase (SI) is ejected through the ejection port (106).

15 13. A method (200) for separating liquid food (RP) into a light phase (LP), a heavy phase (HP) and an ejection phase (SI) that comprises solid impurities (SI) in a separator (100), the method comprises

20 distributing (201) a flow of the liquid food (RP) through a first set of discs (110) in a disc stack (108) arranged in the separator (100) so that the liquid food (RP) is limited to flow between a periphery (107) and a center portion (113) of the disc stack (108), and

25 distributing (202) a flow of the liquid food (RP) through a second set of discs (111) in the disc stack (108) so that the light phase (LP) flows from distribution openings (114), located between the periphery (107) and the center portion (113), towards a center channel (115) at the center portion (113), and the heavy phase (HP) flows from the distribution openings (114) towards the periphery (107).

30 14. A method according to claim 13, comprising
reducing (203) the flow of the liquid food (RP) into the separator (100) while
ejecting (204) the ejection phase (SI) from the separator (100).

15. A method according to claim 13 or 14, comprising
increasing (203') the flow of the light phase (LP) through an outlet (104') for the light phase (LP) while ejecting (204) the ejection phase (SI) from the separator (100).

16. A method according to any of claims 13 – 15, comprising
reducing (203'') the flow of the heavy phase (HP) through an outlet (104) for the
heavy phase (HP) while ejecting (204) the ejection phase (SI) from the separator (100).

5 17. A method according to any of claims 13 - 16, wherein the liquid food (RP) is
coconut water.

18. A method according to any one of claims 13 - 17, wherein the temperature
of the liquid food (RP) is in the range 4 - 15°C.

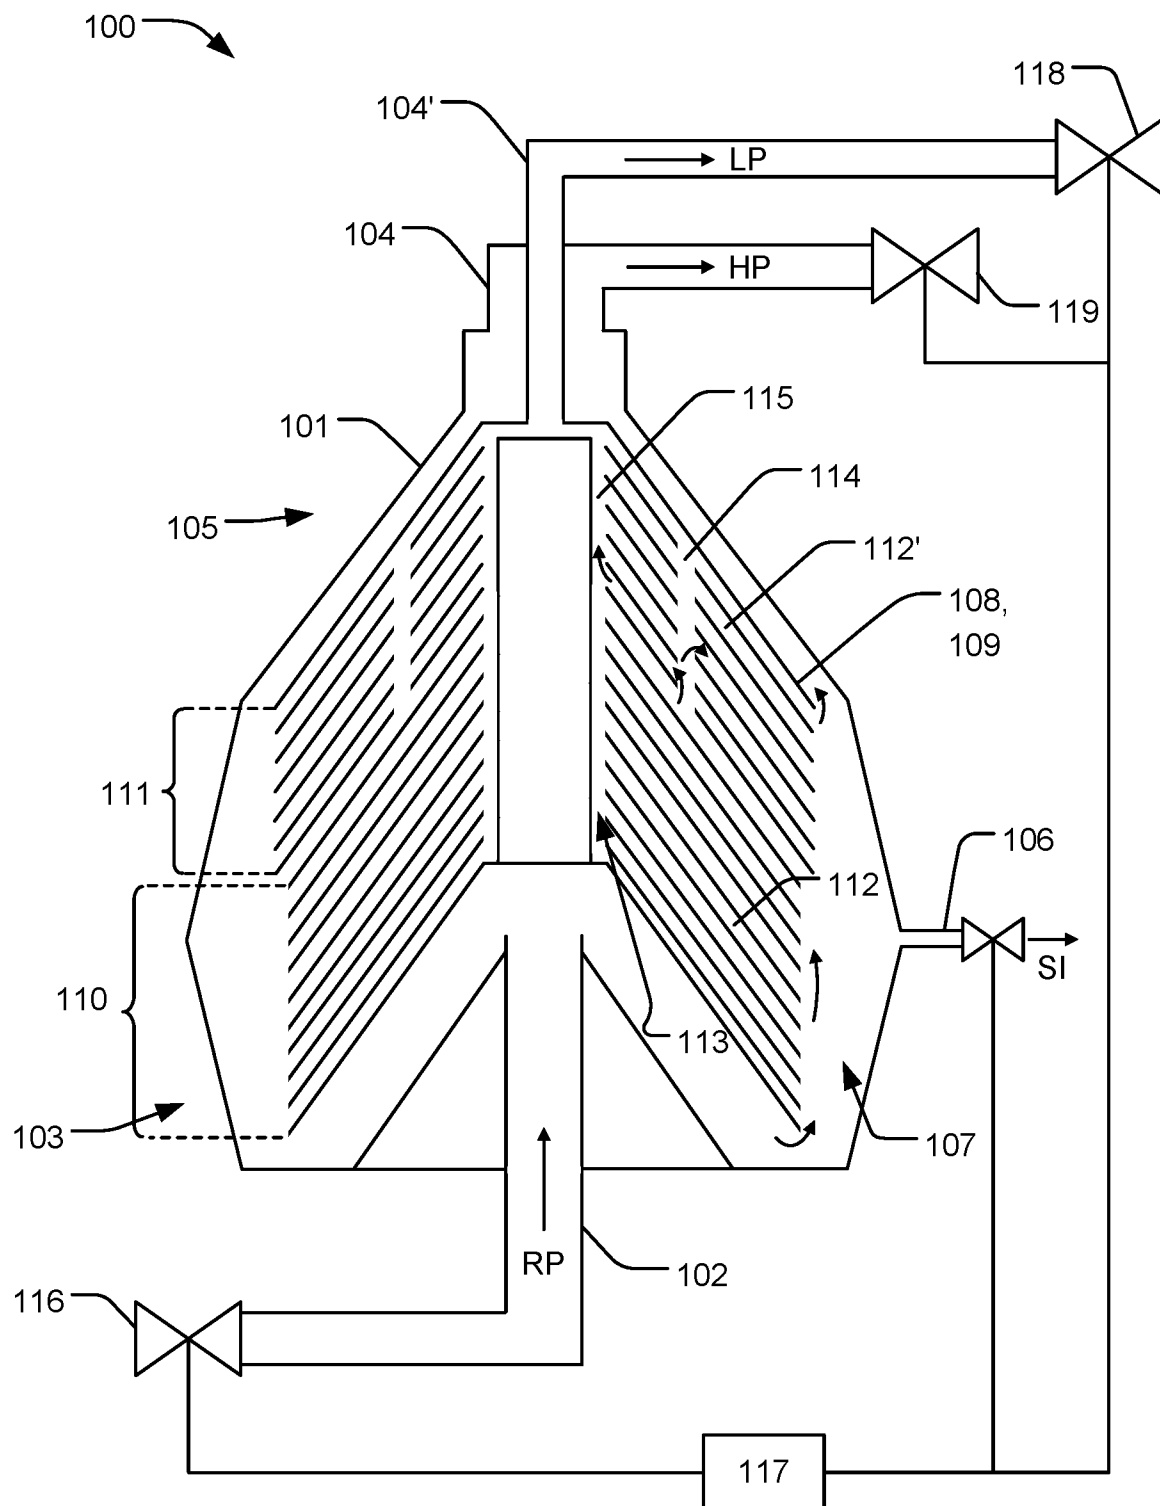


Fig. 1

2/5

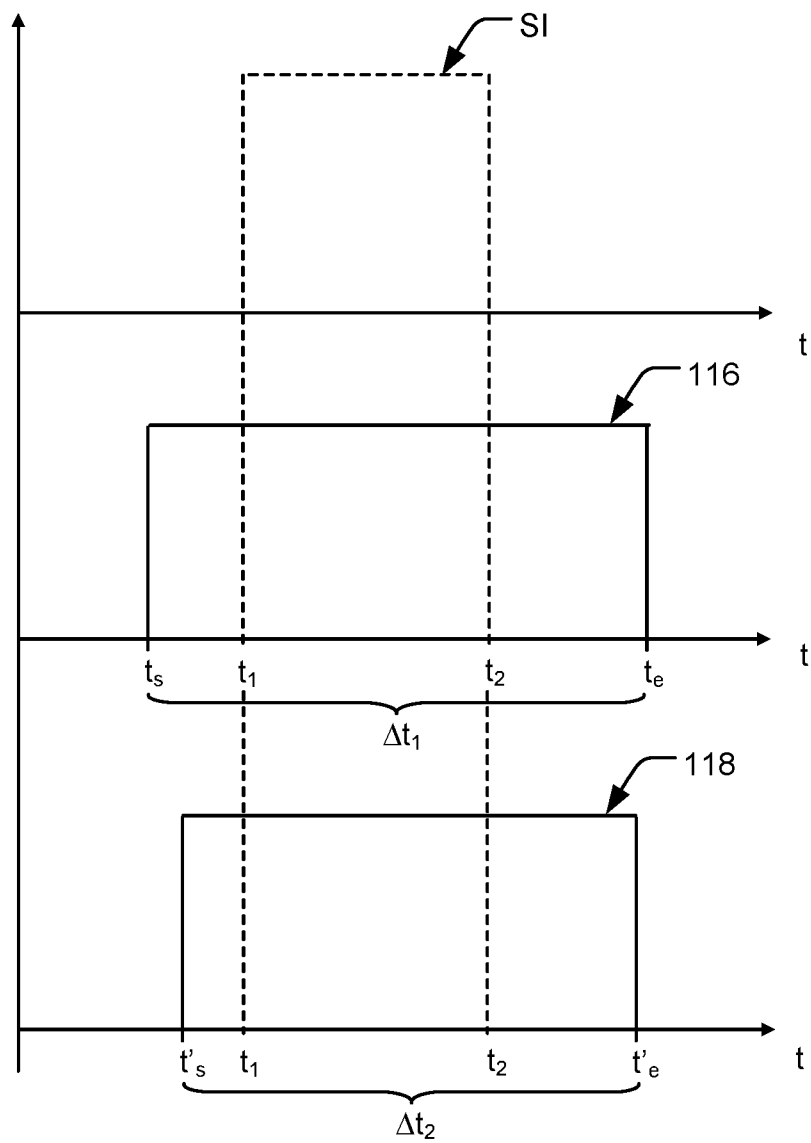


Fig. 2

3/5

200 

201: distributing flow through a
first set of discs for clarification



202: distributing flow through
a second set of discs for
separation

Fig. 3a

200 

201: distributing flow through a
first set of discs for clarification



202: distributing flow through
a second set of discs for
separation



203: reducing the flow into the
separator



204: ejecting an ejection phase
from the separator

Fig. 3b

4/5

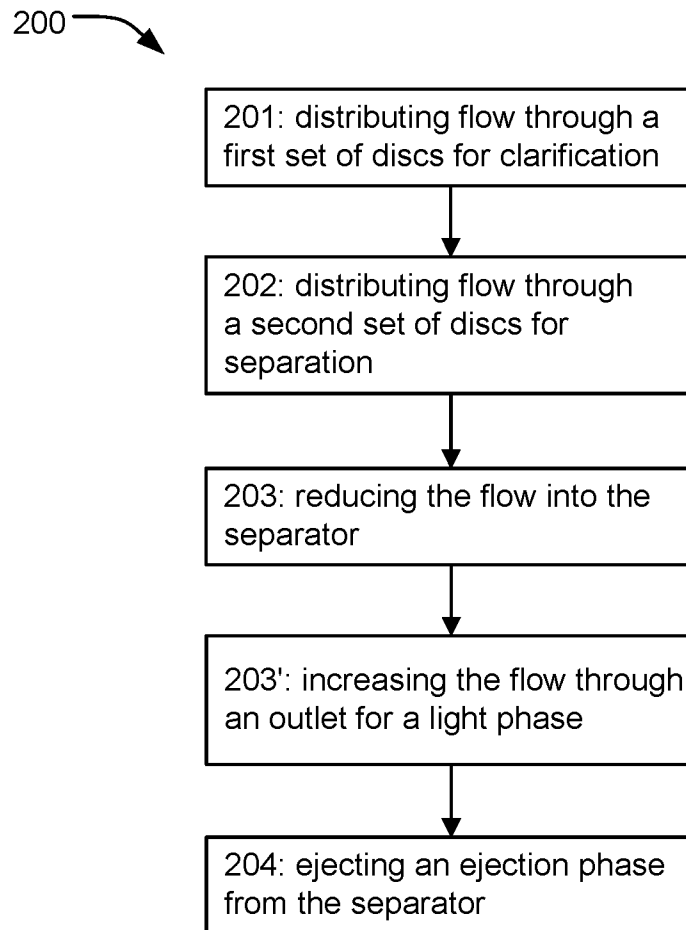


Fig. 3c

5/5

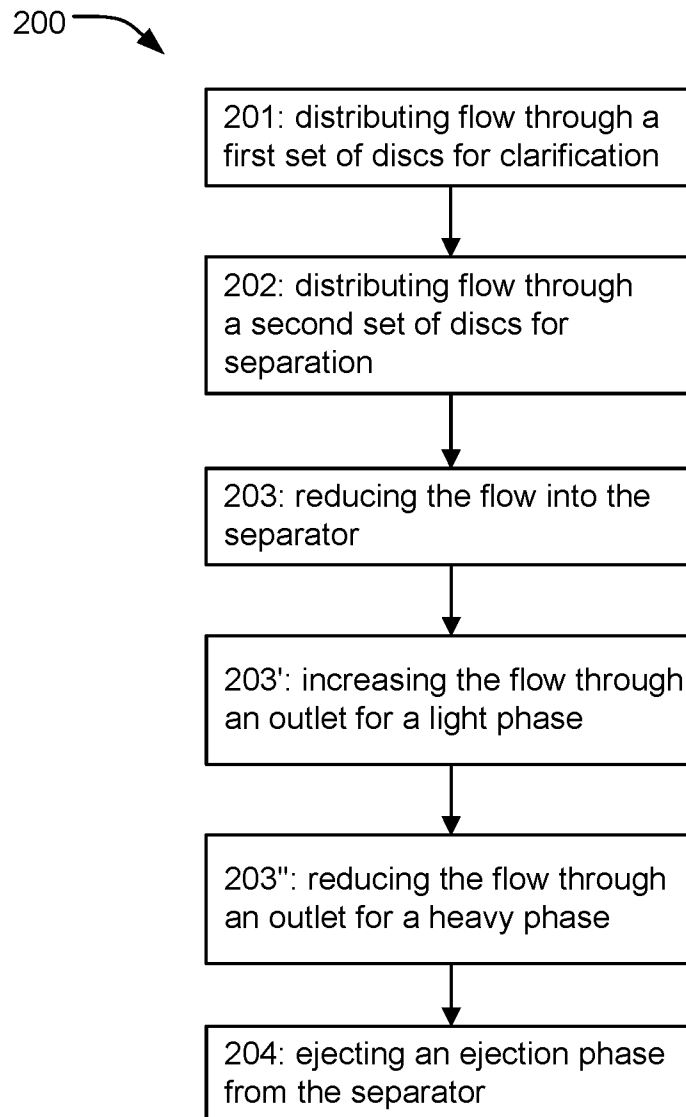


Fig. 3d

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/084485

A. CLASSIFICATION OF SUBJECT MATTER INV. B04B1/08 B04B1/14 B04B11/04 B04B7/14 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 500 100 A (STREZYNSKI GEORGE J) 7 March 1950 (1950-03-07)	1,2,13, 17,18
Y	column 2, line 10 - column 4, line 3; figure	3-6,12, 14,16
Y	----- US 3 938 734 A (WILKE FRIEDRICH) 17 February 1976 (1976-02-17) column 3, line 40 - column 4, line 31; figure	3-5,12, 14,16
Y	----- US 6 837 842 B1 (DELLDEN LARS HAAKAN [SE]) 4 January 2005 (2005-01-04) column 4, line 25 - column 5, last line; figure	3-6,12, 14,16
A	----- US 3 482 771 A (THYLEFORS HENRIC WILHELM) 9 December 1969 (1969-12-09) figure	1,13

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 7 February 2020	Date of mailing of the international search report 17/02/2020	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Leitner, Josef	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/084485

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2500100	A	07-03-1950	NONE
US 3938734	A	17-02-1976	DE 2363741 A1 31-07-1975 DK 663674 A 18-08-1975 FR 2255109 A1 18-07-1975 GB 1491036 A 09-11-1977 JP S5095862 A 30-07-1975 US 3938734 A 17-02-1976 ZA 7408126 B 28-01-1976
US 6837842	B1	04-01-2005	AT 402763 T 15-08-2008 AU 3849900 A 28-09-2000 CN 1349436 A 15-05-2002 EP 1185374 A1 13-03-2002 ES 2311453 T3 16-02-2009 JP 4584460 B2 24-11-2010 JP 2002537997 A 12-11-2002 US 6837842 B1 04-01-2005 WO 0053331 A1 14-09-2000
US 3482771	A	09-12-1969	DE 1657271 A1 11-02-1971 GB 1180317 A 04-02-1970 SE 227107 C1 29-07-1969 US 3482771 A 09-12-1969