



(43) International Publication Date
2 June 2016 (02.06.2016)

(10) International Publication Number
WO 2016/083667 A1

(51) International Patent Classification:
D21H 13/40 (2006.01) *D21H 17/20* (2006.01)
D21F 11/00 (2006.01)

(21) International Application Number:
PCT/FI2015/050811

(22) International Filing Date:
20 November 2015 (20.11.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20146033 24 November 2014 (24.11.2014) FI

(71) Applicant: PAPTIC LTD [FI/FI]; Tekniikantie 2 D,
02150 Espoo (FI).

(72) Inventors: TORNIAINEN, Esa; Tekniikantie 2 D, 02150
Espoo (FI). MUSTONEN, Tuomas; Tekniikantie 2 D,
02150 Espoo (FI). KINNUNEN, Karita; Tekniikantie 2
D, 02150 Espoo (FI). HJELT, Tuomo; Pl 1000, 02044 Vtt
(FI).

(74) Agent: BOCO IP OY AB; Itämerenkatu 5, 00180 Helsinki
(FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FIBER SHEETS AND STRUCTURES COMPRISING FIBER SHEETS

(57) Abstract: The invention relates to fiber sheets, to structures comprising said fiber sheets and to the use of said sheets. The invention further relates to biodegradable and/or recyclable products comprising said fiber sheets, useful in replacing non-biodegradable products.



WO 2016/083667 A1

FIBER SHEETS AND STRUCTURES COMPRISING FIBER SHEETS

5

FIELD OF THE INVENTION

The invention relates to fiber sheets, to structures comprising said fiber sheets, to the use of said fiber sheets and to a method for the manufacture of said fiber sheets. The invention further relates to biodegradable and/or recyclable products comprising said fiber sheets, useful in replacing non-biodegradable products.

10

BACKGROUND

Polymeric products, such as plastic packaging materials, plastic bags, and other plastic applications have become a serious environmental problem. It is estimated that each EU citizen uses an average of 200 plastic bags every year. Said plastic bags are kept for an average of 20 minutes and it takes about 1000 years to degrade the plastic bags. About 4 Mtn on yearly basis of plastic material, particularly plastic bags, can be found in the seas and oceans, where it cause serious damage to the sea ecosystem. The new amendment to the EU waste directive and implementation of the directive on individual country level is targeting to reduce the usage of plastic bags to level of 90 bags per citizen by 2019 and further to 40 bags by 2025. Currently only about 6.6 % of plastic bags are recycled and more than 8% ends up as litter. Thus environmentally acceptable, consumer preferred, recyclable and biodegradable substitute materials for plastic bags are needed.

15

20

25

Corresponding products traditionally made of paper, such as paper bags are also used. However, they have poor water resistance, they are relatively high in weight (e.g. in comparison to plastics), they are inflexible, their converting process is slow, they have poor user experience and preference, and they generally have limited strength properties, especially related to tear.

30

Further, plastic bags made of biodegradable plastic, such as polylactic acids or polymeric starch are available, but they have limited water resistance as well as user acceptance and strength properties. Starch products further compete with food production, which is a serious concern for the sustainability and land use.

35

CN101302319 describes biodegradable shopping bags made of a slurry comprising refined grass, wheat straw, bagasse, annual herb leaves and stems, polyvinyl alcohol, optional gypsum, salt, defoamer and water-proofing agent, where said slurry is poured in a mold, dewatered and dried to obtain a sheet, which is formed to a shopping bag.

Technique relating to methods for producing foam-laid fiber webs is known technology particularly in the field of manufacture of non-woven and tissue products. Fiber web is formed from a dispersion of fibers in a foamed liquid. A pulp or fiber furnish is first prepared in a pulper, followed by dewatering, mixing with a foam or foamable liquid containing a surfactant and water. The fibers are dispersed in the foam and the formed fiber-foam is deposited on a wire and the main portion of the liquid, which is essentially in the form of foam, is removed by a suction. This technique is disclosed in EP 481746. Surfactants may be of any suitable type, such as anionic, cationic, non-ionic and amphoteric surfactants. Additionally, wet-strengtheners, binders, creping chemicals etc. may be used. Surfactants used in the foaming process are generally regarded as having a negative influence on both the dry and wet tensile strength of a paper web.

Based on the above it can be seen that there exists a need to provide environmentally acceptable and biodegradable substitute materials for non-degradable plastics presently used in various applications, such as packaging, plastic bags, etc.

SUMMARY

An object of the present invention is to overcome or substantially reduce the above described problems relating to the use of non-biodegradable plastic materials, such as packaging materials, by way of finding a new material, which is biodegradable and/or recyclable using the currently available recycling systems, flexible, easy to manufacture, user friendly (both consumer and retailer), cost effective, particularly related to water, energy, chemical and material costs, and has sufficient strength properties.

A further object of the invention is to provide fiber sheets, which can be used for replacing plastic materials.

A still further object of the invention is to provide structures comprising said fiber sheets.

A still further object of the invention is to provide uses of said fiber sheets in packaging, in carrier bags and sacks, covering, construction, clothing and fabrics, graphics and interior design applications.

A still further object of the invention is to provide a method for the manufacture of said fiber sheets.

The present invention generally concerns a fiber sheet, which it is obtainable by foam based production technology, it comprises fibers, a binder and a foaming polymer, and where 50-99 wt% of said fibers are natural fibers and 1-50 wt% of said fibers are reinforcement fibers selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof, and where said sheet has properties typically characterizing plastic materials, flexibility, heat sealability, hydrophobicity, water repellency, elongation and strength, and where said sheet is biodegradable and/or recyclable.

The present invention relates to a fiber sheet, which it is obtainable by foam based production technology, it comprises fibers having average fiber length of 0.5-100 mm, a binder and a foaming agent, and where 50-99 wt% of said fibers are natural fibers and 1-50 wt% of said fibers are reinforcement fibers selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof, and where said fiber sheet has stretch in the range of 3-50 %. The fiber sheet is biodegradable and/or recyclable.

The present invention further relates to structures comprising said fiber sheets.

The present invention further relates to a method for the manufacture of a fiber sheet, where said method comprises the steps of

- forming at least one foamed dispersion by dispersing fibers comprising natural fibers and reinforcement fibers, where the reinforcement fibers are selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof in a foam or foamable liquid comprising water and at least one foaming agent to obtain fiber-foam comprising 50 – 99% by weight of natural fibers, 1 to 50% by weight of reinforcement fibers, 0.5 – 10% by weight of at least one foaming agent,
- conveying the formed fiber-foam to a foraminous support and draining liquid through the foraminous support to form a sheet,
- drying and calendering the sheet to obtain the fiber sheet, and
- where the foam or foamable liquid comprises at least one binder; or the formed sheet is finalized before or after drying by treating the surface of the sheet with at least one binder; or the foam or foamable liquid comprises at least one binder and the formed sheet is finalized before or after drying by treating the surface of the sheet with at least one binder.

The invention provides a simple, environmentally acceptable solution for replacing non-biodegradable/non-recyclable/non-renewable materials as described above, at least partly, and it provides even further advantages to the products and structure made from the fiber sheets. The currently available recycling systems can be utilized for recycling the products of the present invention.

In particular, it has surprisingly been found that flexible, light, biodegradable and/or recyclable fiber sheets with high strength, burst and elongation properties can be obtained. Said fiber sheets may be used in a wide range of applications, such as packaging, covering, construction, interior design, graphics, clothing and fabrics, bags and sacks, and the like.

A method utilizing foam based production technology refers here particularly to a method where a fiber web is formed using a foam-laid method. Preferably said foam-laid method is followed by finalizing. Preferably the finalizing is carried out by applying binder to the fibrous web with a method selected from surface treatment methods.

The invention is also directed to the use of the fiber sheet in applications in the field of packaging, carrier bags and sacks, covering, construction, interior design, graphics, clothing and fabrics, and the like.

The characteristic features of the invention are presented in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 (1A-1D) illustrates pulling force as a function of elongation for paper, plastic and products of the invention.

Figure 2 (2A-2B) illustrates strength and TEA of paper, plastic and products of the invention, calculated from the total areas of the curves.

Figure 3 illustrates strength properties of the product according to the invention.

Figure 4 (4A-4E) illustrates properties of the samples according to the invention, when contacted with water.

Figure 5 (5A- 5D) illustrates the stretch and strength properties of the wet sample according to the invention, using paper as reference.

Figure 6 illustrates beneficial bursting behavior of products according to the invention.

Figure 7 illustrates tear strength of products according to the invention.

5 Figure 8 (8A-8E) illustrates laboratory scale process used in development of the invention.

Figure 9 (9A-9B) illustrates bags made from the fiber sheets of the invention.

DEFINITIONS

10 Unless otherwise specified, the terms, which are used in the specification and claims, have the meanings commonly used in the field of pulp and paper industry, as well as in packaging industry. Specifically, the following terms have the meanings indicated below.

15 The term "bio-degradable" refers here to material being capable of being broken down or destroyed to innocuous products or very small parts by natural processes, i.e. by the action of living things such as microorganisms.

The term "recyclable" refers here to material being capable of reusing for providing new products.

20 The term "biodegradable and/or recyclable products" refers here to biodegradable products, or recyclable products, or biodegradable and recyclable products.

25 The term "foam-laying method", also known as "foam-forming method" refers here to any conventional mono-layer and multi-layer foam-laid method used in the manufacture of non-woven products, paper products, tissue products and the like.

The term "foraminous support", also known as "foraminated support" refers here to a wire or the like.

30 The term "fiber sheet" refers here to flat, continuous or discontinuous mass or piece of fibrous material or fibrous web.

DETAILED DESCRIPTION OF THE INVENTION

35 It was surprisingly found that burst resistant, flexible, but yet sufficiently strong, elastic and water resistant fiber sheets can be obtained from biodegradable and/or recyclable materials with a simple and cost effective process. Said fiber sheets find numerous uses

in the field of packaging, in carrier bags and sacks, covering, construction, interior design, graphics, clothing and fabrics, and the like.

5 The fiber sheet has an ideal combination of the advantageous properties of paper and plastics and thus it finds numerous applications in the fields where earlier plastic or paper has been the most popular choice.

10 The present invention relates to a fiber sheet, which is obtainable by foam based production technology, it comprises fibers having average fiber length of 0.5-100 mm, a binder and a foaming agent, and where 50-99 wt% of said fibers are natural fibers and 1-50 wt% of said fibers are reinforcement fibers selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof, and where said fiber sheet has stretch in the range of 3-50 %. The fiber sheet is biodegradable and/or recyclable.

15 Preferably the fiber sheet has stretch in the range of 5-45 %, particularly preferably 10-40 %. Stretch is measured using the method ISO 1924-2:2008.

20 Obtainable by foam based technology refers to a method utilizing foam based production technology. It particularly refers to a method where a fiber web is formed using a foam-laid method, followed by finalizing. The finalizing is carried out with a method selected from surface treatment methods. Preferably a binder is applied to the fibrous web with a method selected from surface treatment methods. The binder may alternatively be applied during the foam laid method, or with the surface treatment method and the foam
25 laid method.

30 The surface treatment methods are selected from spray coating and foam assisted methods carried out at the press section of a paper machine, where the foam laid method is carried out, from external sizing methods carried out at a paper machine, where the foam laid method is carried out, methods utilizing size press, and from conventional surface treatment methods carried out with online or offline coating machines, and foam assisted coating methods.

35 According to a preferable embodiment the fiber sheet has elongation at break of 5-50%, preferably 10-40%, particularly preferably 25-40%. Elongation at break is measured using the method ISO 1924-2:2008.

The fibrous web may have grammage of 2 g/m² - 500 g/m², preferably 10 g/m² - 500 g/m², which may be adjusted according to the end product or structure.

Natural fibers

- 5 The natural fibers are selected from wood pulp, non-wood plant materials, and combinations thereof.

The natural fibers may be selected from chemical pulp, such as sulphate and sulphite pulp, organosolv pulp; recycled fibers; and/or mechanical pulp including e.g. refiner mechanical pulp (RMP), pressurized refiner mechanical pulp (PRMP), pretreatment refiner chemical alkaline peroxide mechanical pulp (P-RC APMP), thermomechanical pulp (TMP), thermomechanical chemical pulp (TMCP), high-temperature TMP (HT-TMP) RTS-TMP, alkaline peroxide pulp (APP), alkaline peroxide mechanical pulp (APMP), alkaline peroxide thermomechanical pulp (APTMP), Thermopulp, groundwood pulp (GW), stone groundwood pulp (SGW), pressure groundwood pulp (PGW), super pressure groundwood pulp (PGW-S), thermo groundwood pulp (TGW), thermo stone groundwood pulp (TSGW), chemimechanical pulp (CMP), chemirefinermechanical pulp (CRMP), chemithermomechanical pulp (CTMP), high-temperature CTMP (HT-CTMP), sulphite-modified thermomechanical pulp (SMTMP), reject CTMP (CTMPR), groundwood CTMP (G-CTMP), semichemical pulp (SC), neutral sulphite semi chemical pulp (NSSC), high-yield sulphite pulp (HYS), biomechanical pulp (BRMP), pulps produced according to the OPCO process, explosion pulping process, Bi-Vis process, dilution water sulfonation process (DWS), sulfonated long fibres process (SLF), chemically treated long fibres process (CTLF), long fibre CMP process (LFCMP), Kraft wood pulp, and modifications and combinations thereof. The pulp may be a bleached or non-bleached pulp.

The wood pulp may originate from hardwood or softwood, including birch, beech, aspen such as European aspen, alder, eucalyptus, maple, acacia, mixed tropical hardwood, pine such as loblolly pine, fir, hemlock, larch, spruce such as Black spruce or Norway spruce, and mixtures thereof. Suitably pulp originating from pine is used.

Also non-wood plant raw material, such as seed hair fibers, leaf fibers, bast fibers, plant fibers can be provided from e.g. straws of grain crops, wheat straw, reed canary grass, reeds, flax, hemp, kenaf, jute, ramie, seed, sisal, abaca, coir, bamboo, bagasse, cotton kapok, milkweed, pineapple, cotton, rice, reed, esparto grass, *Phalaris arundinacea*, or combinations thereof.

Also any combinations of wood pulp and non-wood plant material may be used.

According to a preferable embodiment the fiber sheet comprises 50-99 wt%, particularly preferably 70-99 wt% of the natural fibers.

5

According to a preferable embodiment the fiber sheet comprises 50-99 wt% of natural fibers having average fiber length 0.5-5 mm.

10

According to a preferable embodiment the natural fibers have average fiber length of 0.5-5 mm, preferably 1-3 mm.

Reinforcement fibers

15

The reinforcement fibers are long fibers selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof. The polymer fibers have thermoplastic properties or they are mixed with thermoplastic materials.

The non-wood natural fibers originate from non-wood plant materials as described above.

20

According to a preferable embodiment the polymer fibers are thermoplastic polymer fibers selected from polylactides (PLA), glycolic acid polymers (PGA), polyolefins (PO), polyethyleneterephthalates (PET), polyester (PES), polyvinyl alcohols (PVA) and bicomponent fibers comprising thermoplastic polymers.

25

Preferably the bicomponent fibers are selected from fibers having a thermoplastic polymer as the sheat polymer (bicomponent fiber with thermoplastic surface), such as polyester (PES) core and polyethylene (PE) sheat. Suitably PES/PE bicomponent fibers are used.

30

Bicomponent fibers are comprised of two polymers of different chemical and/or physical properties, extruded from the same spinneret with both polymers in the same filament.

The long reinforcement fibers add flexibility, stretch, strength and functional properties, to the fiber sheet.

35

Thermoplastic fibers add functional properties such as heat sealability to the fiber sheet, as well as latex binders applied as surface treatment.

According to a preferable embodiment the fiber sheet of the present invention comprises 1-50 wt% of reinforcement fibers having average fiber length of 3-100 mm.

According to a preferable embodiment the fiber sheet of the present invention comprises 1-30 wt%, particularly preferably 1-20 wt% of the reinforcement fibers.

According to a preferable embodiment the fiber sheet of the present invention comprises at least 5 wt% of thermoplastic polymer fibers, whereby the obtained fiber sheet is heat sealable.

According to a preferable embodiment the reinforcement fibers have average fiber length of 5-30 mm, particularly preferably 6-15 mm.

Binder

According to a preferable embodiment the fiber sheet of the present invention comprises a binder in an amount of 0.005 – 10% by weight, preferably 0.05 – 5% by weight, particularly preferably 1 – 5% by weight.

Suitably the binder is selected from a group consisting of polyvinyl alcohols, polyvinyl acetate dispersions, ethyl vinyl alcohol dispersions, polyurethane dispersions, acrylic latexes, styrene butadiene dispersions, binders based on finely divided cellulose, binders based on cellulose derivatives, biopolymers, such as biopolymers based on starch derivatives, natural gum latexes, alginates, guar gum, hemicellulose derivatives, chitin, chitosan, pectin, agar, xanthan, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and the like and combinations thereof.

The binder is preferably selected from acrylic latexes (polyacrylate latexes or polyacrylic acid latexes) and combinations thereof, optionally in combination with polyvinylalcohol.

The binder may originate from the foam laid method, or from the finalizing method or from both.

Foaming agent

According to a preferable embodiment the fiber sheet of the present invention comprises 0.1 -10 wt% of the foaming agent.

The foaming agent acts as a surface active agent, which enables the formation of the foam and additionally it provides the formed fibrous web the desired strength.

The foaming agent is selected from water-soluble foaming polymeric agent and water dispersible foaming polymeric agents and combinations thereof.

Preferably the foaming agent is selected from water soluble glycans, water dispersible glycans, water soluble hydrophilic polymers and water dispersible hydrophilic polymers and combinations thereof.

Preferably the water soluble glycans and water dispersible glycans are selected from polysaccharides and derivatives thereof.

Preferably the water soluble hydrophilic polymers and water dispersible hydrophilic polymers are selected from poly(vinyl alcohol)s and poly(vinyl acetate)s and copolymers thereof.

Optional additives

Optionally additives modifying the functional properties of the sheet, such as heat resistance, heat sealability, opacity, printability, formability, flame resistance, etc. or providing more flexibility and/or strength can be used, and/or additives modifying the appearance of the web.

Suitably the additives are selected from nanofibrillated cellulose, microfibrillated cellulose, starch, resins etc., as well as colorants etc.

Use and applications of the fiber sheet

It was surprisingly found that the highly durable and flexible fiber sheet can be used in numerous applications in the field of packaging, covering, construction, interior design, graphics, clothing and fabrics, in carrier bags and sacks, and the like. Examples of such applications are industrial packaging, carrier bags and sacks, covers, medical packaging, envelopes, coverts, medical fabrics, protective apparel, etc.

The fiber sheet can be made heat sealable by selecting the reinforcement fibers from thermoplastic polymers. Suitably combinations of thermoplastic polymers and latexes are used. Thus products like bags, sacks, flexible packaging and clothing etc. can be easily

produced without the usage of glues and adhesives, with efficient heat sealing converting machinery and providing seams having suitable durability.

5 The fiber sheet has very good wet strength and water repellency, and thus the structures like bags and sacks maintain their form even when being in contact with moisture.

The fiber sheet can be printed if desired using printing methods used for fibrous and paper and plastic substrates, such as offset, gravure, flexo, digital printing and the like.

10 The fiber sheet and structures, such as products made therefrom can be sterilized using suitable sterilization methods.

15 The fiber sheet and structures made therefrom can be pressed, squeezed or compressed to a small volume whereby surprisingly the products maintain the small volume and do not expand like a plastic bag etc. However, it can be reopened repeatable to its original shape and the original condition can be maintained.

20 The fiber sheet may be recyclable and/or at least partly or even completely biodegradable, depending on the selected materials used in the manufacture. Completely biodegradable fiber sheets are obtained from completely biodegradable materials.

25 The fiber sheet and structures, such as products, may be designed and manufactured according to varying needs and specifications, with respect to the composition, thickness and field of use of the desired product.

30 Products in the field of packaging, such as carrier bags and sacks, light and medium weight shopping bags, bags of various size for replacing conventional plastic bags in grocery shops etc, refuse sacks, wrappings of goods, industrial packages, medical packages, coverts, envelopes etc packaging structures may be obtained from the fiber sheet.

35 Products in the field of construction, such as wind shield panels, protective and construction sheets, earth/ground frost insulation sheets, geotextiles and sheets in excavation may be obtained from the fiber sheet. Said products provide improved protection against water and moisture intrusion.

Water resistant covers are particularly suitable for boats, cars, campers etc.

Products for use in various graphic applications, such as maps, posters, banners, flags may be obtained from the fiber sheet.

- 5 Products in the field of interior design, such as decorative sheets, may be obtained from the fiber sheet.

10 Products in the field of clothing and fabrics, such as protective apparel, disposable clothing, disposable cloths and sheets, medical fabrics, cloths for diapers and disposable incontinence products, and the like may be obtained from the fiber sheet.

The products and fiber sheets of the present invention may be disposed of by degrading them biologically, recycling them in paper and/or carton recycling systems, or by combustion.

15

Manufacture of the fiber sheet

The fiber sheet may be obtained by a method utilizing foam based production technology. Preferably the fiber sheet may be obtained by a method utilizing foam based production technology, followed by finalizing by a method utilizing surface treating technology.

20

Particularly, the present invention relates to a method for the manufacture of a fiber sheet, where said method comprises the steps of

- 25 - forming at least one foamed dispersion by dispersing fibers comprising natural fibers and reinforcement fibers, where the reinforcement fibers are selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof in a foam or foamable liquid comprising water and at least one foaming agent to obtain fiber-foam comprising 50 – 99% by weight of natural fibers, 1 to 50% by weight of reinforcement fibers, 0.5 – 10% by weight of at least one foaming agent,
- 30 - conveying the formed fiber-foam to a foraminous support and draining liquid through the foraminous support to form a sheet,
- drying and calendering the sheet to obtain the fiber sheet, and
- 35 - where the foam or foamable liquid comprises at least one binder; or the formed sheet is finalized before or after drying by treating the surface of the sheet with at least one binder; or the foam or foamable liquid comprises at least one binder, and the formed sheet is finalized before or after drying by treating the surface of the sheet with at least one binder.

According to one embodiment the foam or foamable liquid comprises at least one binder and the fiber-foam comprises 0.5 – 10% by weight of at least one binder.

5 The method utilizing foam based production technology is a foam-laid method generally known in the art.

Preferably, a fiber web is formed using a foam-laid method, followed by finalizing with a method selected from surface treatment methods, particularly preferably by applying
10 binder to the fibrous web or sheet with a method selected from surface treatment methods.

In the surface treatment method an aqueous dispersion or foam comprising 10- 70 wt%, preferably 20-50 wt% of the binder is applied on the surface of the sheet. Preferably foam
15 is used. Preferably 2-50 g/m², particularly preferably 2-10 g/m² of the binder is applied on the surface.

A method utilizing surface treating technology, i.e. surface treatment method is selected from conventional coating methods and external sizing methods used in paper and board
20 manufacture and from spray coating and foam assisted coating methods carried out at the press section of a paper machine, and foam assisted coating methods.

The surface treatment methods are preferably selected from spray coating and foam assisted methods carried out at the press section of a paper machine, where the foam
25 laid method is carried out, from external sizing methods carried out at a paper machine, where the foam laid method is carried out, methods utilizing size press, and from conventional surface treatment methods carried out with online or offline coating machines, and from foam assisted coating methods.

30 The method of the invention provides effective, continuous and economic means for producing the fiber sheets of the invention.

Foam-laid method

The foam-laid method may be any foam-laid method known in the art. Typically a fiber
35 web is formed from a dispersion of fibers in a foamed liquid. A pulp or fiber furnish is first prepared in a pulper, followed by dewatering, mixing with a foam or foamable liquid comprising a surfactant and water. The fibers are dispersed in the foam and the formed

fiber-foam is deposited on a wire and the main portion of the liquid, which is essentially in the form of foam, is removed. This technique is disclosed in EP 481746.

5 The foam-laid method makes it possible to produce flexible, plastic like fiber webs. The foam-formation technology provides several benefits, such as even formation, controllable fiber orientation and makes it possible to use polymers and long reinforcement fibers, which are generally not suitable for water forming methods.

10 In the foam-laid method a binder may be used, selected from a group consisting of polyvinyl alcohols, polyvinyl acetate dispersions, ethyl vinyl alcohol dispersions, polyurethane dispersions, styrene butadiene dispersions, binders based on finely divided cellulose, binders based on cellulose derivatives, biopolymers, such as biopolymers based on starch derivatives, natural gum latexes, acrylic latexes, alginates, guar gum, hemicellulose derivatives, chitin, chitosan, pectin, agar, xanthan, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and the like and combinations thereof.

20 The foaming agent, also known as foaming polymer, is selected from water-soluble foaming polymeric agent and water dispersible foaming polymeric agents and combinations thereof.

25 Preferably the foaming agent is selected from water soluble glycans, water dispersible glycans, water soluble hydrophilic polymers and water dispersible hydrophilic polymers and combinations thereof.

Preferably the water soluble glycans and water dispersible glycans are selected from polysaccharides and derivatives thereof.

30 Preferably the water soluble hydrophilic polymers and water dispersible hydrophilic polymers are selected from poly(vinyl alcohol)s and poly(vinyl acetate)s and copolymers thereof.

35 Optionally the foam or foamable liquid may comprise at least one binder, preferably the amount of the binder is 0.5 – 10% by weight.

The fiber-foam refers here to foamed dispersion.

Optionally at least one additional foamed dispersion is formed of fibers comprising natural fibers and reinforcement fibers by dispersing said fibers in a foamable liquid comprising water and at least one foaming polymer.

5

Optionally said foamed dispersions are conveyed to the foraminous support as individual layers.

The foraminous support is suitable a wire.

10

The draining is suitably carried out with the aid of vacuum, using vacuum pumps, or by gravitational filtration.

Drying of the formed web or sheet is suitably carried out for example by heating with means conventionally used in the manufacture of non-woven, paper and tissue products.

15

In the method the foamed dispersion (or dispersions) is formed of 50 – 99% by weight, preferably 70 – 99% by weight, particularly preferably 85 – 99% by weight of natural fibers, 1 to 50% by weight, preferably 1 – 30% by weight, particularly preferably 1 – 20% by weight of reinforcement fibers, 0.5 – 10% by weight, preferably 0.5 – 5% by weight, particularly preferably 0.5 – 2% by weight of at least one foaming polymer, 0.5 – 10% by weight, preferably 0.5 – 5% by weight, particularly preferably 0.5 – 2% by weight of at least one binder, water and optional additives.

20

An additional foamed dispersion (s) may be conveyed individually on the support, whereby a product comprising at least two individual fiber layers is obtained.

25

The foamed dispersion comprises from 40 to 80% by volume, preferably from 55 to 75% by volume of air. Air refers here to all gases having more than 50% by volume of nitrogen content, which includes atmospheric air or gases derived from atmospheric air.

30

In the foam-laid method any equipment and apparatus used in foam-formation processes in the tissue paper and non-woven manufacture can be utilized here, such as suggested for example in GB 1397378, EP 481746 and US 3716449. Products comprising one or more foam-deposited layers may be obtained.

35

Optionally the dried product (such as sheet, felt, etc) is coated or laminated on one side or on both sides with at least one layer comprising at least one polymer.

The applying of the polymer may be carried out by coating using spray coating, extrusion coating, curtain coating or foam coating.

Finalizing of the sheet

The sheet may be finalized utilizing surface treatment methods. The surface treatment methods are preferably selected from spray coating and foam assisted methods carried out at the press section of a paper machine, where the foam laid method is carried out, from external sizing methods carried out at a paper machine, where the foam laid method is carried out, methods utilizing size press, and from conventional surface treatment methods carried out with online or offline coating machines, and from foam assisted coating methods.

Surface treatment methods with foamed compositions include external sizing of fibrous web using a foamed composition and coating with a foamed composition. Any surface treatment methods with foamed compositions known in the art may be utilized, such as those described in US 4,597,831 and in EP 0195458.

In the method a substrate is treated by applying to the surface of the substrate a foamed composition comprising a liquid vehicle, a binder and a foaming agent, through at least one foam applicator, followed by breaking down mechanically at least part of the applied foam.

The substrate is a sheet or web obtained from the natural fibers and reinforcement fibers using foam laid technology, as described above

The liquid vehicle is preferably an aqueous solution, suitably water.

In the surface treatment method an aqueous dispersion or foam comprising 10- 70 wt%, preferably 20-50 wt% of the binder is applied on the surface of the sheet. Preferably foam is used. Preferably 2-50 g/m², particularly preferably 2-10 g/m² of the binder is applied on the surface.

Suitably the binder is selected from a group consisting of polyvinyl alcohols, polyvinyl acetate dispersions, ethyl vinyl alcohol dispersions, polyurethane dispersions, acrylic

latexes, styrene butadiene dispersions, binders based on finely divided cellulose, binders based on cellulose derivatives, biopolymers, such as biopolymers based on starch derivatives, natural gum latexes, alginates, guar gum, hemicellulose derivatives, chitin, chitosan, pectin, agar, xanthan, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and the like and combinations thereof.

The foaming agent is selected from water-soluble foaming polymeric agent and water dispersible foaming polymeric agents and combinations thereof. Preferably the foaming agent is selected from water soluble glycans, water dispersible glycans, water soluble hydrophilic polymers and water dispersible hydrophilic polymers and combinations thereof.

Preferably the water soluble glycans and water dispersible glycans are selected from polysaccharides and derivatives thereof.

Preferably the water soluble hydrophilic polymers and water dispersible hydrophilic polymers are selected from poly(vinyl alcohol)s and poly(vinyl acetate)s and copolymers thereof.

The mechanical breaking down of the foam may preferably be effected after drying with drying felts, using any suitable method, such as by suction if the foam is applied to a sheet or web still on a wire or foraminous former, or if the foam is applied to a sheet the mechanical breakdown may be effected using an a knife edge or blade, roll-nip press, or by means of rolls, rods or air knife.

After breaking down of the foam the sheet or web, which is dried and calendared, followed by optional coating as described above.

Alternatively conventional surface treatment methods carried out with online or offline coating machines may be used for finalizing the fiber sheet obtained by foam laid methods as described above. Said conventional methods utilize aqueous non-foamed coating compositions comprising the binder. The coating is effected on/in the sheet or web suitably using a roll-nip press, blade-coater, spray coating device, curtain coating device, extrusion coating device.

Binders and foaming agents as described in connection with surface treatment with foamed compositions can be used, in the same amounts.

In a preferable embodiment acrylic latexes are used in the present invention.

5

In another preferable embodiment acrylic latex (polyacrylic acid) and polyvinylalcohols are used.

10

In further preferable embodiment acrylic acids are used and the manufacturing method is selected from surface treatment methods with foamed composition.

Particularly, on an industrial scale it is preferable to use a foam laid method followed by finalizing, where the binder is added in the finalizing step.

15

The present invention has several advantages. It provides a continuous, effective and economic method for the manufacture of flexible fibrous webs, thus providing economic and environmental benefits. Completely bio-degradable products can be achieved if desired. The properties of the products can be tailored by adjusting the starting materials and process.

20

The fiber sheets of the invention can be heat-sealable in contrast to the paper.

Further, the fiber sheets of the invention are water resistant in contrast to the paper.

25

The fiber sheets of the invention have several properties, which are more typical to plastics than paper. Particularly, when compared with plastics, the fiber sheet of the invention comprises mainly or even completely renewable raw material, it is recyclable and can be biodegradable.

30

One severe drawbacks of paper is the sensitivity for the moisture. If paper gets wet it loses its strength values very rapidly. In case of the fiber sheets of the invention the wetness reduces strength values only slightly.

35

Particularly biodegradable products can be obtained having excellent properties. Tailored products can be manufactured according to end user's need, the amounts of components, foaming polymers and binders may be varied resulting in different properties in the products.

EXAMPLES

The following examples are illustrative of embodiments of the present invention, as described above, and they are not meant to limit the invention in any way.

5

EXAMPLE 1**Manufacture of fibrous sheets**

10 The fibrous sheets were manufactured on laboratory scale as follows. Soft wood fibers were mixed with bicomponent synthetic fibers (PES/PE) in the ratio of 70:30 to the prefabricated foam made from water and polyvinyl alcohol containing soft latex (poly acrylic acid). Foam laid hand sheets were made using a method and an equipment set-up adopted in the glassfiber industry. The fiber foam was decanted into a hand sheet mold and filtrated through a wire using a vacuum chamber. Then the filtrated sheet was
15 detached with the wire from the mold and pre-dried on the suction table. The suction table has a slit with 5 mm width, which sucks air through the sheets with ~ 0.2 bar vacuum. The picture series presented in Figure 8 shows the working procedure used in the laboratory scale development work.

20 After drying under constant atmosphere the sheets were calandered using a Gradek laboratory calander, under nip pressure 80 bar and at roll temperature of 60°C.

The properties of the obtained fiber sheets were tested and paper and plastic were used as reference. The benefit of the fibre sheet of invention is that its properties combine the
25 advantages of paper and plastic. The fiber sheets of the invention have smaller tensile strength than paper but similar to the plastic used in plastic bags. Paper sheet breaks down immediately, when local disruption of the fiber network occurs. Similar to plastic films, the sheet of the invention has an area of elongation with constant force. It means that even when there starts to be breakings in the structure, the material can still carry
30 load. It also gives material flexibility to withstand large force peaks, which is exemplified in Figure 1. Figure 1 shows pulling force as a function of the elongation for paper (1A), plastic (1B) and invention samples 60 and 20 g/m² (1C and 1D).

Figure 2 presents strength (2A) and TEA (2B) of paper, plastic and products of the
35 invention, calculated from the total areas of the curves, giving the toughness of the material. The sheets of the invention have this value higher than paper but smaller than plastic.

Figure 3 illustrates the stretch and strength properties and mechanism of failure of the samples according to the invention, as pictures of the test strips used in the measurements. Samples 1-5 are parallel samples made according to the invention. In this test the samples according to the invention after strength measurements were used. The complete breaking from one point, using paper as reference, was observed. The samples of the invention stretched significantly before breaking, finally breaking occurred at one or more points.

Figure 4 illustrates the properties of the samples according to the invention, when contacted with water. One severe drawback of conventional paper is the sensitivity for the moisture. If a paper sheet absorbs moisture it loses its strength properties very rapidly. In case of the sheets of the invention the wetness of the sample reduces strength values only slightly.

In Figure 4, in 4A and in 4B the behaviour of the water droplet on the surface of a conventional paper bag (left and middle samples, both sides of the bag) and of the material according to the invention (samples on the right, after time period 15 seconds and after 30 seconds. The paper bag had absorbed the water droplets, whereas the water droplet on the surface of the sample according to the invention was remained unchanged. After 40 minutes (4C) the water droplet still can be seen on the surface according to the invention.

Figure 4, 4D and 4E illustrates samples of paper, of conventional paper bag (brown, resin sized) and of the material according to the invention, where the samples were set in water (4D). After 3 minutes the samples were removed from the water and drawn (4E). The paper materials broke similar way, but the material according to the invention stretched before a breakdown.

Figure 5 illustrates the stretch and strength properties of the wet sample according to the invention, using paper as reference. A water droplet of the size of 200 μ l was put on the samples and allowed to absorb in the structure: in paper 40 seconds, sample according to the invention 40 minutes and rest of the water was dried away using a paper towel. Elongation was measured from the samples. Elongation of dry paper sample is presented in Figure 5A, and of wet paper sample in Figure 5B. Elongation of dry sample of the invention is presented in Figure 5C and of wet paper sample in Figure 5D. The water droplet was absorbed in the conventional paper and also in brown paper bag in 30

seconds, whereas the fiber sheet of the invention repelled water. The elongation of paper decreased from 2 % to less than 0.7 % in the wet sample. The fiber sheet absorbed 2/3 of the water droplet after 40 minutes. The elongation decreased from 37% to 9 % in the moist sample of the invention.

5

Figure 6 illustrates the bursting strength of the sample according to the invention (left) and paper (right). In case of paper after initial burst the whole section under pressure rips open, where as in case of the sheet of the invention only the cap of the pressed area is damaged. This indicates much better resistance to withstand puncture, which is a highly critical property particularly in packaging applications.

10

Figure 7 illustrates the tear strength of the sample according to the invention. The tear strength of the sheet made according to the invention is over 70 % higher than that for typical paper bag material (kraft paper), over 200 % higher than that for conventional paper, and over 50 % higher than that of biodegradable plastic film. The plastic shopping bag measured had a tear strength of 6200 mN.

15

EXAMPLE 2

Manufacture of bags from fiber sheets

20

Bags were made from fiber sheets manufactured as follows. Fiber sheets were obtained with the foam-laid method as described in example 1. Soft wood (pine) fibers were mixed with bicomponent synthetic fibers (PES/PE) in the ratio of 70:30 to the prefabricated foam made from water and polyvinyl alcohol (PVA) containing soft latex (poly acrylic acid). After drying under constant atmosphere the sheets were calandered. Fiber sheets containing 10 wt% of PVA and latex (total) and having grammage of 30 g/m² and 80 g/m² were obtained. Heat sealed bags were made of the fiber sheets. The bags were repeatably compressed to small balls and reopened to the original shape without any alterations in the appearance and no breakage was observed. The bags can be turned around like socks. A photo of the bags is presented in Figure 9A and tearing strength of plastic bags, paper bags, paper and the bags made in this example is presented in Figure 9B.

30

CLAIMS

- 5 1. A fiber sheet, **characterized** in that the fiber sheet it is obtainable by foam based
production technology, it comprises fibers having average fiber length of 0.5-100
mm, a binder selected from a group consisting of polyvinyl alcohols, polyvinyl
acetate dispersions, ethyl vinyl alcohol dispersions, polyurethane dispersions,
10 acrylic latexes, styrene butadiene dispersions, binders based on finely divided
cellulose, binders based on cellulose derivatives, biopolymers, and combinations
thereof, and a foaming agent, and where 50-99 wt% of said fibers are natural
fibers and 1-50 wt% of said fibers are reinforcement fibers selected from polymer
fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations
thereof, and where said fiber sheet has stretch in the range of 3-50%.
- 15 2. The fiber sheet according to claim 1, **characterized** in that the fiber sheet fiber
sheet is biodegradable and/or recyclable.
- 20 3. The fiber sheet according to claim 1 or 2, **characterized** in that the polymer fibers
are thermoplastic polymer fibers selected from polylactides (PLA), glycolic acid
polymers (PGA), polyolefins (PO), polyethyleneterephthalates (PET), polyester
(PES), polyvinyl alcohols (PVA) and bicomponent fibers comprising thermoplastic
polymers.
- 25 4. The fiber sheet according to claim 3, **characterized** in that the bicomponent fibers
are selected from fibers having a thermoplastic polymer as sheat polymer.
- 30 5. The fiber sheet according to any one claims 1-4, **characterized** in that the
foaming agents is selected from water-soluble and dispersible foaming agents,
preferably from water-soluble glycans, water-dispersible glycans, water-soluble
hydrophilic polymers and copolymers, and water-dispersible hydrophilic polymers
and copolymers.
- 35 6. The fiber sheet according to any one of claims 1-5, **characterized** in that the
foaming agent is selected from polysaccharides and derivatives thereof, poly(vinyl
alcohols), poly(vinyl acetates) and copolymers thereof.

7. The fiber sheet according to any one of claims 1-6, **characterized** in that the fiber sheet has stretch in the range of 5-45%, preferably 10-40%.
- 5 8. The fiber sheet according to any one of claims 1-7, **characterized** in that the binder is selected from acrylic latexes.
- 10 9. The fiber sheet according to any one of claims 1-8, **characterized** in that the foam based production technology comprises foam-laid method followed by finalizing by treating the surface of the fiber sheet with a binder.
- 15 10. Use of the fiber sheet of any one of claims 1-9 in packaging, covering, construction, interior design, graphics, carrier bags and sacks, and clothing and fabrics applications.
- 20 11. Use according to claim 10, **characterized** in that the packaging applications are selected from carrier bags and sacks, shopping bags, refuse sacks, wrappings of goods, industrial packages, medical packages, coverts, envelopes and bags for replacing plastic bags.
- 25 12. Use according to claim 10, **characterized** in that the construction applications are selected from wind shield panels, protective and construction sheets, earth/ground frost insulation sheets, geotextiles and sheets in excavation.
- 30 13. Use according to claim 10, **characterized** in that the clothing and fabrics applications are selected from protective apparel, disposable clothing, disposable cloths and sheets, covers, medical fabrics.
- 35 14. Use according to claim 10, **characterized** in that the interior design applications are selected from decorative sheets.
15. Use according to claim 10, **characterized** in that the graphic applications are selected from maps, posters, banners and flags.
16. Structures comprising the fiber sheet of any one of claims 1-9, **characterized** in that the structures are selected from packages, carrier bags, sacks, shopping bags, refuse sacks, wrappings of goods, industrial packages, medical packages, coverts, envelopes and bags for replacing plastic bags.

17. Structures comprising the fiber sheet of any one of claims 1-9, **characterized** in that the structures are selected from wind shield panels, protective and construction sheets, earth/ground frost insulation sheets, geotextiles and sheets in excavation.

18. Structures comprising the fiber sheet of any one of claims 1-9, **characterized** in that the structures are selected from clothing, fabrics, protective apparel, disposable clothing, disposable cloths and sheets, covers and medical fabrics.

19. Structures comprising the fiber sheet of any one of claims 1-9, **characterized** in that the structures are selected from maps, posters, banners, flags and decorative sheets.

20. A method for the manufacture of the fiber sheets of any one of claims 1-9, **characterized** in that the method comprises the steps

- forming at least one foamed dispersion by dispersing fibers comprising natural fibers and reinforcement fibers, where the reinforcement fibers are selected from polymer fibers, mineral fibers, non-wood natural fibers and glass-fibers and combinations thereof, in a foam or foamable liquid comprising water and at least one foaming agent to obtain fiber-foam comprising 50 – 99% by weight of natural fibers, 1 to 50% by weight of reinforcement fibers, 0.5 – 10% by weight of at least one foaming agent,
- conveying the formed fiber-foam to a foraminous support and draining liquid through the foraminous support to form a sheet,
- drying and calendering the sheet to obtain the fiber sheet, and
- where the foam or foamable liquid comprises at least one binder; or the formed sheet is finalized before or after drying by treating the sheet with at least one binder; or the foam or foamable liquid comprises at least one binder and the formed sheet is finalized before or after drying by treating the sheet with at least one binder, and
- the binder is selected from a group consisting of polyvinyl alcohols, polyvinyl acetate dispersions, ethyl vinyl alcohol dispersions, polyurethane dispersions, acrylic latexes, styrene butadiene dispersions, binders based on finely divided cellulose, binders based on cellulose derivatives, biopolymers, and combinations thereof.

21. The method according to claim 20, **characterized** in that the binder is selected from acrylic latexes.

22. The method according to claim 20 or 21, **characterized** in that the polymer fibers are thermoplastic polymer fibers selected from polylactides (PLA), glycolic acid polymers (PGA), polyolefins (PO), polyethyleneterephthalates (PET), polyester (PES), polyvinyl alcohols (PVA) and bicomponent fibers comprising thermoplastic polymers.

23. The method according to any one of claims 20-22, **characterized** in that the bicomponent fibers are selected from fibers having a thermoplastic polymer as sheat polymer.

24. The method according to any one claims 20-23, **characterized** in that the foaming agents is selected from water-soluble and dispersible foaming agents, preferably from water-soluble glycans, water-dispersible glycans, water-soluble hydrophilic polymers and copolymers, and water-dispersible hydrophilic polymers and copolymers.

25. The method according to any one of claims 20-24, **characterized** in that the foaming agent is selected from polysaccharides and derivatives thereof, poly(vinyl alcohols), poly(vinyl acetates) and copolymers thereof.

26. The method according to any one of claims 20-25, **characterized** in that the finalizing is carried out with a method selected from surface treatment methods, preferably by applying the binder to the sheet with a method selected from surface treatment methods.

27. The method according claim 26, **characterized** in that the surface treatment method is selected from spray coating methods and foam assisted methods carried out at the press section of a paper machine, where the foam laid method is carried out, from external sizing methods carried out at a paper machine, where the foam laid method is carried out, methods utilizing size press, and from conventional surface treatment methods carried out with online or offline coating machine, and foam assisted coating methods.

28. The method according to any one of claims 20-25, **characterized** in that the foam or foamable liquid comprises no binder, and the formed sheet is finalized before or after drying by treating the surface of the sheet with at least one binder.

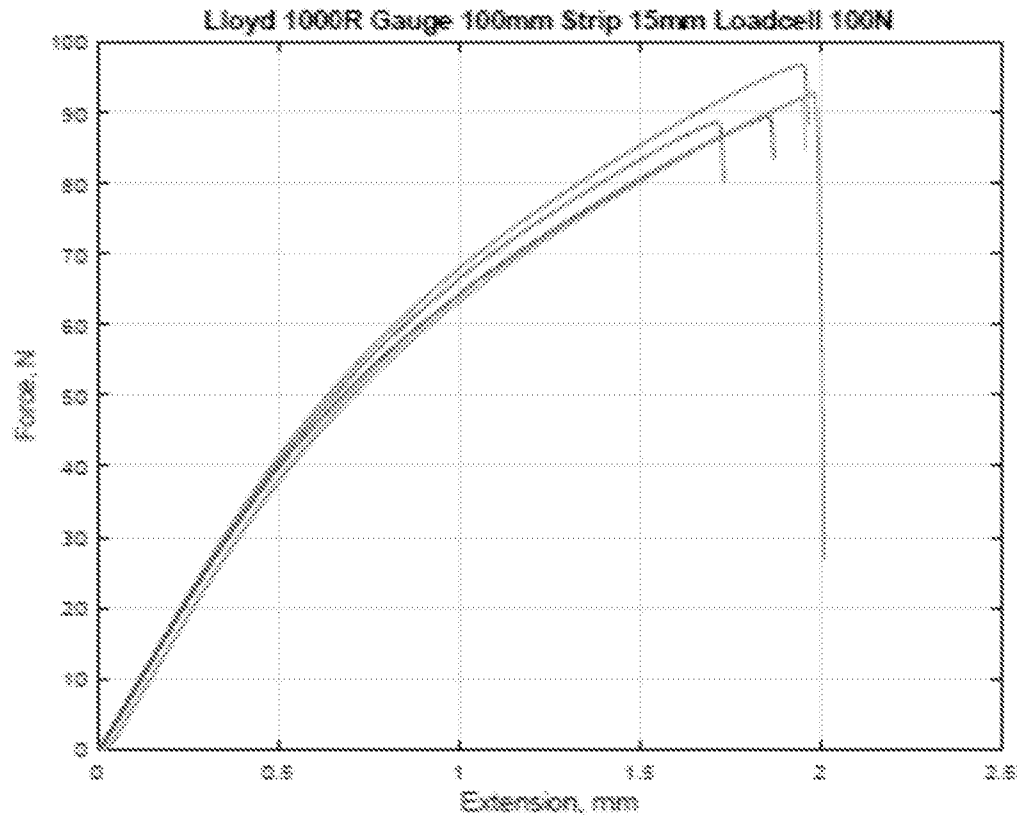


Fig. 1A

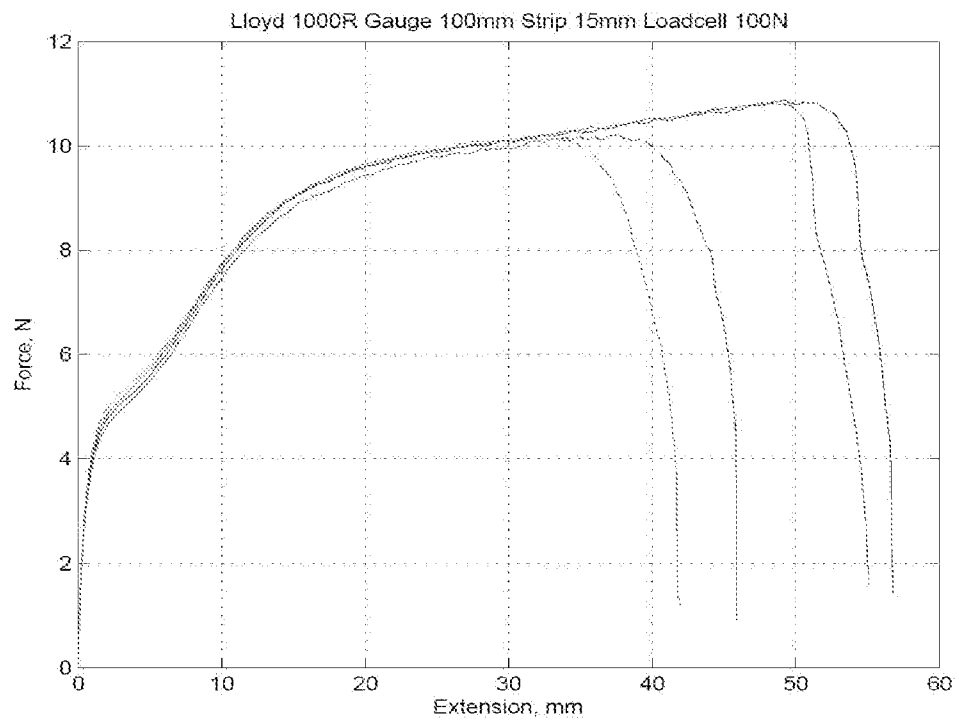


Fig. 1B

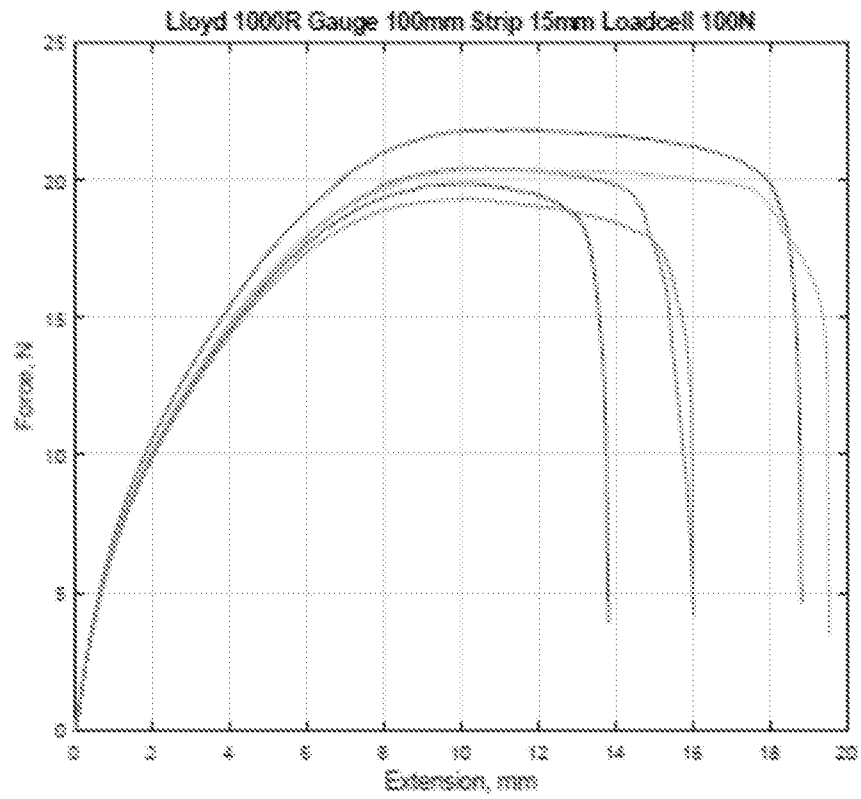


Fig. 1C

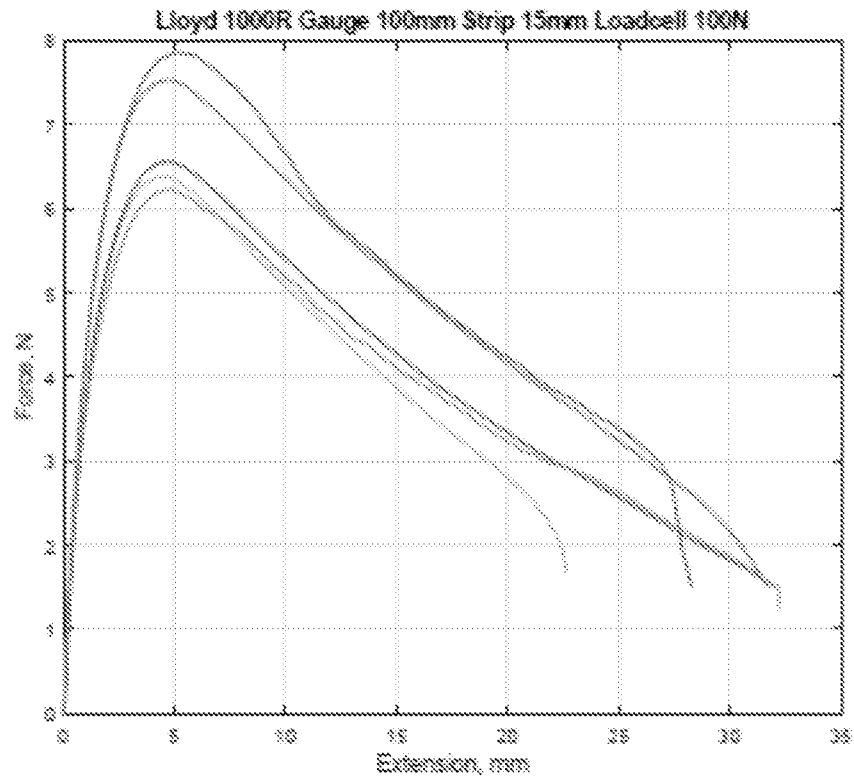


Fig. 1D

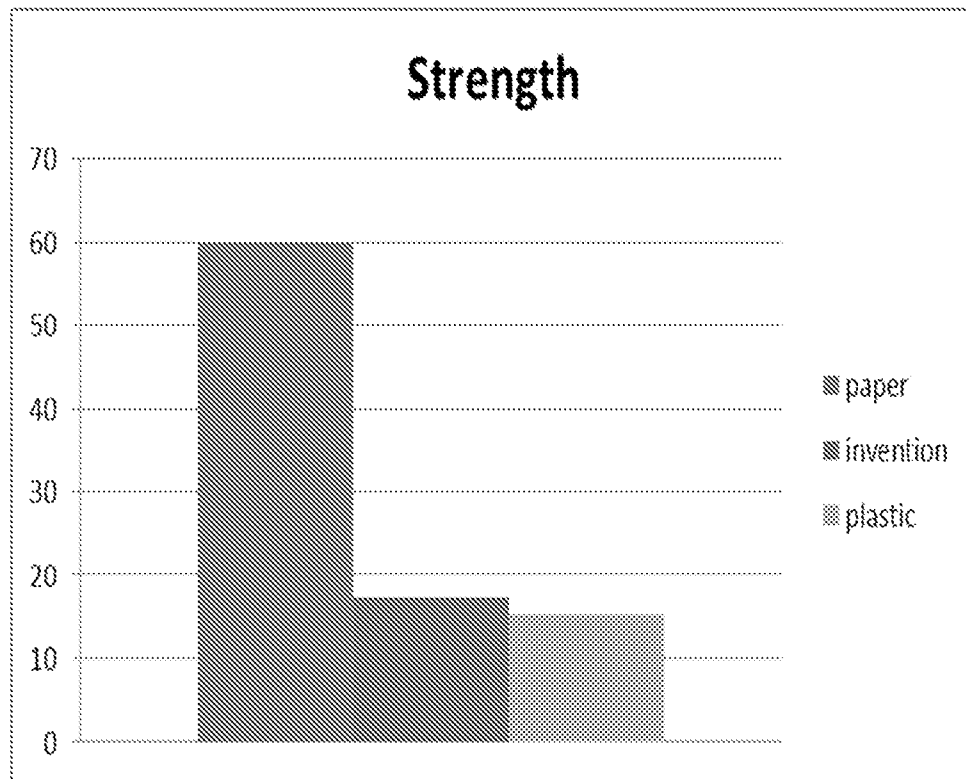


Fig. 2A

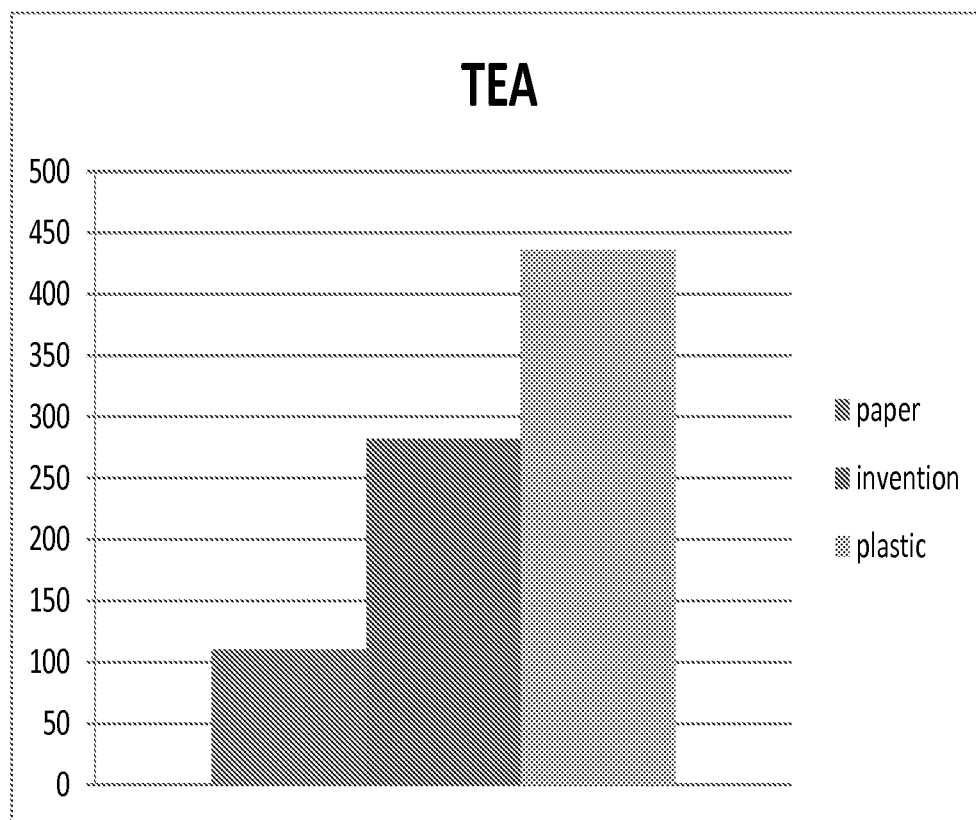


Fig. 2B

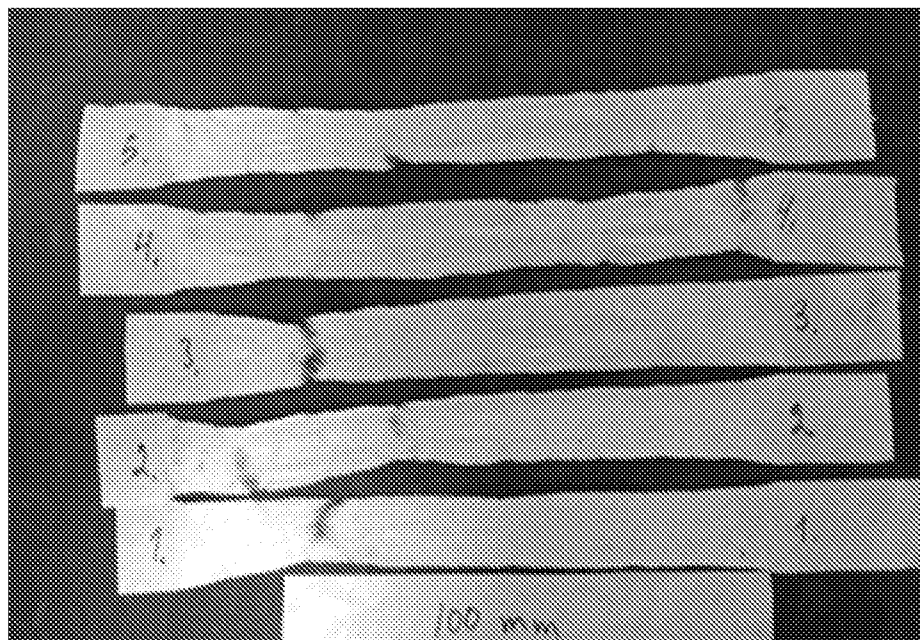


Fig. 3

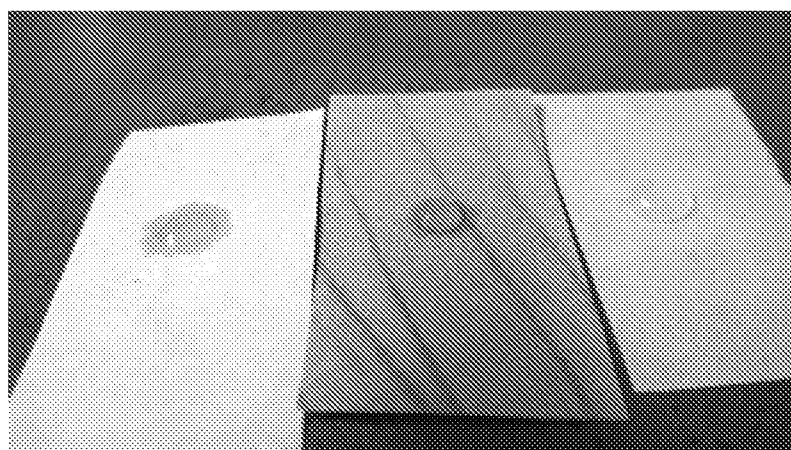


Fig. 4A

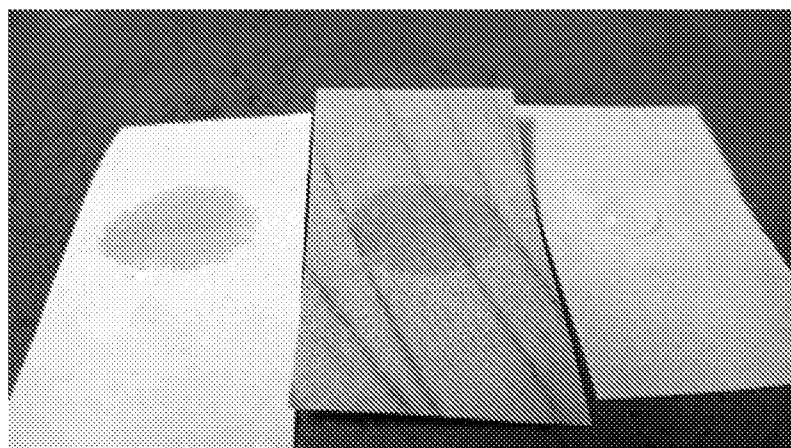


Fig. 4B

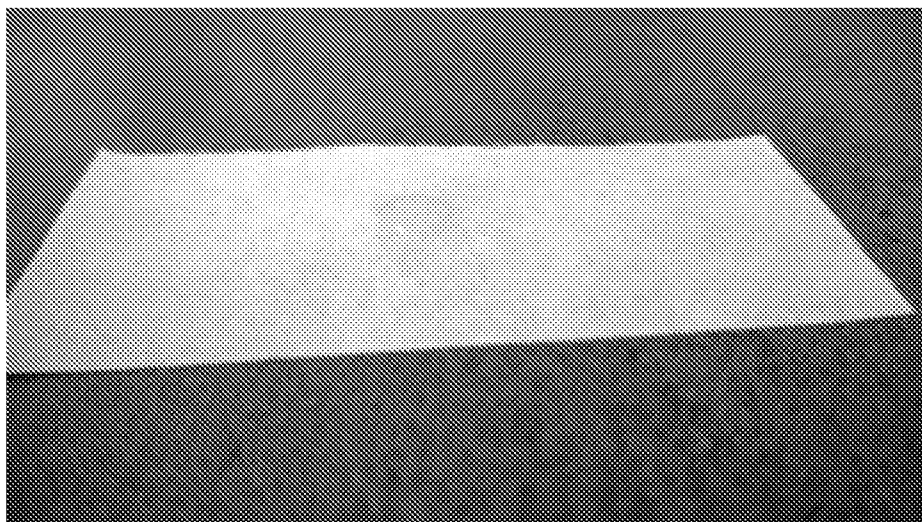


Fig. 4C

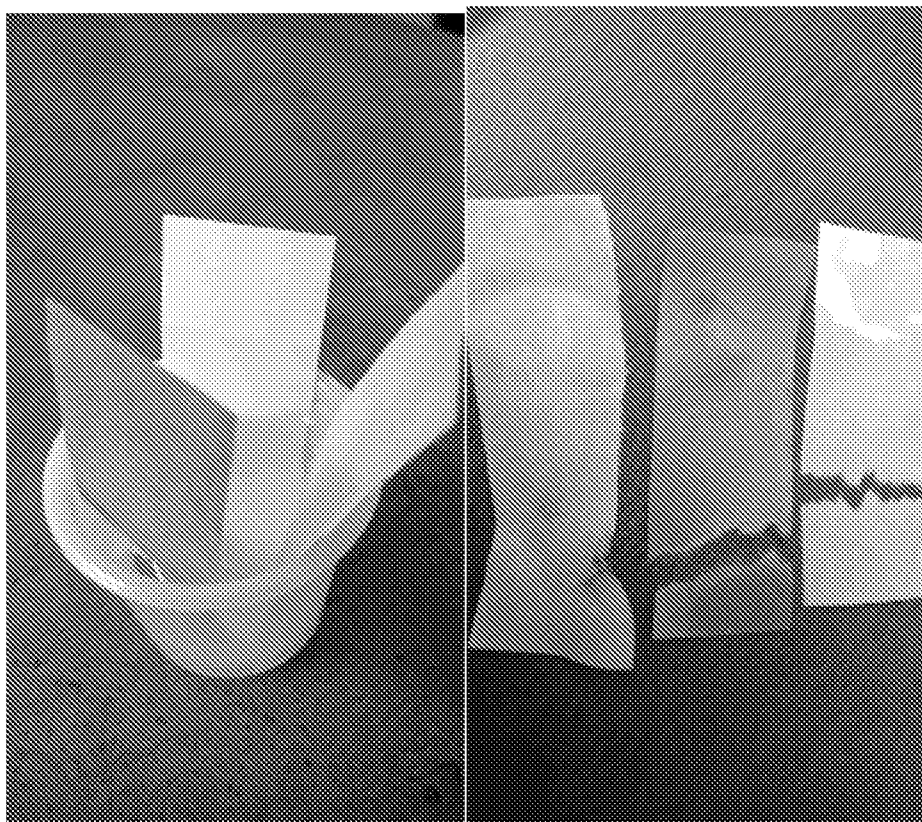


Fig. 4D

Fig. 4E

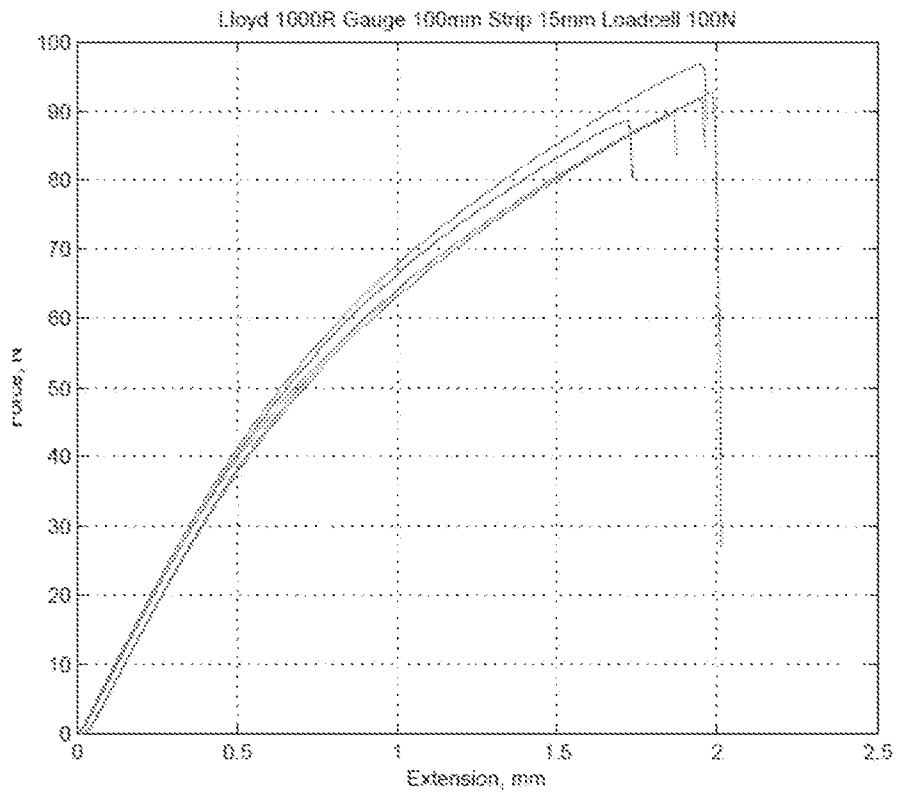


Fig. 5A

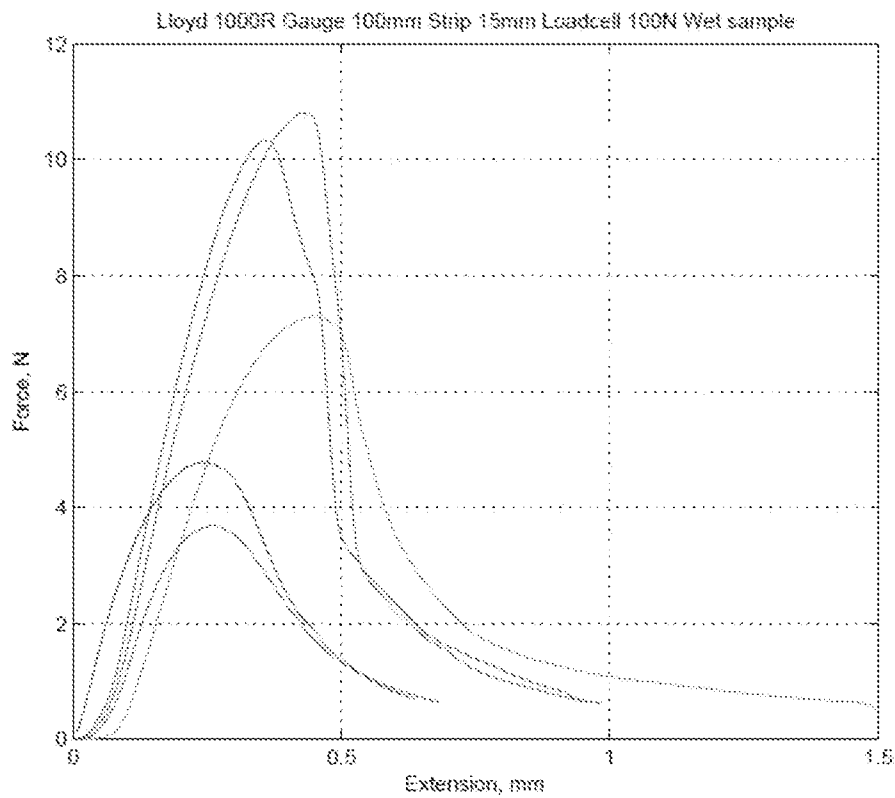


Fig. 5B

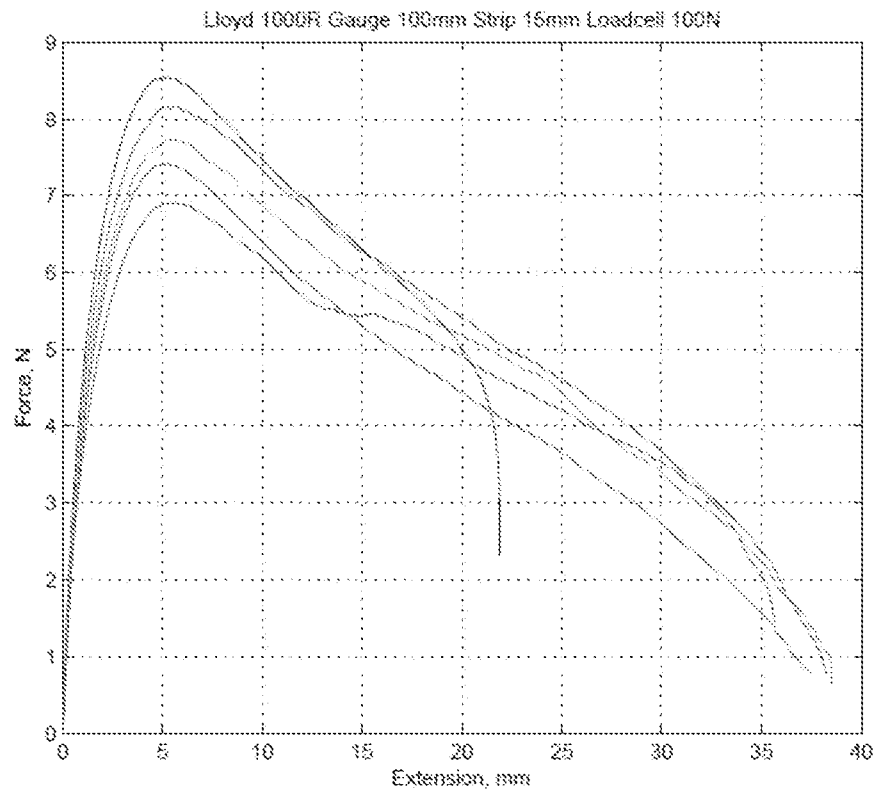


Fig. 5C

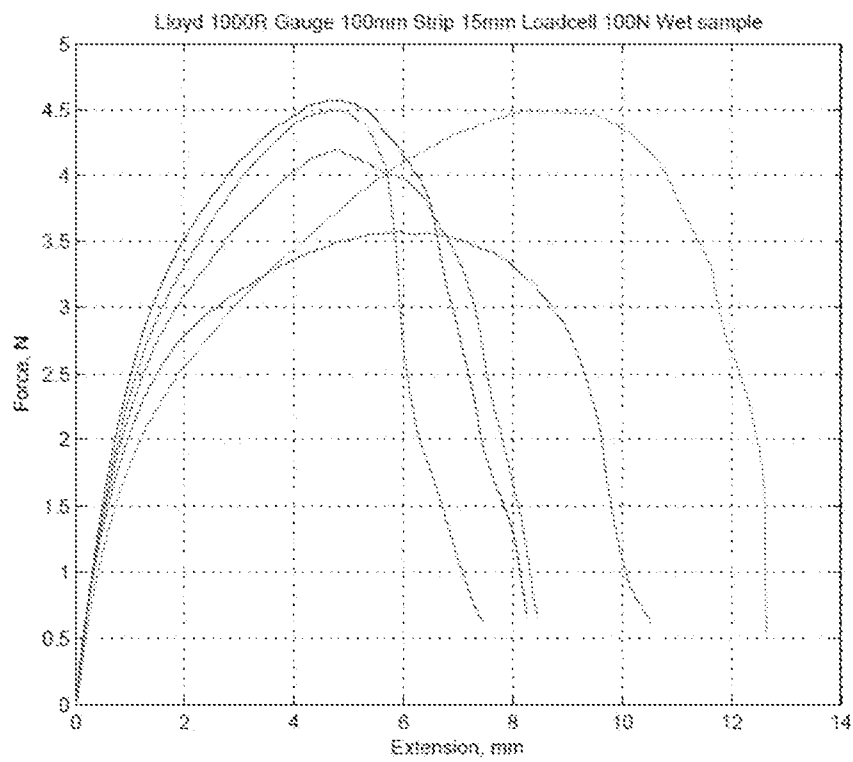


Fig. 5D



Fig. 6

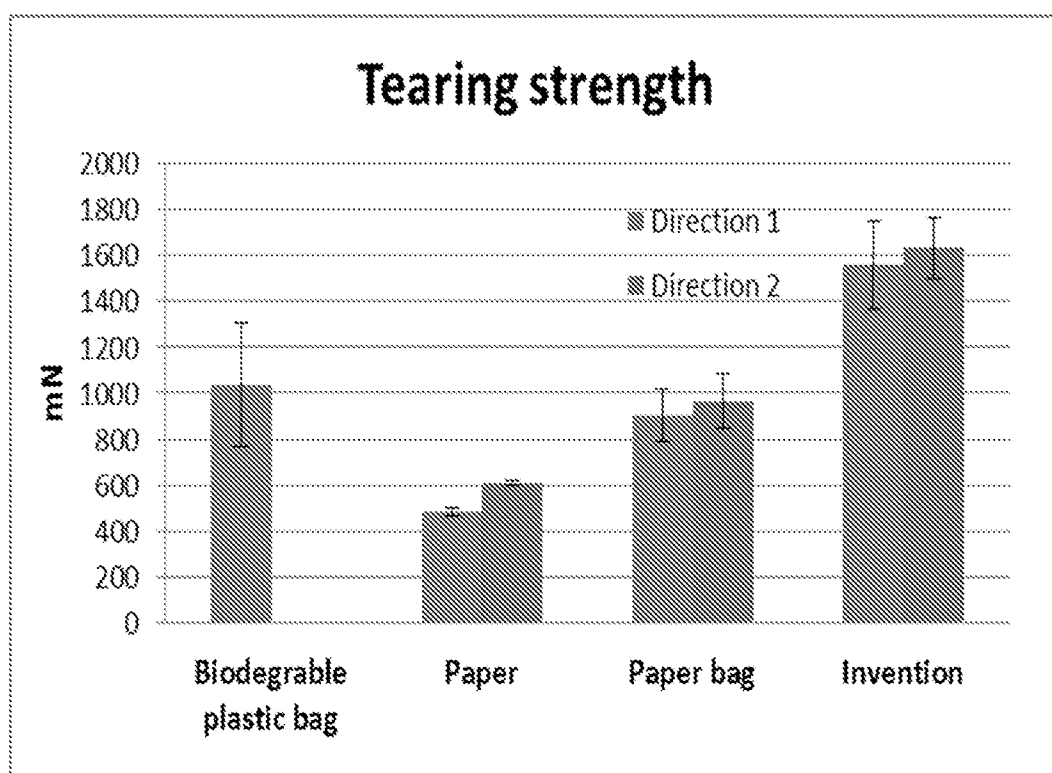


Fig. 7

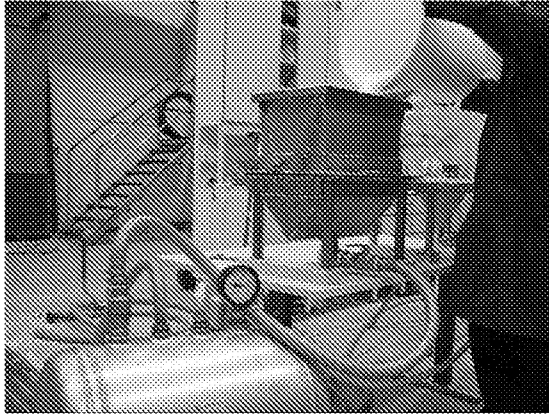


Fig 8A

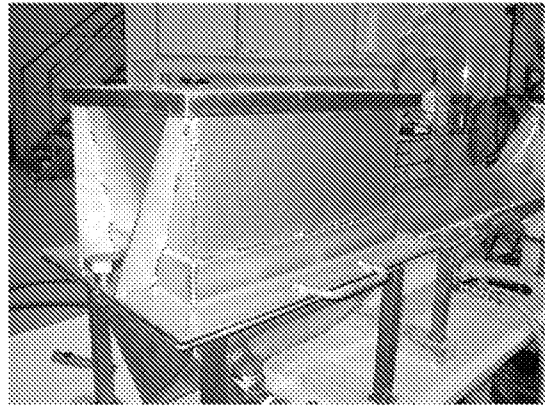


Fig 8B

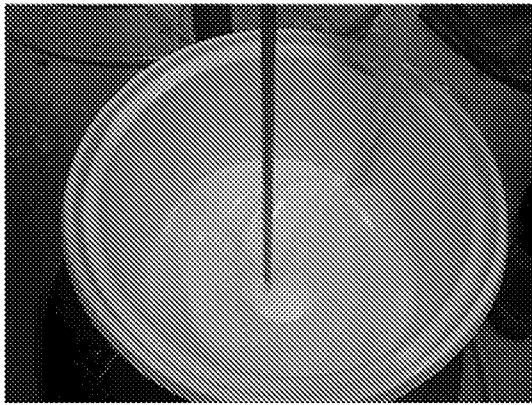


Fig 8C

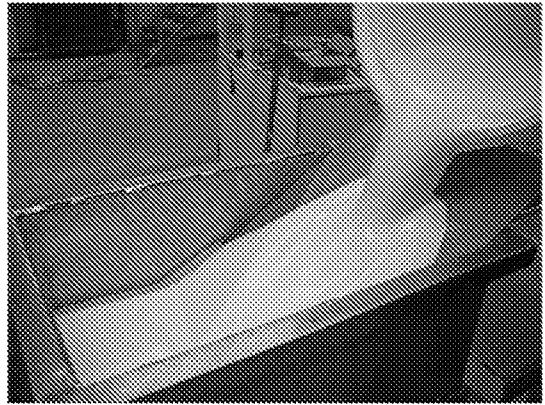


Fig 8D

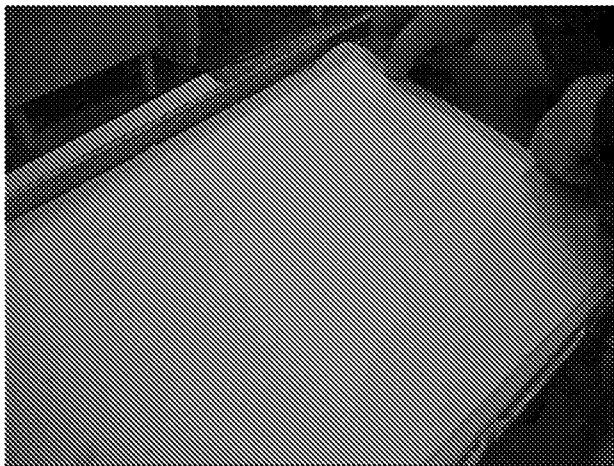


Fig. 8E

Fig. 8



Fig. 9A

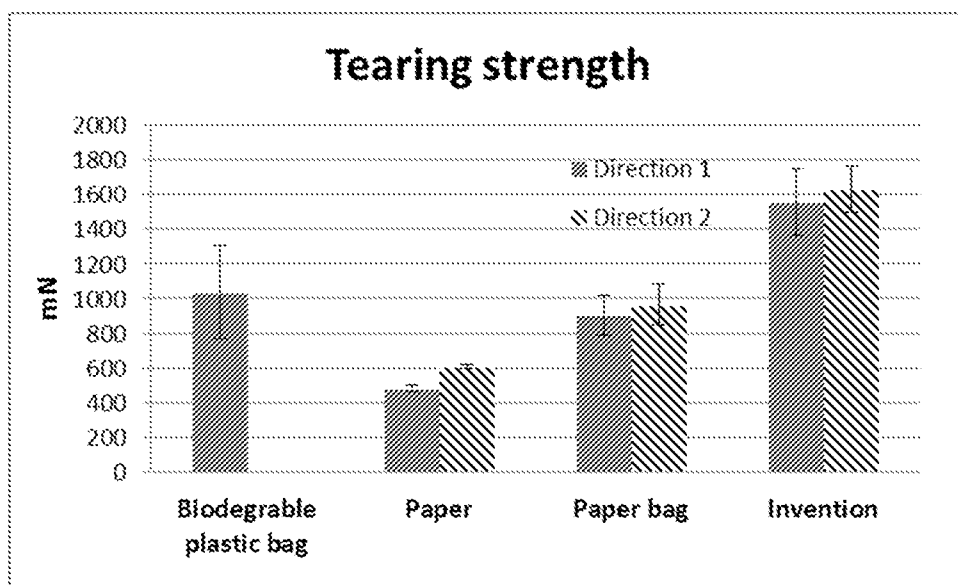


Fig. 9B

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2015/050811

A. CLASSIFICATION OF SUBJECT MATTER

INV. D21H13/40 D21F11/00 D21H17/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D21H D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/144449 A1 (TEKNOLOGIAN TUTKIMUSKESKUS VTT [FI]) 3 October 2013 (2013-10-03) page 2, lines 20-30 page 5, lines 5-10 page 7, line 15 - page 8, line 13 page 9, lines 4-21 -----	1,10,16, 20
X	WO 96/02702 A1 (MOELNLYCKE AB [SE]; REINER LENNART [SE]) 1 February 1996 (1996-02-01) page 1, lines 5-10 page 4, lines 12-30 page 9, line 25 - page 10, line 17 ----- -/--	1,10,16, 20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 February 2016

Date of mailing of the international search report

03/03/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lanniel, Geneviève

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2015/050811

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 094 164 A1 (ARMSTRONG WORLD IND INC [US]) 25 April 2001 (2001-04-25) paragraphs [0002], [0019] - [0021], [0024] -----	2-9, 11-15, 17-19, 21-28
Y	US 2006/137799 A1 (HAQUE ENAMUL [US] ET AL) 29 June 2006 (2006-06-29) paragraphs [0017], [0019], [0020] -----	2-9, 11-15, 17-19, 21-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2015/050811

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013144449	A1	03-10-2013	CA 2868935 A1 03-10-2013
		EP 2831157 A1 04-02-2015	
		FI 20125353 A 29-09-2013	
		WO 2013144449 A1 03-10-2013	

WO 9602702	A1	01-02-1996	AT 172261 T 15-10-1998
		AU 686845 B2 12-02-1998	
		AU 2996195 A 16-02-1996	
		CA 2194180 A1 01-02-1996	
		CN 1127816 A 31-07-1996	
		CZ 9700103 A3 11-06-1997	
		DE 69505392 D1 19-11-1998	
		DE 69505392 T2 11-03-1999	
		DK 0772714 T3 23-06-1999	
		EP 0772714 A1 14-05-1997	
		ES 2124572 T3 01-02-1999	
		FI 965307 A 13-01-1997	
		HU 219273 B 28-03-2001	
		JP H10506437 A 23-06-1998	
		NO 970083 A 24-02-1997	
		NZ 289970 A 26-06-1998	
		PL 318215 A1 26-05-1997	
		SK 3397 A3 06-08-1997	
		TW 299380 B 01-03-1997	
		US 5720851 A 24-02-1998	
		WO 9602702 A1 01-02-1996	
		ZA 9505805 A 29-03-1996	

EP 1094164	A1	25-04-2001	AT 417161 T 15-12-2008
		CA 2323340 A1 18-04-2001	
		EP 1094164 A1 25-04-2001	
		US 6596389 B1 22-07-2003	

US 2006137799	A1	29-06-2006	AU 2005322396 A1 06-07-2006
		BR PI0519686 A2 03-03-2009	
		CA 2594222 A1 06-07-2006	
		CN 101163827 A 16-04-2008	
		EP 1831445 A1 12-09-2007	
		JP 2008525664 A 17-07-2008	
		KR 20070094816 A 21-09-2007	
		US 2006137799 A1 29-06-2006	
		WO 2006071518 A1 06-07-2006	
