

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 August 2001 (16.08.2001)

PCT

(10) International Publication Number
WO 01/59168 A1

(51) International Patent Classification⁷: **C22C 38/06**

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(21) International Application Number: **PCT/US01/01646**

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 19 January 2001 (19.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/181,936 11 February 2000 (11.02.2000) US
09/540,403 31 March 2000 (31.03.2000) US

(71) Applicant and

(72) Inventor: LIN, Hui [CN/US]; 48 Pennsylvania Avenue, Malvern, PA 19355 (US).

(74) Agents: GARRETT, Arthur, S. et al.; Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P., 1300 I Street, N.W., Washington, DC 20005-3315 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/59168 A1

(54) Title: IRON BASE HIGH TEMPERATURE ALLOY

(57) **Abstract:** The present invention is directed to an iron, aluminum, chromium, carbon alloy and a method of producing the same, wherein the alloy has good room temperature ductility, excellent high temperature oxidation resistance and ductility. The alloy includes about 10 to 70 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon. The invention is also directed to a material comprising a body-centered-cubic solid solution of this alloy, and a method for strengthening this material by the precipitation of body-centered-cubic particles within the solid solution, wherein the particles have substantially the same lattice parameters as the underlying solid solution. The ease of processing and excellent mechanical properties exhibited by the alloy, especially at high temperatures, allows it to be used in high temperature structural applications, such as a turbocharger component.

IRON BASE HIGH TEMPERATURE ALLOY

This application claims priority to U.S. Patent Application 09/540,403, filed March 31, 2000, which claims priority to U.S. provisional application serial number 60/181,936, filed February 11, 2000.

The present invention is directed to an iron base, heat and corrosion resistant alloy that has low density, good tensile ductility, and excellent properties related to oxidation resistance, corrosion resistance, castability and strength. This new class of alloys is about 20-25% lighter and 20-80% cheaper than most traditional nickel-containing steels, e.g., stainless steels, heat resistant steels and heat resistant alloys.

Currently, heat resistant structural applications most often employ heat resistant steels, heat resistant alloys and superalloys. There is, however, a need for materials with similar properties having a much lower density since heat-resistant steels, heat-resistant alloys, and superalloys have relatively high densities. While alternative materials such as ceramics and intermetallic ordered alloys are being studied for their low densities, none of them have achieved the combination of low density, adequate tensile ductility, high strengths, and good oxidation resistance that is needed for high temperature engineering applications.

In the case of ceramics, their complete lack of tensile ductility severely limits the advantage of their low densities. In addition, ceramic components are usually produced through a powder sintering process which is a relatively costly process. Because of their lack of ductility and high cost, ceramics parts can only be used in very limited applications.

Light intermetallic ordered materials have not achieved adequate intrinsic tensile ductility and exhibit low fracture toughness, especially at room temperature. As a result of these properties, relatively complex processing techniques have to be employed to produce these materials and fabricate them into components. This significantly increases the production costs and their relatively low toughness at room temperature can cause handling problems and high component rejection rates.

An example of such an intermetallic ordered material is Fe_3Al . Unlike pure iron, which is a body centered cubic (BCC) solid solution and is very ductile, Fe_3Al forms an ordered BCC structure (generally defined as DO_3 at room temperature and B_2 at high temperatures) in which Fe atoms and Al atoms are arranged in a regular fashion. Fe_3Al has a low density and reasonably good oxidation resistance up to about 800°C because of its high aluminum content. The aluminum in the material will easily form an oxide scale in an oxidizing environment, although the oxide scale is not strong and easily spalls at temperatures above 800°C . Moreover, the raw materials for Fe_3Al are also relatively inexpensive. However, Fe_3Al is very brittle and has a low room temperature tensile ductility, it easily fractures in both intergranular and transgranular fashion.

Although chromium containing Fe_3Al has shown limited improvement in tensile ductility and is relatively lightweight, as evidenced by a density of about 6.5 g/cm^3 , conventional ordered Fe-Al-Cr compositions suffer from relatively poor high-temperature strengths, corrosion resistance and oxidation resistance.

Consequently, the simultaneous achievement of a more affordable heat resistant structural material that has a low density, good tensile ductility, excellent oxidation resistance and excellent workability, is a continuing objective of this field of endeavor. Specifically, there has been a need for a new iron-base alloy having a low density, high strength, adequate tensile ductility, defined as $\geq 5\%$ tensile elongation, and excellent oxidation and corrosion resistance. The above-mentioned objectives can be substantially realized by adding carbon to a chromium-containing iron aluminum compound such that a body-centered-cubic iron aluminum chromium carbon alloy is formed.

The immediate application for the present invention includes turbochargers for high speed diesel engines used in boats, trucks and passenger cars. Diesel engines are widely used because of better fuel economy than gasoline engines. To achieve such fuel economy, as well as

increase engine efficiency and reduce pollution, turbo-chargers are routinely used in high-speed diesel engines. Most industrial trucks as well as about 10% of passenger cars in the world (up to 20% in Europe and 10% in Japan) are powered by high-speed diesel engines with turbochargers.

A turbocharger for a diesel engine is made up of a compressor and a turbine. From a mechanical performance perspective, the turbine is the most critical part, since it operates at high temperatures, e.g., up to 650°C, and under high centrifugal stress due to high-speed rotation. The environment in which a turbine operates can also be both oxidizing and corrosive.

Currently, turbocharger turbines are cast from an iron-nickel base alloy or a nickel base alloy that is both expensive and heavy. Because of the weight, it takes time for present turbochargers to overcome inertia before the turbine can reach the working speed in which it operates most effectively. As evidenced by the emission of a dark cloud of exhaust on sudden acceleration, the exhaust gas is not properly burned during the time it takes for the turbine to reach its operating speed. To solve the above-mentioned problems associated with Fe-Ni base or Ni base-alloy turbochargers, turbocharger turbines and compressors from the body-centered-cubic iron aluminum chromium carbon alloy have been fabricated of the present invention.

SUMMARY OF THE INVENTION

Accordingly, a subject of the present invention is a material comprising a body-centered-cubic, single-phase, solid solution of iron aluminum, specifically Fe-Al-Cr-C. Preferably the material includes about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon. The material has excellent properties in polycrystalline form. In addition, the material can be strengthened by well-known methods that include solid solution strengthening, grain size refinement or by the introduction of particles of a strengthening phase. Preferably, the material can be strengthened by precipitating within the solid solution, BCC, solid solution particles that have substantially the same lattice parameters as the underlying solid solution. The inventive material is oxidation resistant at

temperatures up to 1150°C, and has excellent mechanical properties at temperatures up to about 650°C.

DESCRIPTION OF THE DRAWING

The following drawing, which form a part of the disclosure of the present invention depict additional aspect of the invention. Of the drawing:

Fig. 1 is a ternary phase diagram showing a BCC phase field.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is embodied in a new Fe-Al-Cr-C body-centered-cubic solid solution alloy which has a low density (e.g., in the range of from 5.5 g/cm³ to 7.5 g/cm³, and preferably 6.1 g/cm³), an adequate room temperature tensile ductility, excellent high temperature strength, oxidation resistance and corrosion resistance.

The inventive alloy preferably comprises about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium, and about 0.9 to 15 at.% carbon, wherein the combination of aluminum and chromium is preferably present in an amount of at least 30 at.%.

Depending on the desired final properties, chromium content may change and fall into different preferred ranges. For example, cast materials preferably employ about 5 to 20 at.% chromium, while wrought materials employ lower amounts of chromium, e.g., about 1 to 10 at. %.

In the present invention, powder x-ray diffraction is used to determine the existence of a BCC phase from the relative intensities of the diffraction peaks. In this invention, a BCC phase is either a single BCC phase or a combination of several BCC phases with substantially the same lattice parameters. A BCC phase is defined as a phase containing <3% non-BCC phase. That is, even if a diffraction pattern for a phase shows weak non-BCC peaks, the phase is still considered to be a BCC phase if the relative intensity of the non-BCC peaks are <3% of the intensity of the strongest BCC peak. Such a determination is only necessary to define the boundaries of the ternary phase diagram shown in Fig. 1, since a diffraction pattern within those boundaries shows only BCC peaks.

The inventive material has a yield strength of greater than 320 MPa up to and including a temperature of about 650°C. In addition, that the inventive material's yield strength increases or stays the same with increasing temperature from room temperature to about 600°C. In one embodiment, the yield strength of the material increases sharply with increasing temperature from room temperature to about 600°C, which is contrary to traditional BCC materials. The yield strength for BCC materials generally decreases with increasing temperature.

This material can be further strengthened by (a) the incorporation of an additional solid solution phase to said solid solution, (b) grain size refinement, (c) the introduction of particles of a strengthening phase, or (d) the addition of a strengthening element in the solid solution.

The incorporation of an additional solid solution phase can be carried out by the precipitation of body-centered-cubic particles within the solid solution, wherein the particles have substantially the same lattice parameters as the solid solution.

Strengthening can also be carried out by the addition of refractory oxide particles to the solid solution, such as Y_2O_3 .

It has been unexpectedly discovered that the addition of significant amounts of carbon and chromium transforms light weight iron-aluminum from an ordered BCC alloy, into a BCC solid solution. In addition, it was found that the solubility of the carbon in the present invention increases with increasing amounts of chromium and decreasing amounts of aluminum.

The light-weight alloy possesses an adequate tensile ductility at room temperature. As illustrated by the properties below, the combination of a low density, an adequate tensile ductility and high-temperature strengths is a significant technological breakthrough for light-weight, heat resistant structural materials.

It has been further discovered that standard processing techniques (e.g., casting) can be used to shape the inventive alloy into desired articles. One object of the present invention, therefore, is to produce, using standard

processing techniques, an article or a composite comprising solid solution phases of Fe-Al-Cr-C, wherein the solid solution phases are each body-centered-cubic and single-phase, and their lattice parameters substantially match each other.

Another object of the present invention is to produce a turbocharger part, specifically a turbine rotor or a compressor comprising the inventive alloy.

PROPERTIES

A. Oxidation Resistance

The present invention has excellent oxidation resistance, which is defined as the weight change of the material when exposed to a high temperature, oxidizing environment. In fact, the inventive materials exhibit oxidation resistance that is superior to stainless steels, heat-resistant steels, heat-resistant alloys, and superalloys. In one embodiment, the material exhibits a weight loss rate of 0.2 g/m² day after more than 100 hours at 1000°C in air. The excellent oxidation resistance is believed to be due to the large amounts of aluminum and chromium in the material. If needed, the oxidation resistance can be further improved by the addition of rare-earth elements to the material.

B. Strength

An article made according to the present invention exhibits high-temperature strength, e.g., up to 650°C, that is superior to stainless steels, and most heat resistant steels and alloys. Considering the low density associated with the material, the specific strength of the material at temperatures up to 650°C is even more superior. For example, the present invention in as-cast form has a yield strength of greater than 320 MPa up to 650°C. The strength of this alloy can be further improved with conventional strengthening methods such as grain refinement (e.g., hot-rolling followed by re-crystallization to change the microstructure of the article), solid solution strengthening (e.g., incorporating into the solid solution a strengthening element), and second phase particle strengthening.

Second phase particle strengthening can result from the external addition of refractory oxides, such as Y_2O_3 . Preferably second phase particle strengthening is done internally, via an in situ technique. By adjusting the Fe-Al-Cr-C composition, internal particles of Fe-Al-Cr-C precipitate within the solid solution. For example, the amount and the distribution of the body-centered-cubic particles within the solid solution can be tailored by adjusting the amount of iron, aluminum, chromium and carbon within the composition. These particles are also BCC, their lattice parameters substantially match the surrounding solid solution, which eliminates stress related to gradients between phases, and provides high temperature stability.

The combination of oxidation resistance and high temperature strength associated with the inventive material allows it to be readily used as load bearing components exposed to an oxidizing environment at temperatures of up to 650°C. The present invention can also be used as non load-bearing parts at temperatures as high as 1200°C.

C. Corrosion Resistance

An article comprising the inventive material also exhibits good corrosion resistance when tested in a nitric acid solution. The material has a corrosion resistance rate of less than 0.01 mm/year weight loss in HNO_3 solution ranging from 20% to 65% at room temperature. The material also shows no sign of grain boundary corrosion when exposed to the foregoing conditions.

D. Ductility

The present invention has an adequate tensile ductility at room temperature and good tensile ductility at over 700°C providing good hot workability. For example, the present invention in as-cast form exhibits tensile ductility of over 5% at room temperature and over 95% at approximately 900°C. Therefore, the inventive material was readily hot-rolled at temperatures above 900°C.

E. Castability

Due to the excellent castability properties associated with the present invention, e.g., a low viscosity when molten, standard metal melting and casting techniques can be used in producing finished articles. Articles can be made using conventional induction melting techniques carried out in a controlled or protective atmosphere, e.g., in an inert gas or under vacuum. The unique ability of the material to form near net shape articles is a combination of the fluidity of the molten alloy and the characteristics of the strengthening phase. Preferably, the material has a eutectic structure. This microstructure coupled with excellent flow properties, allows the molten alloy to conform to the shape of the mold, and results in near net shape articles that do not require additional finishing steps before use.

The microstructure of an article made in accordance with the present invention can be further tailored by adjusting the casting temperature. For example, it has been discovered that a higher casting temperature can result in a finer particle size for the secondary, strengthening phase. For purposes of illustration, a fine microstructure is one where the mean size of the secondary phase precipitates is less than approximately 50 μ m, and preferably about 10-20 μ m.

ARTICLE

In one embodiment, investment vacuum casting was used to produce a cast turbocharger turbine rotor with the thinnest blade having a thickness of approximately

0.5 mm. As shown in Example 1 below, the as-cast turbocharger turbine rotor exhibited excellent high temperature strengths up to 650°C. This high temperature strength is similar to cast iron-nickel base heat-resistant alloys currently used in turbochargers. However, due to the low density of the inventive material, the specific strength is approximately 25% higher than current cast iron-nickel base turbochargers. For example, the turbocharger turbine comprising the inventive alloy had a density of about 6.1 g/cm³, compared to cast iron-nickel base alloys, which have a density of about 8.1

g/cm³. Therefore, a turbocharger turbine made in accordance with the present invention is approximately 25% lighter in weight than standard iron-nickel base turbocharger turbine rotors.

The light weight turbine rotor of the turbocharger leads to significant reduction in pollution because it overcomes inertia and reaches operating speeds faster than the heavier iron-nickel base turbochargers currently used. Due to this effect, acceleration time can decrease by at least 25%, leading to a more efficient burn of the exhaust gas during acceleration, when compared to the heavier iron-nickel turbocharger. In fact, the light weight alloy of the present invention, when used to make a turbocharger turbine rotors and compressors would assist diesel engines in meeting transient (accelerating) emission standards, in addition to steady state emission standards.

In addition to the above performance benefits, the material costs of the inventive alloy is substantially cheaper, e.g., at least 50% cheaper, than conventional nickel-iron turbochargers. This price difference is primarily associated with the high amounts of nickel present in standard turbochargers, that are not present in the inventive alloy.

Finally, the present alloy has much better oxidation resistance than iron-nickel alloy or nickel base alloy turbocharger turbine rotor.

Having disclosed the present invention generally, the following example further describes the invention.

EXAMPLES

Example 1

An Fe-Al-Cr-C article comprising a composition within the range defined in Figure 1 was prepared by a standard melting technique. The composition was melted under a vacuum to form a molten Fe-Al-Cr-C alloy, which was then poured into a mold having a cavity in the shape of the article. The as-poured mold remained under a vacuum until it was sand-cooled in air to room temperature to form the as-cast article. The as-cast article was subsequently removed from the mold, and was found to be a Fe-Al-Cr-C body-centered cubic, solid solution having a density of about 6.1 g/cm³.

The mechanical properties of the as-cast article are shown in Table 1. As can be seen, a material within the present invention exhibits excellent yield and tensile strength up to 650°C, and good ductility, particularly at 900°C.

Table 1. Mechanical Properties of a bcc Fe-Al-Cr-C alloy

Temperature (°C)	0.2% Offset Yield Strength σ_y (MPa)	Tensile Strength σ_b (MPa)	Elongation (%)
Room Temp.	360	500	5.3
200	375	580	5.8
400	364	617	8.8
500	353	600	8.7
600	361	530	8.7
650	324	403	9.3
700	170	247	33
750	116	168	43
800	90	112	66.7
900	54	68	95.8
1000	26	32	39.2

Table 2 further shows that the inventive material is almost completely oxidation resistant up to 1150°C.

Table 2. Oxidation Resistance Properties of a bcc Fe-Al-Cr-C alloy

Temperature (°C)	Weight Change Rate after 100 hours in air (g/m ² d)
600	0.015
700	0.074
800	0.065
900	0.096

1000	-0.2
1100	-2
1150	0.42

Table 3 illustrates the excellent corrosion resistance properties, even in a 65% solution of nitric acid, of the inventive material.

Table 3. Corrosion Resistance Properties of a bcc Fe-Al-Cr-C alloy

HNO ₃ solution (%)	Corrosion Rate (mm/yr)
5	0.04
20	0.009
35	0.0084
50	0.0062
65	0.0075

The present invention has been disclosed generally and by reference to embodiments thereof. The scope of the invention is not limited to the disclosed embodiments but is defined by the appended claims and their equivalents.

What is claimed is:

1. A material comprising a body-centered-cubic, solid solution of Fe-Al-Cr-C.
2. The material of claim 1, comprising about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon.
3. The material of claim 2, wherein aluminum and chromium are present in a combined amount of at least 30 at.%.
4. The material of claim 1, said material having a yield strength of greater than 320 MPa up to about 650°C.
5. The material of claim 1, said material being polycrystalline.
6. The material of claim 1, which is strengthened by
 - (a) the incorporation of an additional solid solution phase to said solid solution,
 - (b) grain size refinement,
 - (c) the introduction of particles of a strengthening phase, or
 - (d) the addition of a strengthening element in the solid solution.
7. The material of claim 6, which is strengthened by the precipitation of body-centered-cubic particles within the solid solution, said particles having the substantially the same lattice parameters as said solid solution.
8. The material of claim 6, which is strengthened by the addition of refractory oxide particles to said solid solution.
9. The material of claim 8, wherein said refractory oxide particles comprise Y_2O_3 .

10. The material of claim 1, said material having a density of about 5.5 g/cm³ to about 7.5 g/cm³.

11. The material of claim 10, wherein said density is about 6.1 g/cm³.

12. The material of claim 1, said material having a yield strength that stays the same or increases with increasing temperature from room temperature to about 600°C.

13. The material of claim 1, said material having substantially no weight change due to oxidation at temperatures up to about 1150°C.

14. The material of claim 1, said material having a tensile ductility greater

than about 95% at temperatures of about 900°C.

15. A composite comprising solid solution phases of Fe-Al-Cr-C, wherein said solid solution phases are each body-centered-cubic and single-phase, having a composition of about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon, said solid solution phases having substantially the same lattice parameters.

16. A polycrystalline solid solution of Fe-Al-Cr-C comprising a composition of about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon.

17. The polycrystalline solid solution of claim 16, wherein aluminum and chromium are present in a combined amount of at least 30 at.%.

18. The polycrystalline solid solution of claim 16, which is strengthened by the incorporation of an additional solid solution phase to said polycrystalline solid solution.

19. The polycrystalline solid solution of claim 18, which is strengthened by the precipitation of body-centered-cubic particles within said polycrystalline solid solution, said particles having substantially the same lattice parameters as said polycrystalline solid solution.

20. The polycrystalline solid solution of claim 16, which is strengthened by the addition of refractory oxide particles to said polycrystalline solid solution.

21. The polycrystalline solid solution of claim 20, wherein said refractory oxide particles comprise Y_2O_3 .

22. An article comprising a body-centered-cubic, solid solution of Fe-Al-Cr-C.

23. The article of claim 22, comprising a composition of about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon.

24. The article of claim 23, wherein aluminum and chromium are present in a combined amount of at least 30 at.%.

25. The article of claim 22, said article having a density of about 5.5 g/cm³ to about 7.5 g/cm³.

26. The article of claim 25, wherein said density is about 6.1 g/cm³.

27. The article of claim 22 disposed to have a load applied thereto at temperatures up to about 650°C.

28. The article of claim 27, said article having a yield strength of greater than 320 MPa up to about 650°C.

29. The article of claim 22, said article having a yield strength that stays the same or increases with increasing temperature from room temperature to about 600°C.

30. The article of claim 22, said article having substantially no weight change due to oxidation up to about 1150°C.

31. The article of claim 22, said article having a tensile ductility greater than about 95% at temperatures of about 900°C.

32. A method of making the article of claim 22, said method comprising: melting a composition comprising about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon to form a molten Fe-Al-Cr-C alloy under a controlled atmosphere,

pouring said molten alloy into a mold under a controlled atmosphere, said mold having a cavity in the shape of said article,

cooling said molten alloy to room temperature to form a solid, as-cast article, and

removing the solid as-cast article from said mold.

33. The method according to claim 32, wherein said controlled atmosphere consists of an inert gas or a vacuum.

34. A method of strengthening the material of claim 1, wherein said method comprises precipitating body-centered-cubic particles within the solid solution, said particles having substantially the same lattice parameters as said solid solution.

35. The method of strengthening according to claim 34, wherein said method comprises adjusting the amount and the distribution of the body-centered-cubic particles within the solid solution by adjusting the amount of iron, aluminum, chromium and carbon.

36. A turbocharger part comprising a body-centered-cubic, solid solution of Fe-Al-Cr-C.

37. The turbocharger part of claim 36, comprising a composition of about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon.

38. The turbocharger part of claim 37, wherein aluminum and chromium are

present in a combined amount of at least 30 at.%.

39. The turbocharger part of claim 36 disposed to have a load applied thereto at temperatures up to about 650°C.

40. The turbocharger part of claim 39, said turbocharger part having a yield strength of greater than 320 MPa up to about 650°C.

41. The turbocharger part of claim 36, said turbocharger part having a yield strength that stays the same or increases with increasing temperature from room temperature to about 600°C.

42. The turbocharger part of claim 36, said turbocharger part having a density of about 5.5 g/cm³ to about 7.5 g/cm³.

43. The turbocharger part of claim 42, wherein said density is about 6.1 g/cm³.

44. The turbocharger part of claim 36, which is strengthened by the precipitation of body-centered-cubic particles within the solid solution, said

particles having the substantially the same lattice parameters as said solid solution.

45. The turbocharger part of claim 36, which is a turbine rotor.
46. The turbocharger turbine of claim 45, wherein said turbine rotor has blades that are approximately 0.5mm thick.
47. The turbocharger part of claim 36, which is a compressor.
48. A method of making a turbocharger part, said method comprising:

melting a composition comprising about 10 to 80 at.% iron, about 10 to 45 at.% aluminum, about 1 to 70 at.% chromium and about 0.9 to 15 at.% carbon to form a molten Fe-Al-Cr-C alloy under a protective atmosphere,

pouring said molten alloy into a mold, said mold having a cavity in the shape of said turbocharger part under a protective atmosphere,


cooling said molten alloy to room temperature to form a solid, as-cast turbo- charger part, and

removing the solid, as-cast turbocharger part from said mold.

49. The method according to claim 48, wherein said as-cast turbocharger part does not require additional finishing steps before using.

50. The method according to claim 48, wherein said part is a turbine rotor.

51. The method according to claim 48, wherein said part is a compressor.

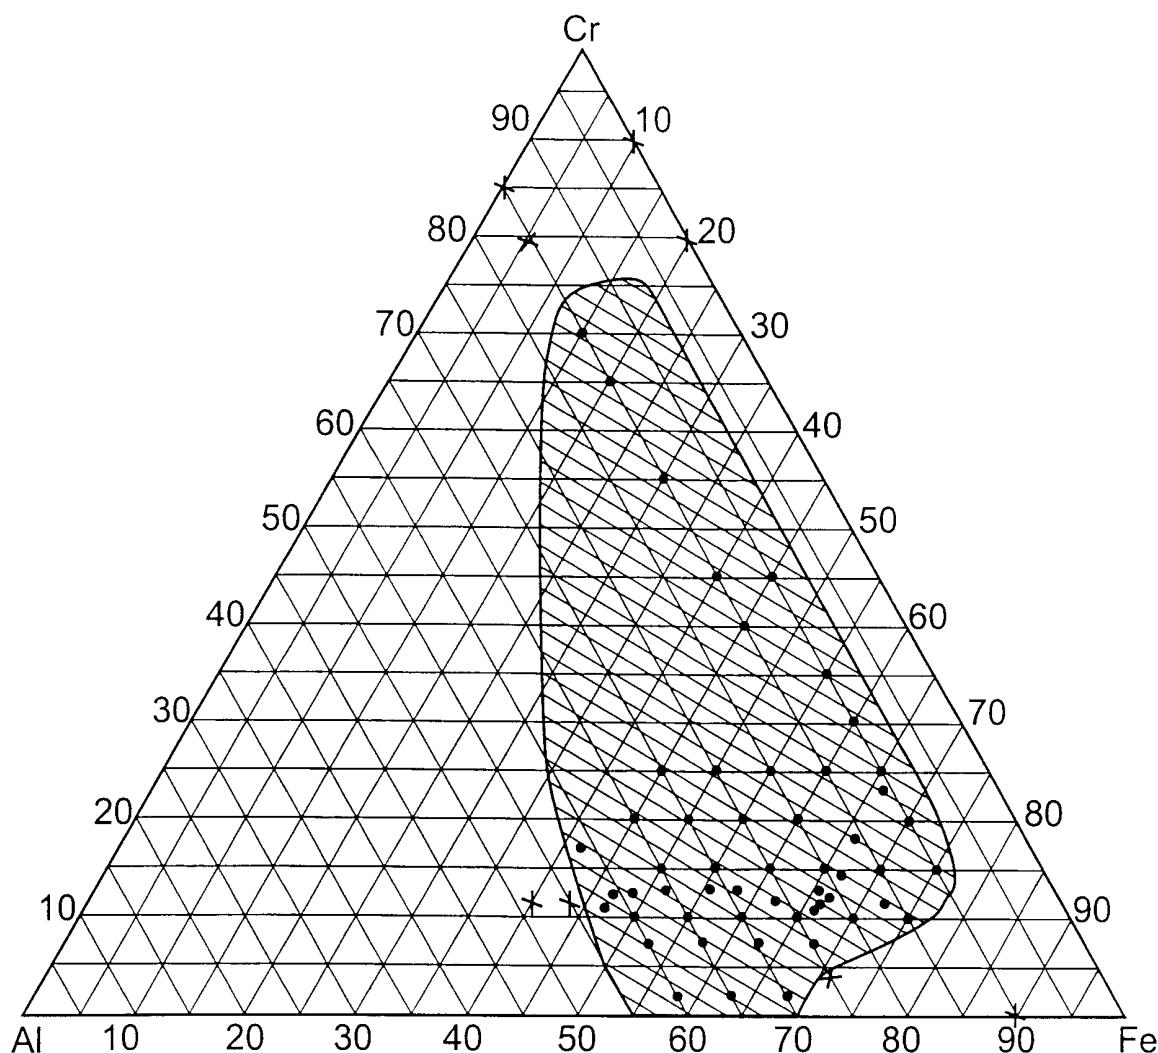

Fe-Al-Cr-C BCC SOLID SOLUTION PHASE DIAGRAM

C CONTENT: 0.9～15 AT %

BCC PHASE = A SINGLE OR A COMBINATION OF SEVERAL BCC PHASES WITH SUBSTANTIALLY THE SAME LATTICE PARAMETERS

- BCC SOLID SOLUTION > 97% FROM X-RAY POWDER DIFFRACTION

× BCC SOLID SOLUTION ≤ 97% FROM X-RAY POWDER DIFFRACTION

FIG. 1

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

I	nternational Application No
PCT/US 01/01646	

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C22C38/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data, METADEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT
--

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>DATABASE WPI Section Ch, Week 199530 Derwent Publications Ltd., London, GB; Class M24, AN 1995-225051 XP002168024 -& CN 1 087 685 A (UNIV BEIJING SCI & TECHNOLOGY), 8 June 1994 (1994-06-08) abstract</p> <p>---</p> <p>US 5 346 562 A (BATAWI EMAD ET AL) 13 September 1994 (1994-09-13)</p> <p>Claim 1</p> <p>---</p> <p>-/-</p>	1,3,22, 24
X		1,3,6,7, 22,24, 34,35

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority, claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 May 2001	08/06/2001
Name and mailing address of the ISA	Authorized officer

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Bjoerk, P

INTERNATIONAL SEARCH REPORT

International Application No	
PCT/US 01/01646	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 961 903 A (MCKAMEY CLAUDETTE G ET AL) 9 October 1990 (1990-10-09)	1,3-5, 12,22, 24,28,29
A	Tables - alloy FA-129; Col.3, 1.16-18 ----	13,32,33
X	ED. BY N.S. STOLOFF AND V.K. SIKKA: "Physical Metallurgy and processing of Intermetallic Compounds" 1996 , CHAPMAN & HALL , USA XP002168023	1,3-5, 10,12, 22,24, 25, 27-29,36
A	Chapter 9 "Iron Aluminides" by C.G. McKamey, Table 9-1; Fig.9-2; p.369;Table 9-3; Page 377; Page 382 and Table 9-5 ----	37-51
A	BALIGIDAD R G ET AL: "Processing of high carbon Fe3Al based intermetallic alloy" INTERMETALLICS, GB,ELSEVIER SCIENCE PUBLISHERS B.V, vol. 6, no. 7-8, 12 November 1998 (1998-11-12), pages 765-769, XP004143885 ISSN: 0966-9795 Abstract ----	1-35
P,X	BALIGIDAD R G ET AL: "Effect of alloying additions on structure and mechanical properties of high carbon Fe-16 wt.% Al alloy" MATERIALS SCIENCE & ENGINEERING A (STRUCTURAL MATERIALS: PROPERTIES, MICROSTRUCTURE AND PROCESSING), 31 JULY 2000, ELSEVIER, SWITZERLAND, vol. AA287, no. 1, pages 17-24, XP001000068 ISSN: 0921-5093 Abstract; Table 1 -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/01646

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
CN 1087685	A	08-06-1994			NONE
US 5346562	A	13-09-1994	EP	0587960 A	23-03-1994
			AT	166112 T	15-05-1998
			DE	59209325 D	18-06-1998
US 4961903	A	09-10-1990	AT	112809 T	15-10-1994
			CA	2042363 A,C	08-09-1991
			DE	69013335 D	17-11-1994
			DE	69013335 T	16-02-1995
			DK	455752 T	14-11-1994
			EP	0455752 A	13-11-1991
			ES	2061022 T	01-12-1994
			JP	6089435 B	09-11-1994
			JP	4500390 T	23-01-1992
			WO	9010722 A	20-09-1990