



(11) **EP 4 129 511 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
29.05.2024 Bulletin 2024/22

(51) International Patent Classification (IPC):
B21C 51/00 ^(2006.01) **B21B 37/28** ^(2006.01)
B21B 38/02 ^(2006.01)

(21) Application number: **21775354.0**

(52) Cooperative Patent Classification (CPC):
B21C 51/00; B21B 37/28; B21B 13/142;
B21B 37/38; B21B 37/40; B21B 37/42; B21B 38/02;
B21B 2263/02; B21B 2267/18; B21B 2269/06;
B21B 2269/16

(22) Date of filing: **12.02.2021**

(86) International application number:
PCT/JP2021/005355

(87) International publication number:
WO 2021/192713 (30.09.2021 Gazette 2021/39)

(54) **METHOD FOR SHAPE CONTROL IN ROLLING MILL AND DEVICE FOR SHAPE CONTROL IN ROLLING MILL**
FORMSTEUERUNGSVERFAHREN IN EINEM WALZWERK UND FORMSTEUERVORRICHTUNG IN EINEM WALZWERK
PROCÉDÉ DE COMMANDE DE FORME DANS UN LAMINOIR ET DISPOSITIF DE COMMANDE DE FORME DANS UN LAMINOIR

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **23.03.2020 JP 2020050557**

(43) Date of publication of application:
08.02.2023 Bulletin 2023/06

(73) Proprietor: **JFE Steel Corporation**
Tokyo 100-0011 (JP)

(72) Inventors:
• **SUZUKI, Kenji**
Tokyo 100-0011 (JP)

• **HARADA, Yoshimitsu**
Tokyo 100-0011 (JP)

(74) Representative: **Hoffmann Eitle**
Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)

(56) References cited:
JP-A- S5 348 057 JP-A- H09 174 128
JP-A- 2005 313 190 JP-A- 2011 183 429
JP-A- 2017 064 790

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field

[0001] The present invention relates to a method for shape control in a rolling mill and a device for shape control in the rolling mill, see e.g. JP 2017 064790 A, which forms the basis for the preamble of claim 1 and claim 2.

Background

[0002] In rolling mills such as continuous cold rolling mills, a method is employed in which the shape of a steel sheet is measured after rolling, and then the result of the measurement is fed back to a rolling mill to control the shape of the steel sheet to within an allowable range. Furthermore, another method is employed in which a sheet thickness gauge or both a sheet thickness gauge and a sheet passing speedometer are provided in each of rolling stands to perform roll gap control or roll speed control in each of the rolling stands (see Patent Literature 1).

Citation List

Patent Literature

[0003]

Patent Literature 1: Japanese Patent Application Laid-open No. 2012-110939

Summary

Technical Problem

[0004] However, the above-described methods are for controlling the thickness of a steel sheet to within an allowable range, and therefore effective in reducing sheet thickness defects, but are not effective in preventing sheet breakage. Especially, there has been the problem that, when a steel sheet has a width of 1200 mm or wider, such wide steel sheet is prone to cause breakage more easily due to a shape defect.

[0005] The present invention is proposed in view of the above-described problem, and an object of the present invention is to provide a method for shape control in a rolling mill and a device for shape control in the rolling mill, the method and the device being capable of substantially preventing the breakage of even a wide steel sheet without increasing the cost of, for example, equipment modifications.

Solution to Problem

[0006] A method for shape control in a rolling mill according to the present invention includes: a measurement step of measuring a shape of a steel sheet on a delivery

side of the rolling mill; and a control step of controlling the rolling mill in a manner that the shape of the steel sheet falls within an allowable range, based on the shape of the steel sheet measured at the measurement step, wherein the control step includes a step of setting a control gain smaller than a control gain for a width of a steel sheet as a target for rolling being equal to or smaller than the predetermined value when the steel sheet as the target for rolling has a width greater than a predetermined value.

[0007] A device for shape control in a rolling mill according to the present invention includes: a measurement unit configured to measure a shape of a steel sheet on a delivery side of the rolling mill; and a control unit configured to control the rolling mill in a manner that the shape of the steel sheet falls within an allowable range, based on the shape of the steel sheet measured by the measurement unit, wherein the control unit is configured to set a control gain smaller than a control gain for a width of a steel sheet as a target for rolling being equal to or smaller than the predetermined value when the steel sheet as the target for rolling has a width greater than a predetermined value.

25 Advantageous Effects of Invention

[0008] A method for shape control in a rolling mill and a device for shape control in the rolling mill according to the present invention can prevent the breakage of even a wide steel sheet without increasing the cost of, for example, equipment modifications.

Brief Description of Drawings

35 [0009]

FIGS. 1(a) and 1(b) are a diagram illustrating a target shape and an actual shape of a steel sheet having a sheet width of 1200 mm or smaller and a diagram illustrating a target shape and an actual shape of a steel sheet having a sheet width greater than 1200 mm, respectively.

FIG. 2 is a schematic diagram of a configuration of a continuous cold rolling mill in Examples.

FIG. 3 is a diagram illustrating the breakage rates of Conventional Example and Invention Examples.

Description of Embodiments

50 [Concept]

[0010] First, the concepts of a method for shape control in a rolling mill and a device for shape control in the rolling mill according to the present invention will be described with reference to FIGS. 1(a) and 1(b).

[0011] FIGS. 1(a) and 1(b) are a diagram illustrating a target shape and an actual shape of a steel sheet having a sheet width of 1200 mm or smaller and a diagram il-

illustrating a target shape and an actual shape of a steel sheet having a sheet width greater than 1200 mm, respectively. As illustrated in FIG. 1(a), when the sheet width of the steel sheet is 1200 mm or smaller, the actual shape of the steel sheet is such that edge portions and a center portion in the width direction of the steel sheet have an elongated shape while intermediate portions (quarter portions) between the edge portions and the center portion have a stretched shape, and the shape of any of these portions is similar to the target shape. The steel sheet having the above-described shape distribution is less likely to break because the edge portions of the steel sheet have the elongated shape.

[0012] In contrast, as illustrated in FIG. 1(b), when the sheet width of the steel sheet is greater than 1200 mm, the actual shape of the steel sheet is such that distributions of the elongated shape and the stretched shape in the width direction do not necessarily match those in the target shape (shape irregularity), and such mismatch covers a wide region. In this case, there is a risk that an actuator of the rolling mill for adjusting the shape of the region having partial shape irregularity may be overcontrolled. Then, such overcontrol causes shape distortion in another region that is different from the region having shape irregularity, whereby, for example, the edge portions changes in shape in the stretch direction, so that the steel sheet breaks more easily.

[0013] The control gain of an actuator has conventionally been set to a constant value, regardless of the width of a steel sheet. Here, the control gain indicates an operation amount of the actuator configured to control a shape. When a deviation of a detected shape from a target shape becomes a predetermined value or larger, the actuator operates to perform shape control. The amount of this operation is defined as control gain. However, in the case where the width of a steel sheet is greater than a predetermined width, for example, greater than 1200 mm, the use of the same value of the control gain results in overcontrol, which leads to increased shape distortion, so that the risk of breakage of the steel sheet is incurred. Therefore, in the present invention, the width of a steel sheet that is prone to cause distortion of the shape of the steel sheet is defined beforehand as a predetermined sheet width. When the width of a steel sheet as a target for rolling exceeds the predetermined sheet width, the control gain of the actuator configured to control the shape of the steel sheet is made smaller than a control gain for the width of the steel sheet as a target for rolling being the predetermined sheet width or smaller. Specifically, in the case of examples illustrated in FIGS. 1(a) and 1(b), when a steel sheet having a width greater than 1200 mm is rolled, the control gain is made smaller than a control gain for the width of the steel sheet being 1200 mm or smaller. Thus, without increasing the cost of, for example, equipment modifications, the breakage of a steel sheet due to distortion of the shape of the steel sheet can be substantially prevented and the steel sheet can be stably rolled.

Examples

[0014] Next, examples of a method for shape control in a rolling mill and a device for shape control in the rolling mill according to the present invention will be described with reference to FIG. 2 and FIG. 3.

[0015] In Examples, in a continuous cold rolling mill 1 illustrated in FIG. 2, the control of the shape of a steel sheet was exemplarily performed using a result obtained by measuring the shape in the width direction of the steel sheet on the delivery side of a final rolling stand. Note that the continuous cold rolling mill 1 illustrated in FIG. 2 was a rolling mill configured to roll a steel sheet S delivered from a reel 2a by using rolling stands 3a to 3e and then wind the steel sheet S around a reel 2b. On the delivery side from the rolling stand 3e serving as a final rolling stand, a shape measuring device 10 configured to measure a shape in the width direction of the steel sheet S was disposed. Based on the shape in the width direction of the steel sheet S that was measured by the shape measuring device 10, a controller 11 controlled an actuator (for shift control or bender control of a tapered first intermediate roll) provided in each of the rolling stands, and thereby controlled the shape in the width direction of the steel sheet S to within an allowable range.

[0016] In Examples, the thickness of the steel sheet S was 0.1 to 3.5 mm and the rolling speed thereof was 30 to 2000 rpm. The width of the steel sheet S was within a range of 600 to 1300 mm. Furthermore, based on past operational performance, the width of the steel sheet S subjected to the change of control gain was set to 1200 mm, which was a limit beyond which the risk of breakage caused by shape distortion increased. Then, rolling with the same control gain as that in the case of a sheet width of 1200 mm or smaller (Conventional Example: normal gain), rolling with one-half of the control gain in the case of a sheet width of 1200 mm or smaller (Invention Example 1: 1/2 gain value), and rolling with one-quarter of the control gain in the case of a sheet width of 1200 mm or smaller (Invention Example 2: 1/4 gain value) were performed in terms of the respective numbers of passing sheets (the number of coils) illustrated in FIG. 3. As a result, as illustrated in FIG. 3, the breakage rate in Conventional Example was approximately 3.9%, while the breakage rate of any of Invention Examples was 0%. It was confirmed that, according to the present invention, without increasing the cost of, for example, equipment modifications, the breakage of a steel sheet due to distortion of the shape of the steel sheet can be substantially prevented, so that the steel sheet can be stably rolled.

[0017] Embodiments to which the invention established by the inventors were described above. However, the invention is not limited by the description and drawings that constitute a part of the present disclosure according to the present embodiments. For example, the invention is applicable to single-stand rolling mills such as a Sendzmir mill. In other words, other embodiments, examples, and operational techniques, and the likes

made by those skilled in the art, based on the present embodiments, should be all included in the scope of the present invention.

Industrial Applicability

[0018] According to the present invention, a method for shape control in a rolling mill and a device for shape control in the rolling mill can be provided, the method and the device being capable of substantially preventing the breakage of even a wide steel sheet without increasing the cost of, for example, equipment modifications.

Reference Signs List

[0019]

1 continuous cold rolling mill
2a, 2b reel
3a to 3e rolling stand
10 shape measuring device
11 controller
S steel sheet

Claims

1. A method for shape control in a rolling mill (1), the method comprising:

a measurement step of measuring a shape of a steel sheet (S) on a delivery side of the rolling mill; and
a control step of controlling the rolling mill in a manner that the shape of the steel sheet falls within an allowable range, based on the shape of the steel sheet measured at the measurement step, **characterized in that**
the control step includes a step of setting a control gain smaller than a control gain for a width of a steel sheet as a target for rolling being equal to or smaller than the predetermined value when the steel sheet as the target for rolling has a width greater than a predetermined value.

2. A device for shape control in a rolling mill (1), comprising:

a measurement unit (10) configured to measure a shape of a steel sheet (S) on a delivery side of the rolling mill; and
a control unit (11) configured to control the rolling mill in a manner that the shape of the steel sheet falls within an allowable range, based on the shape of the steel sheet measured by the measurement unit, **characterized in that**
the control unit is configured to set a control gain smaller than a control gain for a width of a steel

sheet as a target for rolling being equal to or smaller than the predetermined value when the steel sheet as the target for rolling has a width greater than a predetermined value.

Patentansprüche

1. Verfahren zur Formsteuerung in einem Walzwerk (1), wobei das Verfahren Folgendes umfasst:

einen Messschritt des Messens einer Form eines Stahlblechs (S) an einer Ausgabeseite des Walzwerks; und
einen Steuerschritt des Steuerns des Walzwerks auf solche Weise, dass die Form des Stahlblechs in einen zulässigen Bereich fällt, basierend auf der in dem Messschritt gemessenen Form des Stahlblechs, **dadurch gekennzeichnet, dass**
der Steuerschritt einen Schritt des Einstellens einer Steuerverstärkung einschließt, die kleiner ist als eine Steuerverstärkung für eine Breite eines Stahlblechs als Ziel für das Walzen, die gleich oder kleiner als der vorbestimmte Wert ist, wenn das Stahlblech als Ziel für das Walzen eine größere Breite als ein vorbestimmter Wert aufweist.

2. Vorrichtung zur Formsteuerung in einem Walzwerk (1), umfassend:

eine Messeinheit (10), die so konfiguriert ist, dass sie eine Form eines Stahlblechs (S) an einer Ausgabeseite des Walzwerks misst; und
eine Steuereinheit (11), die so konfiguriert ist, dass sie das Walzwerk auf einer solchen Weise steuert, dass die Form des Stahlblechs in einen zulässigen Bereich fällt, basierend auf der durch die Messeinheit gemessenen Form des Stahlblechs, **dadurch gekennzeichnet, dass**
die Steuereinheit dazu konfiguriert ist, eine Steuerverstärkung einzustellen, die kleiner ist als eine Steuerverstärkung für eine Breite eines Stahlblechs als Ziel für das Walzen, die gleich oder kleiner als der vorbestimmte Wert ist, wenn das Stahlblech als Ziel für das Walzen eine größere Breite als ein vorbestimmter Wert aufweist.

Revendications

1. Procédé de commande de forme dans un laminoir (1), le procédé comprenant :

une étape de mesure consistant à mesurer une forme d'une tôle (S) d'acier sur un côté distribution du laminoir ; et

une étape de commande consistant à commander le laminoir de façon à ce que la forme de la tôle d'acier se trouve dans une plage admissible, sur la base de la forme de la tôle d'acier mesurée à l'étape de mesure, **caractérisé en ce que** 5
 l'étape de commande inclut, lorsqu'une tôle d'acier à laminier a une largeur supérieure à une valeur prédéterminée, une étape consistant à régler un gain de commande pour qu'il soit inférieur à un gain de commande correspondant 10
 à une largeur de la tôle d'acier à laminier inférieure ou égale à la valeur prédéterminée.

2. Dispositif de commande de forme dans un laminoir (1), comprenant : 15

une unité (10) de mesure configurée pour mesurer une forme d'une tôle (S) d'acier sur un côté distribution du laminoir ; et
 une unité (11) de commande configurée pour 20
 commander le laminoir de façon à ce que la forme de la tôle d'acier se trouve dans une plage admissible, sur la base de la forme de la tôle d'acier mesurée par l'unité de mesure, **carac-**
térisé en ce que 25
 l'unité de commande est configurée pour, lorsque la tôle d'acier à laminier a une largeur supérieure à une valeur prédéterminée, régler un gain de commande pour qu'il soit inférieur à un gain de commande correspondant à une largeur 30
 de la tôle d'acier à laminier inférieure ou égale à la valeur prédéterminée.

35

40


45

50

55

FIG.1

(a)

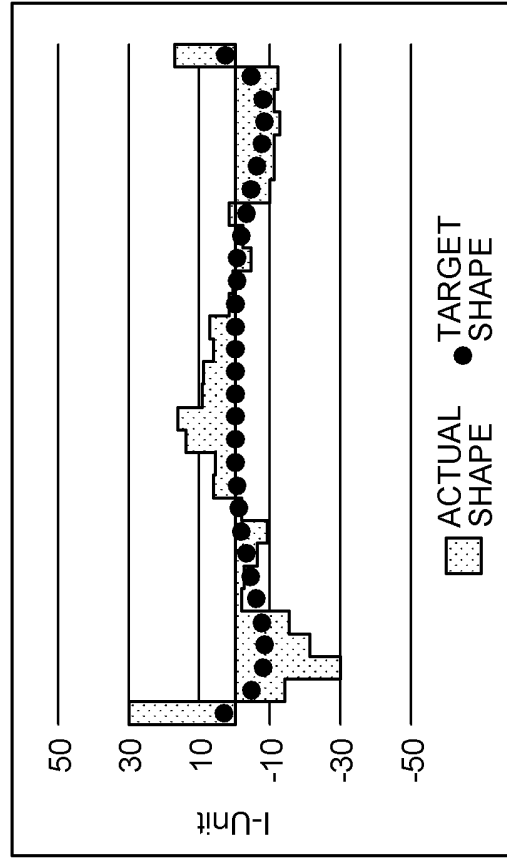

(b)

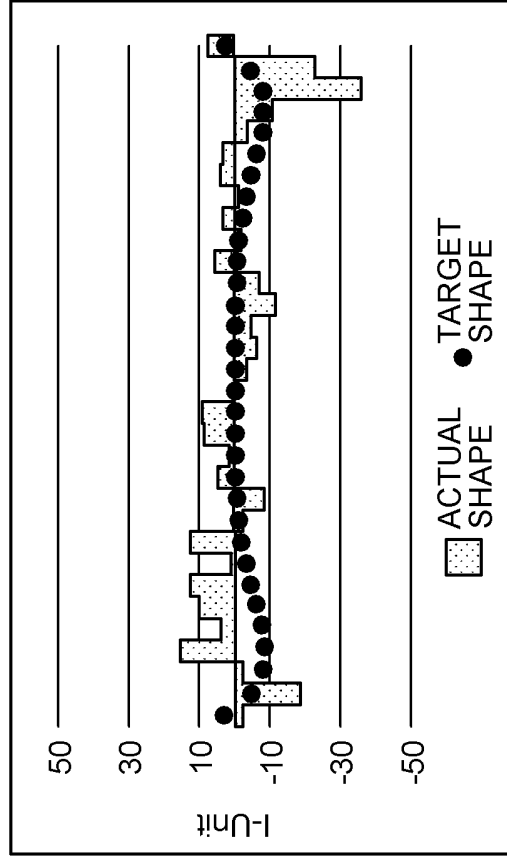


FIG.2


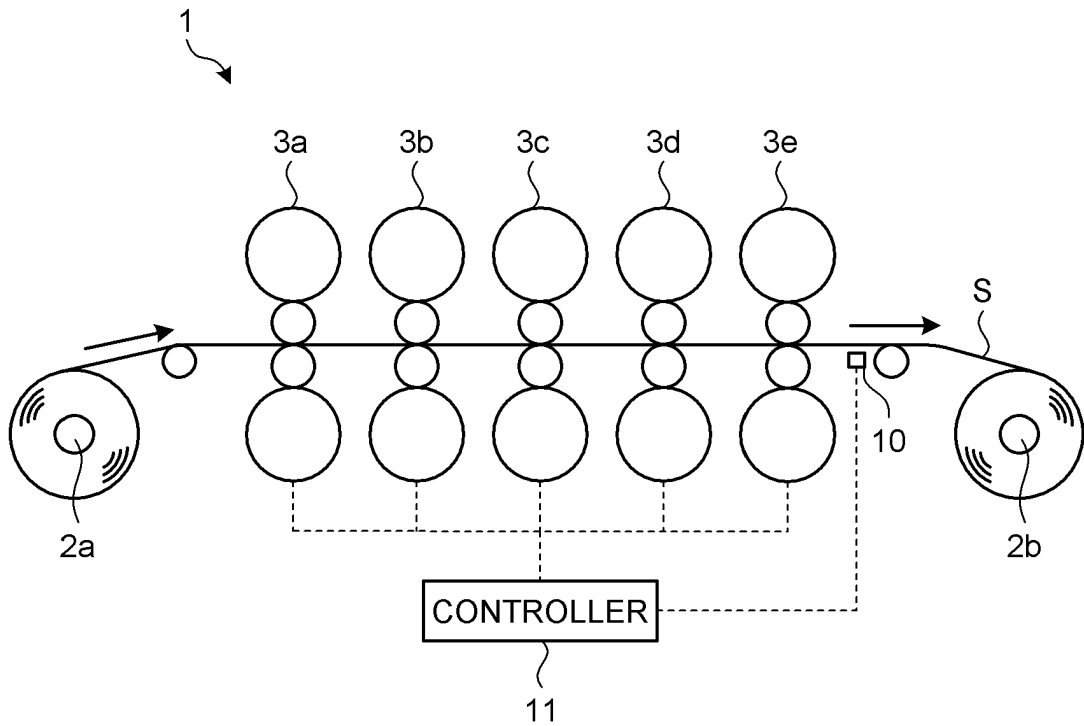


FIG.3

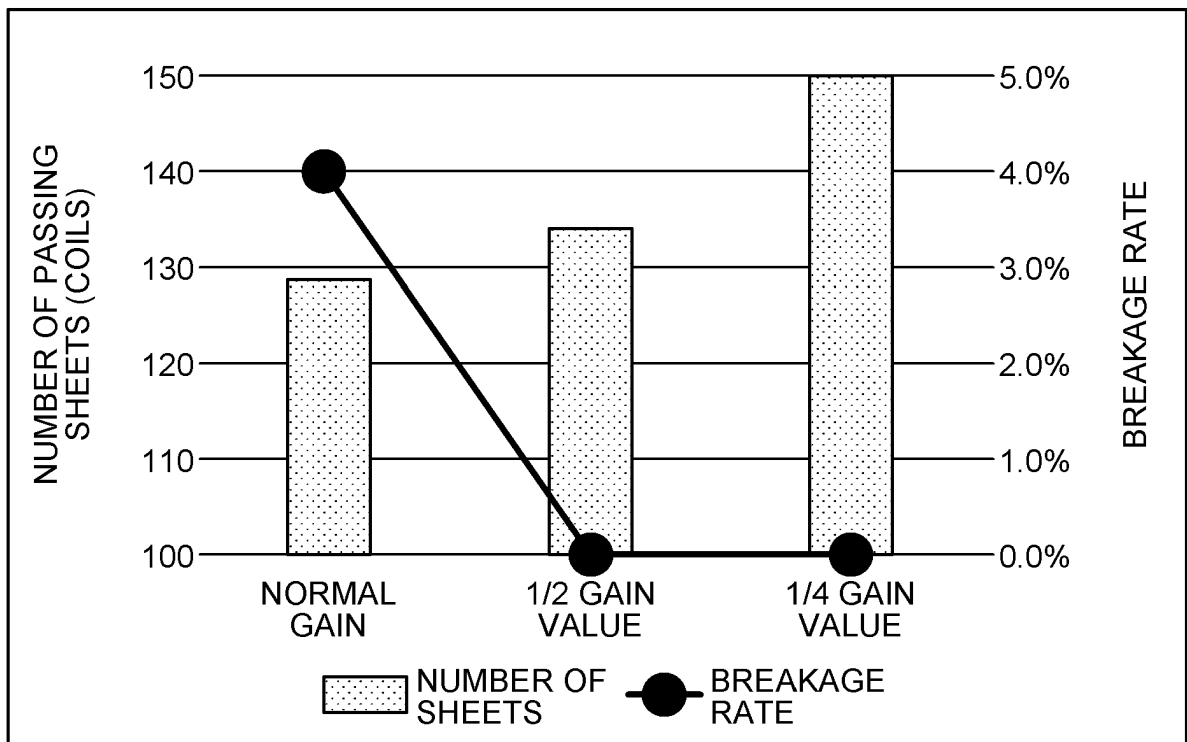

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2017064790 A [0001]
- JP 2012110939 A [0003]