



(22) Date de dépôt/Filing Date: 2019/10/18

(41) Mise à la disp. pub./Open to Public Insp.: 2020/05/09

(45) Date de délivrance/Issue Date: 2023/10/17

(30) Priorité/Priority: 2018/11/09 (US16/185,500)

(51) Cl.Int./Int.Cl. *F16B 37/14* (2006.01)


(72) Inventeurs/Inventors:
HANSEN, DARRIN M., US;
HARGRAVE, BENJAMIN P., US;
PAJEL, CARISSA, US

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR LP

(54) Titre : CAPUCHON POUR EMPECHER UN SCELLANT NON DURCI DE COULER

(54) Title: EME CAP FOR PREVENTING UNCURED SEALANT SQUEEZE OUT

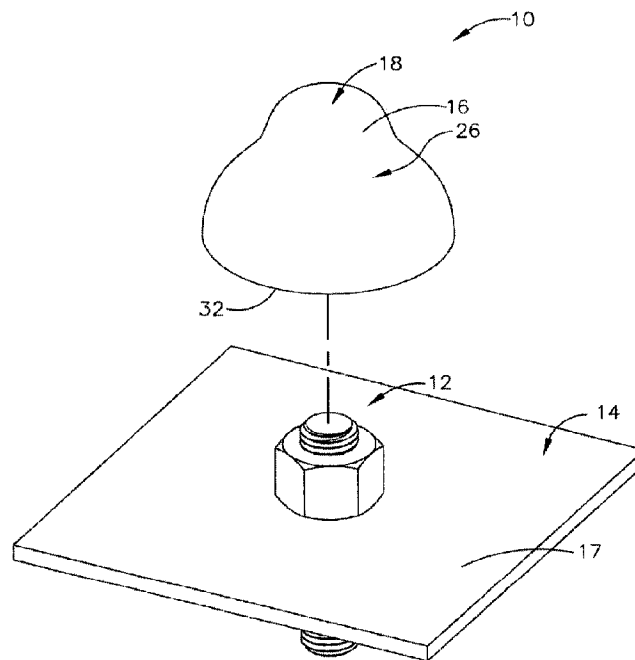

(57) Abrégé/Abstract:

A containment apparatus for enclosing a metallic fastener extending through a structure includes a cap member. The cap member includes a first wall member which defines a first cavity and a first end. The first end defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further includes a second wall member secured to and extends from an exterior surface of the first wall member. The second wall member extends spaced apart from and along the first wall member to a first end. The second wall member surrounds the first wall member such that first wall member and second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are coplanar with one another.

ABSTRACT

A containment apparatus for enclosing a metallic fastener extending through a structure includes a cap member. The cap member includes a first wall member which defines a first cavity and a first end. The first end defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further includes a second wall member secured to and extends from an exterior surface of the first wall member. The second wall member extends spaced apart from and along the first wall member to a first end. The second wall member surrounds the first wall member such that first wall member and second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are coplanar with one another.

EME CAP FOR PREVENTING UNCURED SEALANT SQUEEZE OUT

BACKGROUND

This disclosure relates to an electrical insulation containment apparatus which electrically insulates a metallic fastener from transmitting electrical current or sparks into a vicinity of the location of the metallic fastener upon an occurrence of an electromagnetic effect ("EME") or lightning strike event and more particularly to an electrical insulating cap member containing sealant which encloses the metallic fastener within the cap member and a structure surface from which the metallic fastener extends.

Electrical insulation containment apparatus such as cap members made of cured sealant material, which also contains sealant, have been used to cover, enclose and electrically insulate an end portion of a metallic fastener assembly extending from a structure surface. The metallic fastener assembly can include a wide range of fasteners wherein the end portion can include, for example, a nut and a threaded end portion of a stud or bolt or a bolt head along with washers as well as other such configurations. The cap member confines the end portion of the metallic fastener within the cap member and the structure surface from which the metallic fastener extends.

A portion of the uncured sealant, which is positioned within the cap member, is often displaced by the end portion of the metallic fastener being inserted into the cap member during installation of the cap member. The uncured sealant which is displaced is squeezed out between the edge of the cap member and the structure surface to which the edge of the cap member is to abut with the cap member being installed. The uncured sealant from the cap member is positioned on the structure surface and positioned about the cap member.

The unsecured sealant expelled or squeezed out of the cap member is then smoothed out about the containment cap to ensure proper sealing of the cap member. The smoothing process of the unsecured sealant is tedious and time consuming. In

addition, after the uncured sealant has been smoothed out, the sealant, which is positioned outside of the cap member, is also subjected to visual inspection, adhesion testing and post adhesion inspections. As a result, there is a need to design a cap member, which contains uncured sealant, for electrically insulating a metallic fastener, such that with installation of the cap member which prevents the occurrence of uncured sealant escaping the confinement of the cap member.

SUMMARY

An example includes a containment apparatus for enclosing a metallic fastener extending through a structure, which includes a cap member. The cap member includes a first wall member which defines a first cavity and a first end, wherein the first end defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further includes a second wall member secured to and extends from an exterior surface of the first wall member. The second wall member extends spaced apart from and along the first wall member to a first end and the second wall member surrounds the first wall member such that first wall member and second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are coplanar with one another.

An example includes a method of installing a containment apparatus for enclosing a metallic fastener extending from a structure includes a step of placing an uncured sealant into a first cavity of a cap member. The cap member includes a first wall member which defines the first cavity and a first end, wherein the first end defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further includes a second wall member secured to and extends from an exterior surface of the first wall member, wherein the second wall member extends spaced apart from and extends along the first wall member to a first end of the second wall member. The second wall member surrounds the first wall member such that the first wall member and the second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are

coplanar with one another. The method further includes a step of inserting at least a portion of the metallic fastener into the first cavity.

In one embodiment, there is provided a containment apparatus for enclosing a metallic fastener extending through a structure. The containment apparatus comprises a cap member comprising a first wall member, which defines a first cavity and a first end. The first end of the first wall member defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further comprises a second wall member joined together with the first wall member. The second wall member extends spaced apart from the first wall member and extends along the first wall member continuously to a first end of the second wall member. The second wall member surrounds the first wall member such that the first wall member and the second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are coplanar with one another.

In another embodiment, there is provided a method of installing a containment apparatus for enclosing a metallic fastener extending from a structure. The method comprises placing an uncured sealant into a first cavity of a cap member. The cap member comprises a first wall member which defines the first cavity and a first end. The first end of the first wall member defines a first opening providing access into the first cavity for at least a portion of the metallic fastener. The cap member further comprises a second wall member joined together with the first wall member. The second wall member extends spaced apart from the first wall member and extends along the first wall member continuously to a first end of the second wall member. The second wall member surrounds the first wall member such that the first wall member and the second wall member form a second cavity positioned between the first wall member and the second wall member. The first end of the first wall member and the first end of the second wall member are coplanar with one another. The method further comprises inserting at least a portion of the metallic fastener into the first cavity.

BRIEF SUMMARY OF THE DRAWINGS

FIG. 1 is an exploded perspective view of a containment apparatus for enclosing an end portion of a metallic fastener and a structure from which the metallic fastener extends;

FIG. 2 is a cross section view of the containment apparatus of FIG. 1 positioned against the structure surface enclosing the portion of the metallic fastener which extends from the structure surface;

FIG. 3 is a top plan view of the containment apparatus of FIG. 2 installed on the structure surface from which a metallic fastener extends;

FIG. 4 is a perspective view into the containment apparatus of FIG. 1 with uncured sealant positioned within a first cavity of the containment cap before the containment cap is installed enclosing the end portion of the metallic fastener;

FIG. 5 is a cross section view of the containment apparatus of FIG. 2 being installed; and

FIG. 6 is a flow chart of a method for installing a containment apparatus for enclosing a metallic fastener extending through a structure.

DESCRIPTION

In referring to FIGS. 1-3, containment apparatus **10** for enclosing metallic fastener **12** extending through structure **14** is shown. Cap member **16** of containment apparatus **10** includes first wall member **18**, which defines first cavity **20** and first end **22**, wherein first end **22** defines first opening **24** providing access into first cavity **20** for at least a portion of metallic fastener **12**. Second wall member **26** is secured to and extends from exterior surface **28** of first wall member **18**. Second wall member **26** extends spaced apart from and along first wall member **18** to first end **32**. Second wall member **26** can be connected to first wall member **18** as separate parts or can be integrally molded as a single part. Second wall member **26** surrounds first wall

member **18**, as seen in FIG. **4**, such that first wall member **18** and second wall member **26** form second cavity **30** positioned between first wall member **18** and second wall member **26**. First end **22** of first wall member **18** and first end **32** of second wall member **26** are coplanar with one another positioned within plane *P* as seen in FIG. **5**. This configuration of cap member **16** provides for confining uncured sealant so as not to become squeeze out uncured sealant from cap member **16** during installation. In avoiding uncured sealant exiting cap member **16**, substantial labor and cost can be avoided in not having to smooth out exited uncured sealant. In addition, second cavity **30** confines uncured sealant which has been displaced out of first cavity **20** from the insertion of metallic fastener **12** into first cavity **20** during installation. The uncured sealant confined within second cavity **30**, when cured, provides additional securement of cap member **16** to structure **14** that is provided by cured sealant positioned within first cavity **20**.

Cap member **16** can be constructed in one of a variety of fabrication processes such as for example various molding techniques or additive manufacturing and from one of a wide variety of materials such as for example thermoplastic or thermoset materials. Thermoplastic materials can include, for example, such compositions as acrylonitrile butadiene styrene, polylactic acid, polyvinyl alcohol, polycarbonate and polyetherimide or other like compositions. Thermoset materials can include, for example, such compositions as polysulfide, polythioether, polyurethane, epoxy, acrylate or polyimide or other like compositions.

In referring to FIGS. **2** and **4**, first end **22** in this example includes flat surface **34**. Flat surface **34** of first end **22** extends in circular direction *C*, as seen in FIG. **4**, defining first opening **24** having circular configuration **38**. Flat surface **34** provides for reliable confinement of metallic fastener **12** with cap member **16** positioned against a flat surface of structure **14** and the circular configuration provides ease in manufacturing of cap member **16** provides a versatile configuration in engaging different shaped metallic fasteners **12**. First end **32** of second wall member **26** includes, in this example, flat surface **40**. Flat surface **40** provides for a reliable confinement for second cavity **30** in preventing uncured sealant from exiting second

cavity **30** and be positioned outside of cap member **16**. Flat surface **40** of first end **32** of second wall member **26** and flat surface **34** of first end **22** of first wall member **18** are spaced apart from one another and flat surface **40** of first end **32** of second wall member **26** surrounds flat surface **34** of first end **22** of first wall member **18**. Flat surface **40** of second wall member **26** extends in circular direction C'. Flat surfaces **34** and **40** provide a concentric configuration, as seen in FIG. 4. The spaced surrounding of second wall member **26** about first wall member **18** provides second cavity **30** for securing and storing uncured sealant within second cavity **30** and prevent uncured sealant initially positioned within first cavity **20** to exit cap member **16**.

As seen FIG. 2, in this example, first wall member **18** and second wall member **26** is integral with one another, which provides for ease in manufacturing and reduction in cost with respect to assembling. First wall member **18** and second wall member **26** are joined together at location M spaced apart from first end **22** of first wall member **18** and first end **32** of second wall member **26**. This configuration of first wall member **18** and second wall member **26** provides for accommodating space within second cavity **30** to receive uncured sealant exiting first cavity **20** and preventing uncured sealant exiting second cavity **30**. Interior surface **42** of second wall member **26** extends in curvilinear direction **44** from first end **32** of second wall member **26**. At least a portion **45** of an interior surface **46** of first wall member **18** extends in a curvilinear direction **47**. The curvilinear surfaces of the respective wall members provide ease in manufacturing of cap member **16**. Exterior surface **52** of second wall member **26** extends in curvilinear direction **53** from exterior surface **28** of first wall member **18** provides for a smooth continuous outer surface which provides for ease in manufacturing of cap member **16**.

In referring to FIG. 6, method **62** of installing a containment apparatus **10** for enclosing metallic fastener **12** extending from structure **14** surface **17** includes step **64** of placing uncured sealant **66** into first cavity **20** of cap member **16**, which includes first wall member **18**, which defines first cavity **20** and first end **22**, as seen in FIG. 4. Uncured sealant **66** can include one of a wide variety of chemical compositions such as for example, polysulfide, polythioether, polyurethane, epoxy, acrylate or polyimide.

First end **22** defines first opening **24** providing access into first cavity **20** for at least a portion of metallic fastener **12**. Second wall member **26** is secured to and extends from exterior surface **28** of first wall member **18**, as seen in FIG. 2. Second wall member **26** extends spaced apart from and extends along first wall member **18** to first end **32** of second wall member **26**. Second wall member **26** surrounds first wall member **18** such that first wall member **18** and second wall member **26** form second cavity **30** positioned between first wall member **18** and second wall member **26**. First end **22** of first wall member **18** and first end **32** of second wall member **26** are coplanar with one another with being positioned in plane P as seen in FIG. 5. Method **62** further includes step **68** of inserting at least a portion of metallic fastener **12** into first cavity **20**, as also seen in FIG. 5. Method **62** provides for installation of cap member **16**, such that uncured sealant **66** is confined within cap member **16** during installation and does not result in uncured sealant **66** within cap member **16** becoming squeeze out uncured sealant **66** from cap member **16** during installation. In avoiding uncured sealant **66** exiting cap member **16**, substantial labor and cost savings can be experienced in not having to smooth out uncured sealant **66** that has exited the cap member **16**. In addition, second cavity **30** confines uncured sealant **66** which has come out of first cavity **20** from the insertion of metallic fastener **12** and into second cavity **30** during installation. Uncured sealant **66** confined within second cavity **30**, when cured, provides additional securement of cap member **16** to structure **14** to that which is provided by uncured sealant **66** positioned within first cavity **20**. Method **62** further includes a step of exerting a force onto cap member **16** in direction **70** toward metallic fastener **12**. The step of exerting the force onto the cap member **16** further includes turning cap member **16** in direction **72** about central axis **74** of cap member **16**. The application of force toward metallic fastener **12** and turning of cap member **16** provides for a smoothing and thinning out of uncured sealant **66** exiting first cavity **20** with metallic fastener **12** being inserted into first cavity **20**.

Method **62** further includes a step of moving uncured sealant **66**, as seen in FIG. 5, between first end **22** of first wall member **18** and structure **14**. This moving of uncured sealant **66** is facilitated with smoothing and squeezing out of uncured sealant

66 positioned between first end 22 of first wall member 18 and surface 17 of structure 14 with turning of cap member 16 and with exerting the force onto cap member 16. Moving of uncured sealant 66 between first end 22 of wall member 18 allows the displaced uncured sealant from first cavity 20 to move into second cavity 30 and provide ease in installing cap member 16 onto metallic fastener 12 with experiencing little resistance with uncured sealant flowing through and between first end 22 and structure 14. The step of moving further includes positioning uncured sealant 66 which has moved beyond first wall member 18 in alignment with second cavity 30 with first end 22 of first wall member 18 and first end 32 of second wall member 26 positioned spaced apart from structure 14. Positioning uncured sealant 66 in alignment with second cavity 30 provides for ease in confinement of uncured sealant 66 within second cavity 30 when installing cap member 16. Method 62 further includes a step of positioning first end 22 of first wall member 18 and first end 32 of second wall member 26 in abutting relationship with structure 14 with uncured sealant 66 positioned within second cavity 30. With abutting of first end 22 and first end 32 against structure 14, uncured sealant 66 aligned with second cavity 30 is then confined within second cavity 30 and sealed from exiting cap member 16. As a result, uncured sealant 66 that has been squeezed out from first wall member 18 is thereby confined within second cavity 30 by second wall member 26 blocking uncured sealant 66 from squeezing out beyond second wall member 26. Confinement of uncured sealant 66 within cap member 16, as mentioned, reduces labor and cost in not having to smooth out uncured sealant 66 and prevents an occurrence of uncured sealant 66 being positioned on structure 14 outside of cap member 16 and within an environment which can be sensitive to uncured sealant 66. Uncured sealant 66 positioned within first cavity 20, when cured, secures cap member 16 to structure 14 and uncured sealant 66 positioned within second cavity 30, when cured, further secures cap member 16 to structure 14.

While various embodiments have been described above, this disclosure is not intended to be limited thereto. Variations can be made to the disclosed embodiments that are still within the scope of the appended claims.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A containment apparatus for enclosing a metallic fastener extending through a structure, the containment apparatus comprising:

a cap member comprising:

a first wall member, which defines a first cavity and a first end, wherein the first end of the first wall member defines a first opening providing access into the first cavity for at least a portion of the metallic fastener; and

a second wall member joined together with the first wall member, wherein:

the second wall member extends spaced apart from the first wall member and extends along the first wall member continuously to a first end of the second wall member;

the second wall member surrounds the first wall member such that the first wall member and the second wall member form a second cavity positioned between the first wall member and the second wall member; and

the first end of the first wall member and the first end of the second wall member are coplanar with one another.

2. The containment apparatus of claim 1, wherein the first end of the first wall member comprises a flat surface.
3. The containment apparatus of claim 2, wherein the flat surface of the first end of the first wall member extends in a circular direction defining first opening having a circular configuration.

4. The containment apparatus of any one of claims 1 to 3, wherein the first wall member and the second wall member are integral with one another.
5. The containment apparatus of any one of claims 1 to 4, wherein the first wall member and the second wall member are joined together at a location spaced apart from the first end of the first wall member and the first end of the second wall member.
6. The containment apparatus of any one of claims 1 to 5, wherein an exterior surface of the second wall member extends in a curvilinear direction from an exterior surface of the first wall member.
7. The containment apparatus of claim 1, wherein the first end of the first wall member comprises a first flat surface and the first end of the second wall member comprises a second flat surface.
8. The containment apparatus of claim 7, wherein the second flat surface of the second wall member and the first flat surface of the first wall member are spaced apart from one another.
9. The containment apparatus of claim 7 or 8, wherein the second flat surface of the second wall member surrounds the first flat surface of the first wall member.
10. The containment apparatus of any one of claims 7 to 9, wherein the second flat surface of the second wall member extends in a circular direction.
11. The containment apparatus of any one of claims 1 to 10, wherein an interior wall of the second wall member extends in a curvilinear direction from the first end of the second wall member.
12. The containment apparatus of claim 1, wherein the first end of the first wall member has a flat surface and the first end of the second wall member has a flat

surface such that the flat surface of the first wall member and the flat surface of the second wall member provide a concentric configuration.

- 13.** The containment apparatus of any one of claims **1** to **12**, wherein the first cavity is configured to receive an uncured sealant.
- 14.** The containment apparatus of claim **13**, wherein the uncured sealant is confined inside the first cavity during at least a part of installation of the containment apparatus.
- 15.** The containment apparatus of claim **14**, wherein the uncured sealant confined inside the first cavity, when cured, secures the cap member and the structure.
- 16.** The containment apparatus of any one of claims **1** to **12**, wherein the second cavity is adapted to receive an uncured sealant.
- 17.** the containment apparatus of claim **16**, wherein the uncured sealant is confined inside the second cavity during at least a part of installation of the containment apparatus.
- 18.** The containment apparatus of claim **17**, wherein the uncured sealant confined inside the second cavity, when cured, secures the cap member and the structure.
- 19.** A method of installing a containment apparatus for enclosing a metallic fastener extending from a structure, the method comprising:

placing an uncured sealant into a first cavity of a cap member, which comprises:

a first wall member which defines the first cavity and a first end, wherein the first end of the first wall member defines a first opening providing access into the first cavity for at least a portion of the metallic fastener; and

a second wall member joined together with the first wall member,
wherein:

the second wall member extends spaced apart from the first wall member and extends along the first wall member continuously to a first end of the second wall member;

the second wall member surrounds the first wall member such that the first wall member and the second wall member form a second cavity positioned between the first wall member and the second wall member; and

the first end of the first wall member and the first end of the second wall member are coplanar with one another; and

inserting at least a portion of the metallic fastener into the first cavity.

- 20.** The method of claim **19**, further including exerting a force onto the cap member in a direction toward the metallic fastener.
- 21.** The method of claim **20**, wherein exerting the force onto the cap member further includes turning the cap member about a central axis of the cap member.
- 22.** The method of any one of claims **19** to **21**, further including moving the uncured sealant between the first end of the first wall member and the structure.
- 23.** The method of claim **22**, wherein moving the uncured sealant further includes positioning the uncured sealant which has moved beyond the first wall member in alignment with the second cavity with the first end of the first wall member and the first end of the second wall member positioned spaced apart from the structure.

- 24.** The method of claim **23**, further including positioning the first end of the first wall member and the first end of the second wall member in abutting relationship to the structure with the uncured sealant positioned within the second cavity.
- 25.** The method of claim **24**, wherein the uncured sealant placed into the first cavity, when cured, secures the cap member to the structure.
- 26.** The method of claim **24** or **25**, wherein the uncured sealant positioned within the second cavity, when cured, secures the cap member to the structure.

1/6

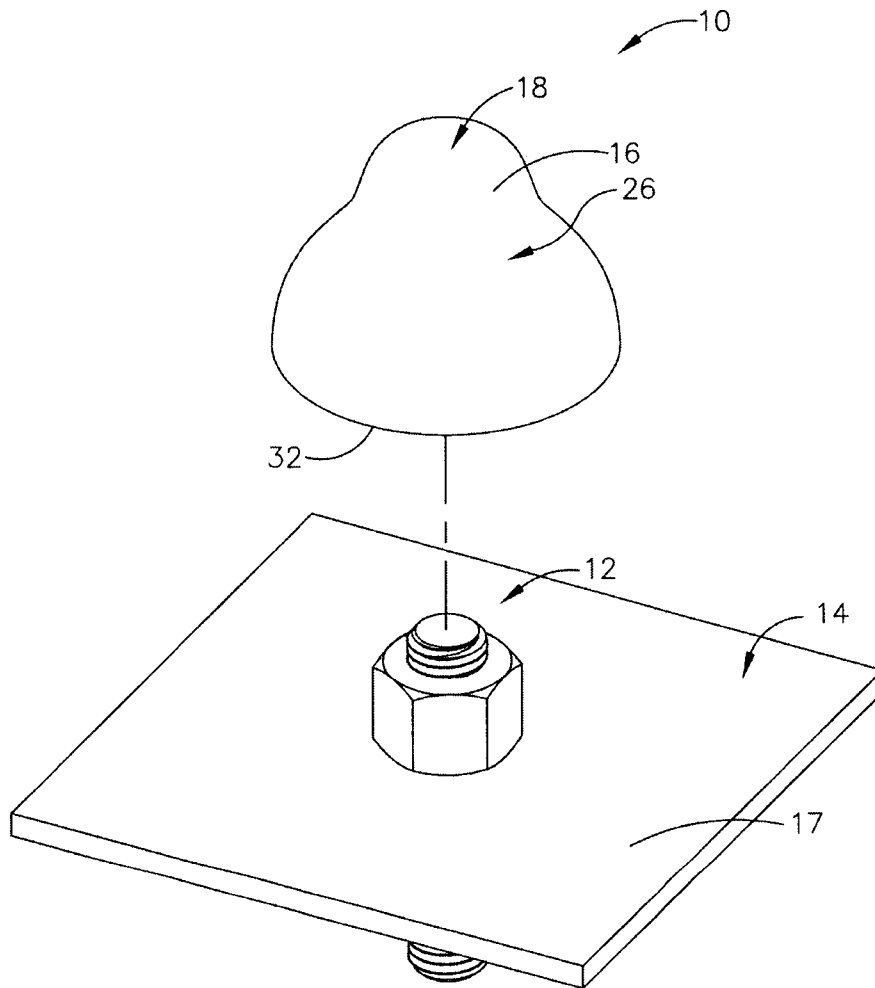


FIG. 1

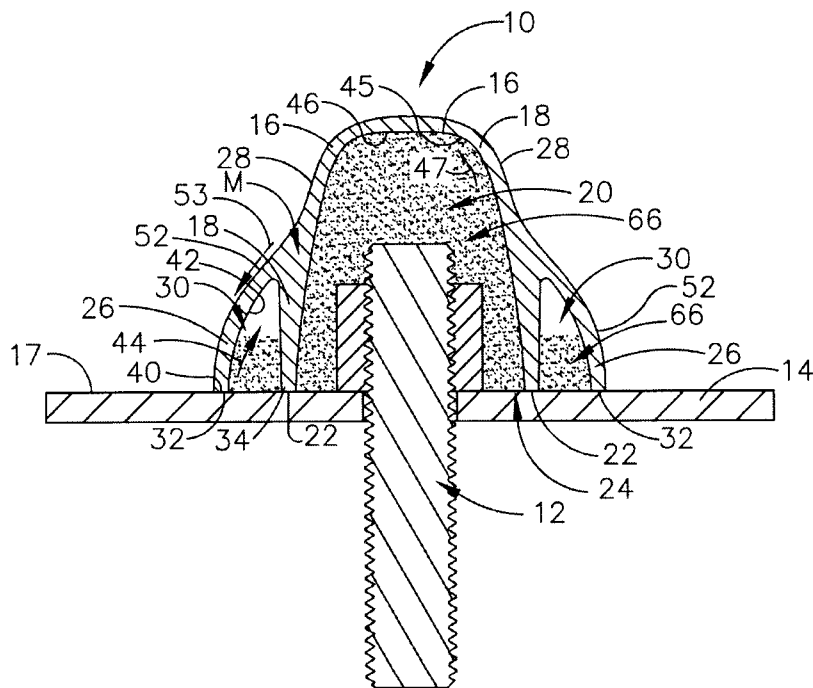


FIG. 2

3/6

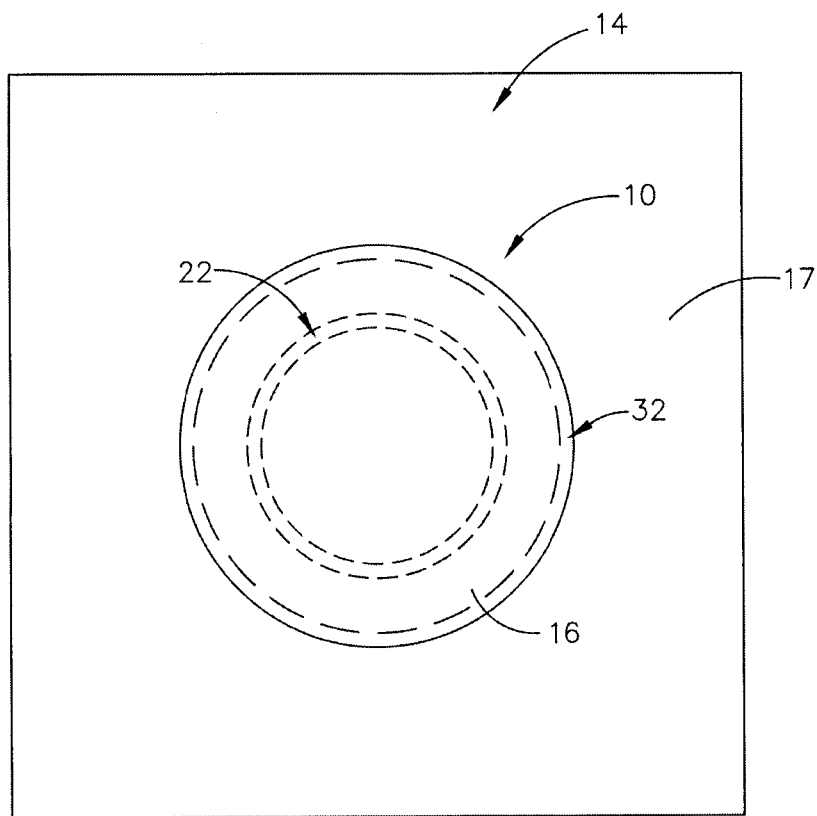


FIG. 3

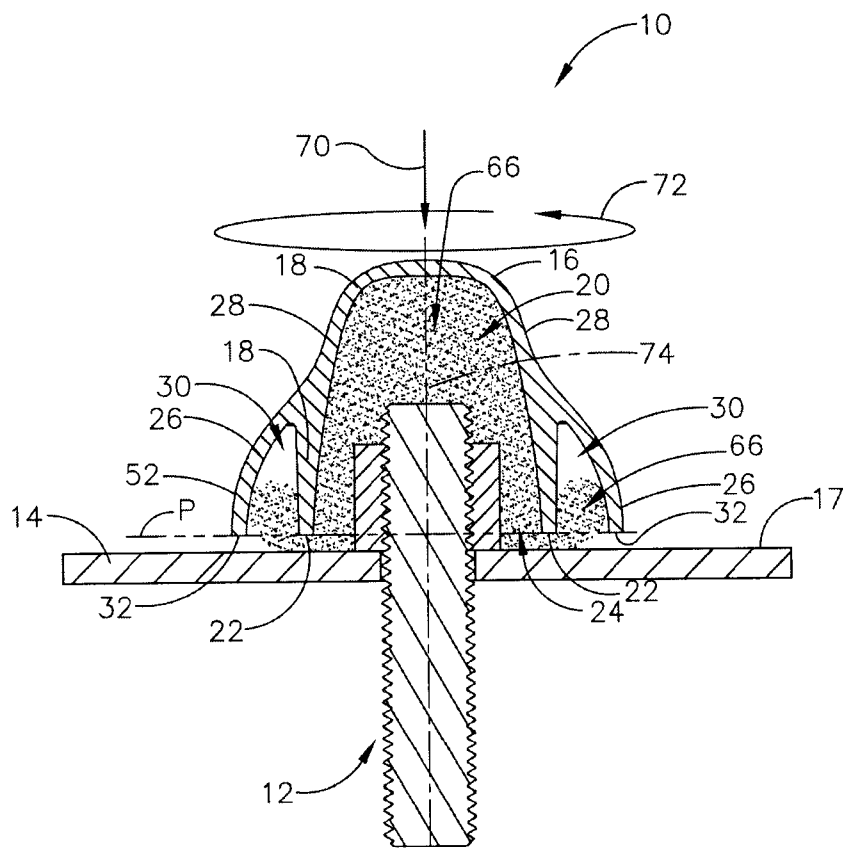


FIG. 5

6/6

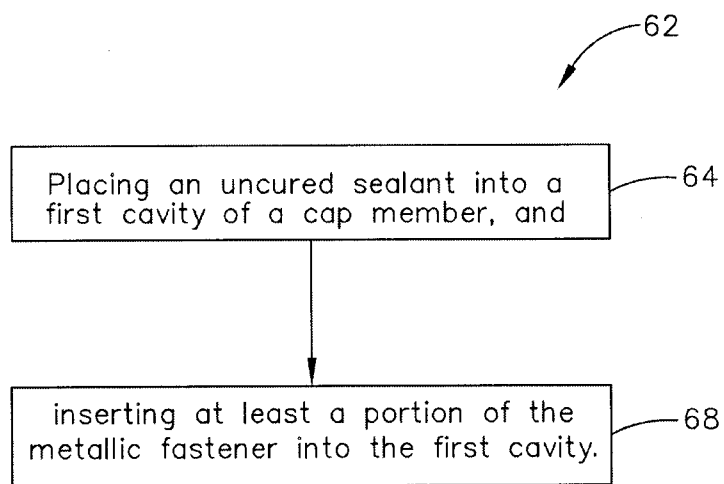


FIG. 6

