

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 July 2010 (29.07.2010)

(10) International Publication Number
WO 2010/085667 A2

PCT

(51) International Patent Classification:

E21B 34/06 (2006.01) *F16K 5/06* (2006.01)
E21B 34/14 (2006.01)

(21) International Application Number:

PCT/US2010/021834

(22) International Filing Date:

22 January 2010 (22.01.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/359,786 26 January 2009 (26.01.2009) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEALL, Clifford, H.** [US/US]; 8002 South Peach Circle, Broken Arrow, OK 74011 (US). **SLOAN, James, T.** [US/US]; 19512 East 385th Street, Broken Arrow, OK 74014 (US). **PATTERSON, Richard** [US/US]; 3210 Louisiana, Apt. 1316, Houston, TX 77006 (US).

(74) Agents: **DUPHORNE, Darin, H.** et al.; BAKER HUGHES INCORPORATED, P. O. Box 4740, Houston, Texas 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: BIDIRECTIONAL SEALING MECHANICALLY SHIFTED BALL VALVE FOR DOWNHOLE USE

(57) Abstract: A downhole ball valve is mounted on a string and features a rotating ball that turns on its axis as it is held against an upstream and a downstream seal by a cage. The cage accepts a slide that engages the ball off-center to rotate it between the open and closed positions. The slide is operated by a sleeve attached to a piston assembly. The sleeve is mechanically operated in opposed directions such as by a wireline shifting tool. Differential pressure on a closed ball does not affect the actuation piston because pressure across the actuating piston is balanced while holding pressure differential across the closed ball. A check valve allows the actuation piston to be in pressure balance as the ball stays closed.



WO 2010/085667 A2

Bidirectional Sealing Mechanically Shifted Ball Valve for Downhole Use

PRIORITY INFORMATION

[0001] This application is a continuation in part of Application Number 11/595,596 filed November 9, 2006 entitled Downhole Lubricator Valve.

FIELD OF THE INVENTION

[0002] The field of the invention relates to downhole shutoff valves, that can be used in a lubricator application, that allow a string to be made up in a live well by isolation of a lower portion of it and more particularly to features regarding such valves relating to mechanically operating them and design features that prevent applied differential pressure from above to inadvertently open them.

BACKGROUND OF THE INVENTION

[0003] Lubricator valves are valves used downhole to allow long assemblies to be put together in the well above the closed lubricator valve with well pressure further below the closed lubricator valve. These valves are frequently used in tandem with sub-surface safety valves to have redundancy of closures against well pressures below.

[0004] Lubricator assemblies are used at the surface of a well and comprise a compartment above the wellhead through which a bottom hole assembly is put together with the bottom valve closing off well pressure. These surface lubricators have limited lengths determined by the scale of the available rig equipment. Downhole lubricators simply get around length limitations of surface lubricators by using a lubricator valve downhole to allow as much as thousands of feet of length in the wellbore to assemble a bottom hole assembly.

[0005] In the past ball valves have been used as lubricator valves. They generally featured a pair of control lines to opposed sides of a piston whose movement back and forth registered with a ball to rotate it 90 between an open and a closed position. Collets could be used to hold the ball in both positions and would release in response to control pressure in one of the control lines. An example of such a design can be seen in USP 4,368,871; 4,197,879 and 4,130,166. In these patents, the ball turns on its own axis on trunnions. Other designs translate the ball while rotating it 90 degrees between and open

and a closed position. One example of this is the 15K Enhanced Landing String Assembly offered by the Expro Group that includes such a lubricator valve. Other designs combine rotation and translation of the ball with a separate locking sleeve that is hydraulically driven to lock the ball turning and shifting sleeve in a ball closed position as shown in USP 4,522,370. Some valves are of a tubing retrievable style such as Halliburton's PES® LV4 Lubricator Valve. Lock open sleeves that go through a ball have been proposed in USP 4,449,587. Other designs, such as USP 6,109,352 used in subsea trees have a rack and pinion drive for a ball and use a remotely operated vehicle (ROV) to power the valve between open and closed positions claiming that either end positioned is a locked position but going on to state that the same ROV simply reverses direction and the valve can reverse direction. Ball valves that are not used downhole are shown in USP 6,695,286; 4,289,165 and 5,417,405.

[0006] What is lacking and addressed by the present invention is a more elegant solution to a downhole ball type valve for use in applications such as a barrier or in a sand control application, for a few examples. The present invention is directed to a mechanical actuation of a ball valve through a shifting of a sleeve that can in one instance be actuated with a shifting tool run on wireline. It further provides a pressure equalizing mechanism on the actuation assembly in the event the ball is closed and pressure differential comes from above the ball. The pressure is equalized on the actuation mechanism but not across the closed ball so as to prevent pressure differential from moving a sleeve in the actuation mechanism that would otherwise rotate the ball open. These and other features of the present invention will become more readily apparent to those of ordinary skill in the art from a review of the description of the preferred embodiment that appears below in conjunction with the associated drawings while recognizing that the appended claims are the full measure of the invention.

SUMMARY OF THE INVENTION

[0007] A downhole ball valve is mounted on a string and features a rotating ball that turns on its axis as it is held against an upstream and a downstream seal by a cage. The cage accepts a slide that engages the ball off-center to rotate it between the open and closed positions. A sleeve is attached to a piston assembly which in turn is attached to the slide for tandem movement to rotate a ball. The sleeve is mechanically operated in

opposed directions such as by a wireline shifting tool. Differential pressure on a closed ball does not affect the actuation piston because pressure across the actuating piston is balanced while holding pressure differential across the closed ball. A check valve allows the actuation piston to be in pressure balance as the ball stays closed.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0008] FIG. 1 is a section view of the entire valve assembly;
- [0009] FIG. 2 is an enlarged view of the top of the assembly in FIG. 1;
- [0010] FIG. 3 is an enlarged view of the middle of the assembly of FIG. 1;
- [0011] FIG. 4 is an enlarged view of the lower end of the assembly in FIG. 1;
- [0012] FIG. 5 is a perspective to show the interaction of the slide with the cage in the operation of the ball.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] Referring to FIGS. 1 and 5, the valve **V** is part of a string (not shown) that goes downhole and is connected to the top end **10** and the bottom end **12** of the housing **14**. An inner sleeve **16** has an internal groove **18** to be engaged and moved in opposed directions preferably by a wireline tool represented schematically by double headed arrow **20**. Movement of sleeve **16** shifts the piston assembly **22** and with it slide **24** relative to stationary cage **26**. Ball **28** is pinned with opposed pins **30** so that it can rotate about them on its central axis. Pins **32** extend from arms **34** and engage ball **28** off-center so as to be able to rotate ball **28** in opposed directions when the slide **24** moves with respect to the stationary cage **26**. Upper seat **36** and lower seat **34** are retained to the ball **28** with the cage **26**.

[0014] With the major components now described, a detailed description of the remaining components will be more readily understood using the enlarged views of FIGS. 2-4. Sleeve **16** has a retaining nut **40** held to it externally at thread **42**. Nut **40** bears down on piston connector **44** for downward tandem movement. During upward movement of sleeve **16** a shoulder **46** engages the piston connector **44** for tandem movement. Connector **44** is attached to upper piston **48**, which is in turn attached to a lower piston **50** at thread **52**. Lower piston **50** moves in a bore **54** in housing **10** and is sealed in bore **54** with seals **56**. As seen in FIG. 5, the lower end of lower piston **50** is attached to slide **24** so that pins **32** can be shifted relative to pins **30** that fix the ball **28** to

the cage 26 to allow ball 28 to be rotated about pins 30 between an open and a closed position that represent preferably 90 degree rotation of ball 28. One way to limit the downward movement of sleeve 16 is when shoulder 58 hits shoulder 60 of body 10. While a single piston assembly 22 has been described in detail, those skilled in the art that additional assemblies can be used and are preferably disposed on equal spacing circumferentially in housing 10 so as to minimize any moment that is applied to the slide 24 from motion imparted from a tool moving sleeve 16.

[0015] Body 10 has at least one bore 62 with a check valve 64 which allows pressure from above represented by arrow 66 to enter bore 62 with the ball 28 in the closed position. When the ball 28 is in the closed position, passage 68 is obstructed as is bore 54 due to the seals 56 on lower piston 50. Normally, without bore 62 and check valve 64 pressure could build on connector 44 and urge the piston assembly 22 down. This could have an undesirable effect of shifting the piston assembly 22 and ultimately the ball 28 from the closed to the open position. The presence of bore 62 and check valve 64 allows a differential from uphole of a closed ball 28 to avoid putting a net force on the piston assembly 22 by equalizing pressure to it but without equalizing pressure across the closed ball 28. Reference to FIG. 3 further clears up this concept.

[0016] FIG. 3 shows a redundant check valve 70 at the lower end of bore 62 and oriented in the same direction as check valve 64 to serve as a backup to it. Preferably they are the same and feature a poppet 74 biased against a seat 76 by a spring 78. Other one way flow device can be used instead. Bore 62 opens into annular space 72 which is also in communication with lower piston 50. In that way, when the flow is past the check valves in bore 62 to the annular space 72 the piston assembly 22 is in pressure balance from pressure in passage 68 above the closed ball 28.

[0017] Upper seat 36 has a seal stack 80 against the housing 10 and a ball seal 82 to contact ball 28 that together effectively hold pressure above the closed ball 28 and out of space 84 where the slide 24 and the cage 26 are disposed. In fact spaces 72 and 84 are contiguous. FIG. 3 also shows lower seat assembly 38 with a resilient seal 86 in contact with ball 28. Seat assembly 38 continues into FIG. 4 further showing seal stack 88, which is similar in size and function to seal stack 80. A shoulder 90 on housing 10 supports a ring 92 and a wave spring or Belleville washer stack 94 that push on nut 96

secured at thread 98 to the lower seat assembly 38. Set screw 100 holds the position of nut 96. Stack 94 puts a preload on seals 82 and 86 that are in contact with the ball 28. Seal 88 as with seal 80 help to retain the pressure in passage 68 and isolate spaces 84 and 72 from the pressure in passage 68.

[0018] Those skilled in the art will appreciate that the ball valve of the present invention can be used downhole and operated mechanically within the string preferably by a wireline shifting tool to move from the open to the closed position and back. Other shifting tools that are run on coiled or rigid tubing can be used instead. It has an equalization provision to prevent unintended opening of the ball 28 when it is in the closed position by pressure buildup from above the closed ball 28. The equalization occurs on the piston assembly 22 that is above the ball without equalizing pressure across the closed ball. In the closed position, the ball 28 seals against differential pressures in opposed directions using ball seals 82 and 86 that remain in contact with ball 28 regardless of the direction of differential pressure on the closed ball 28. The pressure equalization on the piston assembly 22 is not dependent on any initial ball rotation of ball 28. Wave spring 94 provides a preload to enhance contact between ball 28 and seals 82 and 86 when there is differential from downhole and it resists separation of ball 28 from seal 82 in situations of net differential pressure in a downhole direction.

[0019] It is to be understood that this disclosure is merely illustrative of the presently preferred embodiments of the invention and that no limitations are intended other than as described in the appended claims.

We claim:

1. A ball valve for downhole use in a tubular string, comprising:
a housing further comprising a ball in a passage therethrough with seals
operatively connected to said ball, said ball movable between an open position where said
passage is open to flow and a closed position where the passage is closed;
an actuator assembly movably mounted in said passage to move said ball between
said open and closed positions.
2. The ball valve of claim 1, wherein:
said passage is closed to differential pressure in opposed directions when said ball
is in said closed position.
3. The ball valve of claim 1, wherein:
said actuator assembly, with said ball in said closed position, is selectively in
pressure balance with pressure in the portion of said passage in which said actuator
assembly is disposed.
4. The ball valve of claim 3, wherein:
said actuator assembly can be put into pressure balance without movement of said
ball.
5. The ball valve of claim 4, wherein:
said actuator assembly can be put into pressure balance through a flow equalizer
passage comprising at least one one way valve.
6. The ball valve of claim 5, wherein:
said actuator assembly comprises a shifting sleeve operatively connected to said
ball.
7. The ball valve of claim 6, wherein:
said actuator assembly comprises at least one piston connected to said sleeve
adjacent one end and operably connected to said ball adjacent another end, said piston
having at least one seal between its opposed ends and movable in a piston bore in said
housing, said piston bore comprising a first end that is exposed to pressure in said
passage on one side of said ball and a second end sealingly isolated from said pressure in
said passage on the same side of said ball.

8. The ball valve of claim 7, wherein:
said flow equalizer passage provides flow communication between said first and second ends of said piston bore.
9. The ball valve of claim 8, wherein:
a cage retains an upper seat and a lower seat against said ball, said seats having tubular extensions that in part define said passage and an annular space outside said passage, said annular space is in fluid communication with said second end of said piston bore.
10. The ball valve of claim 9, wherein:
said piston comprises a slide engaged to it and to said ball in an off center location so that axial movement of said shifting sleeve results in rotation of said ball within said cage.
11. The ball valve of claim 10, wherein:
said seats each comprise a seal in contact with said ball and another seal on said extension and outside said passage and in said annular space.
12. The ball valve of claim 11, wherein:
a biasing mechanism acts on at least one of said seats to enhance contact against said ball by said seals that contact said ball.
13. The ball valve of claim 6, wherein:
said shifting sleeve comprises an internal recess accessible from said passage for shifting said sleeve with a tool inserted through the string into said housing.
14. The ball valve of claim 13, further comprising:
a wireline supported shifting tool to engage said internal recess to shift said shifting sleeve in opposed directions.

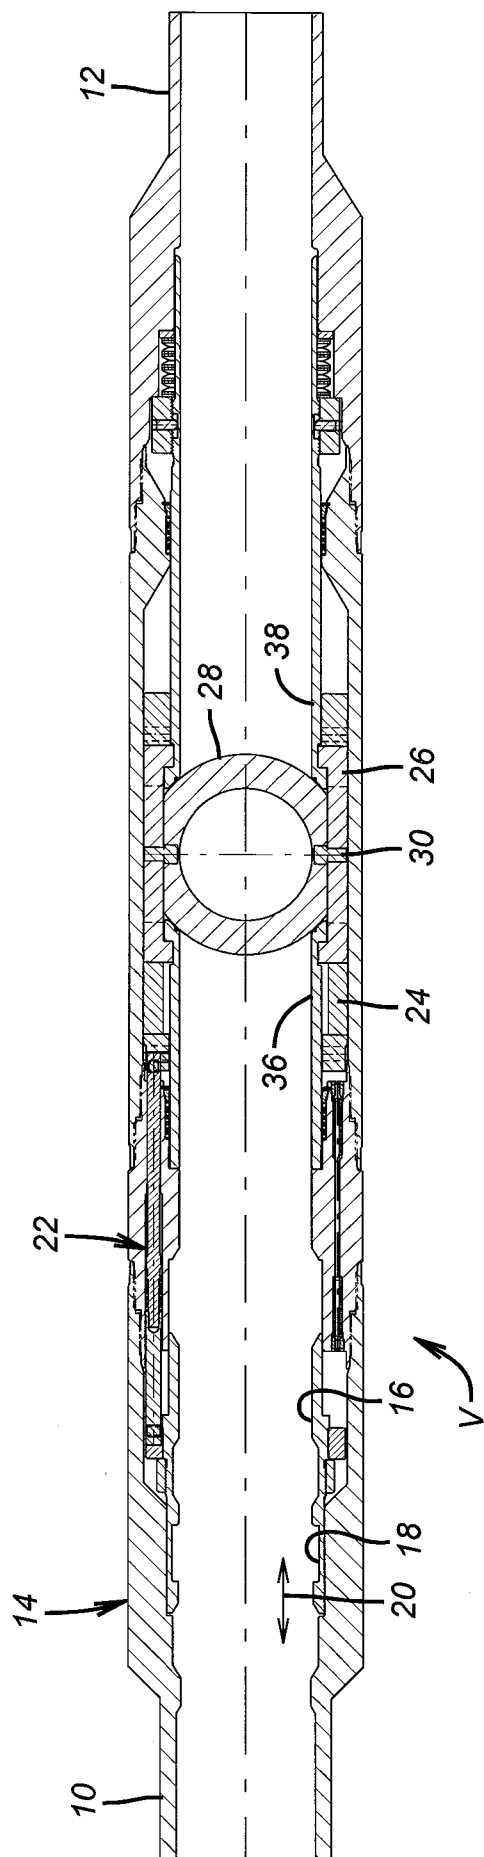


FIG. 1

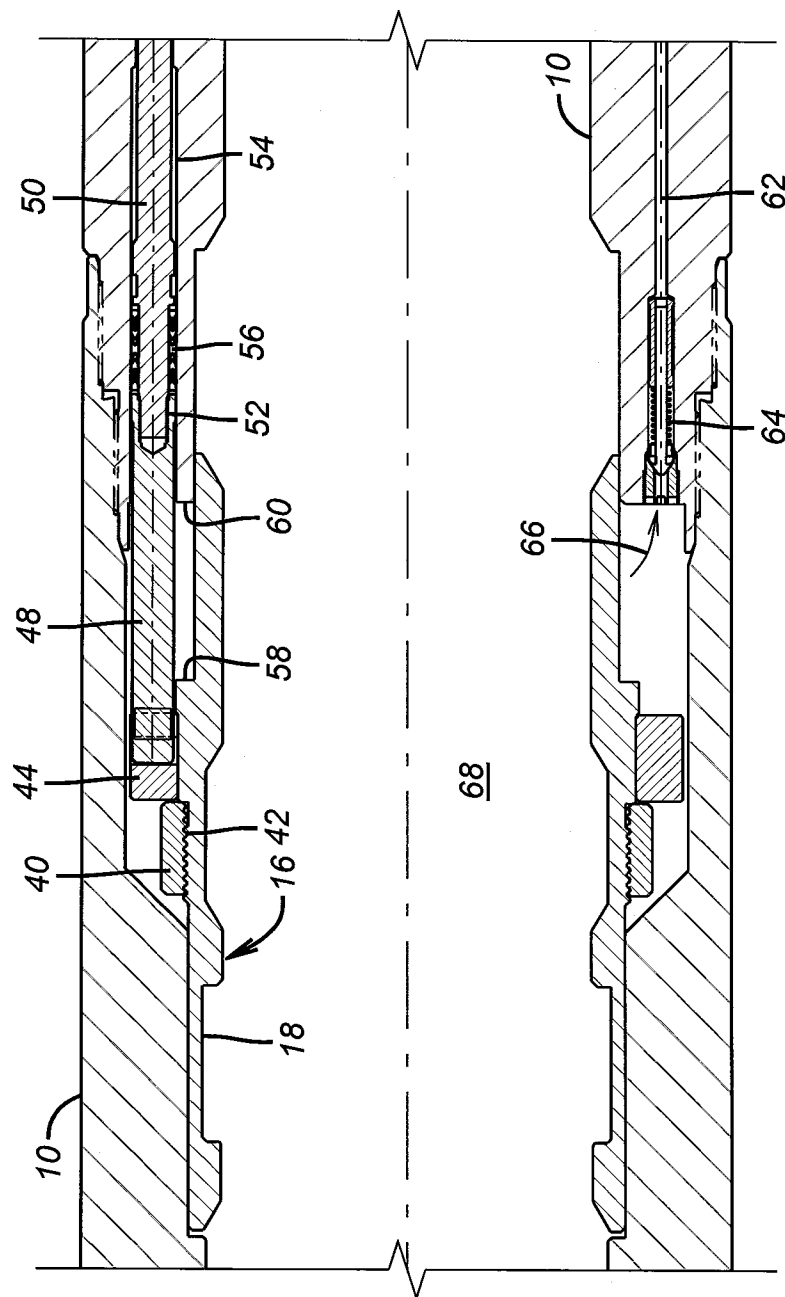


FIG. 2

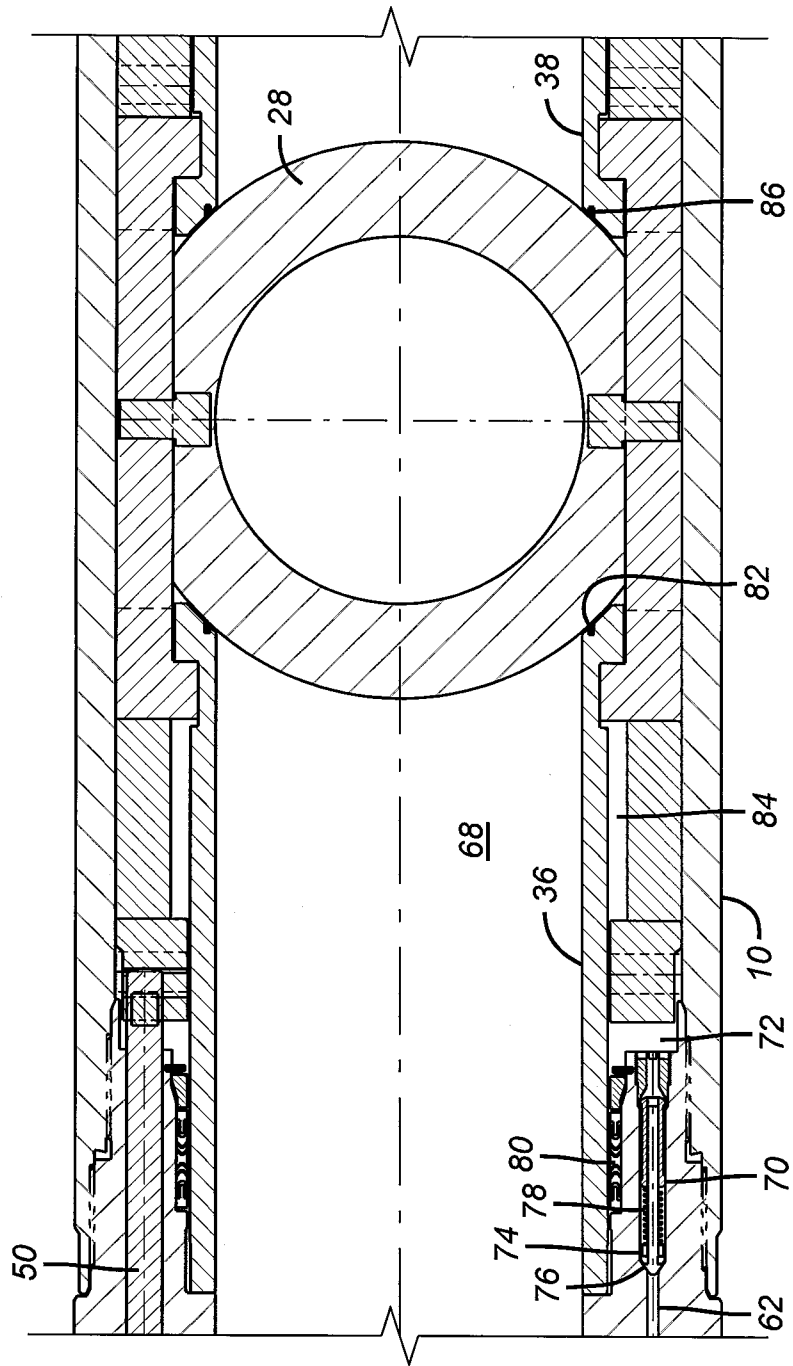


FIG. 3

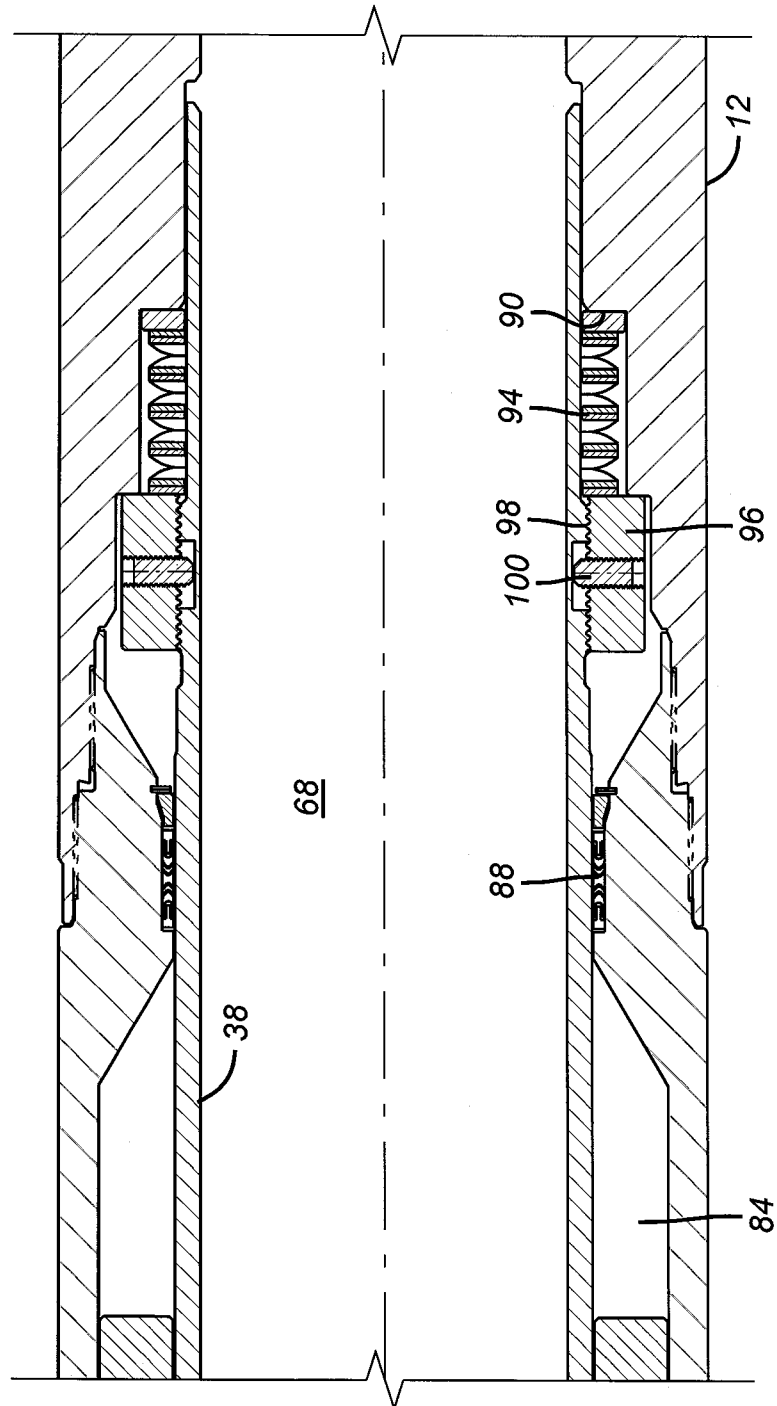


FIG. 4

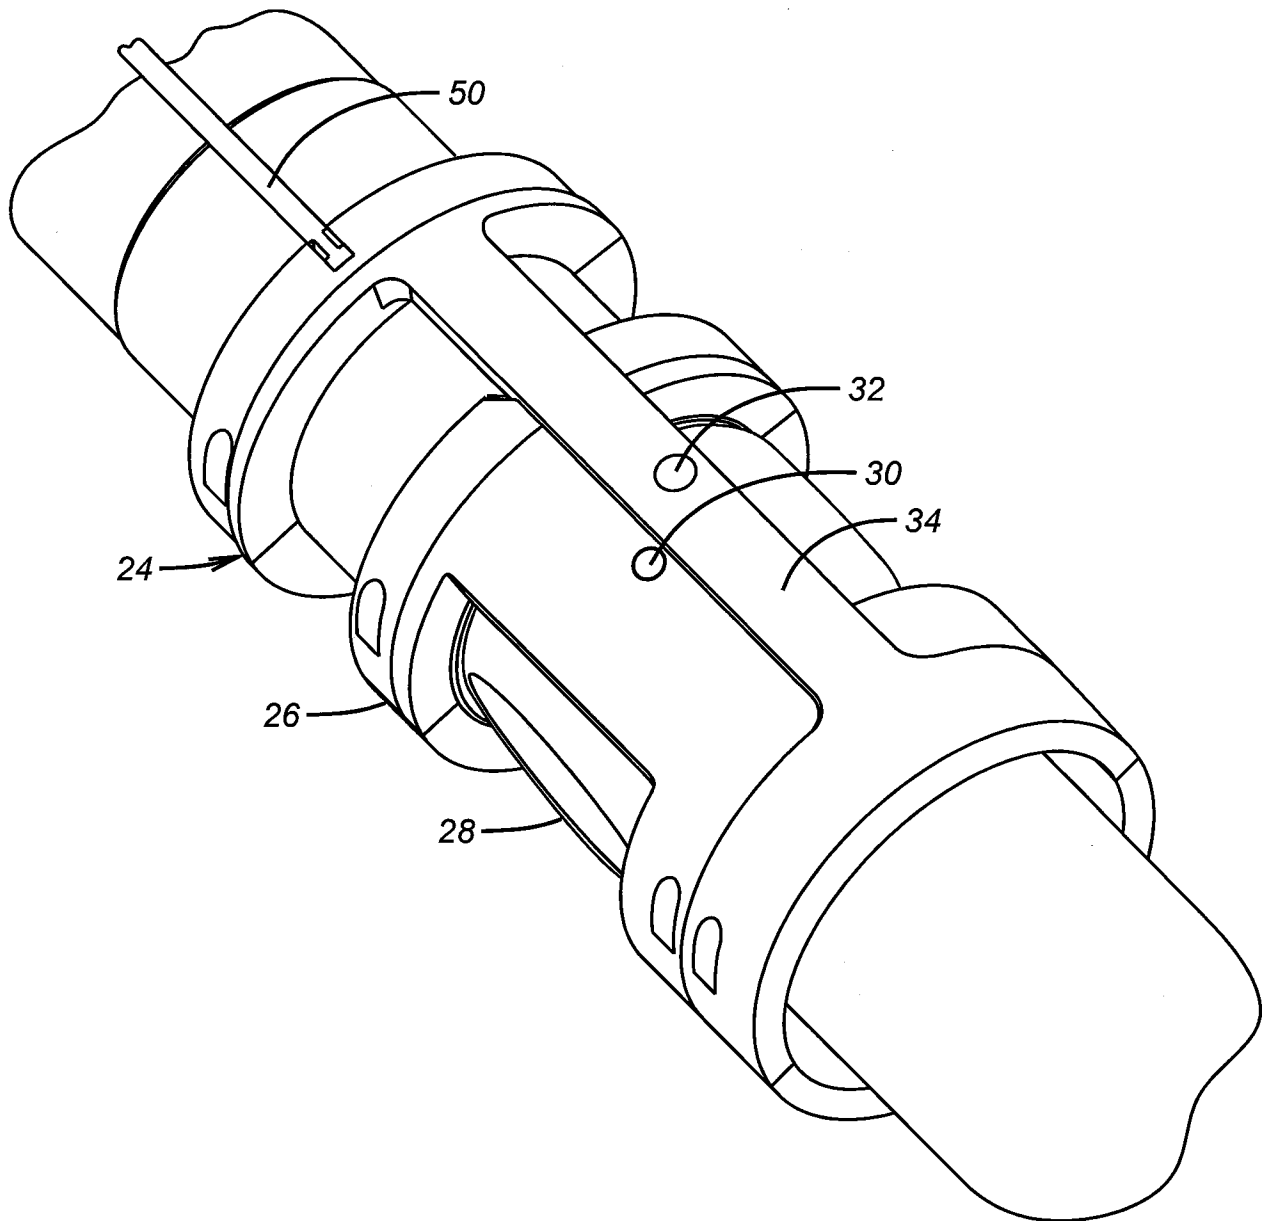


FIG. 5