




(86) Date de dépôt PCT/PCT Filing Date: 2000/05/25
 (87) Date publication PCT/PCT Publication Date: 2000/12/28
 (45) Date de délivrance/Issue Date: 2005/06/07
 (85) Entrée phase nationale/National Entry: 2001/11/26
 (86) N° demande PCT/PCT Application No.: US 2000/014429
 (87) N° publication PCT/PCT Publication No.: 2000/078525
 (30) Priorité/Priority: 1999/06/18 (09/335,579) US

(51) Cl.Int.⁷/Int.Cl.⁷ B29C 49/24
 (72) Inventeurs/Inventors:
 DUNLAP, RICHARD L., US;
 SANFORD, EDWARD L., US;
 AMIRALTY, DAVID M., US
 (73) Propriétaire/Owner:
 PLASTIPAK PACKAGING, INC., US
 (74) Agent: SMART & BIGGAR

(54) Titre : TETE DE DISTRIBUTION D'ETIQUETTES POUR SYSTEME D'ETIQUETAGE DANS LE MOULE A MOULAGE PAR INJECTION DE PLASTIQUE
 (54) Title: LABEL DISPENSING HEAD FOR PLASTIC BLOW MOLDING IN-MOLD LABELING SYSTEM

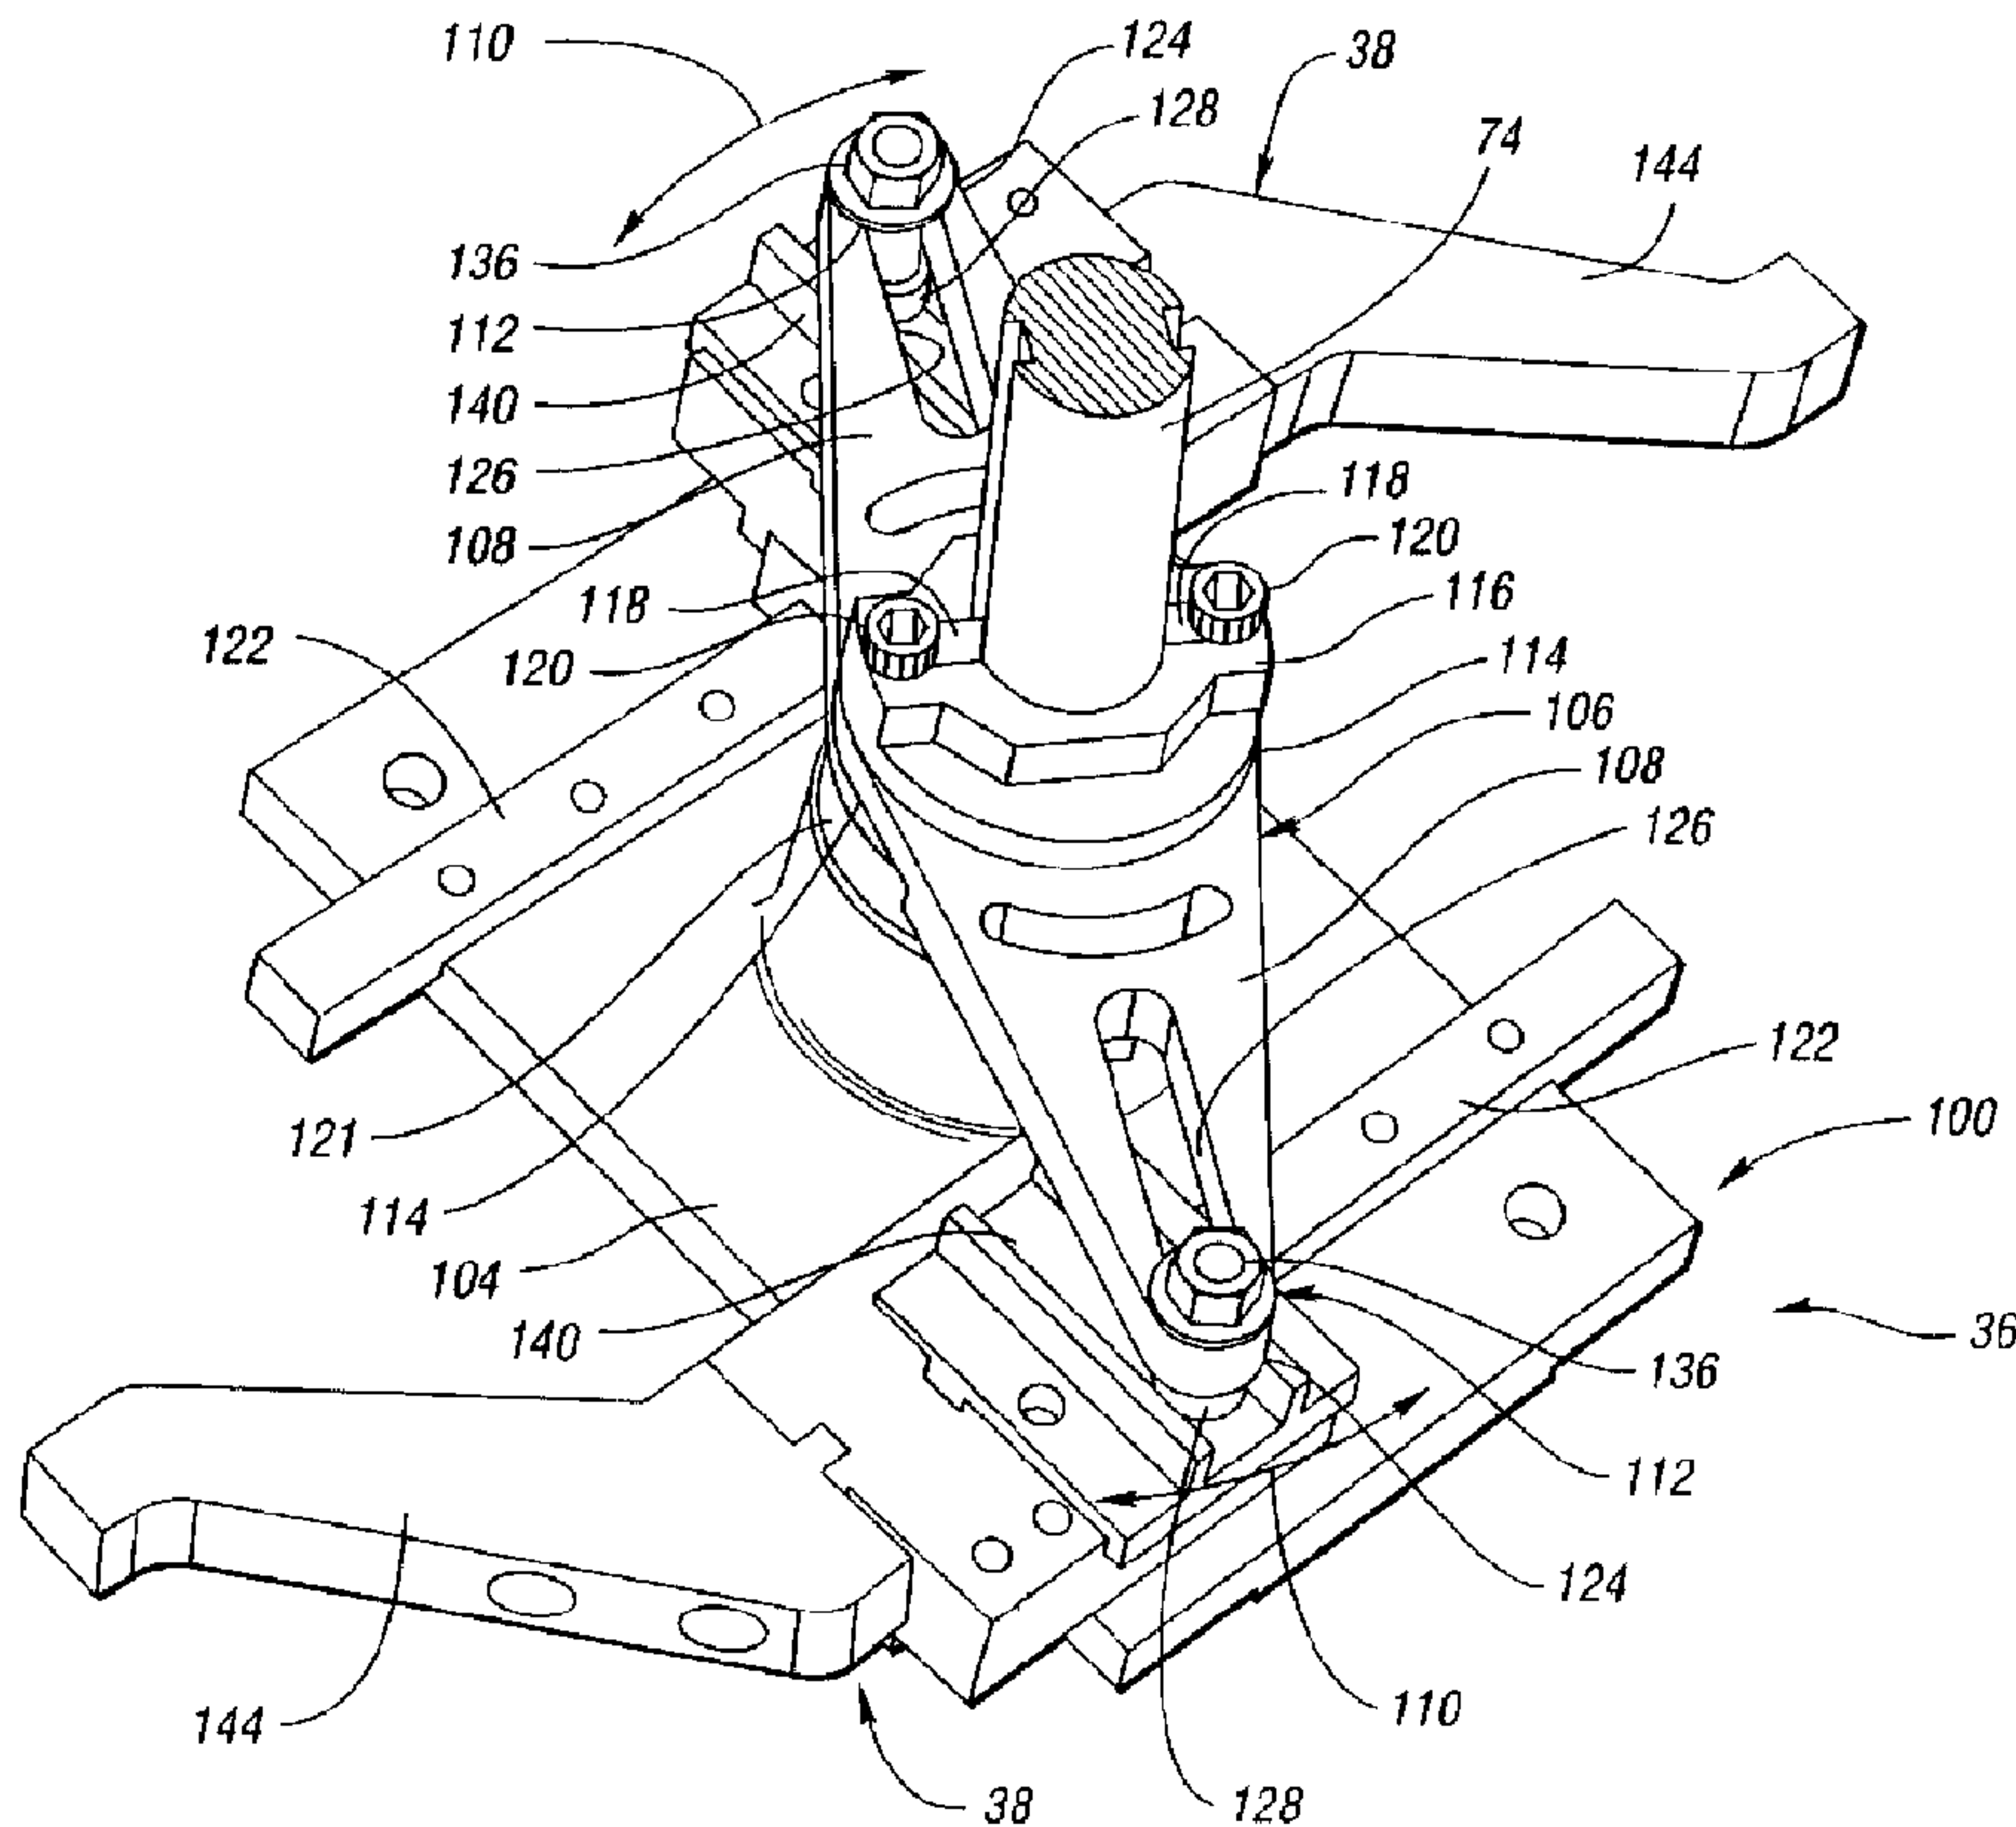

(57) **Abrégé/Abstract:**

A dispensing head (36) for an in-mold labeling system includes a lever assembly (106) rotatively driven by a rotary drive member (74) and having a pair of levers (108) that are adjustable with respect to the rotary drive member independently of each other. Each lever (108) has a cam and follower connection (112) to an associated label carrier (38) such that rotation of the rotary drive member (74) provides movement of the label carriers (38) between retracted and label transfer positions.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/78525 A1

- (51) International Patent Classification⁷: B29C 49/24
- (21) International Application Number: PCT/US00/14429
- (22) International Filing Date: 25 May 2000 (25.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/335,579 18 June 1999 (18.06.1999) US
- (71) Applicant: PLASTIPAK PACKAGING, INC. [US/US];
P.O. Box 2500 C, 9135 General Court, Plymouth, MI 48170 (US).
- (72) Inventors: DUNLAP, Richard, L.; P.O. Box 81, 301 Sweaney Street, Cairo, OH 45820 (US). SANFORD, Edward, L.; 538 E. Franklin, Lima, OH 45804 (US). AMIRAULT, David, M.; 1537 Brookfield Lane, Troy, OH 45373 (US).
- (74) Agents: KUSHMAN, James, A. et al.; Brooks & Kushman, 1000 Town Center, 22nd floor, Southfield, MI 48075 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LABEL DISPENSING HEAD FOR PLASTIC BLOW MOLDING IN-MOLD LABELING SYSTEM

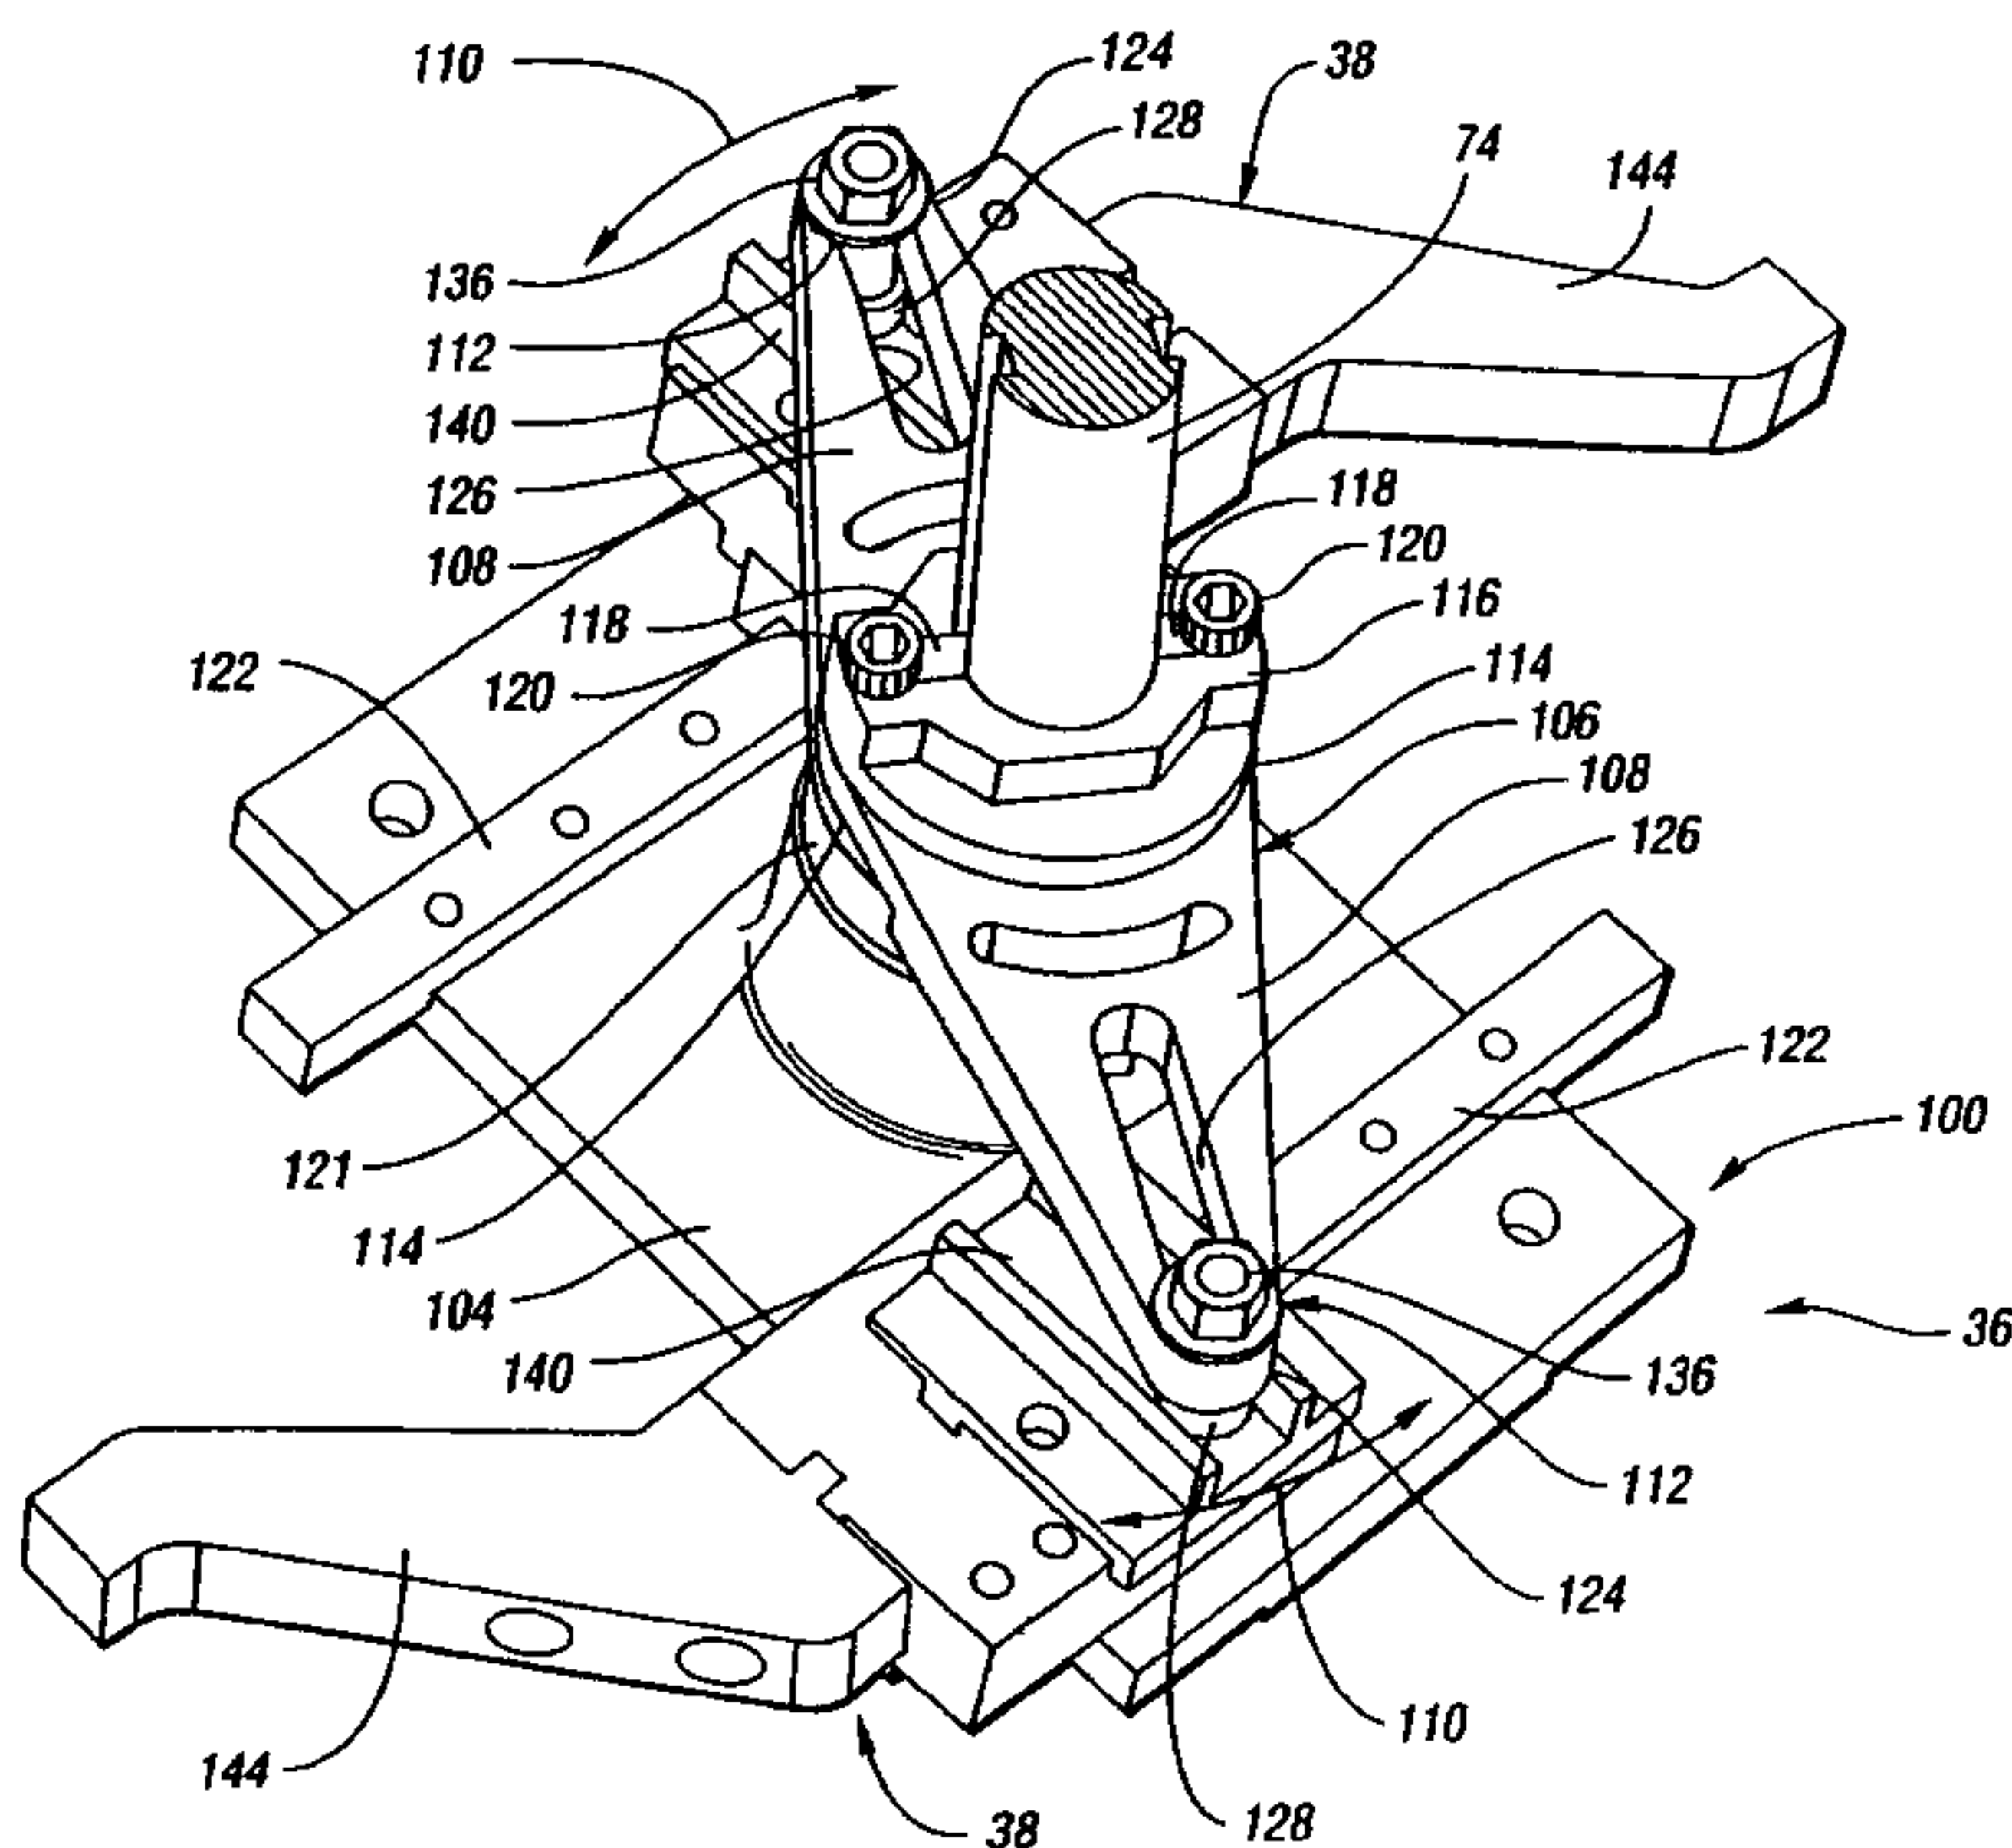

(57) Abstract: A dispensing head (36) for an in-mold labeling system includes a lever assembly (106) rotatively driven by a rotary drive member (74) and having a pair of levers (108) that are adjustable with respect to the rotary drive member independently of each other. Each lever (108) has a cam and follower connection (112) to an associated label carrier (38) such that rotation of the rotary drive member (74) provides movement of the label carriers (38) between retracted and label transfer positions.

WO 00/78525 A1

LABEL DISPENSING HEAD FOR PLASTIC BLOW MOLDING IN-MOLD LABELING SYSTEM

TECHNICAL FIELD

This invention relates to a dispensing head for an in-mold labeling
5 system and having a construction that is adjustable for different labeling runs.

BACKGROUND ART

In-mold labeling has been developed in the recent past to provide
superior bonding of labels to blow molded containers. Such in-mold labeling is
10 performed by inserting a label within an open mold prior to closing of the mold
around an extruded hot plastic tube or a heated injection molded plastic preform.
Subsequent mold closing and blow molding forms the hot plastic around the label to
the shape of the mold and activates a heat sensitive adhesive that provides a
permanent bond which is incapable of being broken by moisture or otherwise. Also,
15 such in-mold labeling provides a smooth transition between the label and the adjacent
surface of the container and further provides additional strength since the label
cooperates with the container wall in resisting deformation. Such strengthening also
allows the use of less plastic to blow mold the container and thereby reduces the
ultimate cost to the consumer. Furthermore, when utilized with containers for
20 carbonated beverages, the in-mold labeling reduces the flow of carbon dioxide out
through the container wall over a period of time and thereby increases the shelf life.

United States Patent 4,479,770 Slat et al., 4,582,474 Ziegler,
4,639,207 Slat et al., and 4,909,723 Slat et al. disclose in-mold labeling systems
wherein a dispensing head of the in-mold labeling system is moved between a label
25 supply location aligned with one or more label magazines adjacent the associated
blow molding machine and a label delivery position within an adjacent open mold of
the blow molding machine, and one or more label carriers on the dispensing head is
moved between a retracted position and a label transfer position in order to provide

a pick and place movement of the labels from the label magazines into the mold where a vacuum is drawn to secure the label to the mold before mold closing for the blow molding operation. A vacuum is also utilized by the label carrier to secure the labels for the movement from the associated label magazine to the associated mold.

5 In-mold labeling systems of the type described above have previously included a common mechanical drive from the blow molding machine for driving the dispensing head between the label supply and delivery locations and for also driving the label carriers between the retracted and label transfer positions. As such, the respective speeds and movements of the dispensing head and each label carrier are
10 coupled with each other.

 With relatively high speed labeling, it has been found that it is difficult to remove labels from a label magazine at a greater speed than about 65 to 70 labels per minute since such high speed operation does not allow time for air to enter behind the label as the label carrier pulls it from the label magazine. As such, more
15 than one label can be pulled away and thereby cause problems in the in-mold labeling process.

 Previously, in-mold labeling of a pair of labels to an associated pair of mold members of a mold has been performed in two ways. In one practice, a pair of rotary drive members that are spaced from each other and each rotates an
20 associated lever that has a cam and follower connection to an associated label carrier to provide the label carrier movement between the retracted and label transfer positions. In another practice, a single rotary drive member is utilized and through a lever drives one label carrier that is connected by a gear and rack assembly to another label carrier so that both label carriers are concomitantly moved between the
25 retracted and label transfer positions by the rotation of the one rotary drive member.

 Other United States patents disclosing in-mold labeling for plastic blow molding include: 4,680,000 Nowicki et al.; 4,729,731 Hasl et al.; 4,801,260 Oles et al.; 4,808,366 Kaminski et al.; 4,834,641 Keyser; 4,861,542 Oles et al.; 4,880,368 Hasl et al.; 4,944,665 Hasl et al.; 4,973,241 Keyser; 5,044,922 Plenzler

71087-659

et al.; 5,086,937 Robinson; 5,169,653 Tate et al.; 5,192,554 Savich et al.;
5,275,780 Robinson; 5,344,305 McKillip; 5,350,483 Yager et al.; 5,383,779
Robinson; 5,665,404 Weber et al.; 5,753,278 Aguilar; and 5,759,593 Weber et al.

DISCLOSURE OF INVENTION

5 An object of the present invention is to provide an improved
dispensing head for an in-mold labeling system for use with a plastic blow molding
machine to transfer labels from a pair of label magazines adjacent the blow molding
machine to open molds thereof prior to mold closing for blow molding.

10 In carrying out the above object, the dispensing head of the invention
includes a head member that is mounted for movement between a supply location
adjacent the label magazines and a delivery location between mold members of an
open mold. A pair of label carriers of the dispensing head are mounted on the head
member for movement between a retracted position and a label transfer position. A
rotary drive member is rotatable in response to the blow molding machine operation.
15 A lever assembly of the dispensing head is rotatively driven by the rotary drive
member and has a pair of levers that are adjustable with respect to the rotary drive
member independently of each other. Each lever has a connection to an associated
label carrier such that rotation of the rotary drive member provides movement of the
label carriers between the retracted and label transfer positions such that the label
20 carriers are moved from the retracted position to the label transfer position while the
dispensing head is in the supply location to receive labels from the label magazine
and are then moved back to the retraced position for movement of the dispensing
head to the delivery location where the label carriers are again moved to the label
transfer position to transfer the labels to an adjacent open mold prior to mold closing
25 for the blow molding.

71087-659

In another aspect, there is provided a dispensing head for an in-mold labeling system for use with a plastic blow molding machine to transfer labels from a pair of label magazines adjacent the blow molding machine to open molds thereof prior to mold closing for blow molding, the dispensing head comprising: a head member that is mounted for movement between a supply location adjacent the label magazines and a delivery location between mold members of an open mold; a pair of label carriers mounted on the head member for movement between a retracted position and a label transfer position; a rotary drive member that is rotatable in response to the blow molding machine operation; a lever assembly rotatively driven by the rotary drive member and having a pair of levers that extend from the rotary drive member in generally opposite directions and are adjustable with respect to the rotary drive member independently of each other, and each lever having a cam and follower connection to an associated label carrier such that rotation of the rotary drive member provides movement of the label carriers between the retracted and label transfer positions such that the label carriers are moved from the retracted position to the label transfer position while the dispensing head is in the supply location to receive labels from the label magazines and are then moved back to the retracted position for movement of the dispensing head to the delivery location where the label carriers are again moved to the label transfer position to transfer the labels to an adjacent open mold prior to mold closing for the blow molding.

In a further aspect, there is provided a dispensing head for an in-mold labeling system for use with a plastic blow molding machine to transfer labels from a pair of label magazines adjacent the blow molding machine to

71087-659

open molds thereof prior to mold closing for blow molding, the dispensing head comprising: a head member that is mounted for movement between a supply location adjacent the label magazines and a delivery location between mold members
5 of an open mold; a pair of label carriers; a pair of spaced and parallel rails that mount the pair of label carriers on the head member for movement between a retracted position and a label transfer position; a rotary drive member that is located between the pair of parallel rails and is rotatable
10 in response to the blow molding machine operation; a lever assembly rotatively driven by the rotary drive member and having a pair of levers that extend from the rotary drive member in generally opposite directions and are adjustable with respect to the rotary drive member independently of
15 each other, and each lever having a cam and follower connection to an associated label carrier such that rotation of the rotary drive member provides movement of the label carriers between the retracted and label transfer positions such that the label carriers are moved from the retracted
20 position to the label transfer position while the dispensing head is in the supply location to receive labels from the label magazines and are then moved back to the retracted position for movement of the dispensing head to the delivery location where the label carriers are again moved to the
25 label transfer position to transfer the labels to an adjacent open mold prior to mold closing for the blow molding.

In the preferred construction, the dispensing head has the pair of levers of the lever assembly extending from
30 the rotary drive member in generally opposite directions from each other, and a key ring adjustably secures the pair of levers to each other.

The preferred construction of the dispensing head also includes a pair of rails mounted on the head member with the rotary drive member located between the pair of rails. The pair of label carriers are respectively mounted by the pair of rails for movement between the retracted and label transfer positions. Each connection is preferably a cam and follower connection that extends between the associated lever and the associated label carrier to provide movement thereof between the retracted and label transfer positions under the impetus of the rotary drive member. Each of the pair of levers has a distal end including an elongated slot that extends radially with respect to the rotation of the rotary drive member. Each cam and follower connection includes a cam having a mount including a T-shaped member with a threaded shank that extends through the elongated slot in the distal end of the associated lever. Each mount also has a nut that is secured to the threaded shank of the associated T-shaped member. The cam of each cam and follower connection has a threaded shank threaded into the associated T-shaped member, and each cam and follower connection also includes an elongated follower mounted on the associated label carrier and receiving the associated cam to be moved thereby under the impetus of the rotary drive member. Each cam and follower connection also includes a set screw that secures the threaded shank of the cam to the associated T-shaped member.

20

BRIEF DESCRIPTION OF DRAWINGS

FIGURE 1 is a schematic view of an in-mold labeling system that embodies the invention.

25

FIGURE 2 is a sectional view taken generally along the direction of line 2-2 in Figure 1 to illustrate label magazines, a dispensing head that is shown in a supply location and has label carriers that are movable between solid line indicated retracted position and phantom line indicated label transfer position to pick labels from the label magazines.

FIGURE 3 is a view similar to Figure 2 but illustrating the dispensing head located in a delivery location within the open mold after outward movement of

the label carriers has transferred the labels to the mold members of the open mold which have vacuum passages that secure each label for the mold closing and blow molding operation.

5 FIGURE 4 is an elevational view taken generally along the direction of line 4-4 in Figure 2 to illustrate the manner in which the dispensing head provides in-mold labeling of a pair of the molds during each of its cycles of movement.

10 FIGURE 5 is an elevational view taken generally along the direction of line 5-5 in Figure 4 to illustrate first and second servomotors and associated cam mechanisms that respectively move the dispensing head between the supply location adjacent the label magazine and the delivery location between the open mold on the rotary wheel of the blow molding machine and move each label carrier on the dispensing head between its retracted and label transfer positions.

15 FIGURE 6 is a partially broken away view illustrating the cam mechanism that moves the label carriers of the dispensing head between the retracted and label transfer positions and is also illustrative of the general construction of the cam mechanism that moves the dispensing head between the supply and delivery locations.

 FIGURE 7 is a perspective view illustrating the construction of a dispensing head unit of the in-mold labeling system.

20 FIGURE 8 is a perspective of a lever of the dispensing head and a cam and cam mount that supports the cam on the lever.

 FIGURE 9 is a schematic view illustrating operation of the in-mold labeling system by showing the relative movements timewise of both the dispensing head and each label carrier in coordination with each other.

71087-659

BEST MODE FOR CARRYING OUT THE INVENTION

With reference to the schematic illustration in Figure 1, a rotary blow molding machine 10 includes a rotary wheel 12 having a plurality of molds 14 that are movable between open and closed positions as illustrated respectively by solid and partial phantom line representation in Figure 3. An extruder 16 shown in Figure 1 extrudes an upwardly directed hot tubular plastic parison 18 that is received between the molds before closing for the blow molding operation. A schematically indicated drive motor 20 has a rotary output gear 22 that rotatively drives a main drive gear 24 on the blow molding wheel 12 so as to rotate about a central axis A in the direction illustrated by arrow 26. Operation of the blow molding machine 10 can be controlled in any conventional manner such as disclosed by United States Patents 5,240,718 Young et al.; 5,244,610 Kitzmiller; and 5,698,241 Kitzmiller.

With continuing reference to Figure 1, an in-mold labeling system embodying the invention is generally indicated by 28 and is operable to provide an in-mold labeling operation as is hereinafter more fully described. This in-mold labeling system as illustrated in Figures 1-4 includes at least one label magazine 30 for storing a supply of labels 32 at a location adjacent the rotary wheel 12 of the blow molding machine. As is hereinafter more fully described, there are actually two of the label magazines 30 respectively associated with each side of the rotary wheel 12, such that there are four label magazines utilized in the system as shown. Each label magazine 30 includes a spring 34 that biases the associated stack of labels 32 such that their edges are engaged with spaced fingers of the magazine.

With continuing reference to Figures 1-4, the in-mold labeling system 28 includes a dispensing head 36 having at least one label carrier 38 for transferring the labels 32 from the label magazine 30 to the open molds 14 prior to closing for the blow molding. Each mold as shown in Figures 2 and 3 includes a pair of mold members 40 that have cavity sections 42 for defining a mold cavity when the mold members are moved to the closed position as shown by partial phantom line representation in Figure 3. Vacuum passages 44 of the mold member secure the

71087-659

labels in position after being received from the dispensing head 36 as is hereinafter more fully described. The label carriers are also supplied with a vacuum for holding the labels during the transfer from the label magazines to the molds.

As illustrated in Figures 1 and 5, the in-mold labeling system 28 includes a first electrical servomotor 46 and a first cam mechanism 48 driven thereby to move the dispensing head 36 between the supply location shown in Figure 2 adjacent the label magazines 30 and the delivery location shown in Figure 3 within the adjacent open mold 14. More specifically, the first cam mechanism 48 has an input 50 that is rotatively driven by the first servomotor 46 and has an output 52 that is rotatively driven in an oscillating manner and connected to a lever arm 54. A distal end 56 of lever arm 54 has a pivotal connection 58 to one end of a link 60 whose other end has a pivotal connection 62 to the dispensing head 36. Operation of the first servomotor 46 through the first cam mechanism 48 thus pivots the lever arm 54 and moves the link 62 connected thereto to move the dispensing head 36 between the supply location shown in Figure 2 and the delivery location shown in Figure 3 as previously described.

With continuing reference to Figures 1 and 5, the in-mold labeling system also includes a second electrical servomotor 64 and a second cam mechanism 66 driven by the second servomotor to move each label carrier 38 between the solid line indicated retracted position shown in Figures 2 and 3 and the phantom line indicated label transfer position also shown at both the supply location adjacent the label magazines 30 as illustrated in Figure 2 and the delivery location within the adjacent open mold 14 as shown in Figure 3. More specifically, the second electrical servomotor 64 has an output that drives an input 68 of the second cam mechanism in an oscillating manner, and an output 70 of the second cam mechanism drives a linkage 72 that rotatively oscillates a pair of rotary drive members 74 that actuate the label carrier movement as is hereinafter more fully described. The linkage 72 may be of the type disclosed by United States Patent 4,909,723 Slat et al.

As illustrated in Figure 6, the second cam mechanism 66, which is also illustrative of the first cam mechanism 48, has its input 68 and output 70 supported about associated axes that are in an orthogonal relationship with respect to each other. More specifically, the cam mechanism 66 has a housing 75 that rotatably supports a drive cam 76 connected to the input 68 and also rotatably supports a cam follower 78 connected to the output 70. The drive cam 76 includes threadlike cam projections 80 that receive follower members 82 on the cam follower 78 that drives the output 70. Oscillating rotation of the input 68 rotatively oscillates the output 70 through the drive cam 76 and cam follower 78. At all times, the drive cam 76 has two projections 80 between which a follower member 82 is located which allows accurate movement without any overtravel due to inertia.

As illustrated in Figure 1, the in-mold labeling system 28 includes first and second electrical controllers 84 and 86 having associated connections 88 and 90 for respectively operating the first and second servomotors 46 and 64 which can thus be controlled independently of each other. A sensor 92 of the in-mold labeling system 28 senses rotation of the rotary wheel 12 of the blow molding machine and has a connection 94 with respective connections 96 and 98 to the first and second controllers 84 and 86 which are thus operated to separately drive the first and second servomotors 46 and 64 to provide the in-mold labeling operation.

With reference to Figures 1-4, a cycle of operation of the in-mold labeling system 28 will now be described. Initially, the first servomotor 46 through the first cam mechanism 48 positions the dispensing head 36 in the supply location adjacent the label magazines 30 as illustrated in Figure 2. The second servomotor 64 is then operated to move the label carriers 38 from the solid line indicated retracted position to the phantom line indicated label transfer position adjacent the labels 32 such that the vacuum drawn at each label carrier secures the exposed label. Continued operation of the second servomotor 64 then moves the label carriers 38 back to the retracted position and continued operation of the first servomotor 46 moves the dispensing head 36 from the supply location shown in Figure 2 back to the delivery location shown in Figure 3. At the delivery location, the second servomotor 64 drives the label carriers 38 from the solid line indicated retracted

position to the phantom line indicated label transfer position within the cavity sections 42 of the mold members 40 of the adjacent open mold 14. The vacuum drawn at the passages 44 of the mold members 40 secures the labels 32 within the mold and the label carriers 38 are then moved back to the retracted positions shown
5 by solid line representation and the dispensing head 36 is driven back to the supply location shown in Figure 2 in preparation for the next cycle. Movement of the mold members 40 to the closed position partially indicated by phantom line representation in Figure 3 encloses the parison 18 (Figure 1) located within the mold and commences the blow molding cycle as the container is blown against the label to
10 provide an in-mold labeled product.

The construction and operation of the in-mold labeling system 28 as described above thus allow both the movement of the dispensing head 36 and the movement of the label carriers 38 to be coordinated with the rotation of the rotary wheel 12 of the blow molding machine while still being controllable independently
15 of each other as necessary to facilitate the in-mold labeling operation.

As previously mentioned and as illustrated in Figure 4, the system includes a pair of label magazines 30 for supplying two labels 32 to each side of the dispensing head 36 upon label carrier movement from the retracted position to the label transfer position and then back to the retracted position with the dispensing
20 head in the supply location shown in Figure 2 as previously described. Subsequently the dispensing head simultaneously supplies the two labels 32 at each side of the dispensing head 36 to two adjacent open molds 14 by label carrier movement from the retracted position to the label transfer position and then back to the retracted position with the dispensing head 36 in the delivery location as previously described
25 in connection with Figure 3. The second controller 86 (Figure 1) operates the second servomotor 64 faster while the dispensing head 36 is in the delivery location of Figure 3 than while in the supply location of Figure 2 such that the label carrier movement is faster upon being transferred to the molds than while being removed from the label magazines. This supply of labels to more than one mold by the
30 dispensing head thus allows slower removal of the labels from the label magazines such that a faster effective rate of labeling can be provided than is possible when

only one mold is labeled during each cycle and the system is limited by the speed at which the labels can be withdrawn from the label magazines without pulling out the next label due to the limitation involved with how fast the air can move behind the labels as they are withdrawn from the label magazine. Thus, while prior art systems have not been able to supply labels to more than about 65 to 70 molds per minute, the present system can effectively label about twice as fast. More specifically, the second controller 86 shown in Figure 1 can be operated to drive the second servomotor 46 that provides the label carrier movement twice as fast in the delivery location than while in the supply location.

10 The dispensing head 36 includes two subheads 100 whose construction is illustrated in Figure 7 and which will be hereinafter described in greater detail. Each dispensing head subhead 100 includes a pair of label carriers 38 movable in opposite directions as each other such that there are two pairs of label carriers supported by the dispensing head. With combined reference to Figures 1 and 15 4, the system also includes two pairs of label magazines 30 for respectively supplying two labels to each pair of the label carriers 38 upon movement from the retracted position to the label transfer position and then back to the retracted position while the dispensing head 36 is in the supply location shown in Figure 2 as previously described. Subsequently, the operation simultaneously supplies the two 20 pairs of labels on each pair of label carriers 38 to two adjacent open molds 14 as shown in Figure 4 by movement from the retracted position to the label transfer position and then back to the retracted position while in the delivery location illustrated in Figure 3 as previously described. The second controller 86 of the in-mold labeling system shown in Figure 1 operates the second servomotor 64 faster 25 while the dispensing head is in the delivery location than while in the supply location as previously described and, more specifically, can be programmed to operate the second servomotor twice as fast in the delivery location than while in the supply location as illustrated schematically in Figure 9.

30 The sensor 92 illustrated in Figure 1 is preferably an optical encoder that operates the first and second electrical controllers 84 and 86 and is most

preferably operated by a pinion gear 102 that is meshed with the main drive gear 24 of the rotary wheel 12.

The specific blow molding machine 10 with which the in-mold labeling system 28 is utilized includes the extruder 16 that extrudes a tubular hot plastic parison 18 into the open mold for the blow molding after the mold closing as previously discussed, which is a construction for which the in-mold labeling system has particular utility. However, it is also possible for the in-mold labeling system to be utilized with other types of blow molding such as injection and injection-stretch blow molding wherein an injection molded hot preform is positioned within the mold after the in-mold labeling.

With reference to Figure 7, the dispensing head 36 as previously mentioned includes two subheads 100 each of which includes a head member 104 that is moved by the first cam mechanism 48 and its lever arm 54 and connecting link 60 illustrated in Figure 5 as previously discussed. Each subhead 100 as illustrated in Figure 7 includes a pair of label carriers 38 mounted on the head member 104 for movement between the retracted position and the label transfer position as previously described. Each subhead 100 also has an associated rotary drive member 74 of which there are two, as illustrated in Figure 4, rotatably driven in an oscillating manner by the linkage 72 that is driven by the output 70 (Figure 6) of the second cam mechanism 66 that is driven by the second servomotor 64 (Figure 1) operated by the second controller 86 in response to the blow molding machine operation as previously discussed. Each subhead 100 also includes a lever assembly 106 (Figure 7) that is rotatively driven in an oscillating manner by the associated rotary drive member 74. The lever assembly 106 includes a pair of levers 108 that extend outwardly from the rotary drive member 74 and are adjustable independently of each other as shown by arrow 110. Rotary oscillation of the drive member 74 rotatively oscillates the lever assembly 106 and each of its levers 108 under the driving operation previously described. Each lever 108 has a connection 112 to an associated label carrier 38 such that oscillating rotation of the rotary drive member 74 provides movement of the label carriers between the retracted and label transfer positions, such that the label carriers are moved from the retracted position to the

label transfer position while the dispensing head is in the supply location shown in Figure 2 to receive labels from the associated label magazine 30 and are then moved back to the retracted position for movement of the dispensing head 36 to the delivery location shown in Figure 3 where the label carriers are again moved to the label transfer position to transfer the labels to the adjacent open mold prior to mold closing for the blow molding as previously described.

Each lever 108 has a construction as generally illustrated in Figure 8 including an inner end 114 through which the associated rotary drive member extends. The pair of levers 108 extend as illustrated in Figure 7 in generally opposite directions from each other, but with slight variance therefrom being possible to accommodate for necessary adjustment that controls the required amount of label carrier movement for the particular product being produced. A key ring 116 extends around the rotary drive member 74 as shown in Figure 7 and had diametrically opposite keys 118 that are slidably received within diametrically opposite longitudinal grooves in the rotary drive member 74 so as to permit rotation therewith while permitting the movement of the dispensing head along the length of the rotary drive member between the supply and delivery locations previously described. A pair of bolts 120 secure the keys 118 and extend through aligned arcuate slots in the pair of levers 108 at their inner ends to secure the lever assembly to a spindle 121 rotatively supported on the head member 104.

With continuing reference to Figure 7, the subhead 100 of the dispensing head 36 includes a pair of linear rails 122 mounted on the head member 104 in a parallel relationship to each other with the associated rotary drive member located between the pair of rails. The label carriers 38 are respectively mounted by the pair of rails 122 for movement between the retracted and label transfer positions previously described. Each connection 112 of the subhead is a cam and follower connection that extends between the associated lever 108 and the associated label carrier 38 to move the label carriers between the retracted and label transfer positions under the impetus of the rotary drive member 74.

As illustrated by continuing reference to Figure 7, each of the pair of levers 108 has a distal end 124 including an elongated slot 126 that extends radially with respect to the rotation of the rotary drive member 74. Each cam and follower connection as illustrated in Figure 8 includes a cam 128 having a mount 130 including a T-shaped member 132 with a shank 134 that extends through the slot 126 in the distal end 124 of the associated lever 108. Each mount 130 also includes a nut 136 that is secured to the threaded shank 134 of the T-shaped member 132 on the other side of the distal end 124 of the lever 108 to provide securement thereof at the appropriate location. The cam 128 of each cam and follower connection has a threaded shank 138 that is threaded into the associated T-shaped member 132. Each cam and follower connection 112 also has an elongated follower 140 mounted as shown in Figure 7 on the associated label carrier 38 and receiving the associated cam so as to be moved thereby under the impetus of the rotary drive member. Thus, the oscillating rotation of the rotary drive member moves the lever assembly 106 and the pair of levers 108 thereof and the cam and follower connections 112 move the label carriers 38. As shown in Figure 8, each cam and follower connection also includes a set screw 142 that secures the threaded shank 138 of the cam 128 to the associated T-shaped member 132. The flat sides of the T-shaped member 132 engage the sides of the associated lever slot 126 to provide a firm support for the cam. Also, each label carrier 38 includes a plastic arm 144 that easily breaks in case of a malfunction to prevent extensive damage. One or more unshown vacuum cups are mounted by the plastic arms and supplied a vacuum that secures the labels.

While the best mode for carrying out the invention has been described in detail, other modes for practicing the invention can also be utilized as described by the following claims.

WHAT IS CLAIMED IS:

1. A dispensing head for an in-mold labeling system for use with a plastic blow molding machine to transfer labels from a pair of label magazines adjacent the blow molding machine to open molds thereof prior to mold closing for
5 blow molding, the dispensing head comprising:

a head member that is mounted for movement between a supply location adjacent the label magazines and a delivery location between mold members of an open mold;

10 a pair of label carriers mounted on the head member for movement between a retracted position and a label transfer position;

a rotary drive member that is rotatable in response to the blow molding machine operation;

15 a lever assembly rotatively driven by the rotary drive member and having a pair of levers that are adjustable with respect to the rotary drive member independently of each other, and each lever having a connection to an associated label carrier such that rotation of the rotary drive member provides movement of the label carriers between the retracted and label transfer positions such that the label carriers are moved from the retracted position to the label transfer position while the dispensing head is in the supply location to receive labels from the label magazines
20 and are then moved back to the retracted position for movement of the dispensing head to the delivery location where the label carriers are again moved to the label transfer position to transfer the labels to an adjacent open mold prior to mold closing for the blow molding.

2. A dispensing head for an in-mold labeling system as in claim
25 1 wherein the pair of levers extend from the rotary drive member in generally opposite directions from each other, and further including a key ring that adjustably secures the pair of levers to each other.

3. A dispensing head for an in-mold labeling system as in claim
30 2 further including a pair of linear rails mounted on the head member with the rotary drive member located between the pair of rails, the pair of label carriers being

respectively mounted by pair of rails for movement between the retracted and label transfer positions, and each connection being a cam and follower connection that extends between the associated lever and the associated label carrier to provide movement thereof between the retracted and label transfer positions under the
5 impetus of the rotary drive member.

4. A dispensing head for an in-mold labeling system as in claim 3 wherein each of the pair of levers has a distal end including an elongated slot that extends radially with respect to the rotation of the rotary drive member, each cam
10 and follower connection including a cam having a mount including a T-shaped member having a threaded shank that extends through the elongated slot in the distal end of the associated lever, and each mount having a nut that is secured to the threaded shank of the associated T-shaped member.

15 5. A dispensing head for an in-mold labeling system as in claim 4 wherein the cam of each cam and follower connection has a threaded shank threaded into the associated T-shaped member, and each cam and follower connection including an elongated follower mounted on the associated label carrier and receiving the associated cam so as to be moved thereby under the impetus of the
20 rotary drive member.

6. A dispensing head for an in-mold labeling system as in claim 5 wherein each cam and follower connection includes a set screw that secures the threaded shank of the cam to the associated T-shaped member.

71087-659

7. A dispensing head for an in-mold labeling system for use with a plastic blow molding machine to transfer labels from a pair of label magazines adjacent the blow molding machine to open molds thereof prior to mold closing
5 for blow molding, the dispensing head comprising:

a head member that is mounted for movement between a supply location adjacent the label magazines and a delivery location between mold members of an open mold;

a pair of label carriers mounted on the head
10 member for movement between a retracted position and a label transfer position;

a rotary drive member that is rotatable in response to the blow molding machine operation;

a lever assembly rotatively driven by the rotary
15 drive member and having a pair of levers that extend from the rotary drive member in generally opposite directions and are adjustable with respect to the rotary drive member independently of each other, and each lever having a cam and follower connection to an associated label carrier such that
20 rotation of the rotary drive member provides movement of the label carriers between the retracted and label transfer positions such that the label carriers are moved from the retracted position to the label transfer position while the dispensing head is in the supply location to receive labels
25 from the label magazines and are then moved back to the retracted position for movement of the dispensing head to the delivery location where the label carriers are again moved to the label transfer position to transfer the labels

71087-659

to an adjacent open mold prior to mold closing for the blow molding.

8. A dispensing head for an in-mold labeling system for use with a plastic blow molding machine to transfer
5 labels from a pair of label magazines adjacent the blow molding machine to open molds thereof prior to mold closing for blow molding, the dispensing head comprising:

a head member that is mounted for movement between a supply location adjacent the label magazines and a
10 delivery location between mold members of an open mold;

a pair of label carriers;

a pair of spaced and parallel rails that mount the pair of label carriers on the head member for movement between a retracted position and a label transfer position;

15 a rotary drive member that is located between the pair of parallel rails and is rotatable in response to the blow molding machine operation;

a lever assembly rotatively driven by the rotary drive member and having a pair of levers that extend from
20 the rotary drive member in generally opposite directions and are adjustable with respect to the rotary drive member independently of each other, and each lever having a cam and follower connection to an associated label carrier such that rotation of the rotary drive member provides movement of the
25 label carriers between the retracted and label transfer positions such that the label carriers are moved from the retracted position to the label transfer position while the dispensing head is in the supply location to receive labels


71087-659

from the label magazines and are then moved back to the retracted position for movement of the dispensing head to the delivery location where the label carriers are again moved to the label transfer position to transfer the labels
5 to an adjacent open mold prior to mold closing for the blow molding.

SMART & BIGGAR

PATENT AGENTS

OTTAWA, CANADA

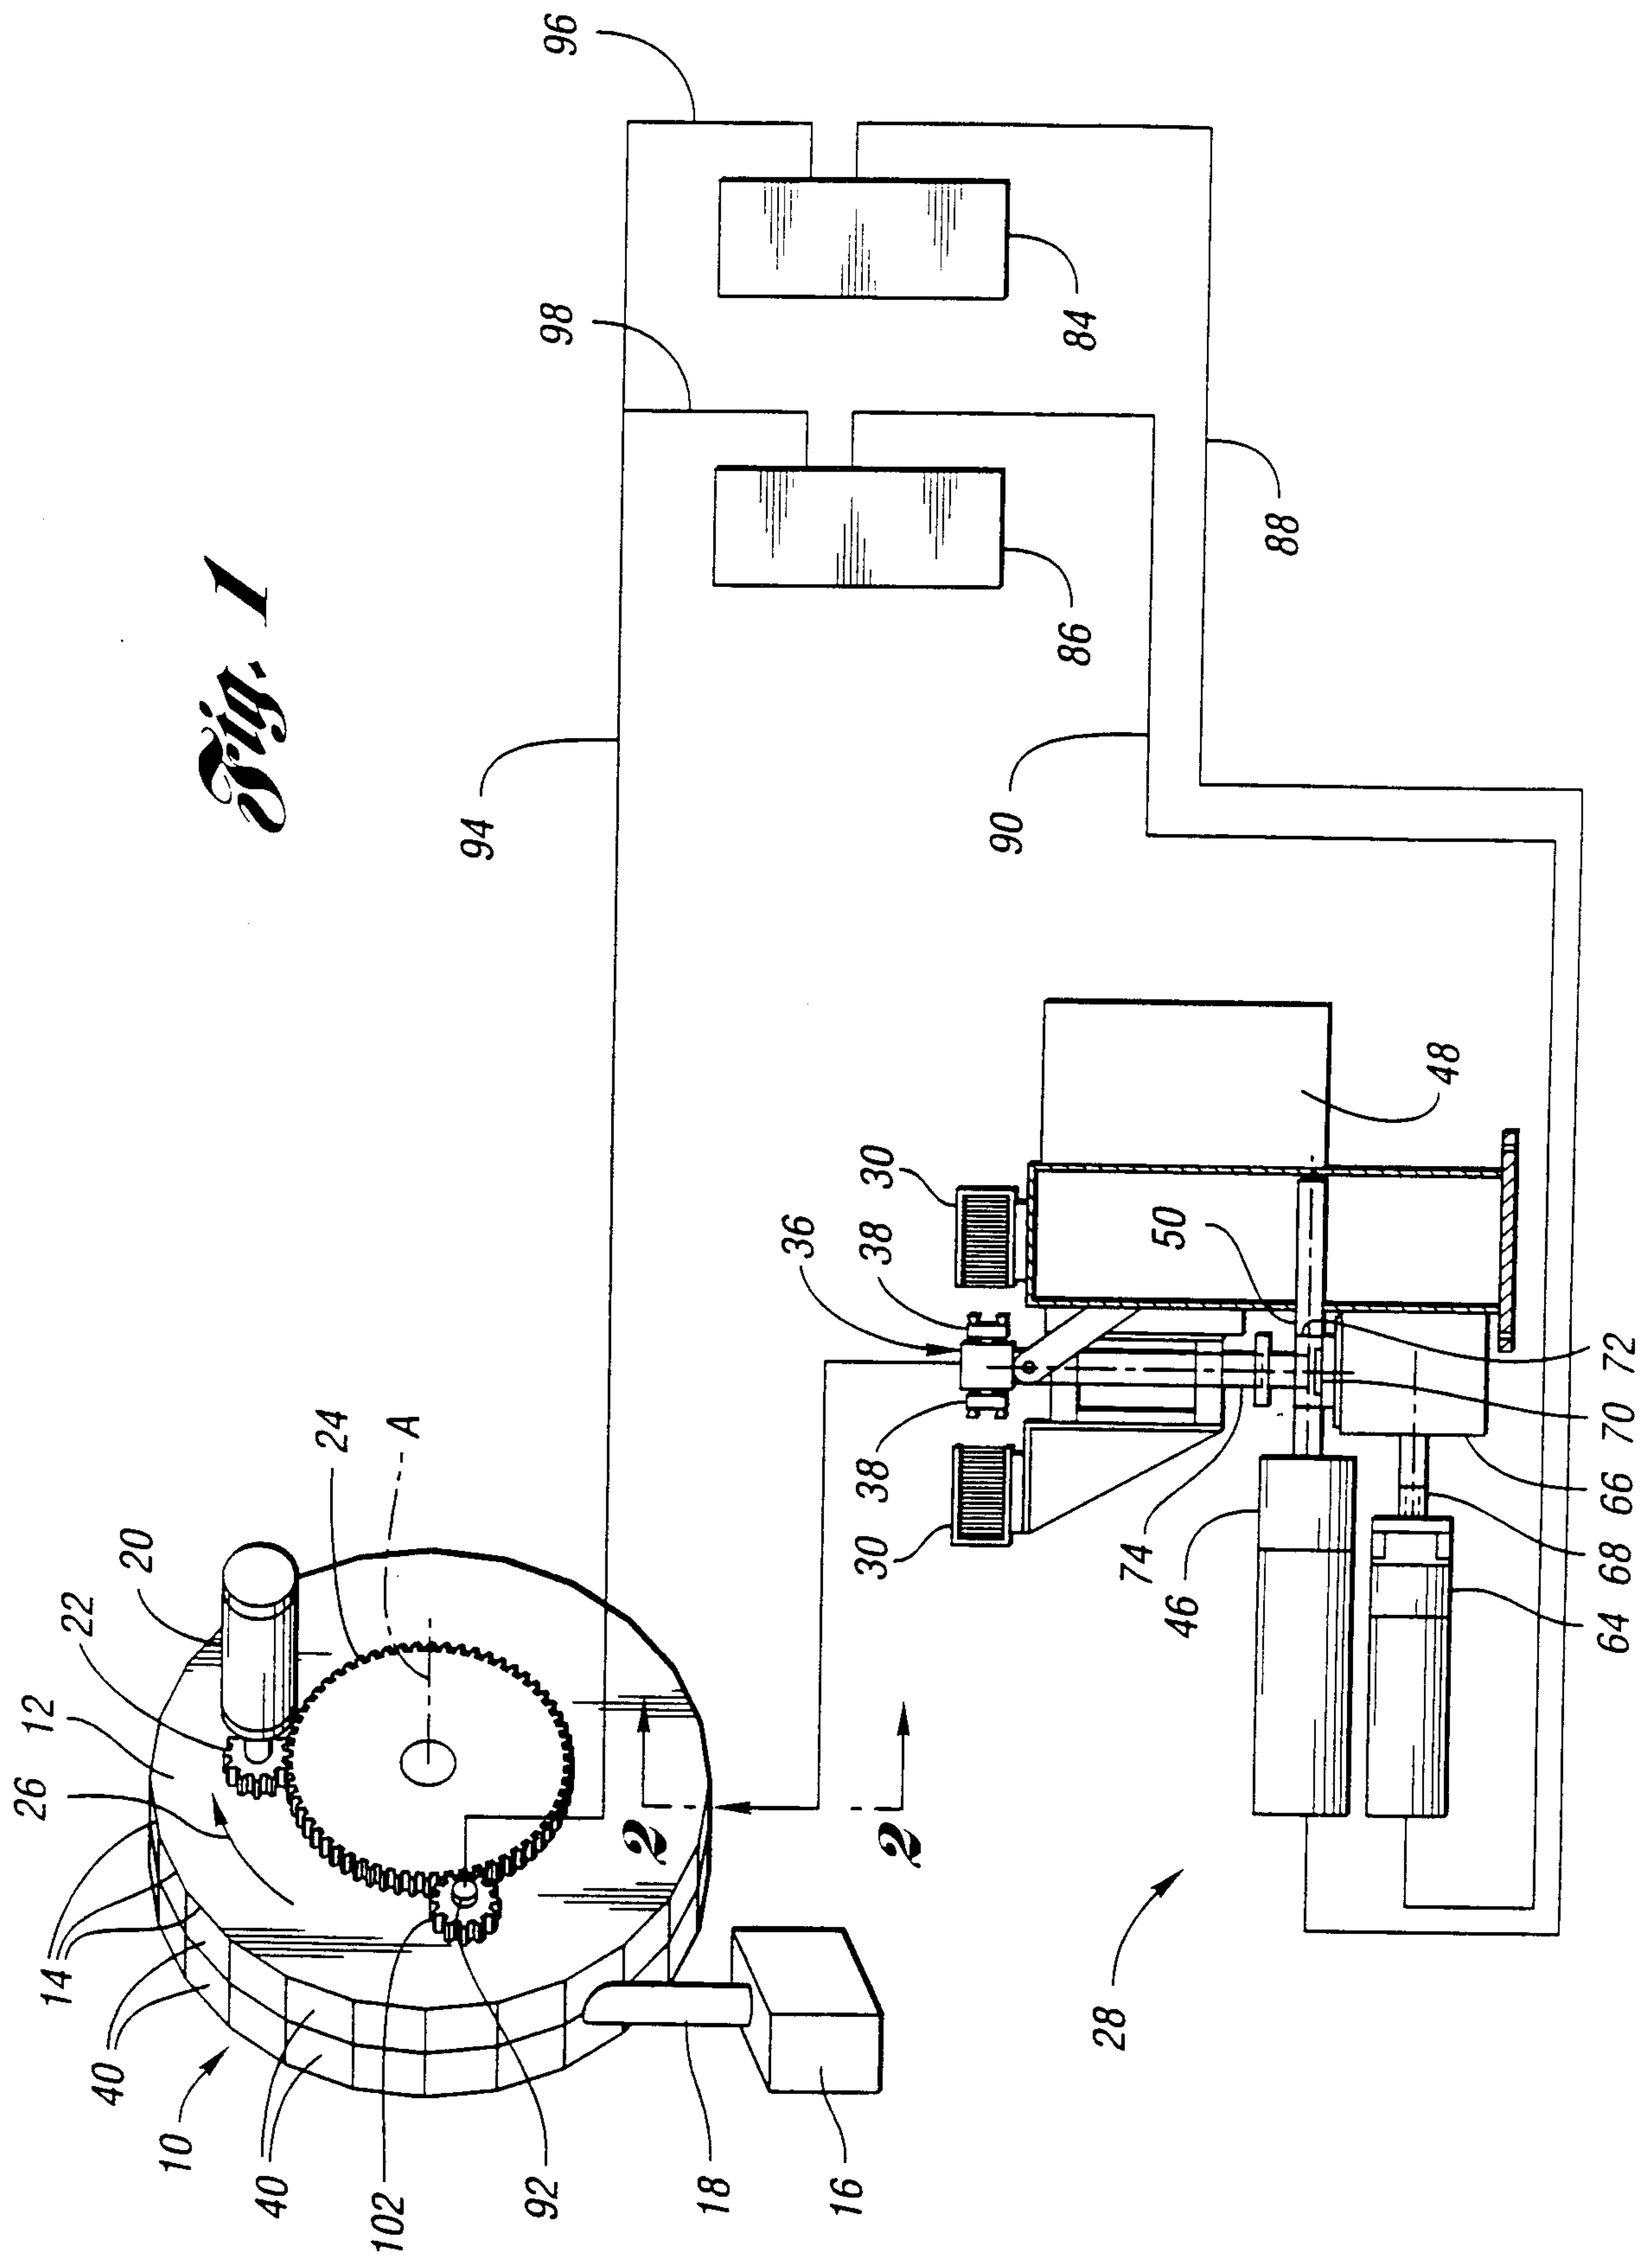

2/5

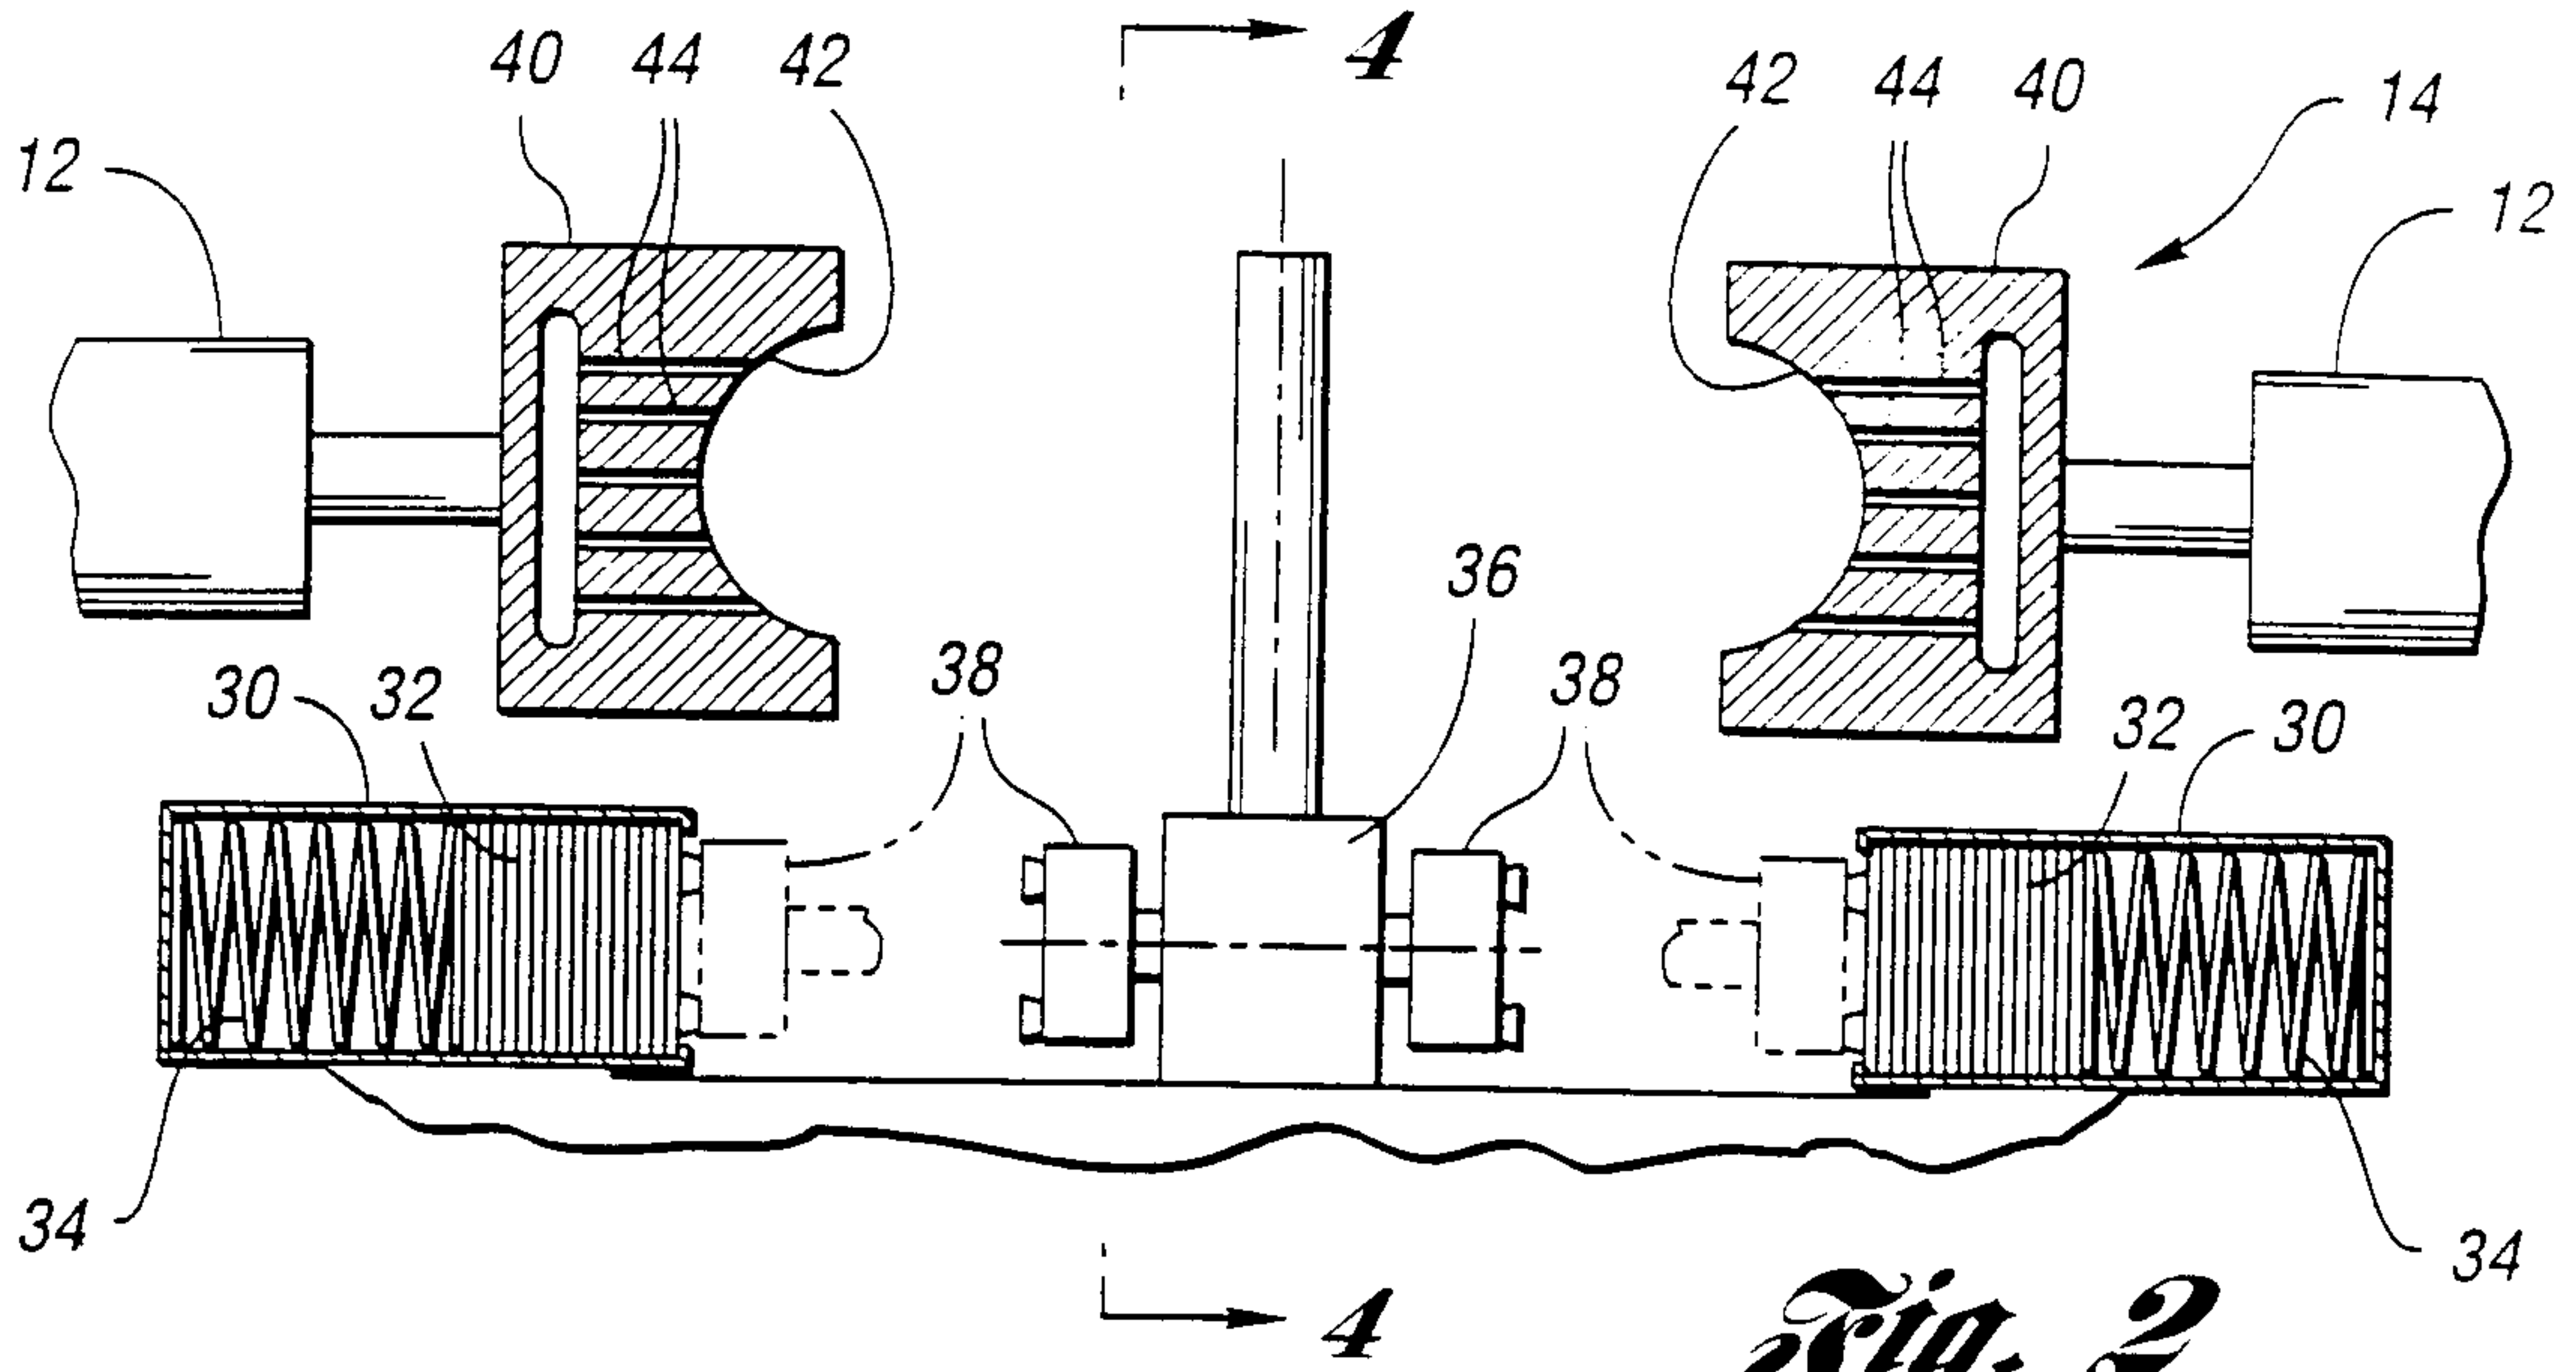


Fig. 2

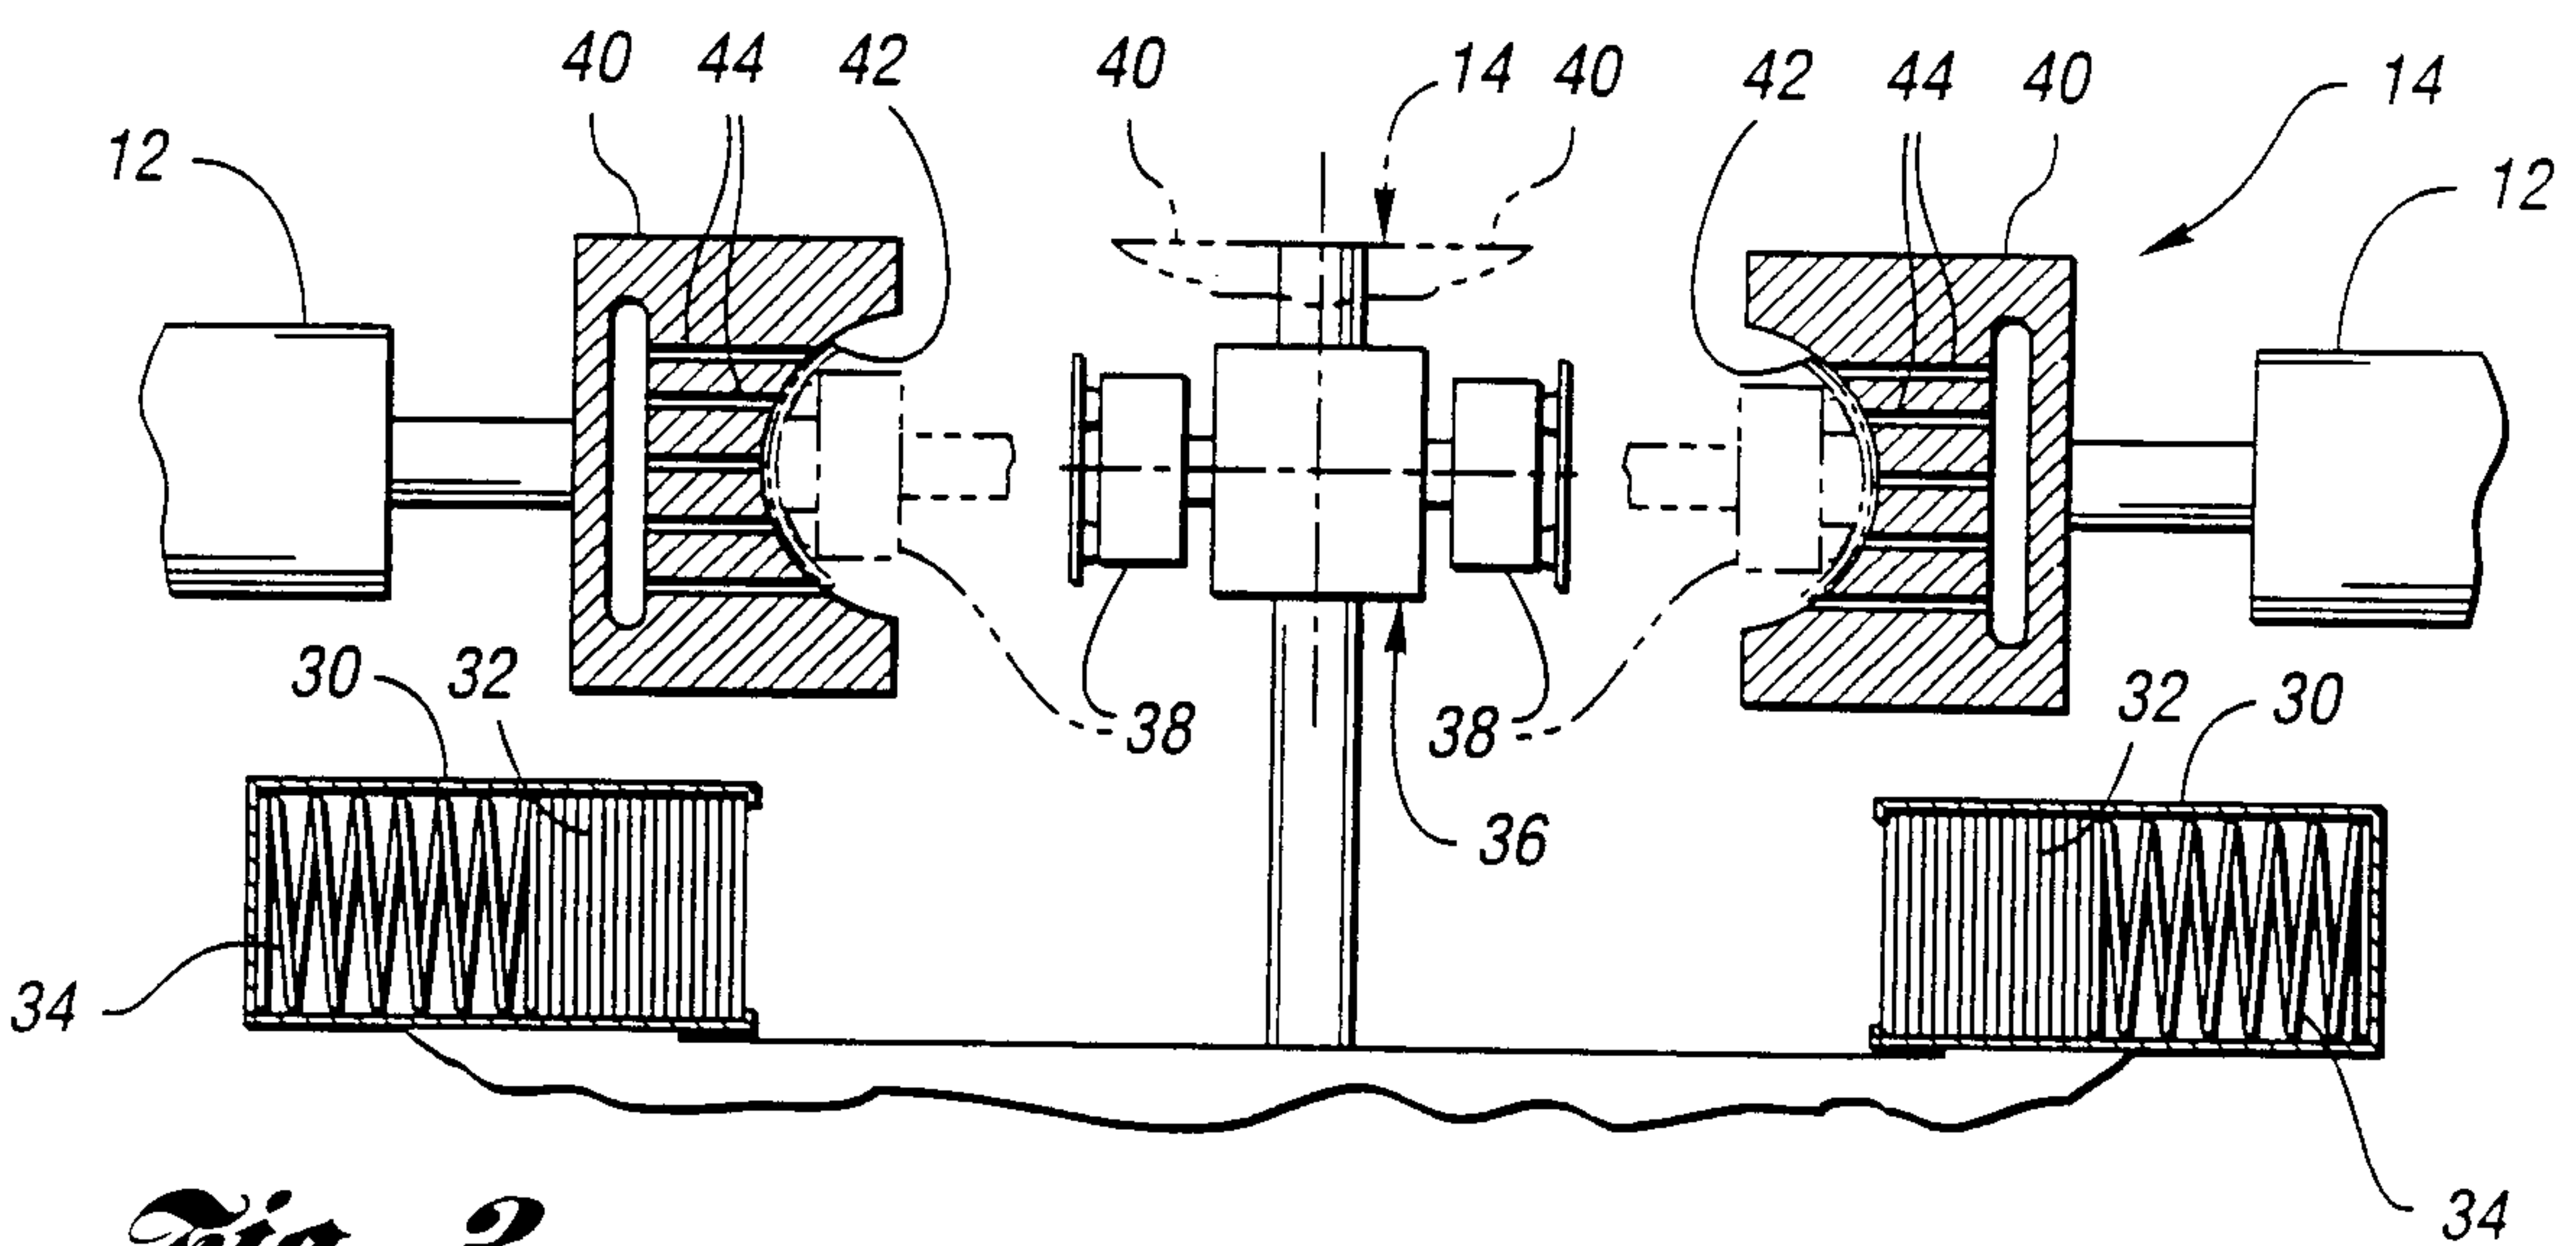


Fig. 3

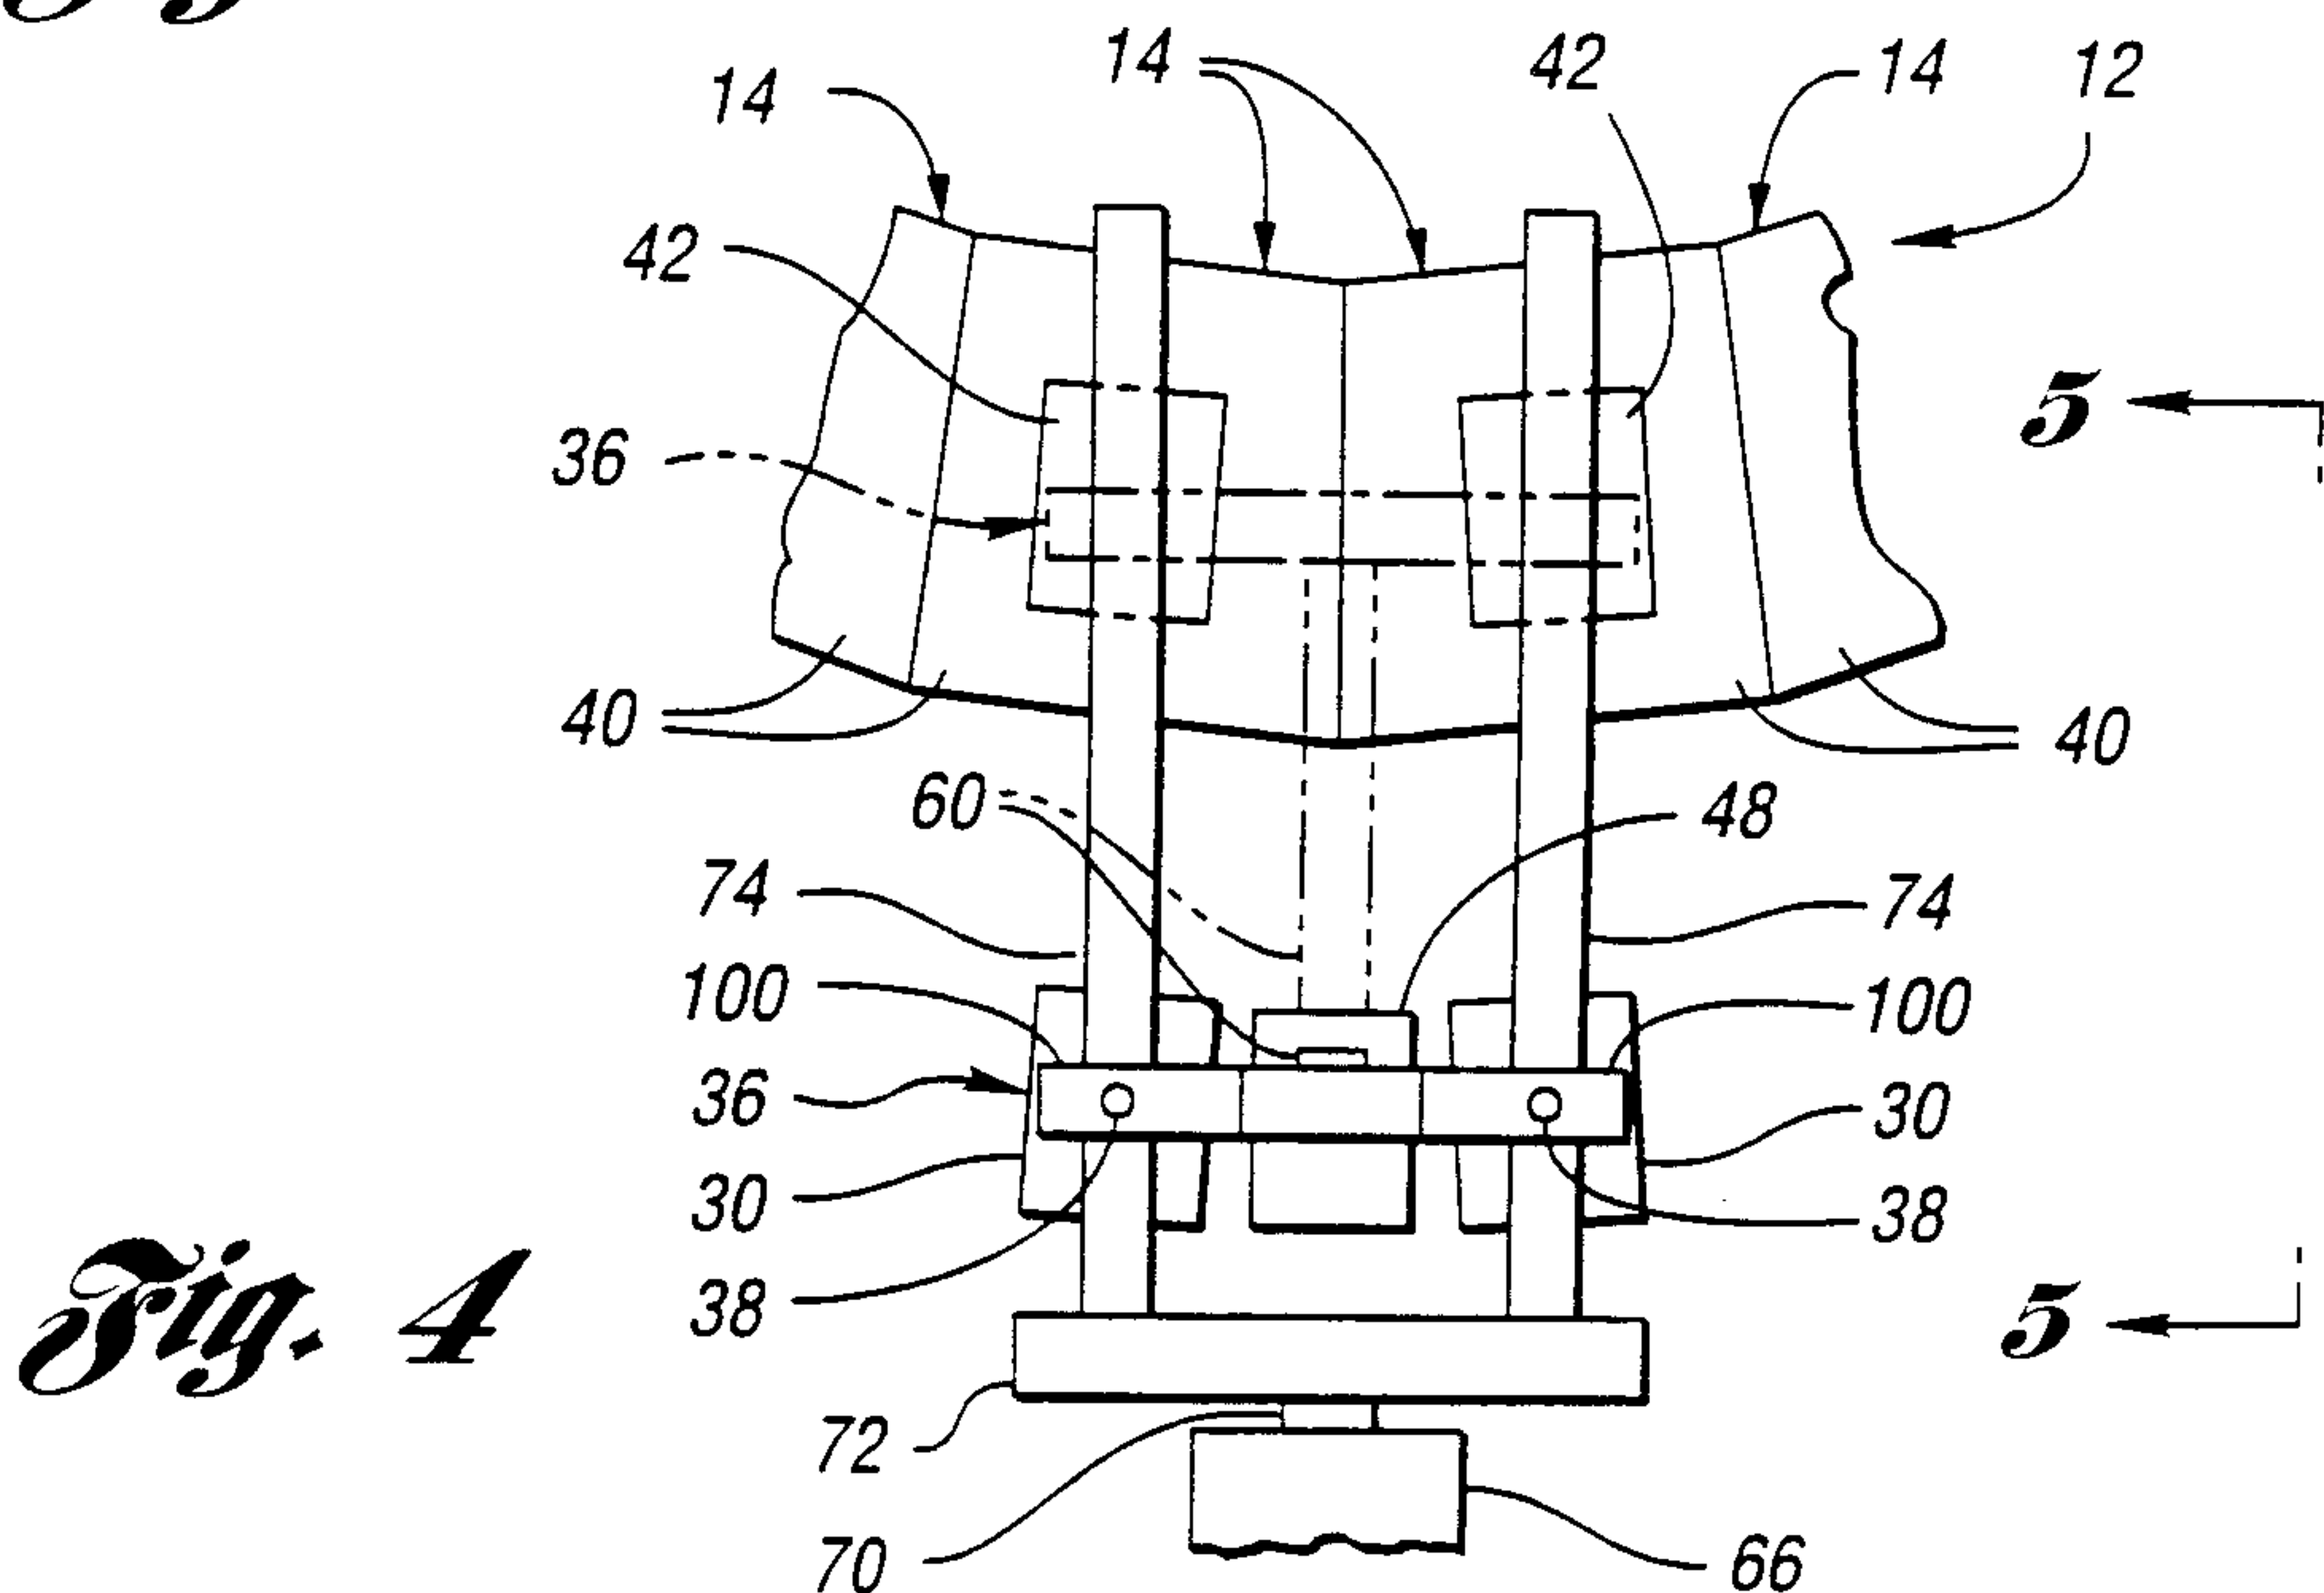
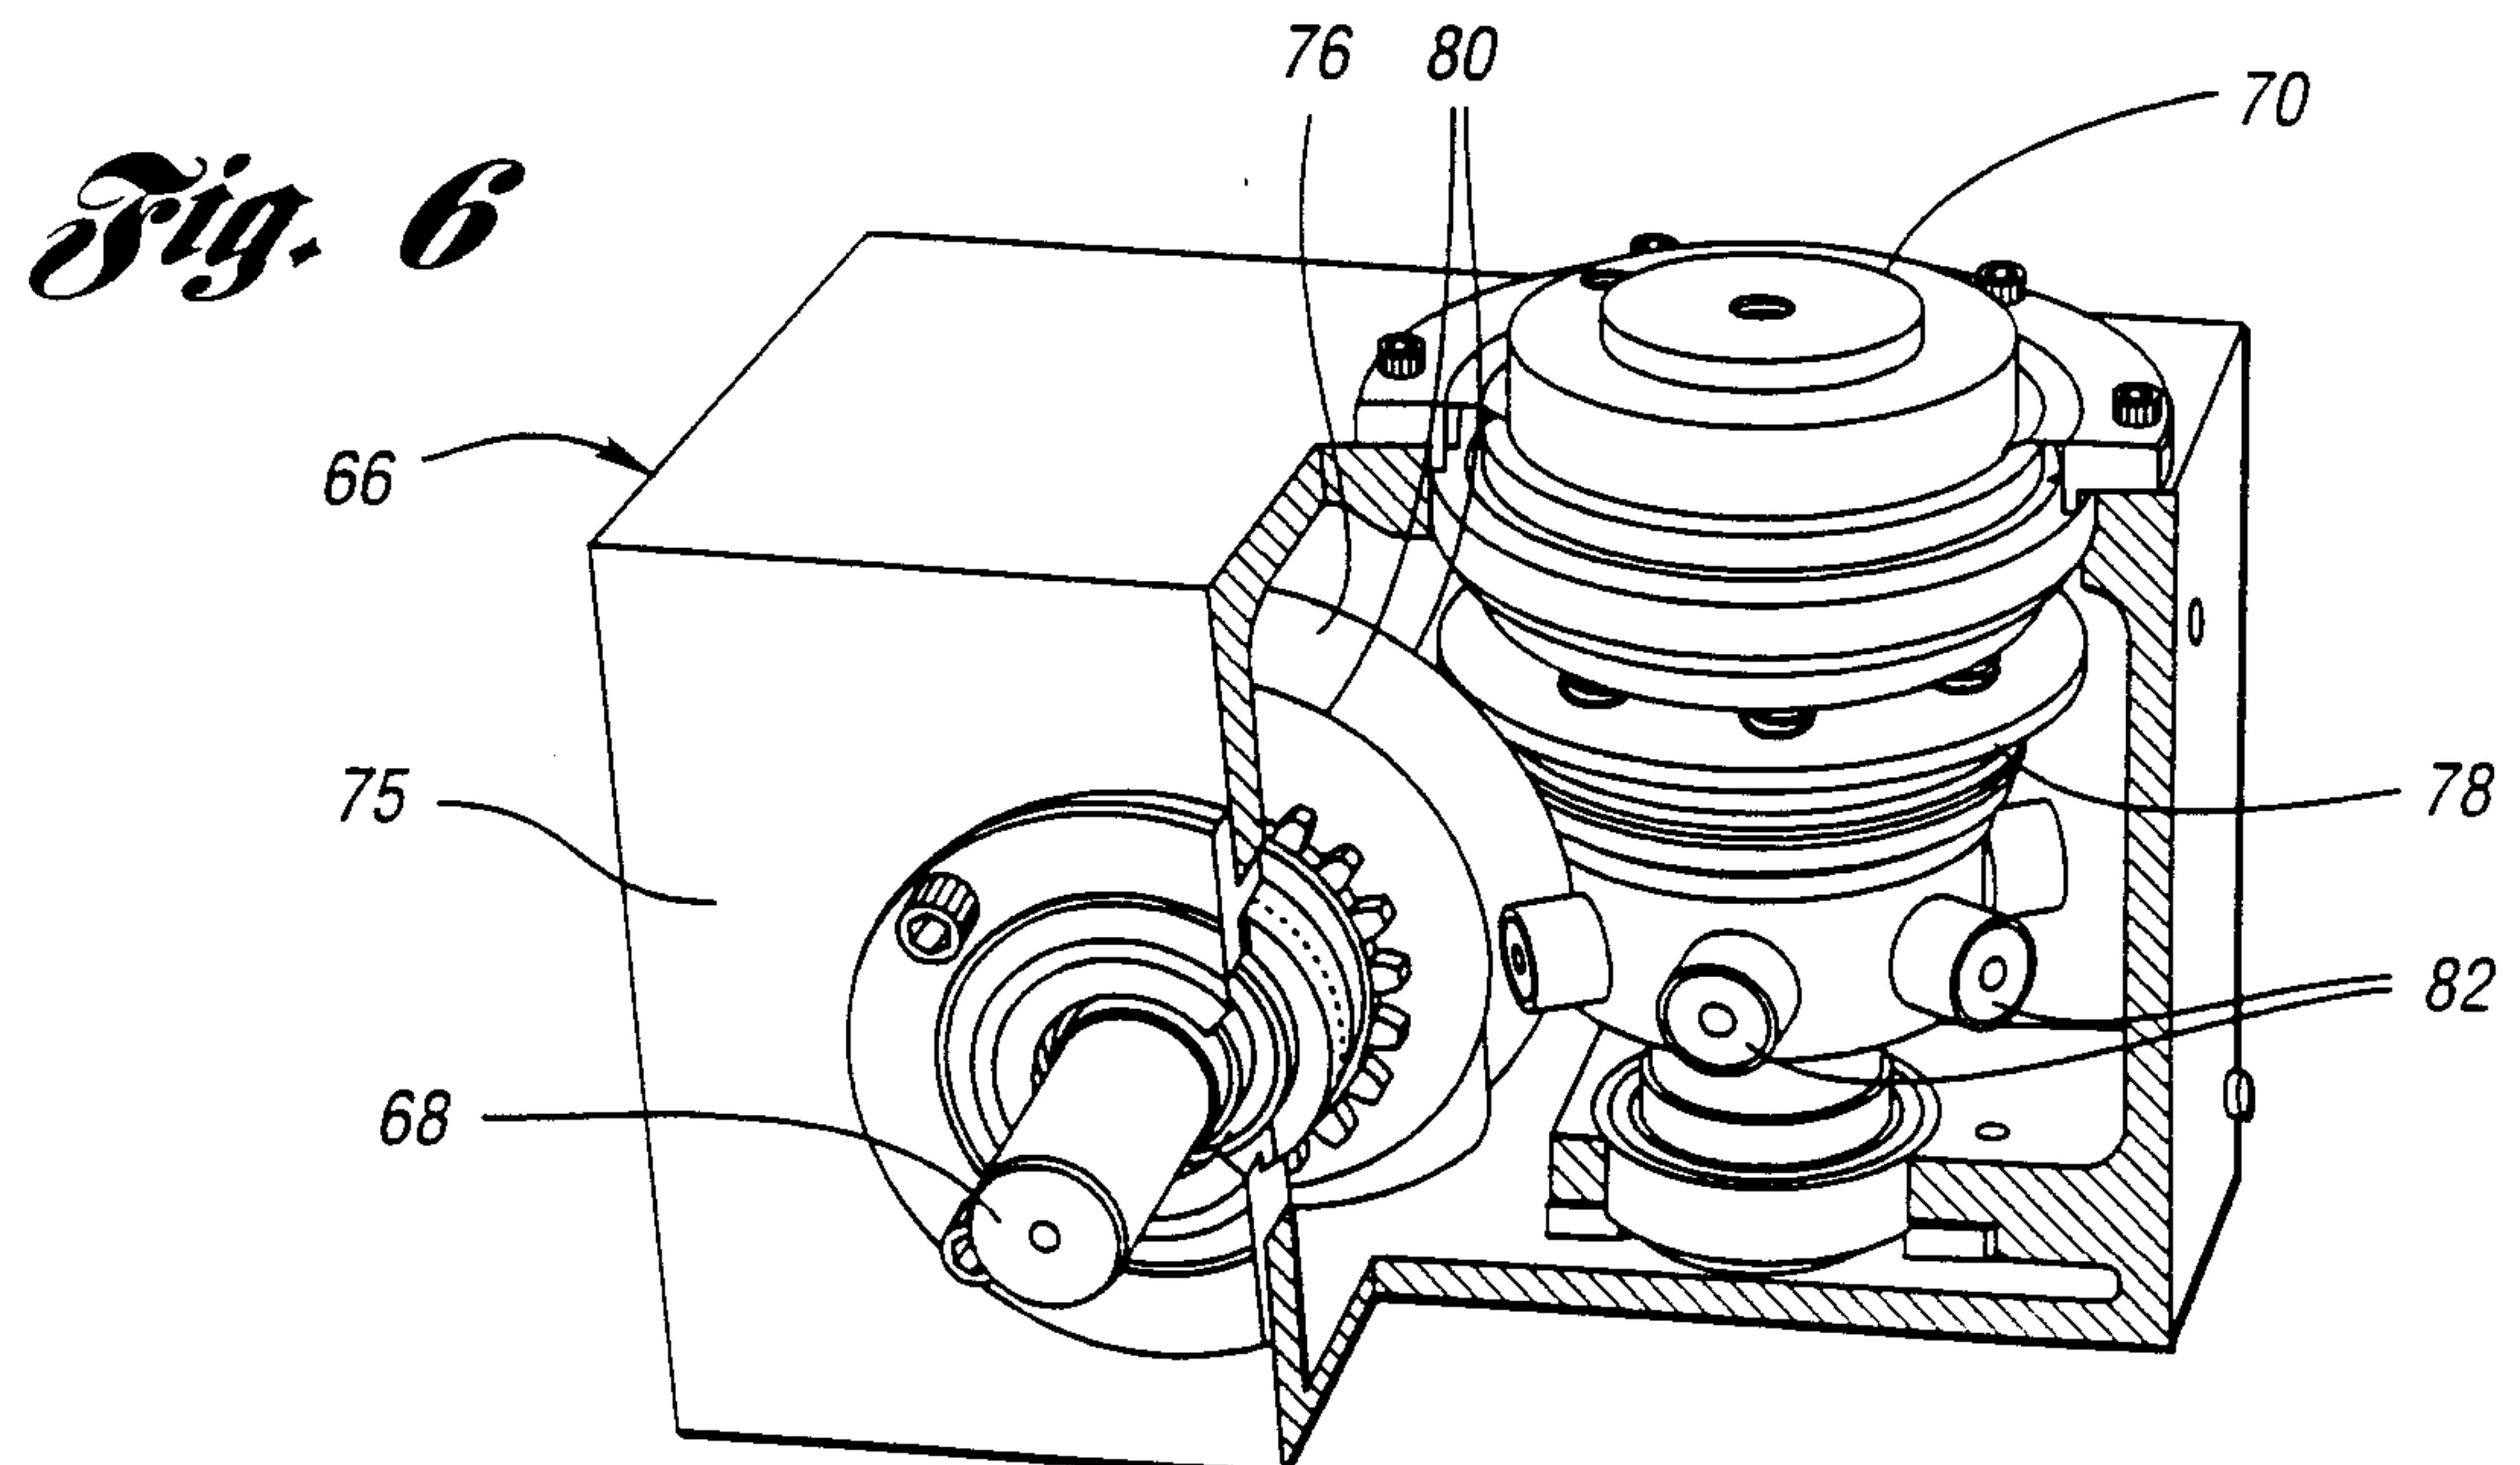
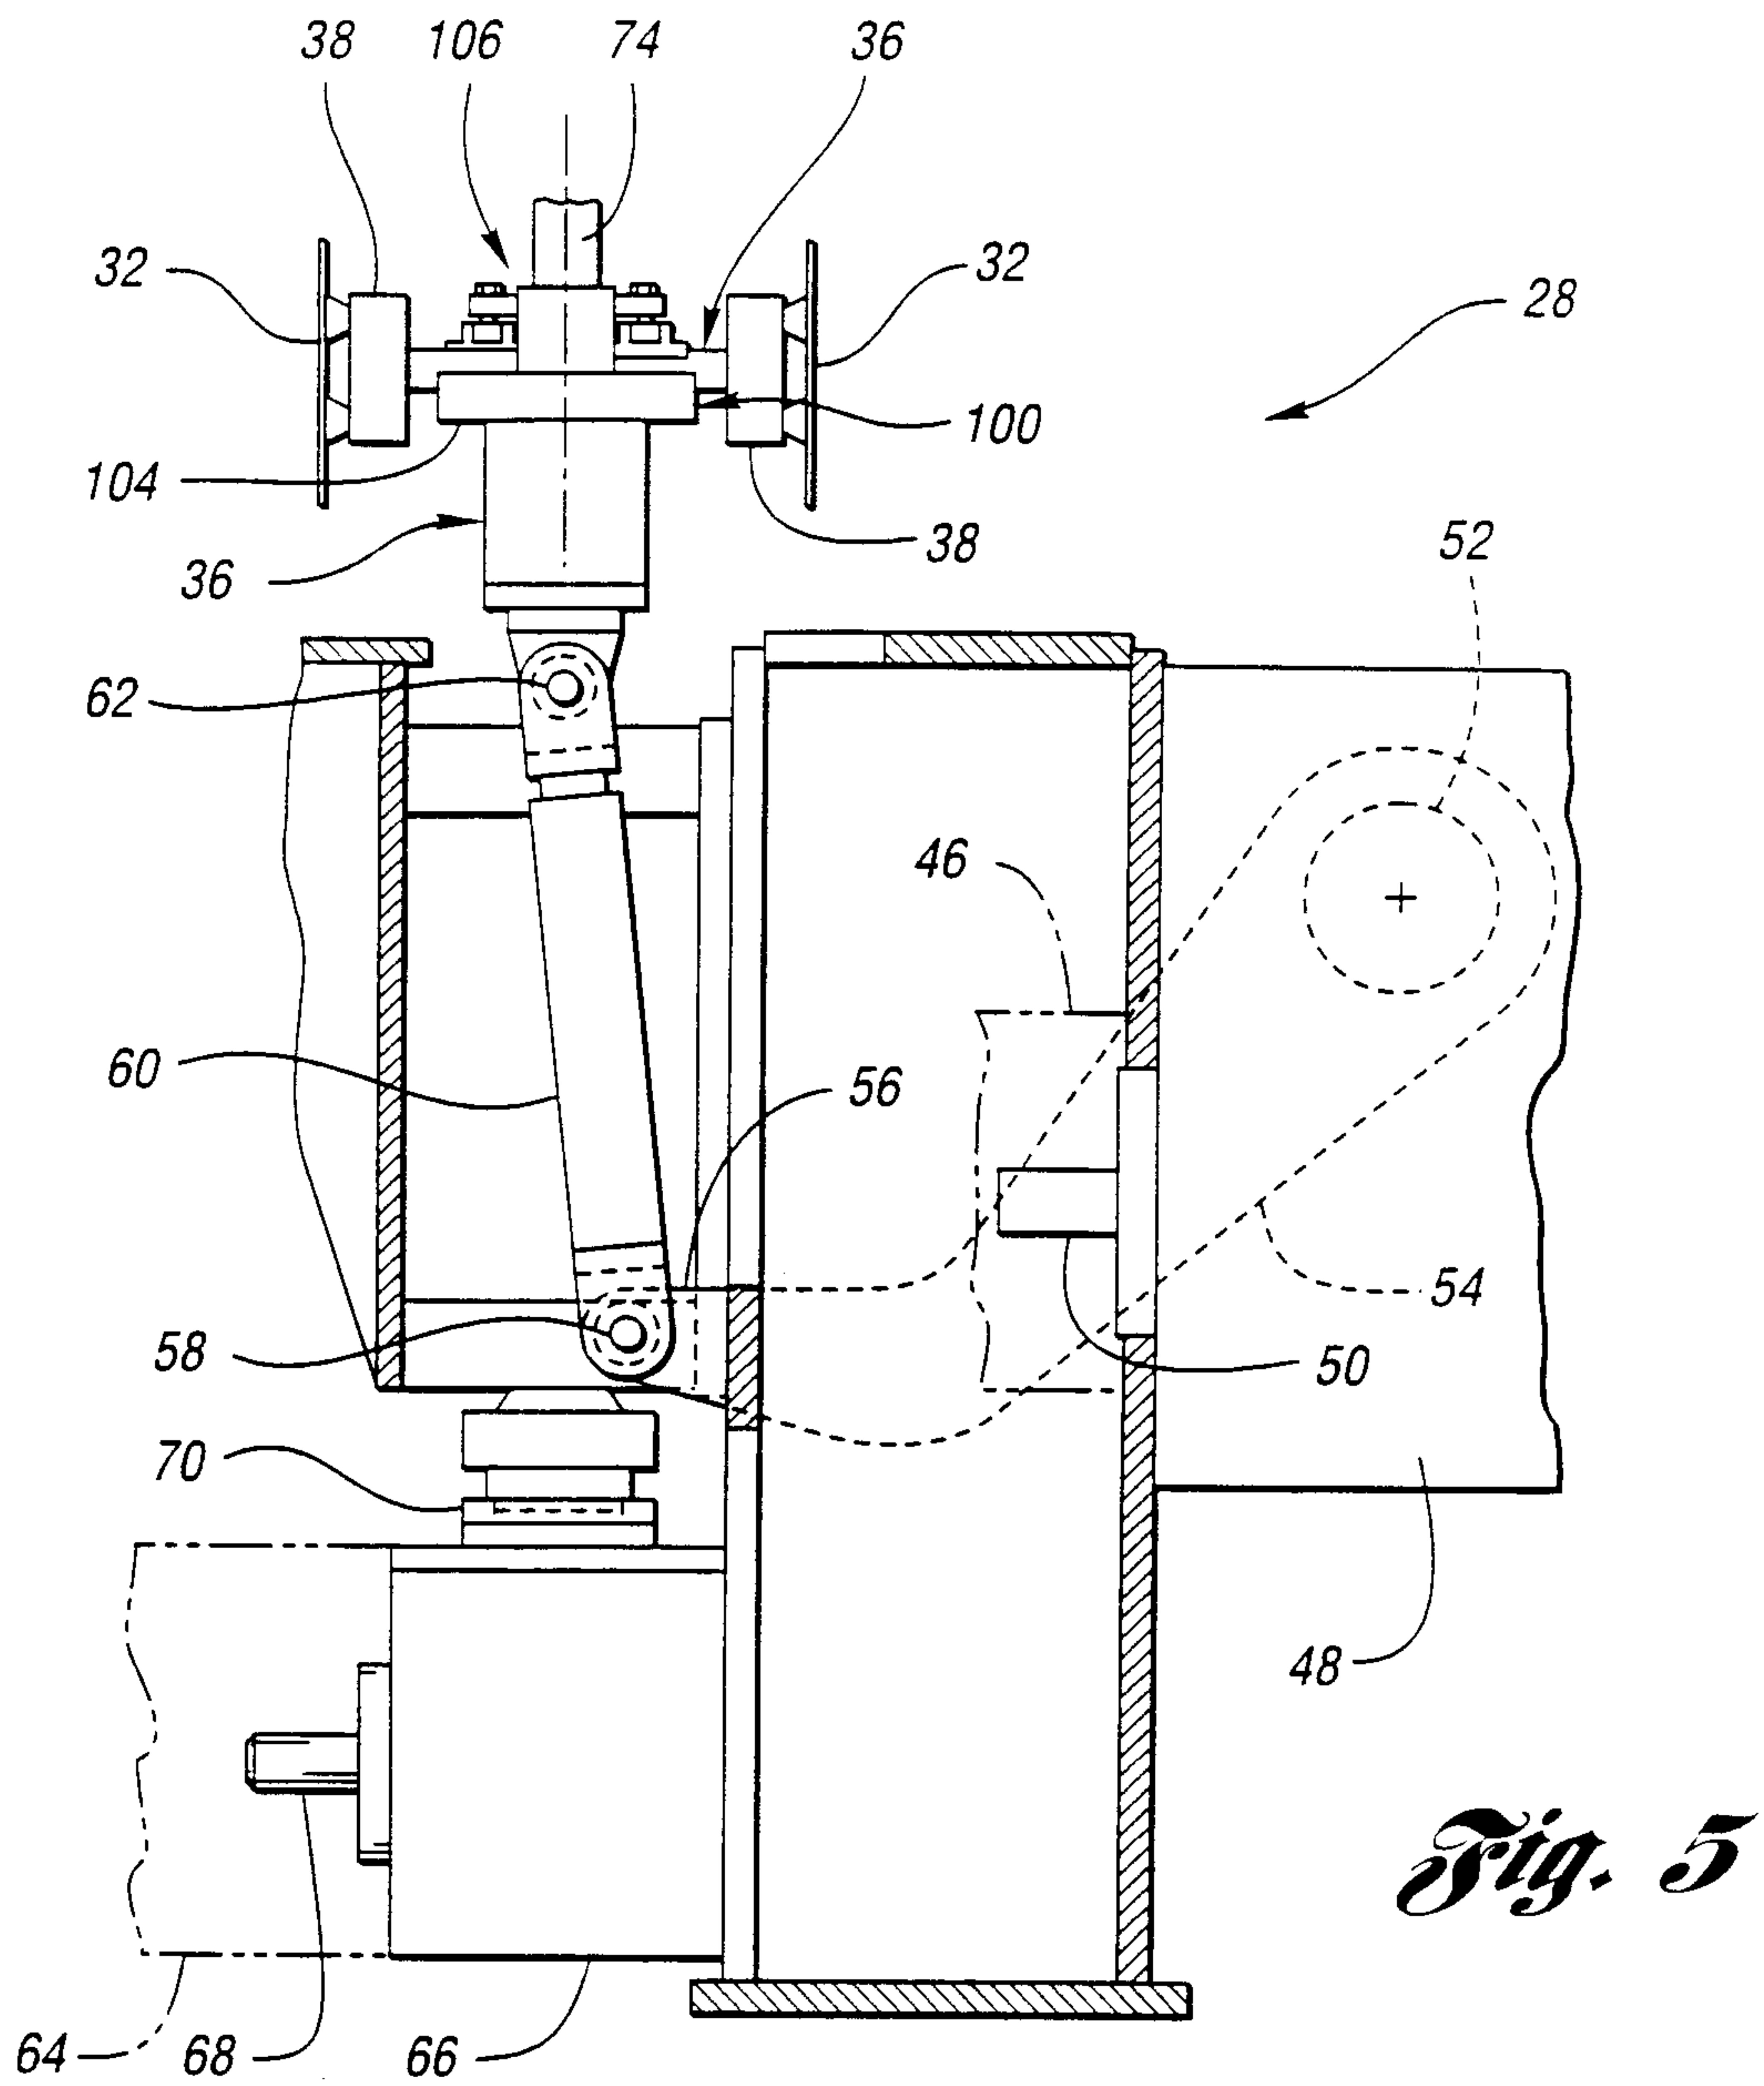


Fig. 4

3/5



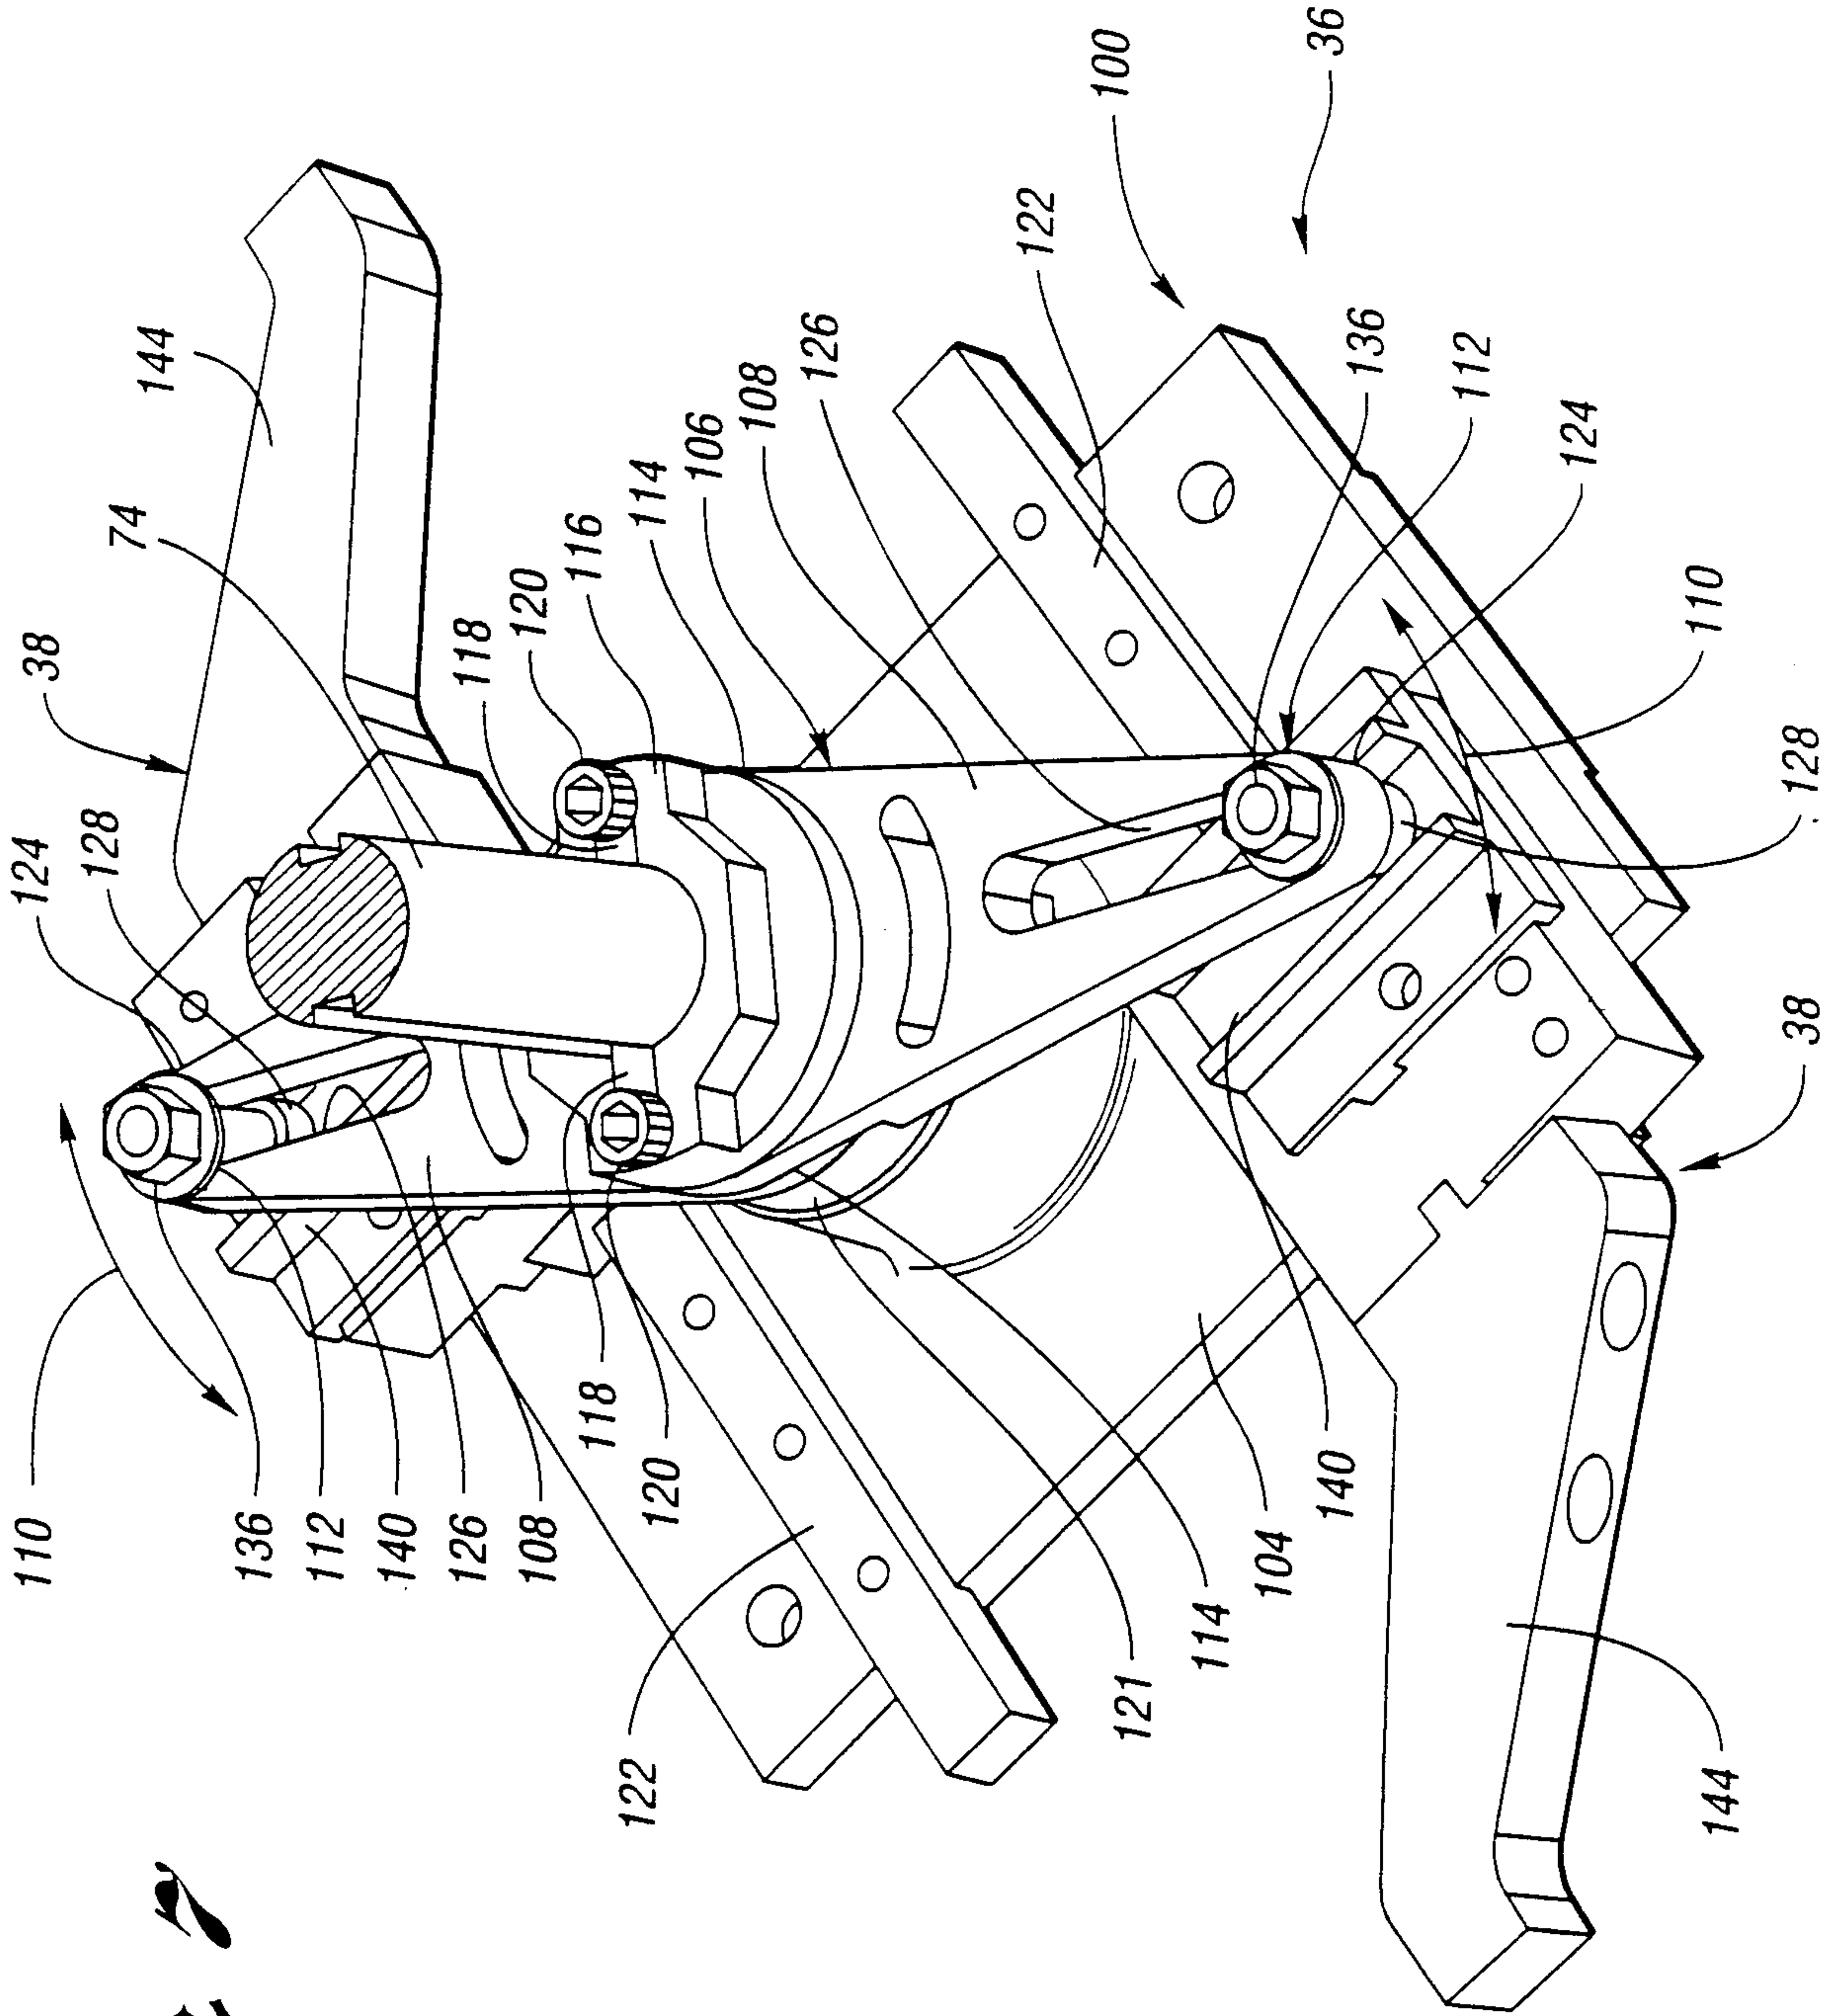


Fig. 7

5/5

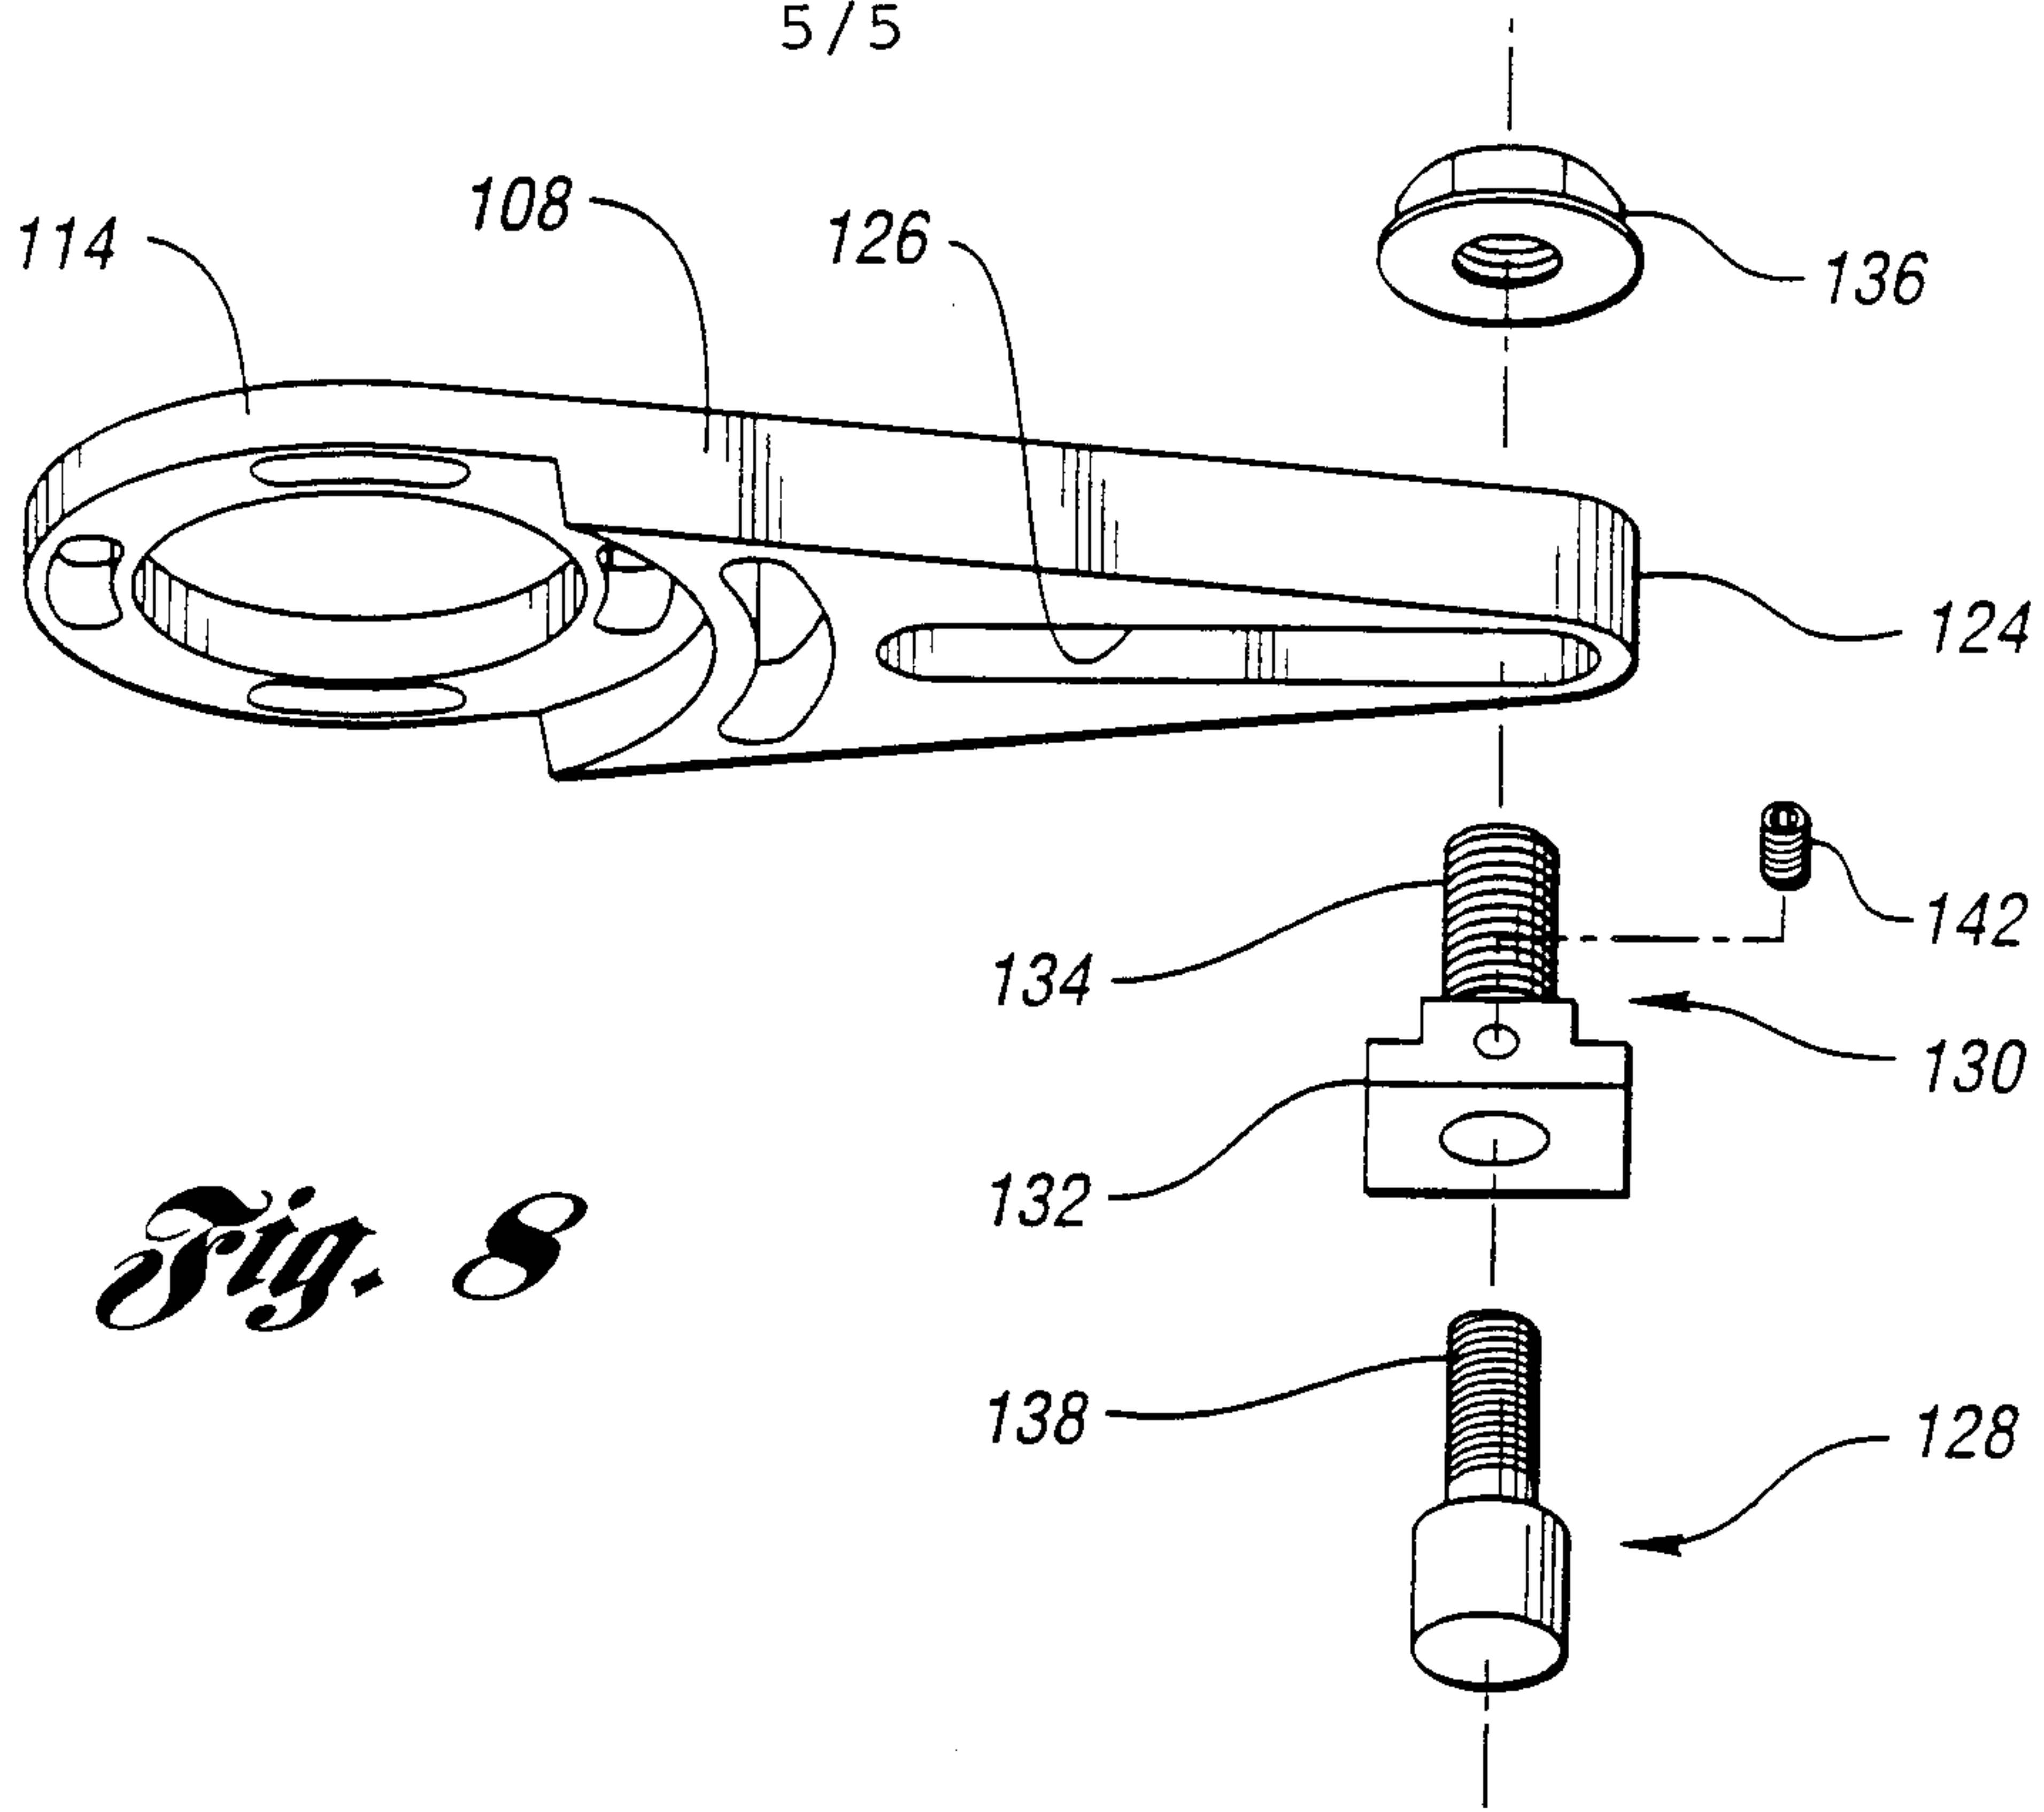


Fig. 8

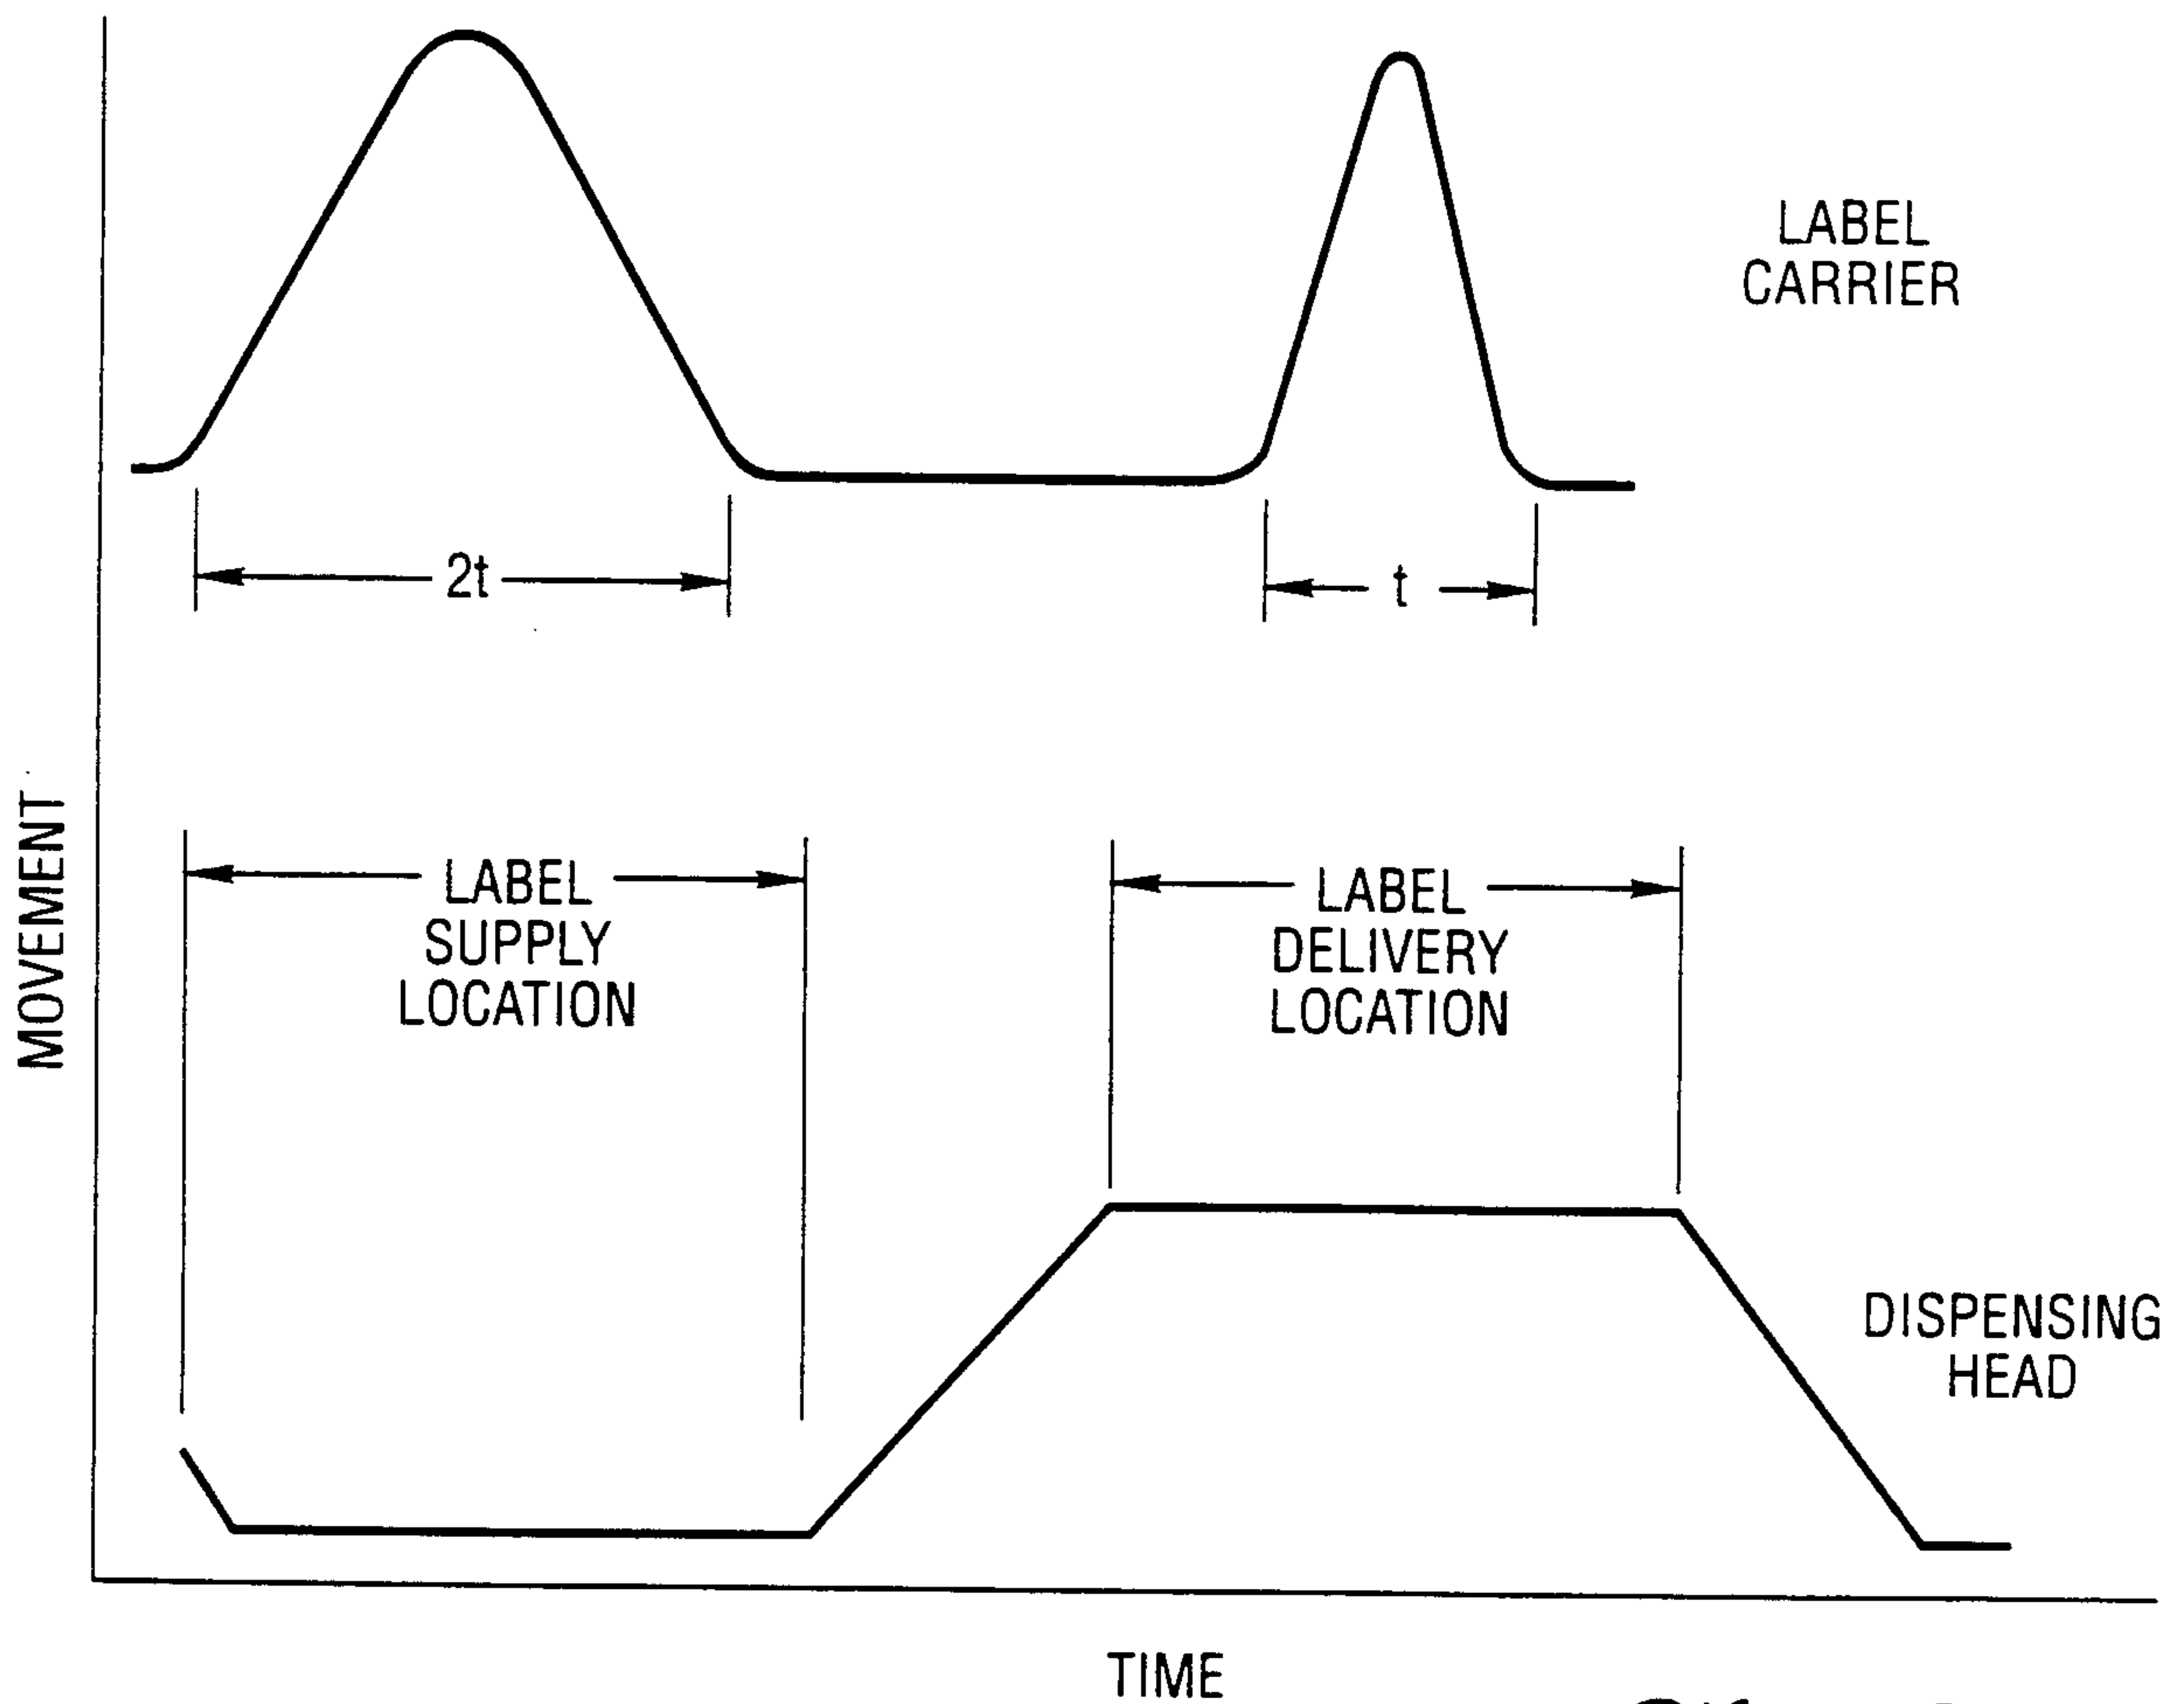


Fig. 9

