



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 749 730 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
27.12.1996 Bulletin 1996/52

(51) Int. Cl.⁶: **A61F 2/06**, A61M 29/00

(21) Application number: **96202442.8**

(22) Date of filing: **28.01.1993**

(84) Designated Contracting States:
BE CH DE FR GB IT LI NL

(30) Priority: **31.01.1992 US 830219**

(62) Application number of the earlier application in
accordance with Art. 76 EPC: **93300610.8**

(71) Applicant: **ADVANCED CARDIOVASCULAR
SYSTEMS, INC.**
Santa Clara California 95052 (US)

(72) Inventor: **Williams, Michael S.**
Cupertino, California 95014 (US)

(74) Representative: **Mayes, Stuart David et al**
BOULT, WADE & TENNANT
27 Furnival Street
London, EC4A 1PQ (GB)


Remarks:

This application was filed on 02 - 09 - 1996 as a
divisional application to the application mentioned
under INID code 62.

(54) **Stent capable of attachment within a body lumen**

(57) There is described an expandable intraluminal stent implantable in a body lumen and adapted to expand from a reduced diameter form to an expanded diameter form. The stent comprises a sheet of material curled into a cylinder having overlapping edges, an interior surface and an exterior surface. The exterior surface is adapted to lie contiguous with the lumen, and the overlapping edges define a region of contact between

said exterior surface and said interior surface. The exterior surface has a surface texture made of a plurality of protrusions and the interior surface contains a plurality of apertures. Several of the protrusions engage the apertures to hold the stent in said expanded form and several of the protrusions engage the lumen.

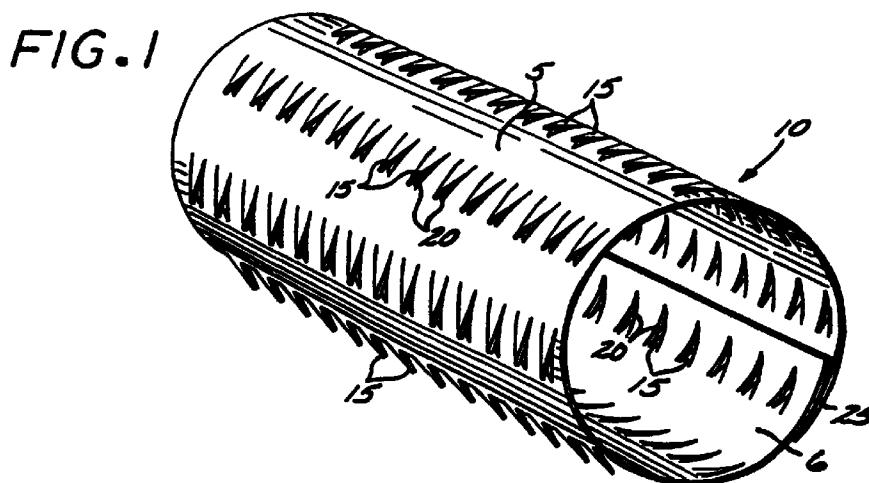

EP 0 749 730 A2

Description

BACKGROUND OF THE INVENTION

Field Of The Invention

The present invention generally relates to expandable endoprosthesis devices, in particular expandable intraluminal vascular grafts, generally called stents, which are adapted to be implanted into a patient's lumen, such as a blood vessel, to maintain the patency of the vessel. These devices are frequently used in the treatment of atherosclerotic stenosis in blood vessels, especially after percutaneous transluminal coronary angioplasty (PTCA) procedures, to prevent restenosis of a blood vessel. The present invention also relates to an expandable intraluminal vascular graft that can be used in any body lumen, and can be used for drug delivery.

Description Of Related Art

In expandable stents that are delivered with expandable catheters, such as balloon catheters, the stents are positioned over the balloon portion of the catheter and expanded from a reduced diameter to an enlarged diameter greater than or equal to the artery wall, by inflating the balloon. Stents of this type can be expanded and held in an enlarged diameter by deformation of the stent (e.g., U.S. Patent No. 4,733,665 to Palmaz), by engagement of the stent walls with respect to one another (e.g., U.S. Patent No. 4,740,207 to Kreamer; U.S. Patent No. 4,877,030 to Beck et al.; and U.S. Patent No. 5,007,926 to Derbyshire), and by one-way engagement of the stent walls together with endothelial growth into the stent (e.g., U.S. Patent No. 5,059,211 to Stack et al.).

SUMMARY OF THE INVENTION

One embodiment of the present invention provides an expandable intraluminal stent implantable in a body lumen and adapted to expand from a reduced diameter form to an expanded diameter form, the stent comprising: a sheet of material curled into a cylinder having overlapping edges, an interior surface, and an exterior surface, said exterior surface being adapted to lie contiguous with said lumen, and said overlapping edges defining a region of contact between said exterior surface and said interior surface, characterised in that said exterior surface has a surface texture made of a plurality of protrusions and said interior surface contains a plurality of apertures, several of the protrusions engaging the apertures to hold the stent in said expanded form and several of the protrusions engaging the lumen.

Other embodiments of the present invention provide a stent having a plurality of different geometric projections on its walls, in any combination of sizes and shapes, for securing the stent in a vessel.

Other embodiments of the present invention provide a stent that is capable of localized therapeutic drug delivery.

Still other embodiments of the present invention provide a stent that is bioabsorbable.

These and other embodiments of the invention will become more apparent from the following detailed description thereof when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a perspective view of one embodiment of the present invention, showing a stent in a nonexpanded form.

Fig. 2 shows an axial view of another embodiment of the present invention, employing shallower dimensioned protrusions.

Fig. 3 shows the dimensions of the protrusions in Fig. 2.

FIG. 4 shows an axial view of a third embodiment of the present invention, employing a random dispersion of protrusions.

DETAILED DESCRIPTION OF THE INVENTION

As shown by the embodiment of Fig. 1, a stent 10 is formed, in its natural state prior to expansion, in a cylinder having protrusions or teeth 15 on one side of the stent, forming a roughened outer wall or exterior surface 5 that is adapted to lie contiguous with an arterial wall. Teeth 15 of roughened outer wall or exterior surface 5 of stent body 10 are designed to engage the arterial walls and endothelium layer of a blood vessel, and, in general, would engage the walls of a body lumen to help retain the stent in place.

The teeth 15 are cut away from a sheet of material which is then curled into a cylinder. The cylinder has a wall thickness 25 at its end. In the embodiment of Fig. 2 the wall thickness of the stent tapers towards the ends, to form a beveled end surface, to give greater flexibility and vessel compliance to the stent, as explained below.

Apertures 20 correspond to the recesses of body 10 left behind when teeth 15 were cut away from the body. Apertures 20 thus have the same outline as teeth 15.

As can be seen in the Fig. 1 embodiment, teeth 15 are arranged in rows extending axially (longitudinally) along the stent body, and have a sharp, narrow "V" shape. Although in this embodiment a sharp "V" shape is employed, in general, practically any shaped protrusion may be employed. The teeth create a roughened surface texture on the stent body.

Furthermore, while in all the embodiments shown the protrusions are found on one side of the stent body, namely the outer wall of the stent body or the side lying against the artery, it is possible to have protrusions or projections on either or both sides of the body.

In the embodiment of Fig. 1, teeth 15 project out

from the exterior surface or roughened outer wall 5 of stent body 10, the side adjacent to the artery wall. The teeth can thus engage the stent wall in a positive manner. The interior surface or inner wall 6 of stent body 10 is the side facing the bloodstream, and is substantially free of any projections.

In the preferred embodiment shown in Fig. 1, the teeth are formed from stent body 10 in a one-piece or unitary manner, being cut from the same sheet of material that constitutes the stent body. The portion of the stent body thus removed becomes a tooth or protrusion, leaving an aperture 20 in the body having substantially the same shape as the tooth. Apertures 20 are thus defined by the portion of the stent body removed to form the teeth or protrusions. The teeth may be formed by injection-molding, casting, lasing, etching, plasma and corona techniques, or machining.

Also in the preferred embodiment of Fig. 1, stent body 10 is formed from a sheet of material curled into a cylinder, with the sheet having overlapping edges, as can be seen in Fig. 1. Also, and as is readily apparent from Fig. 1, the overlapping edges allow the exterior surface or outer wall 5 to contact the interior surface or inner wall 6 of the cylinder forming the stent. The protrusions 15 on the outer wall, which make the outer wall rougher than the inner wall, permit the outer wall to engage the apertures in the inner wall, and, together with the engagement of the protrusions with the blood vessel, hold the stent in place in an enlarged diameter form in the patient's vasculature.

While in the preferred embodiments disclosed herein protrusions 15 were formed from the body in the form of triangular teeth, in general, the protrusions may be formed in any shape and in any manner, including by adding the protrusions to a smooth stent body made of the same or different material from the protrusions, or treating the stent body to create a roughened surface texture, which texture can be with or without apertures in the stent body.

Furthermore, while any material may be employed to form the stent of the present invention, preferably a Food and Drug Administration (FDA) approved material for use in this environment is employed, that is, a biocompatible material. Metals such as stainless steel, Ni-Ti, platinum (Pt), Nitinol (Nitinol is a trade mark of Minnesota Mining and Manufacturing Company), Tantahm (Ta) or gold (Au) may be used.

A plastic that is biocompatible may be used. The biocompatible plastic may also be bioabsorbable, that is, biodegradable. For instance, a polymer from the linear aliphatic polyester family, such as poly(lactic acid), poly(glycolic acid) or polycaprolactone, and their associated copolymers, may be employed. Degradable polymers such as polyorthoester, polyanhydride, polydioxanone and polyhydroxybutyrate may also be employed.

When the stent is expanded by an expanding device, such as a balloon catheter, teeth 15 engage apertures 20 to lock the stent open in an expanded

diameter form. A plurality of teeth 15 hold the stent in an expanded diameter form by engaging apertures 20 and the arterial walls. By engaging the arterial walls, teeth 15 on roughened outer wall 5 also prevent the stent from being axially displaced along the artery.

Expansion of stent 10 from a reduced diameter form into an expanded diameter form is preferably performed by a balloon catheter. Any other means for expanding the stent, however, may be used. Briefly, and in general terms, when the stent is to be deployed in a coronary artery the stent is placed over a balloon catheter that has been prepared for PTCA angioplasty. The catheter is percutaneously introduced into a vessel, following a previously positioned guidewire in an over-the-wire angioplasty catheter system, and tracked by a fluoroscope, until the balloon portion and associated stent are positioned at the point where the stent is to be placed. Thereafter, the balloon is inflated and the stent is expanded by the balloon portion from a reduced diameter form to an expanded diameter form. After the stent has been expanded to its final expanded diameter, the balloon is deflated and the catheter is withdrawn, leaving the stent in place.

It should be understood that the present stent is not limited to use in coronary arteries and over-the-wire angioplasty catheter systems, but the stent may be deployed in any body lumen by any suitable mechanical means, which includes hydraulic expansion.

To facilitate the placement of a stent embodying the present invention, the stent may be impregnated with a radiopaque material, making it opaque, and, therefore, visible, to X-rays. Suitable radiopaque materials include iodine-based materials and solutions thereof, and barium salts, including materials containing iodipamide (sold commercially under the trade name Cholografin), iopanoic acid (sold under the trade name Telepaque), barium sulfate, bismuth trioxide, bismuth oxychloride, or powdered metals, such as tantalum, gold, platinum and palladium.

It is further envisioned that the stent may be impregnated with a therapeutic agent to provide localized drug delivery.

When the stent has been expanded to its final form, the stent is affixed in place by a combination of the teeth in the body engaging apertures in the body of the stent, as well as the teeth engaging the walls of the artery, including the endothelium layer. It is believed that the endothelium layer of the artery will grow into the stent over a short period of time (in 7 to 21 days), to further help retain the stent in place. The stent may be made of a bioabsorbable material, such as any of the materials disclosed above, so that eventually the stent will dissolve. Endothelium layer growth into the stent and the modified surface texture of the stent ensures that pieces of the stent will not discharge into the bloodstream and cause an embolism as the stent is dissolved.

It can be seen that one of the features of the described embodiment includes maintaining an expandable stent in an enlarged diameter or operative

form in a body lumen, by providing a roughened surface texture on the outside surface of the stent that engages both the lumen wall and the stent itself.

Turning now to Fig. 2, a protrusion pattern for a second embodiment of the present invention is disclosed. The stent of the second embodiment substantially corresponds in structure to the embodiment disclosed in Fig. 1, the principle difference being the geometric shape and spacing of the teeth, and the beveling of the ends, to be described below. In the Fig. 1 embodiment teeth 15 form a sharp, narrow "V" shape, whereas in the second embodiment teeth 15 are less pointed, and form a wider "V" shape. As shown in Fig. 3, height 35 of the apex of the "V" is $2.54 \times 10^{-4}\text{m}$ (0.010 in), width 40 at the mouth of the "V" is $5.08 \times 10^{-4}\text{m}$ (0.020 in), and the length of side 45 is $3.556 \times 10^{-4}\text{m}$ (0.014 in). Sides 50 of each tooth are spaced at 90° to one another at the apex. The teeth are spaced along the circumference of the stent in rows, each row spaced $4.801 \times 10^{-4}\text{m}$ (0.0189 in) from one another, as indicated by reference No. 57.

As can be seen in Fig. 2, another modification of the stent of the second embodiment is the presence of beveled ends 55. As can be seen from the drawings, beveled ends 55 are defined as those portions of the cylindrical stent that lie along the longitudinal (axial) axis of the cylinder, spaced from one another by approximately the longitudinal length of the stent. Beveled ends 55 allow the stent to be more compliant and flexible at its ends, so that the ends can more easily match the flexibility of the vessel walls that the stent is embedded in, and allow the stent to be more vessel compliant. Beveled ends 55 taper from a larger wall thickness away from the ends to a smaller wall thickness at the very end of the stent, as can be seen from the drawing. For instance, on the right hand side the stent is beveled along a portion of the stent starting from point 65, defining the right hand end of the stent, to 75. In a symmetrical fashion the left hand side of the stent end is beveled, with both beveled ends having an angulation θ . As is readily apparent the wall thickness of the stent along the beveled portion is less than the wall thickness of the stent outside the beveled portion.

The height of the bevel from points 60 and 65 is $1.397 \times 10^{-3}\text{m}$ (0.055 in), while the length of the straight portion of the stent from points 70 and 75 is 0.012m (0.455 in), with the overall length from end to end being 0.015m (0.600 in).

Another embodiment of the present invention is shown in Fig. 4. In this embodiment, the tooth pattern is substantially random, with protrusions 71 scattered throughout the body of the stent, which is formed from a sheet curled into a cylinder, as in the other embodiments. The operation of this embodiment of stent is the same as the other embodiments, with the teeth engaging apertures in the body, as well as engaging the walls of the vessel the stent resides in, when the stent is expanded into an enlarged diameter form.

Again it should be understood that while in the above embodiments the protrusions on the body were

formed from the stent body, in general, the protrusions may be formed in any manner, including adding the protrusions to a smooth stent body made of the same or different material from the protrusions, or treating the stent body to create a roughened surface texture, with or without apertures in the stent body. As before, the surface texture forming the protrusions may be formed via plasma techniques, corona techniques, molding, casting, lasing, etching, machining, or any other technique that changes the surface texture of the body.

Furthermore, it should be understood that the dimensions set forth for the above embodiments are not intended to limit the invention to only those dimensions. For example, while certain dimensions might be appropriate for a stent used in a coronary artery, these same dimensions might not be suitable for a stent used in other parts of a patient's vasculature or body lumen.

Claims

1. An expandable intraluminal stent (10) implantable in a body lumen and adapted to expand from a reduced diameter form to an expanded diameter form, the stent (10) comprising:

a sheet of material curled into a cylinder having overlapping edges, an interior surface, and an exterior surface, said exterior surface being adapted to lie contiguous with said lumen, and said overlapping edges defining a region of contact between said exterior surface and said interior surface, characterised in that said exterior surface has a surface texture made of a plurality of protrusions (15) and said interior surface contains a plurality of apertures (20), several of the protrusions (15) engaging the apertures (20) to hold the stent (10) in said expanded form and several of the protrusions (15) engaging the lumen.

2. The intraluminal stent of claim 1, wherein said material is biodegradable.
3. The intraluminal stent of claim 2, wherein said material is a polymer selected from the group consisting of polyorthoester, polyanhydride, polydioxanone and polyhydroxybutyrate and polymers from the linear aliphatic polyester family such as poly(lactic acid), poly(glycolic acid) and polycaprolactone and their associated copolymers.
4. The intraluminal stent of claim 1, wherein said material is a biocompatible material selected from the group consisting of stainless steel, nickel-titanium, platinum, Nitinol, tantalum and gold.
5. The intraluminal stent of any preceding claim, wherein said material contains a therapeutic agent.

6. The intraluminal stent of any preceding claim, wherein said cylinder has a longitudinal axis and two ends (55) spaced along said longitudinal axis, said ends (55) being beveled to allow said stent (10) to be more flexible at said ends (55). 5
7. The intraluminal stent of any preceding claim, wherein said material is radiopaque.
8. The intraluminal stent of any preceding claim wherein said protrusions (15) are unitary with said sheet and have a substantially "V" shape. 10
9. The intraluminal stent of claim 8, wherein said protrusions (15) have sides of substantially equal length that form an apex, with said sides spaced by an angle of about 90° at said apex. 15
10. The intraluminal stent of any preceding claim, wherein said apertures (20) have substantially the shape of said protrusions (15). 20
11. The intraluminal stent of any preceding claim, wherein the protrusions (15) are cut away from said sheet, the parts of the sheet thus removed defining the apertures (20). 25
12. The intraluminal stent of any preceding claim, wherein said protrusions (15) are spaced at about 4.801×10^{-4} m (0.0189 inches) to one another, and have sides which are about 3.556×10^{-4} m (0.014 inches) in length. 30
13. The intraluminal stent of any preceding claim, wherein said protrusions (15) are spaced from one another in a substantially uniform manner, to form rows of protrusions (15). 35
14. The intraluminal stent of any of claims 1 to 12, wherein said protrusions (15) are randomly dispersed across said exterior surface. 40

45

50

55

FIG. 1

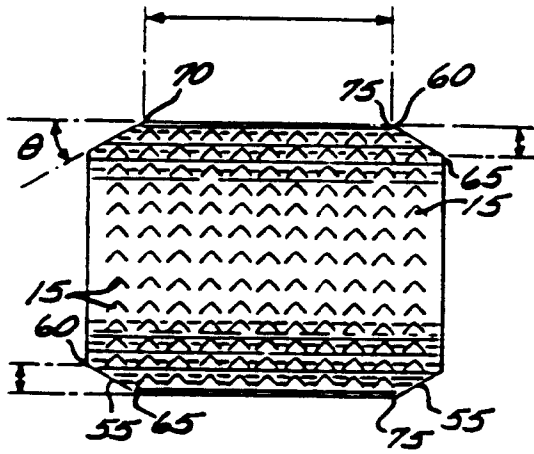
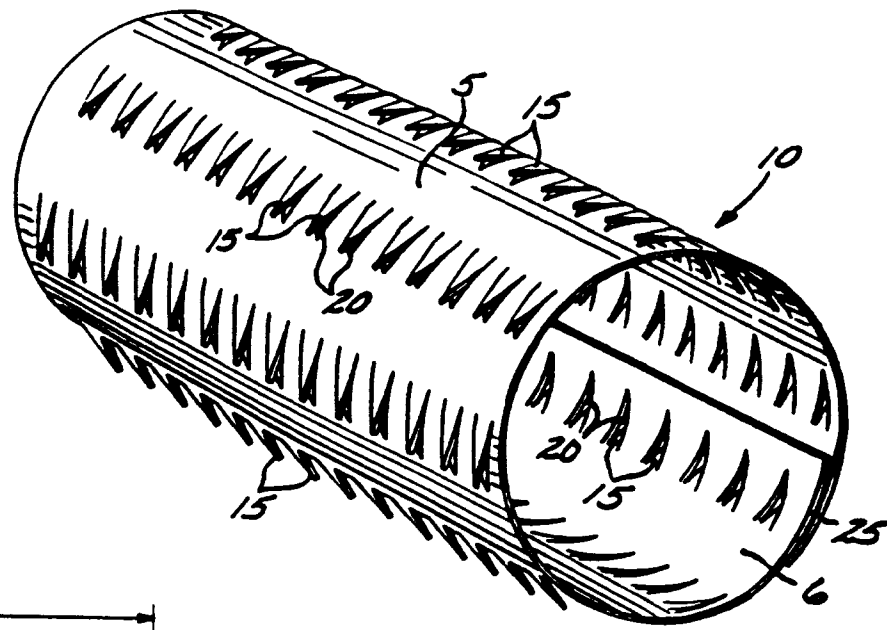


FIG. 2

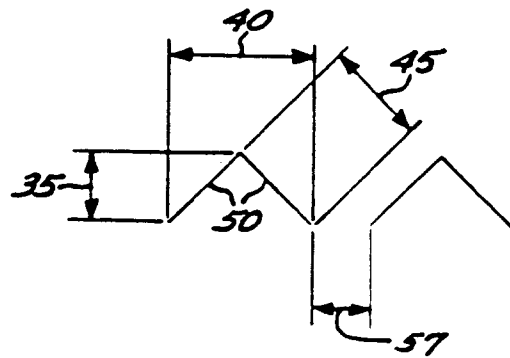


FIG. 3

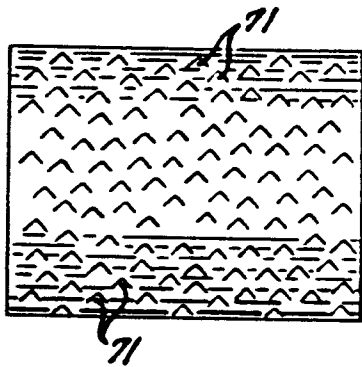


FIG. 4