



US008666303B2

(12) **United States Patent**
Ramaswamy et al.

(10) **Patent No.:** **US 8,666,303 B2**
(45) **Date of Patent:** ***Mar. 4, 2014**

(54) **METHODS AND APPARATUS TO COLLECT MEDIA EXPOSURE INFORMATION**

455/154.2; 705/7, 10, 14.45, 14.58; 725/9,
725/10, 14, 46, 11; 707/104.1; 709/205,
709/223; 340/539.1; 235/375, 492

(71) Applicants: **Arun Ramaswamy**, Tampa, FL (US);
Bruce Hoynoski, Lake Barrington, IL (US)

See application file for complete search history.

(72) Inventors: **Arun Ramaswamy**, Tampa, FL (US);
Bruce Hoynoski, Lake Barrington, IL (US)

(56) **References Cited**

(73) Assignee: **The Nielsen Company (US), LLC**,
Schaumburg, IL (US)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

4,329,684	A	5/1982	Monteath et al.
4,613,904	A	9/1986	Lurie
4,816,904	A	3/1989	McKenna et al.
4,905,080	A	2/1990	Watanabe et al.
5,023,929	A	6/1991	Call
5,249,044	A	9/1993	Von Kohorn
5,253,066	A	10/1993	Vogel
5,664,110	A	9/1997	Green et al.
5,826,164	A	10/1998	Weinblatt

(Continued)

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

(21) Appl. No.: **13/663,373**

Notice of Allowance issued by the United States Patent and Trademark Office in connection with U.S. Appl. No. 12/164,967 on Jul. 27, 2012 (8 pages).

(22) Filed: **Oct. 29, 2012**

(Continued)

(65) **Prior Publication Data**

US 2013/0052938 A1 Feb. 28, 2013

Primary Examiner — Tan Trinh

Related U.S. Application Data

(74) Attorney, Agent, or Firm — Hanley, Flight & Zimmerman, LLC

(63) Continuation of application No. 12/164,967, filed on Jun. 30, 2008, now Pat. No. 8,326,212.

(60) Provisional application No. 60/986,190, filed on Nov. 7, 2007.

(51) **Int. Cl.**
H04H 60/29 (2008.01)


(52) **U.S. Cl.**
USPC ... **455/2.01**; 455/3.06; 455/414.1; 455/154.2;
235/380; 235/492; 725/13

(58) **Field of Classification Search**
USPC 455/2.01, 3.06, 404.2, 414.1, 415, 420,
455/425, 435.1, 41.2, 552.1, 115.1, 556.1,

(57) **ABSTRACT**

Methods and apparatus to collect media exposure information are described. An example apparatus includes an identifier card including a plurality of machine readable codes corresponding to one or more media stations and a metering device including a scanner to read a first one of the codes and a memory to record media exposure information identifying exposure of a user to a media station associated with the first one of the codes, the media information being stored in association with a timestamp corresponding to a time at which the first one of the codes was read.

20 Claims, 8 Drawing Sheets

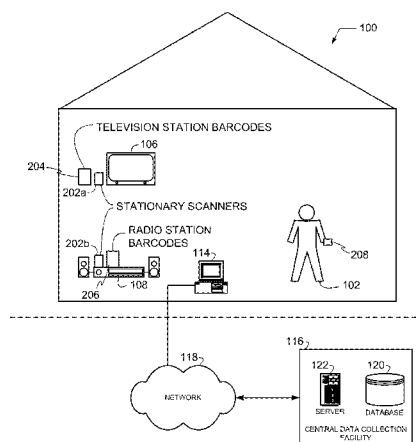

(56)

References Cited

U.S. PATENT DOCUMENTS

6,286,140	B1	9/2001	Ivanyi
6,685,093	B2	2/2004	Challa et al.
6,736,322	B2	5/2004	Gobburu et al.
7,028,906	B2	4/2006	Challa et al.
8,166,497	B2 *	4/2012	Mears 725/9
8,326,212	B2 *	12/2012	Ramaswamy et al. 455/2.01
2002/0196275	A1 *	12/2002	Willner et al. 345/744
2003/0079219	A1	4/2003	Lammerhuber
2003/0126593	A1	7/2003	Mault
2003/0172375	A1	9/2003	Shaw et al.
2004/0031045	A1	2/2004	Ivanyi
2006/0118618	A1	6/2006	Schultz et al.
2006/0155619	A1	7/2006	Rhiando et al.
2007/0198433	A1	8/2007	McGee et al.
2007/0266395	A1 *	11/2007	Lee et al. 725/11
2007/0294126	A1 *	12/2007	Maggio 705/10
2008/0059988	A1 *	3/2008	Lee et al. 725/9
2008/0103626	A1	5/2008	Frankel
2008/0126420	A1 *	5/2008	Wright et al. 707/104.1
2008/0135629	A1	6/2008	Douglas
2008/0140479	A1	6/2008	Mello et al.

2008/0170755	A1 *	7/2008	Nasser et al. 382/106
2008/0172261	A1 *	7/2008	Albertson et al. 705/7
2008/0263579	A1	10/2008	Mears et al.
2009/0007169	A1 *	1/2009	Headley et al. 725/14
2009/0055854	A1 *	2/2009	Wright et al. 725/14
2009/0070797	A1 *	3/2009	Ramaswamy et al. 725/10
2009/0089823	A1 *	4/2009	Mears 725/14
2009/0106397	A1 *	4/2009	O'Keefe 709/219
2009/0150217	A1 *	6/2009	Luff 705/10
2010/0199296	A1 *	8/2010	Lee et al. 725/14
2010/0206949	A1 *	8/2010	Mattlin et al. 235/375
2010/0257052	A1 *	10/2010	Zito et al. 705/14.45
2011/0225064	A1	9/2011	Fou
2012/0196626	A1 *	8/2012	Fano et al. 455/456.3

OTHER PUBLICATIONS

Office action issued by the United States Patent and Trademark Office in connection with U.S. Appl. No. 12/164,967 on Dec. 5, 2011 (16 pages).

Office action issued by the United States Patent and Trademark Office in connection with U.S. Appl. No. 12/164,967 on Jul. 5, 2011 (10 pages).

* cited by examiner

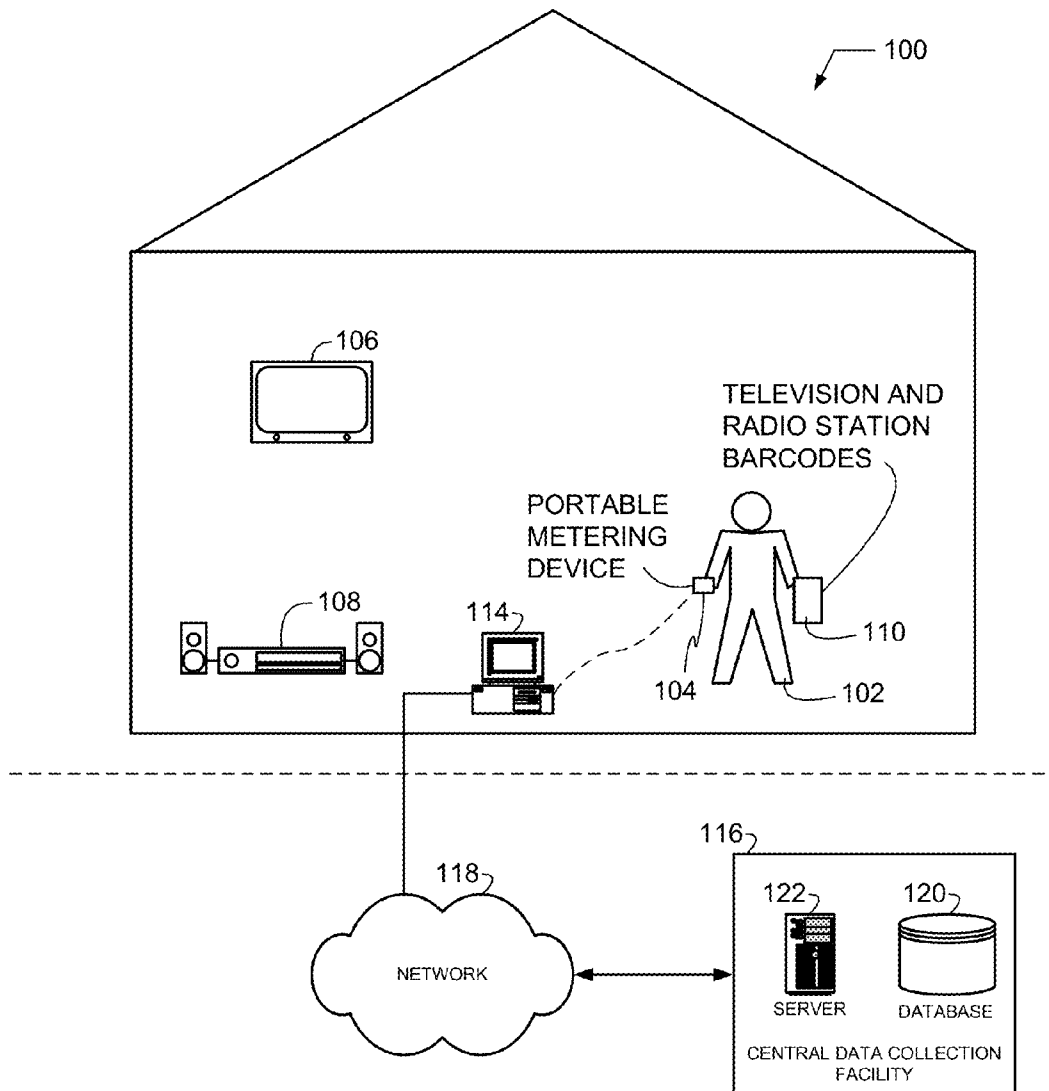


FIG. 1

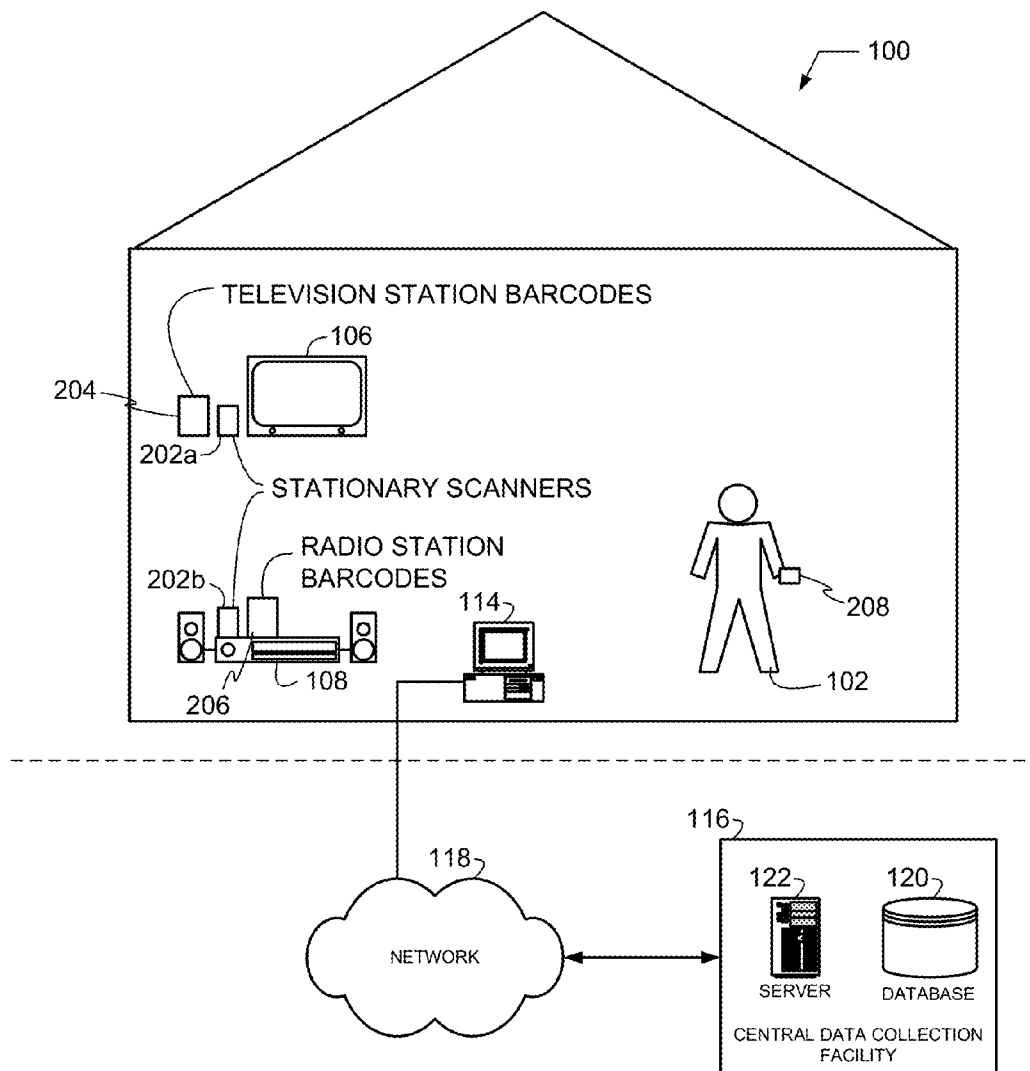


FIG. 2

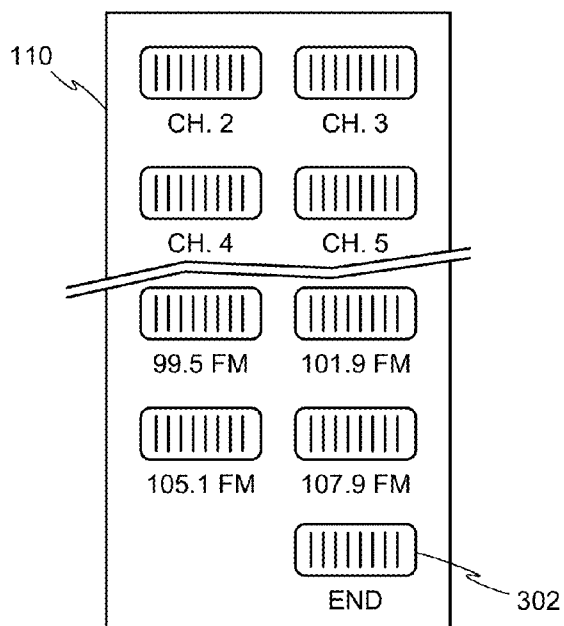


FIG. 3

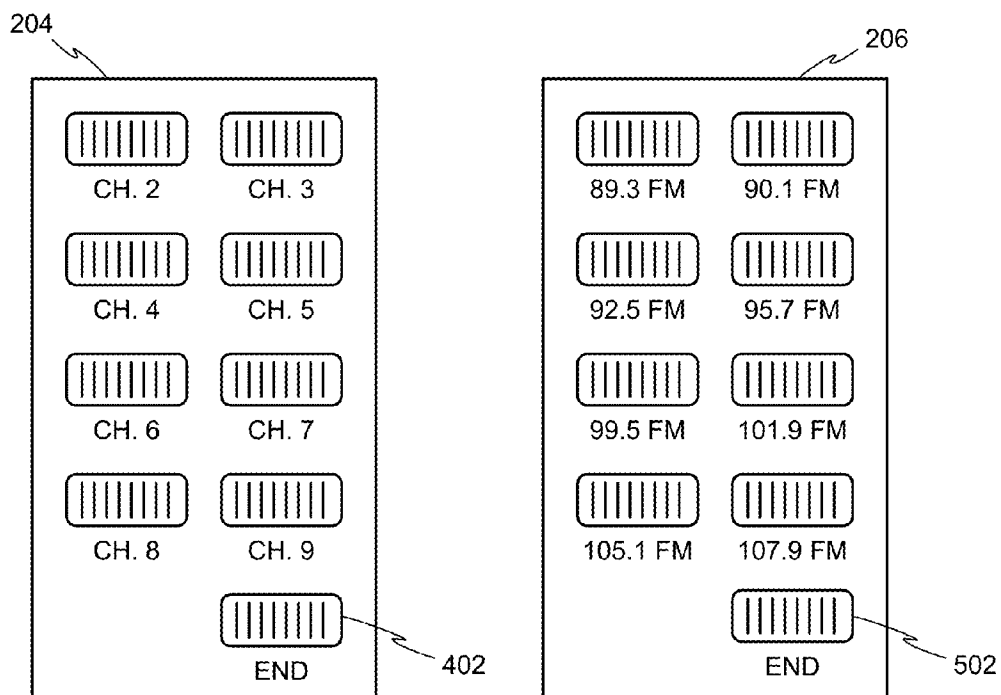


FIG. 4

FIG. 5

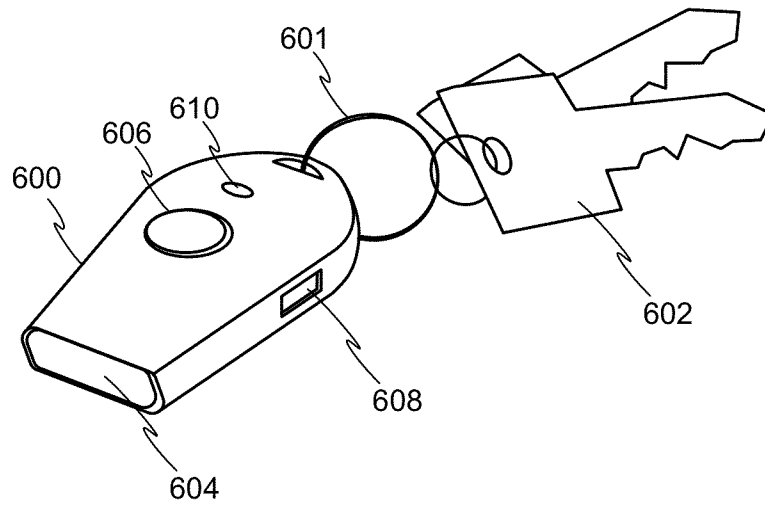


FIG. 6

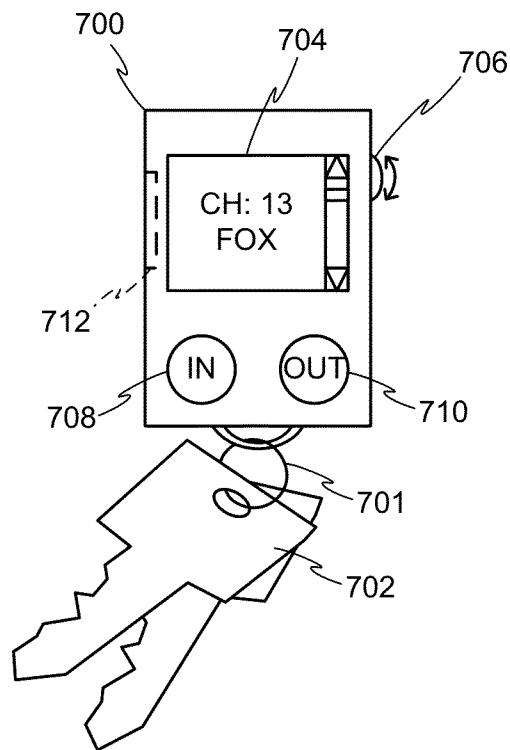


FIG. 7

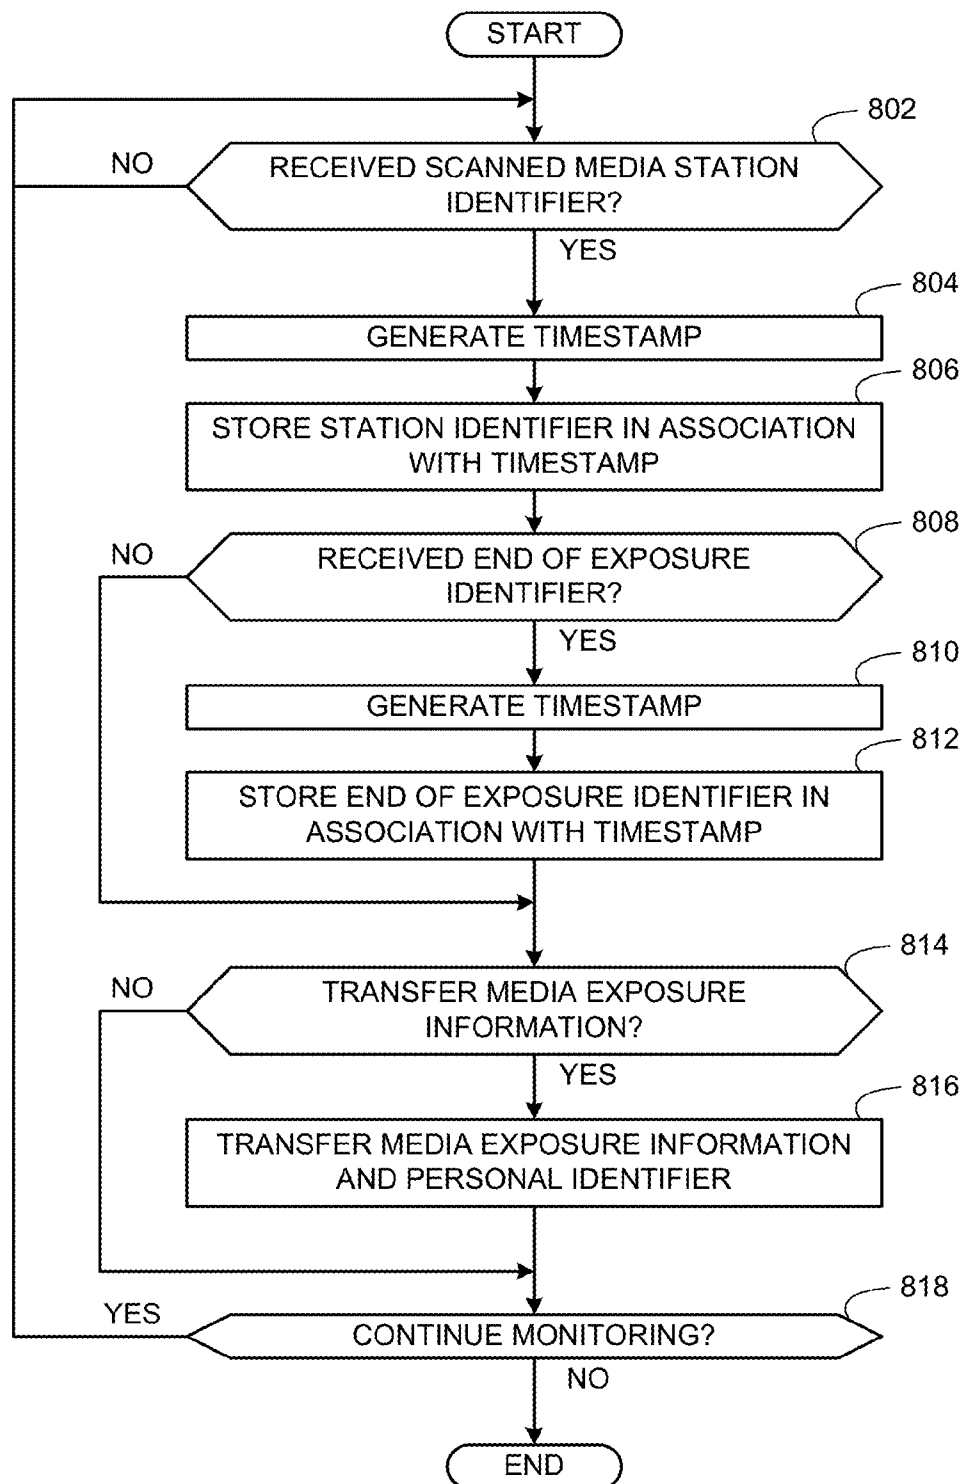
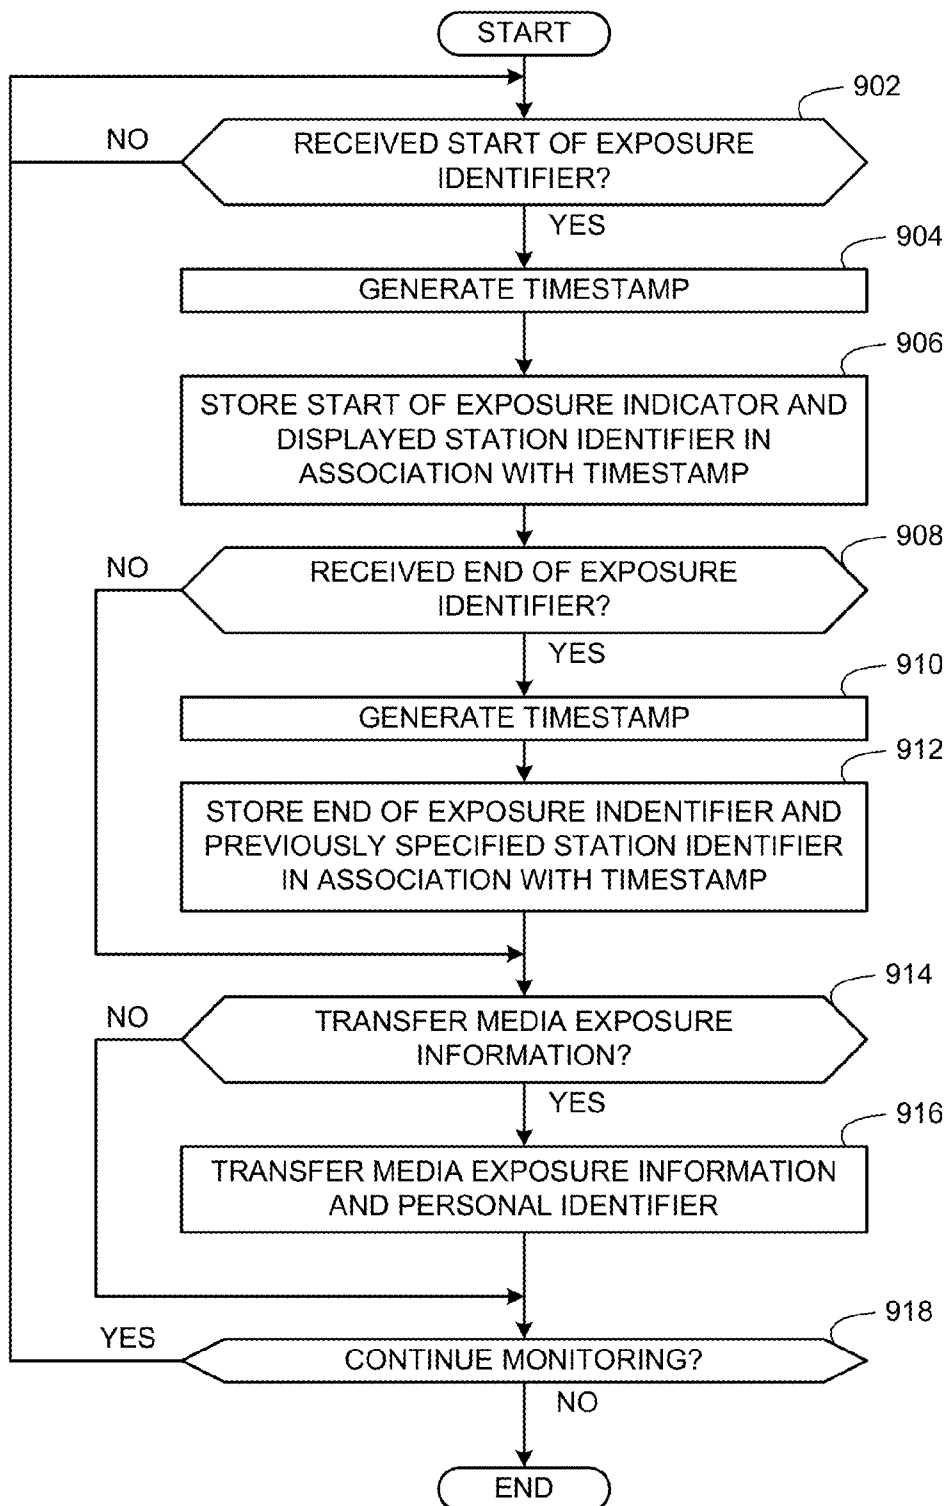


FIG. 8

**FIG. 9**

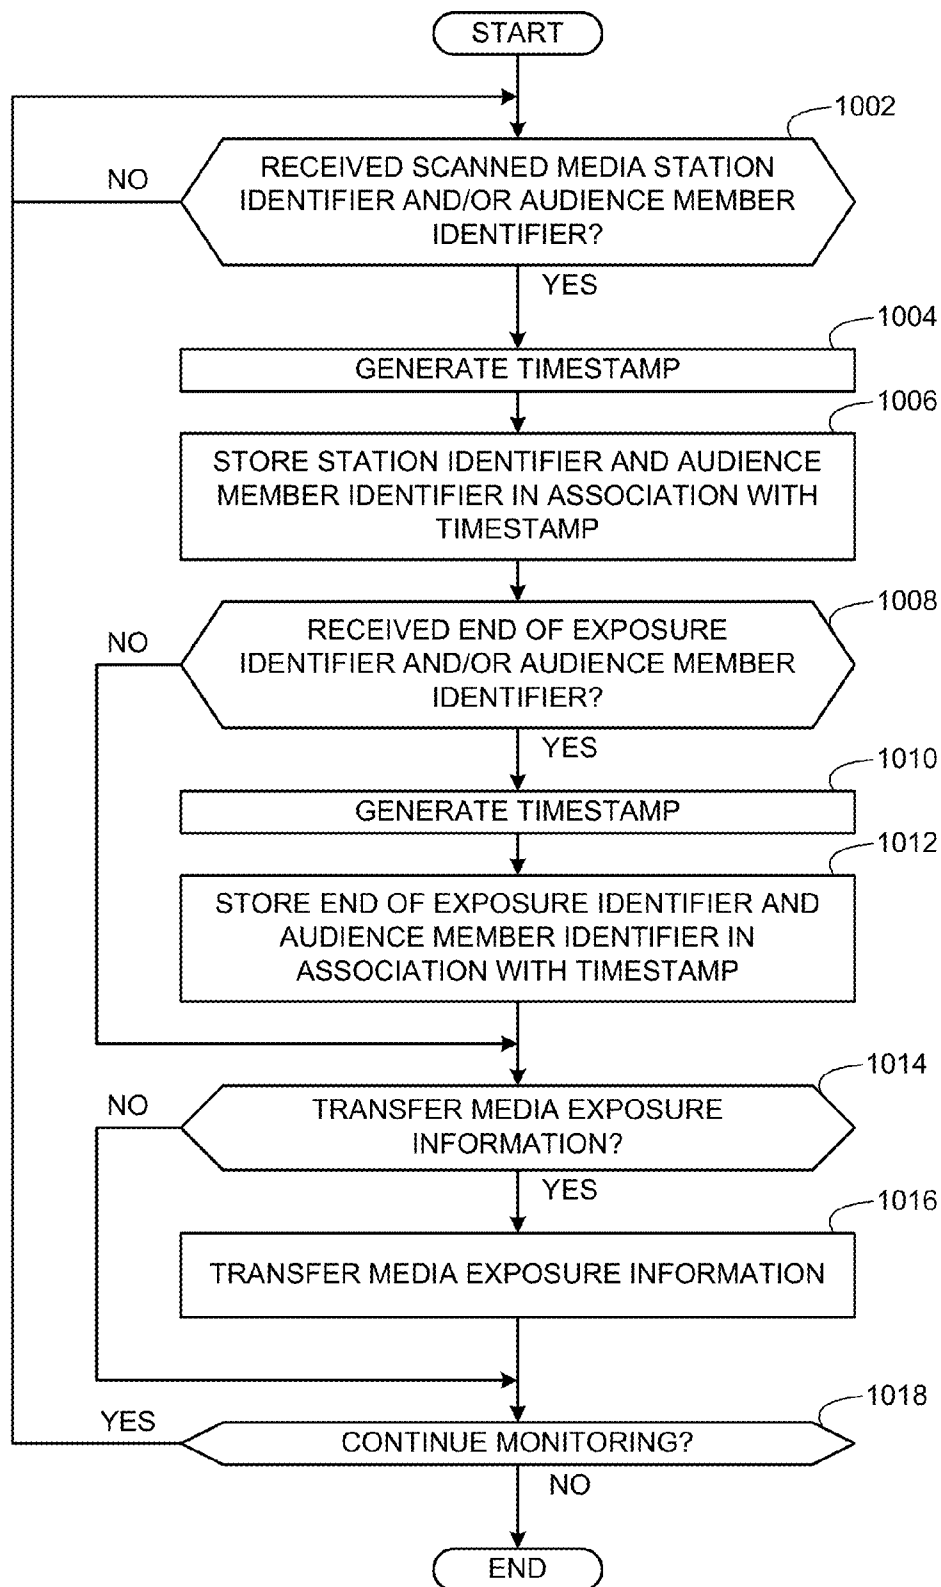
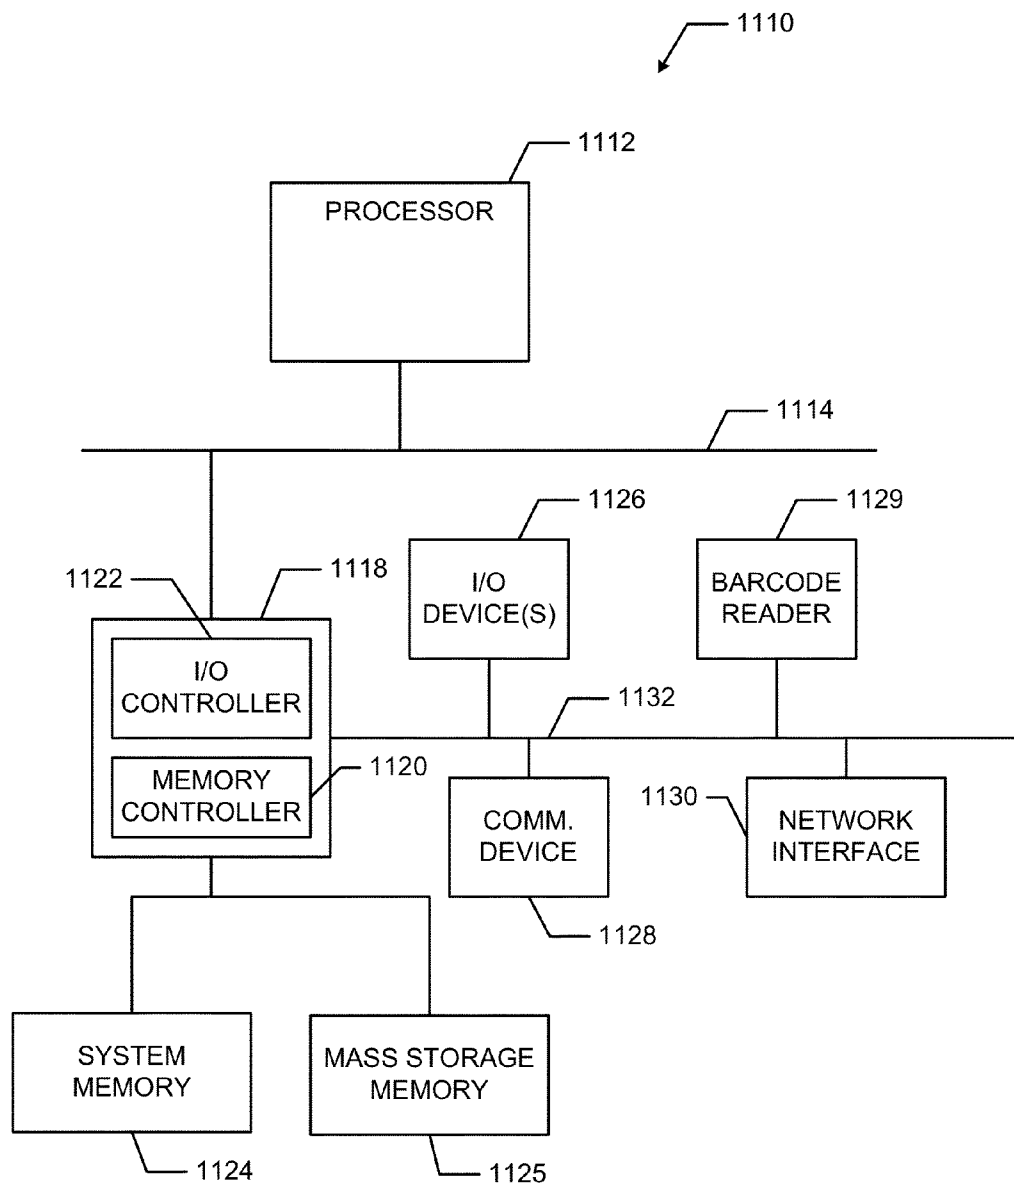


FIG. 10

**FIG. 11**

1

METHODS AND APPARATUS TO COLLECT MEDIA EXPOSURE INFORMATION

RELATED APPLICATIONS

This patent arises from a continuation of U.S. patent application Ser. No. 12/164,967, filed Jun. 30, 2008, now U.S. Pat. No. 8,326,212, which claims priority from U.S. Provisional Patent Application Ser. No. 60/986,190, filed on Nov. 7, 2007. U.S. patent application Ser. No. 12/164,967 and U.S. Provisional Patent Application Ser. No. 60/986,190 are hereby incorporated herein by reference in their entireties.

FIELD OF THE DISCLOSURE

The present disclosure relates generally to monitoring audience member activities and, more particularly, to methods and apparatus to collect media exposure information.

BACKGROUND

Media-centric companies are often interested in tracking how often and/or how long audience members are exposed to media compositions (e.g., television programs, motion pictures, internet videos, radio programs, etc.). To obtain exposure information, some techniques include generating signatures (e.g., representations of some, preferably unique, portion of the media composition or the signal used to transport the media composition) or embedding identification codes (e.g., watermarks) that are then detected at a time of exposure (e.g., during a television viewing session).

Other techniques include active audience member participation. In one example exposure detection system, audience members (e.g., members of a household) are given surveys to be completed at the end of a week to indicate which television and/or radio stations to which they were exposed during the week.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an example media consumption environment in which an audience member carries an example portable metering device to collect media exposure information.

FIG. 2 illustrates the example media consumption environment of FIG. 1 in which example stationary metering devices are located proximate example media presentation devices in the media consumption environment to collect media exposure information.

FIG. 3 illustrates an example barcode arrangement having a plurality of media station identifying barcodes.

FIG. 4 illustrates an example barcode arrangement having a plurality of television station identifying barcodes.

FIG. 5 illustrates an example barcode arrangement having a plurality of radio station identifying barcodes.

FIG. 6 illustrates an example portable metering device that may be used to implement the example portable metering device of FIG. 1.

FIG. 7 illustrates another example portable metering device that may be used to implement the example portable metering device of FIG. 1.

FIG. 8 is a flow diagram representative of example machine accessible instructions that may be executed to implement the example portable metering device of FIG. 6.

FIG. 9 is a flow diagram representative of example machine accessible instructions that may be executed to implement the example portable metering device of FIG. 7.

2

FIG. 10 is a flow diagram representative of example machine accessible instructions that may be executed to implement the example stationary metering devices of FIG. 2.

FIG. 11 is a block diagram of an example processor system that may be used to execute the example machine readable instructions of FIGS. 8, 9, and/or 10 to implement the example metering devices of FIGS. 1, 2, 6, and/or 7.

DETAILED DESCRIPTION

Although the following discloses example methods, apparatus, systems, and articles of manufacture including, among other components, firmware and/or software executed on hardware, it should be noted that such methods, apparatus, and systems are merely illustrative and should not be considered as limiting. For example, it is contemplated that any or all of these firmware, hardware, and/or software components could be embodied exclusively in hardware, exclusively in software, exclusively in firmware, or in any combination of hardware, software, and/or firmware. Accordingly, while the following describes example methods, apparatus, systems, and/or articles of manufacture, the examples provided are not the only way(s) to implement such methods, apparatus, systems, and/or articles of manufacture.

The example methods and apparatus described herein are used to collect media exposure information indicative of a session during which one or more audience members are exposed to media (e.g., television programming, radio programming, internet programming, etc.). In particular, the example methods and apparatus described herein are implemented using portable metering device(s) and/or stationary metering device(s) that audience member(s) use to specify, for example, media station(s) (e.g., television station(s) and/or radio station(s)) to which media presentation device(s) (e.g., televisions, personal computers, and/or radios) in proximity of the audience member(s) are tuned. Any type of media presentation device(s) may be used to receive media via any type of distribution medium such as, for example, cable, satellite systems, Internet, and/or over-the-air distribution mediums. In some example implementations, such as when a metering device is portable and to be carried by an individual, the metering device is assigned to an audience member participating in a market research study. In such instances, the metering device stores a unique audience member identifier corresponding to its respective audience member (e.g., by personal name, by family name, by family position (e.g., father, mother, brother, etc.), by a proxy assigned to members of a household, etc.). In other example implementations, such as when a metering device is stationary and to be placed proximate a media presentation device of a household, the metering device is configured to receive an input including a unique audience member identifier corresponding to a member of the household.

In some example implementations, a metering device includes a barcode scanner, a time-keeping device, and a memory. In such instances, each audience member is provided with a plurality of barcodes identifying a plurality of media stations (e.g., television and/or radio stations) that the audience member can be or is likely to be exposed to in a certain geographic area (e.g., an area surrounding a residence of the audience member or a destination to which the audience member is likely or expected to travel). The barcodes are printed on a portable card and/or a card fixed proximate a media presentation device. When the audience member tunes a media presentation device (e.g., a television, a personal computer, or a radio) to a particular media station or is otherwise exposed to a particular media station, the audience

3

member is to use the example metering device to scan a barcode identifying the media station to which the audience member is exposed. The example metering device stores a station identifier (e.g., electronically in the memory as a string of data) corresponding to the scanned barcode in association with a timestamp indicative of when the station identifying barcode was scanned. In this manner, the example metering device stores a listing of station identifier(s) and corresponding timestamp(s) to track media station(s) to which the audience member was exposed, the date(s) and times of day on which the exposure(s) occurred, the duration(s) during which the exposure(s) occurred, and/or any other media exposure information. The media exposure information is then conveyed (e.g., uploaded via a data network and/or mailed) to a central collection facility (e.g., a server and/or database located remotely from the metering device), at which point the media exposure information is analyzed by, for example, a media exposure measurement entity.

Additionally or alternatively, the example methods and apparatus described herein can be implemented using a metering device that is configured to store and display media station identifiers corresponding to one or more media stations that an audience member can be exposed to or is likely to be exposed to in a certain geographic area (e.g., an area surrounding a residence of the audience member or a destination to which the audience member is likely or expected to travel). In such example implementations, the metering device may store and display the media station identifiers in addition to or without implementing a barcode scanner as described above. Instead of or in addition to scanning printed media station identifying barcodes, when the audience member is exposed to programming from a media station, the audience member can specify or select a corresponding one of the media station identifiers stored (e.g., by a market research entity) and displayed on the metering device. In turn, the metering device can store the specified or selected one of the station identifiers in association with a timestamp indicative of the date and time when the audience member selected the station identifier.

In some example implementations, the metering device is portable and is to be carried by, for example, attachment to a key ring. Additionally or alternatively, a household participating in a market research study using the example methods and apparatus described herein can be provided with one or more stationary metering devices. In such examples, the stationary metering device(s) are placed next to one or more media presentation device(s) (e.g., a television, a radio, a personal computer, etc.). In some examples, an arrangement (e.g., a printed card) of media station identifying barcodes are also placed proximate the media presentation device(s). When an audience member tunes a media presentation device to a particular media station, the audience member scans one of the station identifying barcodes using a barcode scanner implemented in the stationary metering device. In some examples, the audience member additionally scans an audience member identifier barcode that identifies the audience member to which the media station programming is exposed. In turn, the stationary metering device can store the station identifier corresponding to the scanned barcode and the audience member identifier in association with a timestamp indicative of the date and time at which the barcode and the audience member identifier were scanned. In some examples, the stationary metering devices additionally or alternatively store and display a plurality of media station identifiers to be selected in response to an exposure to a media station.

FIG. 1 illustrates an example media consumption environment 100 (e.g., a household 100) in which an audience mem-

4

ber 102 carries a portable metering device 104 to collect media exposure information. The example media consumption environment 100 includes a television 106 and a radio or stereo 108 and may include other media presentation devices (e.g., a set-top box (STB), a personal computer capable of tuning to a television and/or radio station, etc.). In the illustrated example, the audience member 102 carries a media station identifier card 110 having media station identifying barcodes printed thereon. Additionally or alternatively, media station identifier cards could be placed near the monitored information presentation devices (e.g., the television 106 and/or the radio 108), in which case the audience member 102 may choose not to carry the media station identifier card 110. In the illustrated example, the media station identifier card 110 is prepared by a market research entity by selecting, for example, the television and/or radio stations (e.g., the most popular stations, all stations, and/or television and/or radio stations of interest for market research) for the geographic area in which the audience member 102 is located (e.g., where the audience member 102 resides) or in which the media consumption environment 100 is located. An example implementation of the media station identifier card 110 is shown in detail in FIG. 3.

To collect media exposure information, the audience member 102 uses a barcode scanner (e.g., the barcode reader 1129 of FIG. 11) of the portable metering device 104 to scan one of the station identifying barcodes of the media station identifier card 110 when the television 106 and/or the radio 108 is tuned to that media station. The portable metering device 104 then generates a timestamp via the timing device indicative of the time at which the audience member 102 scanned the barcode. The portable metering device then stores the station identifier corresponding to the scanned barcode in association with the generated timestamp. When station tuned by the television 106 or the radio 108 is changed to a different station, the audience member 102 scans the station identifying barcodes representative of the newly tuned station. In response, another timestamp is generated to indicate two events. Specifically, the newly generated timestamp indicates the time at which exposure to the previously tuned station ceased and the time at which exposure to the newly tuned station began. Thus, in the illustrated example, the newly generated timestamp is stored in association with the station identifier representative of the previously tuned station to indicate an end of a media exposure session. Further, the newly generated timestamp is also stored in association with the station identifier representative of the newly tuned station to indicate a start of a new media exposure session. When the television 106 or the radio 108 is powered off or the audience member 102 is no longer exposed to a media presentation (e.g., the audience member 102 walks away from the television 106 or the radio 108 or leaves the media consumption environment 100), the audience member 102 scans an 'END' barcode (e.g., the 'END' barcode 302 of FIG. 3) on the station identifier card 110 to indicate a time at which exposure to the television 106 and/or the radio 108 ended.

In the illustrated example, the portable metering device 104 is battery powered so that the audience member 102 can carry the device outside of, for example, a residence. In this manner, the portable metering device 104 can be used to collect media exposure information anywhere within or outside of the example media consumption environment 100 shown in FIG. 1. For example, the audience member 102 can use the portable metering device 104 while in an automobile to specify, for example, radio stations and/or television stations to which a media presentation device in the automobile

5

is tuned. The audience member **102** can also use the portable metering device **104** while at work or at any other place.

In the illustrated example, the media consumption environment **100** is provided with a computer **114** (e.g., a laptop computer, a personal computer, or processing machine dedicated to the portable metering device **104**) communicatively coupled to a central data collection facility **116**. In the illustrated example, to transfer the media exposure information stored in the memory of the portable metering device **104**, the portable metering device **104** is configured to be communicatively coupled to the computer **114**. Additionally, the portable metering device **104** may be configured to be communicatively coupled to other processing devices, such as handheld devices (e.g., personal digital assistants, cellular telephones, etc.), or any other device capable of communicating with the central data collection facility **116**. The portable metering device **104** uploads its stored media exposure information and an audience member personal identifier indicative of the audience member **102** to the computer **114** (or other device), and the computer **114** (or other device) communicates the media exposure information and the personal identifier to the central facility **116** via a network **118** (e.g., a broadband network connection, a dial-up network connection, etc.). In some example implementations, the audience member **102** may additionally or alternatively ship (e.g., via the United States Postal Service, in an envelope provided by the entity that provided the portable metering device **104**) the portable metering device **104** to the central data collection facility **116** so that the media exposure data can be retrieved from the portable metering device **104**. At the central facility **116**, the media exposure information is stored in a database **120** and/or processed by a server **122** to analyze the times, durations, and/or amounts of exposure to different media stations.

In some example implementations, instead of or in addition to employing the barcode scanner and the card **110** described above, the portable metering device **104** is configured to store a list of media station identifiers indicative of media stations to which the audience member **102** can be or is likely to be exposed (e.g., according to the geographic location in which the audience member **102** resides or is otherwise located). In such example implementations, the portable metering device **104** is configured to display the stored media station identifiers so that, when the audience member **102** is exposed to a particular media station, the audience member **102** can select the tuned station via a display associated with the metering device **104** and a user input interface, an example of which is described below in connection with FIG. 7. In response to such an input, the portable metering device **104** generates a timestamp and stores the selected station identifier in association with the timestamp. Thus, in such examples, the audience member **102** has the option to forego carrying the station identifier card **110**.

FIG. 2 illustrates the example media consumption environment **100** of FIG. 1 but provided with other example metering devices. Specifically, FIG. 2 shows stationary metering devices **202a** and **202b** proximate the television **106** and the radio **108** of the media consumption environment **100**. In the illustrated example of FIG. 2, television station identifying barcodes **204** are placed proximate the television **106** and radio station identifying barcodes **206** are placed proximate the radio **108**. Example television station identifying barcodes **204** are shown in detail in FIG. 4. Example radio station identifying barcodes **206** are shown in detail in FIG. 5. When the television **106** is tuned to a television station, the audience member **102** scans a corresponding one of the television station identifying barcodes **204** using a barcode scanner

6

(e.g., the barcode reader **1129** of FIG. 11) of the stationary metering device **202a** to indicate the television station to which the audience member **102** is exposed. Similarly, when the radio **108** is tuned to a radio station, the audience member **102** scans a corresponding one of the radio station identifying barcodes **206** using a barcode scanner of the stationary metering device **202b** to indicate the radio station to which the audience member **102** is exposed. To identify the audience member **102** who is exposed to the television and/or radio station(s), the audience member **102** is provided with a personal identifier barcode card **208** that the audience member **102** can scan into the stationary metering devices **202a** and/or **202b** to indicate the identity of the audience member **102**.

In some example implementations, instead of or in addition to providing the station identifying barcodes **204** and **206**, the stationary metering devices **202a** and/or **202b** are configured to store and display a listing of media station identifiers indicative of stations to which the audience member **102** may be exposed or is likely to be exposed. In such instances, instead of scanning a station identifying barcode, the audience member **102** may select from one of the media station identifiers stored in one of the stationary metering devices **202a** and/or **202b** to indicate, for example, the television and/or radio station to which the audience member **102** is exposed.

In the illustrated example, to transfer media exposure information and audience member personal identifiers stored in the stationary metering devices **202a-b** to the central data collection facility **116**, the stationary metering devices **202a-b** are communicatively coupled to the computer **114** via wired or wireless communication medium(s). The computer **114** periodically or aperiodically communicates the media exposure information and personal identifiers to the central facility **116**. Additionally or alternatively, the stationary metering devices **202a-b** can be shipped back to the central facility **116** so that the media exposure information can be retrieved from the devices **202a-b** at the facility **116**. In such an approach, the audience member is preferably provided with substitute devices before shipping the devices **202** back to the central facility **116**.

FIGS. 3-5 illustrate example implementations of the example portable media station identifier card **110** of FIG. 1 and the example stationary media station identifier cards **204** and **206** of FIG. 2. In FIG. 3, the example portable card **110** includes barcodes representative of television and radio stations. In FIG. 4, the example stationary card **204** is configured to be placed proximate the television **106** of FIG. 2 and, thus, includes barcodes representative of example television stations, but no radio station barcodes. In FIG. 5, the example stationary card **206** is configured to be placed proximate the radio **108** of FIG. 2 and, thus, includes barcodes representative of example radio stations, but no television station barcodes. Further, the example portable media station identifier card **110** of FIG. 3, the example stationary media station identifier card **204** of FIG. 4, and the example stationary media station identifier card **206** of FIG. 5 include 'END' barcodes **302**, **402**, and **502**, respectively. As described herein, the 'END' barcodes **302**, **402**, and/or **502** are to be scanned at the end of a media exposure session.

In some example implementations, media station identifier cards may be combined, packetized, coupled together, or otherwise arranged. For example, one or more station identifier cards may be attachable to a key ring in a similar manner as the portable metering device **600** described below in connection with FIG. 6. Further, audience members may periodically receive updated cards via mail, electronic mail, or any other suitable delivery method. The cards can also be custom-

ized for individual audience members and/or households based on, for example, user input, subscribed programming packages, and/or according to a design implemented by a media measurement entity (e.g., the entity that provides the barcode cards and/or metering devices described herein).

FIG. 6 illustrates an example portable metering device **600** that may be used to implement the example portable metering device **104** of FIG. 1. In the illustrated example of FIG. 6, the example portable metering device **600** is implemented as a key fob that is attachable to a key ring **601** (e.g., with a set of keys **602**) and is implemented to have a form factor that facilitates carrying the portable metering device **600** by the audience member **102** (FIG. 1). The example device **600** is provided with a barcode scanner **604** (e.g., the barcode reader **1129** of FIG. 11) to scan station identifying barcodes on, for example, the media station identifier card **110** of FIG. 1. To activate the barcode scanner **604**, the device **600** is provided with a scan button **606** that the audience member **102** is to depress when the audience member **102** wishes to scan a barcode to indicate an exposure to a corresponding media station.

The example device **600** of FIG. 6 includes a memory to store media exposure information (e.g., media station identifiers and associated timestamps) and an audience member personal identifier. To transfer the media exposure information and the audience member personal identifier stored in the memory of the device **600** to the computer **114** of FIG. 1, the device **600** is provided with a data interface or port **608** (e.g., the communication device **1128** of FIG. 11), which may be implemented using any type of wired data interface (e.g. Universal Serial Bus (USB), RS-232, etc.). To initiate a data transfer process, the device **600** is provided with a data transfer button **610** to be depressed when the audience member **102** wishes to transfer media exposure information from the device **600** to the computer **114**. Additionally or alternatively, the device **600** may be provided with a wireless data transfer interface (e.g., a Bluetooth® interface, a Zigbee® interface, an IEEE 802.11 interface, etc.) to interact with the computer **114** and/or directly with the central data collection facility **116**.

FIG. 7 illustrates another example portable metering device **700** that may be used to implement the example portable metering device **104** of FIG. 1. In the illustrated example of FIG. 7, the example portable metering device **700** is implemented as a key fob that is attachable to a key ring **701** (e.g., with a set of keys **702**) and is implemented using a form factor that facilitates carrying the portable metering device **700** by the audience member **102** (FIG. 1). In the illustrated example, the device **700** includes a memory to store media exposure information (media station identifiers and associated timestamps) and an audience member personal identifier. As described above, the memory of the device **700** is also configured to store a listing of media station identifiers indicative of media stations to which the audience member **102** can be exposed or is likely to be exposed. To display the media station identifiers, the device **700** is provided with a display **704**, which is implemented using, for example, a liquid crystal display (LCD). To navigate or scroll through the media station identifiers stored in the memory of the device **700**, the device **700** is provided with a navigation interface **706**. In the illustrated example, the device **700** is configured to advance whole pages at a time on the display **704** in forward or reverse fashion in response to actuation of the navigation interface **706**. In other examples, the device **700** is configured to advance through display screens with finer granularity than that offered by advancing whole pages at a time. The navigation interface **706** may be implemented using a scroll wheel,

up and down buttons, a rocker switch, a capacitive switch, or any other type of mechanical user interface.

Depending on whether the device **600**, **700** is to be shared among audience members, the device **600**, **700** can be configured to store one or more audience member identifiers. In a dedicated device implementation, only one audience member identifier needs to be stored and that identifier need not be stored multiple times. In a shared device implementation, the audience member identifiers are stored in association with the station identifiers and timestamps.

To enable the audience member **102** to indicate when exposure to a media station has begun, the device **700** is provided with an 'IN' button **708**. To enable the audience member **102** to indicate when exposure to a media station has ended, the device **700** is provided with an 'OUT' button **710**. When exposure to a media station has started, the audience member **102** uses the navigation interface **706** to display and specify or select the station identifier indicative of the tuned media station and depresses the 'IN' button **708** to indicate that exposure to the specified media station has started. In turn, the device **700** stores the selected station identifier in association with a timestamp and a start of exposure identifier (e.g., a bit, a string, etc.). When the audience member **102** ceases to be exposed to the previously identified media station, the audience member **102** depresses the 'OUT' button **710**. In turn, the device **700** stores the station identifier in association with a timestamp and an end of exposure identifier (e.g., a bit, a string, etc.).

In some implementations, when the television **106** or the radio **108** is changed to a different station, the audience member **102** uses the navigation interface **706** to display and specify or select the station identifier indicative of the newly tuned media station and depresses the 'IN' button **708** to indicate that exposure to the newly specified media station has started. In turn, the device **700** stores the newly selected station identifier in association with a timestamp and a start of exposure identifier. In such a situation, the timestamp also indicates the time at which the exposure to the previously tuned station ceased. Thus, the newly generated timestamp is also stored in association with the station identifier representative of the previously tuned station to indicate an end of a media exposure session.

To transfer the media exposure information (e.g., station identifier(s) and timestamp(s)) and the audience member personal identifier(s) stored in the memory of the device **700** to the computer **114** of FIG. 1, the device **700** is provided with a data interface **712** (e.g., the communication device **1128** of FIG. 11), which may be implemented using any type of wired data interface (e.g. Universal Serial Bus (USB), RS-232, etc.). To initiate a data transfer process, the audience member **102** can use the navigation interface **706** to display a data transfer screen on the output display **704** and can select a transfer selection in the navigation interface **706** or one of the buttons **708** and **710**. In other example implementations, the device **700** is provided with a wireless data transfer interface (e.g., a Bluetooth® interface, an IEEE 802.11 interface, etc.).

FIGS. 8-10 are flow diagrams representative of example machine readable instructions that may be executed (e.g., by the example processor system **1110** of FIG. 11) to implement the example metering device **104** of FIG. 1, the example metering devices **202a-b** of FIG. 2 and/or components thereof. The example machine readable instructions of FIGS. 8-10 may be executed by a processor, a controller, and/or any other suitable processing device. For example, the example machine readable instructions of FIGS. 8-10 may be embodied in coded instructions stored on a tangible medium such as a flash memory, or random access memory (RAM) associated

with a processor (e.g., the processor **1112** of FIG. **11**). Alternatively, some or all of the example flow diagrams of FIGS. **8-10** may be implemented using an application specific integrated circuit (ASIC), a programmable logic device (PLD), a field programmable logic device (FPLD), discrete logic, hardware, firmware, etc. In addition, some or all of the example flow diagrams of FIGS. **8-10** may be implemented manually or as a combination of any of the foregoing techniques (e.g., any combination of firmware, software, hardware, and/or discrete logic). Although the machine readable instructions of FIGS. **8-10** are described with reference to the example flow diagrams of FIGS. **8-10**, other methods of implementing the metering devices **104**, **202a**, and/or **202b** and/or, more generally, the media consumption environment **100** of FIG. **1** may be employed. For example, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, sub-divided, and/or combined. Additionally, the example machine readable instructions of FIGS. **8-10** may be carried out sequentially and/or carried out in parallel by, for example, separate processing threads, processors, devices, circuits, etc.

FIG. **8** is a flow diagram representative of example machine accessible instructions that may be executed to implement the example portable metering device **600** of FIG. **6**. For example, the example device **600** may include a processor (e.g., the processor **1112** of FIG. **11**) communicatively coupled to peripheral devices (e.g., the barcode scanner **604**, the scan button **606**, the data interface **608**, and the data transfer button **610** of FIG. **6**) and a memory. The processor is configured to execute instructions represented by the operations of the flow diagram of FIG. **8** to store media exposure information and communicate the media exposure information to the computer **114** of FIG. **1**.

Initially, the device **600** determines whether it has received a scanned media station identifier (block **802**) via the barcode scanner **604**. If the device **600** has not received a station identifier, it continues to monitor for a received station identifier at block **802**. When the device **600** receives a media station identifier (block **802**) representative of a media station to which the audience member **102** is exposed, the device **600** generates a timestamp (block **804**) (e.g., using a timing device, such as a real-time clock (RTC)) indicative of the time at which the audience member **102** scanned the station identifier. The device **600** then stores the station identifier in association with the timestamp (block **806**) by, for example, creating a media exposure data record and storing the station identifier and the timestamp therein.

The device **600** then determines whether it has received an end of exposure identifier (block **808**) via the barcode scanner **604**. For example, the device **600** may receive an end of exposure identifier when the audience member **102** scans the 'END' barcode **302** shown in FIG. **3**. If the device **600** received the end of exposure identifier associated with the 'END' barcode **302** (block **808**), the device **600** generates a timestamp (block **810**) and stores the end of exposure identifier in association with the timestamp (block **812**). For example, the device **600** may store the end of exposure identifier and the associated timestamp in the same data record created for storing the station identifier and its timestamp at block **806**. For instances in which the audience member **102** does not scan the end of exposure identifier from the 'END' barcode **302** but instead scans in a station identifier to which a media presentation device is subsequently tuned, the timestamp for the subsequently scanned station identifier can be used as the end of exposure time for the previously scanned station identifier.

The device **600** then determines whether it should transfer the media exposure information stored in its memory (block **814**) to, for example, the computer **114**. In the illustrated example, the device **600** is configured to transfer the media exposure information and a personal identifier of the audience member **102** associated with the device **600** when the audience member depresses the data transfer button **610**. Additionally or alternatively, the device **600** may be configured to transfer the media exposure information in response to a request from the central data collection facility **116** or according to a schedule. If the device **600** determines that it should transfer the media exposure information stored in its memory (block **814**), the device **600** transfers the media exposure information and the audience member personal identifier to the computer **114** (block **816**) via the data interface **608**.

The device **600** then determines whether it should continue to monitor for scanned media station identifiers (block **818**). If the device **600** is to continue monitoring for scanned station identifiers (block **818**), control returns to block **802**. Otherwise the example process of FIG. **8** is ended.

FIG. **9** is a flow diagram representative of example machine accessible instructions that may be executed to implement the example portable metering device **700** of FIG. **7**. For example, the example device **700** may include a processor (e.g., the processor **1112** of FIG. **11**) communicatively coupled to peripheral devices (e.g., the display **704**, the navigation interface **706**, the 'IN' button **708**, the 'OUT' button **710**, and/or the data interface **712** of FIG. **7**) and a memory. The processor is configured to execute instructions represented by the operations of the flow diagram of FIG. **9** to store media exposure information and communicate the media exposure information to, for example, the computer **114** of FIG. **1**.

Initially, the device **700** determines whether it has received a start of exposure identifier (block **902**). For example, the device **700** may receive a start of exposure identifier when the audience member **102** uses the navigation interface **706** to display a media station identifier (e.g., using a scroll wheel to search through a list of media station identifiers and stopping when the display **704** shows the media station to which the audience member **102** is being exposed) and depresses the 'IN' button **708**. If the device **700** has not received a start of exposure identifier, it continues to monitor for a received start of exposure identifier at block **902**. When the device **700** receives a start of exposure identifier (block **902**), the device **700** generates a timestamp (block **904**) (e.g., using a timing device, such as a real-time clock (RTC)) indicative of the time at which the audience member **102** depressed the 'IN' button **708**. The device **700** then stores the start of exposure identifier and a media station displayed on the display **704** in association with the timestamp (block **906**) by, for example, creating a media exposure data record and storing the start of exposure identifier, the station identifier, and the timestamp therein.

The device **700** then determines whether it has received an end of exposure identifier (block **908**). For example, the device **700** may receive an end of exposure identifier when the audience member **102** depresses the 'OUT' button **710**. If the device **700** received the end of exposure identifier (block **908**), the device **700** generates a timestamp (block **910**) and stores the end of exposure identifier and the previously specified media station identifier in association with the timestamp (block **912**). For example, the device **700** may store the end of exposure identifier and the associated timestamp in the same data record created for storing the start of exposure identifier, the station identifier and the start of exposure timestamp at block **906**. For instances in which the audience member **102** does not depress the 'OUT' button **710** to indicate when

11

exposure to a media station has ceased but instead depresses the 'IN' button 708 to select a media station for which a media presentation device is subsequently tuned, the timestamp for the subsequently scanned station identifier can be used as the end of exposure time for the previously scanned station identifier.

The device 700 then determines whether it should transfer the media exposure information stored in its memory (block 914) to, for example, the computer 114. For example, the device 700 may be configured to transfer the media exposure information and a personal identifier of the audience member 102 associated with the device 700 when the audience member depresses the navigation interface 706 (or one of the buttons 708 and 710) while the display 704 is showing a data transfer screen. If the device 700 determines that it should transfer the media exposure information stored in its memory (block 914), the device 700 transfers the media exposure information and the audience member personal identifier to the computer 114 (block 916) via the data interface 712.

The device 700 then determines whether it should continue to monitor for start of exposure and/or end of exposure identifiers (block 918). If the device 700 is to continue monitoring for start and end of exposure identifiers (block 918), control returns to block 902. Otherwise the example process of FIG. 9 is ended.

FIG. 10 is a flow diagram representative of example machine accessible instructions that may be executed to implement the example stationary metering devices 202a-b of FIG. 2. For example, the example devices 202a-b may include a processor (e.g., the processor 1112 of FIG. 11) communicatively coupled to peripheral devices (e.g., a barcode scanner, a scan button, a data interface, a data transfer button, etc.) and a memory. The processor is configured to execute instructions represented by the operations of the flow diagram of FIG. 10 to store media exposure information and communicate the media exposure information to, for example, the computer 114 of FIG. 1. For purposes of discussion, the flow diagram of FIG. 10 is described in connection with the example stationary metering device 202a associated with the television 106 to collect media exposure information associated with exposure to programming from different television stations. However, the example instructions represented by the flow diagram of FIG. 10 may be adapted to be implemented the stationary metering device 202b associated with the radio 108.

Initially, the device 202a determines whether it has received a scanned television station identifier and/or an audience member personal identifier (block 1002) via a barcode scanner. If the device 202a has not received either a station identifier or an audience member identifier, it continues to monitor for the identifiers at block 1002. When the device 202a receives a scanned television station identifier representative of a television station to which the audience member 102 is exposed or an audience member identifier representative of the identity of the audience member 102 (block 1002), the device 202a generates a timestamp (block 1004) (e.g., using a timing device, such as a real-time clock (RTC)) indicative of the time at which the audience member 102 scanned in the station identifier or the audience member identifier. In some example situations, receiving the scanned station identifier or the audience member identifier indicates the beginning of an exposure session for an individual, such as a household member turning on a television and/or radio and tuning to a media station. In other example situations, receiving the scanned station identifier or the audience member identifier indicates the audience member 102 is joining an audience at the monitored site including one or more audi-

12

ence members who are already being exposed to the media station (e.g., a household member joining the rest of the family in the media consumption environment 100). The device 202a then stores the station identifier and/or the audience member identifier in association with the timestamp (block 1006) by, for example, creating a media exposure data record and storing the station identifier and/or the audience member identifier together with the timestamp therein.

The device 202a then determines whether it has received an end of exposure identifier and/or an audience member identifier (block 1008) via the barcode scanner. For example, the device 202a may receive an end of exposure identifier and the audience member identifier when the audience member 102 scans an end barcode 402 shown in FIG. 4 and the personal identifier barcode card 208 of FIG. 2 to indicate that the audience member 102 is no longer exposed to the identified television station (e.g., when the audience member 102 leaves the media consumption environment 100, when the audience member 102 stops tuning to the currently tuned media station, when the audience member 102 turns off the television and/or radio, etc.). In some implementations, upon receiving an end of exposure identifier, the device 202a prompts the audience member 102 to also scan the personal identifier barcode card 208. For example, when more than one audience member has scanned an identifier during an exposure session, the device 202a beeps until an identifier is scanned.

If the device 202a received the end of exposure identifier and the audience member identifier (block 1008), the device 202a generates a timestamp (block 1010) and stores the end of exposure identifier and the audience member identifier in association with the timestamp (block 1012). For example, the device 202a may store the end of exposure identifier, the audience member identifier, and the associated timestamp in the same data record created for storing the station identifier, the audience member identifier, and their associated timestamp at block 1006. For instances in which the audience member 102 does not scan in the end of exposure identifier from the end barcode 402 but instead scans in a station identifier to which the television 106 is subsequently tuned, the timestamp for the subsequently scanned station identifier can be used as the end of exposure time for the previously scanned station identifier.

The device 202a then determines whether it should transfer the media exposure information stored in its memory (block 1014) to, for example, the computer 114. For example, the device 202a may be configured to transfer the media exposure information including the personal identifiers of the audience member(s) associated with such exposure information when, for example, the audience member 102 depresses a data transfer button. If the device 202a determines that it should transfer the media exposure information stored in its memory (block 1014), the device 202a transfers the media exposure information and the audience member personal identifier(s) to the computer 114 (block 1016) via a wired or wireless data interface.

The device 202a then determines whether it should continue to monitor for scanned television station identifiers (block 1018). If the device 202a is to continue monitoring for scanned station identifiers (block 1018), control returns to block 1002. Otherwise the example process of FIG. 10 is ended.

FIG. 11 is a block diagram of an example processor system that may be used to implement any or all of the example devices 202a, 202b, 600, 700 described herein. As shown in FIG. 11, the processor system 1110 includes a processor 1112 that is coupled to an interconnection bus 1114. The processor 1112 may be any suitable processor, processing unit or micro-

13

processor. Although not shown in FIG. 11, the system 1110 may be a multi-processor system and, thus, may include one or more additional processors that are identical or similar to the processor 1112 and that are communicatively coupled to the interconnection bus 1114.

The processor 1112 of FIG. 11 is coupled to a chipset 1118, which includes a memory controller 1120 and an input/output (I/O) controller 1122. The chipset provides I/O and memory management functions as well as a plurality of general purpose and/or special purpose registers, timers, etc. that are accessible or used by the processor 1112 coupled to the chipset 1118. The memory controller 1120 performs functions that enable the processor 1112 (or processors if there are multiple processors) to access a system memory 1124 and a mass storage memory 1125.

The system memory 1124 may include any desired type of volatile and/or non-volatile memory such as, for example, static random access memory (SRAM), dynamic random access memory (DRAM), flash memory, read-only memory (ROM), etc. The mass storage memory 1125 may include any desired type of mass storage device including hard disk drives, optical drives, tape storage devices, etc. The example machine readable instructions of FIGS. 8, 9, and/or 10 may be stored in the system memory 1124.

The I/O controller 1122 performs functions that enable the processor 1112 to communicate with peripheral input/output (I/O) device(s) 1126, a communication device 1128, a barcode reader 1129, and a network interface 1130 via an I/O bus 1132. The I/O device(s) 1126 may be any desired type of I/O device such as, for example, a keyboard, a video display or monitor, a mouse, etc. The communication device 1128 may be any desired type of wired communication device such as, for example, Universal Serial Bus (USB), RS-232, etc., or any type of desired wireless communication device such as, for example, a Bluetooth® interface, a Zigbee® interface, an IEEE 802.11 interface, etc. The barcode reader 1129 may be any desired type of signal processing device capable of receiving and interpreting a barcode.

The network interface 1130 may be, for example, an Ethernet device, an asynchronous transfer mode (ATM) device, an 802.11 device, a DSL modem, a cable modem, a cellular modem, etc. that enables the processor system 1110 to communicate with another processor system.

While the memory controller 1120 and the I/O controller 1122 are depicted in FIG. 11 as separate functional blocks within the chipset 1118, the functions performed by these blocks may be integrated within a single semiconductor circuit or may be implemented using two or more separate integrated circuits.

Although certain methods, apparatus, and articles of manufacture have been described herein, the scope of coverage of this patent is not limited thereto. To the contrary, this patent covers all methods, apparatus, and articles of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

What is claimed is:

1. A metering device to collect media exposure information, comprising:
 a housing having a handheld form factor;
 memory within the housing, the memory comprising a list of media stations;
 a display device carried by the housing to display the media stations from the list;
 an input carried by the housing to enable a user to select from the list to indicate exposure to a media station; and
 the memory to store the selection in association with a timestamp.

14

2. A metering device as defined in claim 1, wherein the metering device is associated with a specific audience member and a member identifier corresponding to the specific audience member.

3. A metering device as defined in claim 1, further comprising a timing device to timestamp the media exposure information.

4. A metering device as defined in claim 1, further comprising a communication device carried by the housing to upload the media exposure information to a computer.

5. A metering device as defined in claim 1, further comprising a key ring attached to the housing.

6. A metering device as defined in claim 1, wherein the input comprises at least one of a scroll wheel, a first button to be engaged at a start of a media exposure session, or a second button to be engaged at an end of a media exposure session.

7. A method of collecting media exposure information, comprising:

displaying a list of media station identifiers on a metering device;

detecting, via a logic circuit, a first selection from the list; and

timestamping and storing the first selection to gather media exposure information regarding exposure to a media station corresponding to the first selection.

8. A method as defined in claim 7, further comprising detecting a second selection from the list.

9. A method as defined in claim 8, wherein the first selection indicates a start of a media exposure session and the second selection indicates an end of the media exposure session.

10. A method as defined in claim 7, further comprising assigning a member identifier corresponding to a user to the metering device.

11. A method as defined in claim 7, further comprising transferring the media exposure information to a central facility.

12. An apparatus, comprising:

a display device carried by a housing to display media stations from a list stored in memory carried by the housing;

a first input, selection of the first input to cause a media identifier associated with a currently displayed one of the media stations to be stored in connection with a first timestamp indicating an initiation of a media exposure session; and

a second input, selection of the second input to cause the media identifier associated with the currently displayed one of the media stations to be stored in connection with a second timestamp indicating an end of the media exposure session.

13. An apparatus as defined in claim 12, wherein the media exposure session corresponds to a period of time during which a user was likely exposed to media corresponding to the currently displayed one of the media stations.

14. An apparatus as defined in claim 12, further comprising a third input to enable a user to navigate through the list of media stations on the display device.

15. An apparatus as defined in claim 12, wherein the metering device is associated with a specific audience member and a member identifier corresponding to the specific audience member.

16. An apparatus as defined in claim 12, further comprising a timing device to generate the first timestamp in response to selection of the first input.

17. A method, comprising:

in response to detecting a first engagement of an input
when a first media station is displayed on a display
carried by a housing, storing, in a memory, a first initia-
tion indicator indicative of a beginning of a first session 5
in connection with a first media identifier associated
with the first media station; and

in response to detecting a second engagement of the input
when a second media station different than the first
media station is displayed on the display: 10

storing a termination indicator indicative of an end of the
first session in connection with the first media identi-
fier; and

storing a second initiation indicator indicative of a
beginning of a second session in connection with a 15
second media identifier associated with the second
media station.

18. A method as defined in claim **17**, further comprising
displaying a scrolling list of media stations on the display in
response to a navigation input. 20

19. A method as defined in claim **18**, wherein the naviga-
tion input is received via a scroll wheel implemented on the
housing.

20. A method as defined in claim **17**, further comprising
storing timestamps in connection with the first and second 25
media identifiers.

* * * * *