

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 644 519 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

15.12.1999 Bulletin 1999/50

(51) Int Cl.⁶: **G08G 1/127**

(21) Application number: **94850143.2**

(22) Date of filing: **29.08.1994**

(54) Arrangement in a system including mobile units

Anordnung in einer Anlage mit mobilen Einheiten

Agencement dans un système comportant des unités mobiles

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: **14.09.1993 SE 9302981**

(43) Date of publication of application:
22.03.1995 Bulletin 1995/12

(73) Proprietor: **TELIA AB**
123 86 Farsta (SE)

(72) Inventors:
• **Wichtel, Erik**
S-217 47 Malmö (SE)
• **Andersson, Torbjörn**
S-223 61 Lund (SE)

(74) Representative: **Akerman, Marten Lennart et al**
Albihns Patentbyrå Malmö AB
P.O.Box 4289
203 14 Malmö 4 (SE)

(56) References cited:

EP-A- 0 242 099 **EP-A- 0 501 058**
US-A- 5 173 710

- **PROCEEDINGS OF THE VEHICLE NAVIGATION AND INFORMATION SYSTEMS CONFERENCE, DEARBORN, OCT. 20 - 23, 1991, vol. PART 2, 1 October 1991, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 923-928, XP000357197 WALL N: "INTEGRATED COMMUNICATIONS ARCHITECTURE FOR ROAD TRANSPORT INFORMATICS"**
- **PROCEEDINGS OF THE VEHICLE NAVIGATION AND INFORMATION SYSTEMS CONFERENCE, OSLO, SEPT. 2 - 4, 1992, no. CONF. 3, 2 September 1992, OLAUSSEN L;HELLI E, pages 305-310, XP000365977 ARVID BERTHEAU JOHANNESSEN: "FLEET MANAGEMENT USING INMARSAT-C AND GPS A NORWEGIAN PILOT PROJECT"**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 644 519 B1

Description

TECHNICAL FIELD

[0001] The present invention relates to an arrangement for determining, in a system which includes, on the one hand, mobile units, for example a road transport information system (RTI), and, on the other hand, virtual beacons (radio beacons), the passage of a respective mobile unit past a respective beacon.

PRIOR ART

[0002] From American Patent Specification 5,043,736, it is already known to utilize a cellular locating system. The system consists of a portable locating unit which can be used both as mobile telephone and for global positioning. The unit has a receiver for receiving signals from a global positioning system (GPS) and circuits for calculating the position. The position thus obtained is then transmitted via a mobile telephone system to the central unit. In the central unit, there is a possibility for correlating the position obtained with a stored digital map for placing the user on the actual location on the map.

[0003] In American Patent Specification US 4,701,760, a method for positioning vehicles and for providing communication between the vehicles and a central unit is described. Coordinates of the vehicles are determined with the aid of an omega network and corrected when passing control beacons.

[0004] In European Patent Application 242,099, a method for locating a vehicle, for example when a car is stolen, is shown. A unit in the vehicle calculates the position of the vehicle with the aid of a GPS system. This position is transmitted to a central monitoring station via a mobile telephone system if a break-in is detected or if a change of the position is detected.

[0005] The publication "Integrated Land and Coastal Navigation Using a Differential GPS receiving System, the Third International Conference On Beacle Navigation and Information system, N Cheong, 1991, Volume 1, pages 380-386" discloses an integrated navigation system based on differential GPS. The system is intended for both sea and land vehicles and utilizes the base stations in a cellular mobile telephone system for transmitting the DGPS signals to the user on land.

[0006] The above references thus show different possibilities for determining the position of a vehicle, for example a mobile unit, with the aid of external positioning systems together with a communications system which can be of the mobile type.

DESCRIPTION OF THE INVENTION

TECHNICAL PROBLEM

[0007] A beacon is a location where short-range data

transactions for RTI (Road Transport Informatics) can be carried out. The range of a beacon is 10 - 500 metres depending on the technology used. Beacon systems are not continuous and do not operate with handover capability. The coverage is thus patchy by area without coverage in between.

[0008] The data structure in a beacon system is adapted to the discontinuous coverage. When passing a beacon, the vehicle obtains standard set-up data which describes the traffic level of the nearest surrounding area. The vehicle reports the traffic situation on the distance just travelled, which is then used by the beacon system for updating the traffic situation in its entirety. Individual transactions for a range of applications can also be carried out.

[0009] Detecting a beacon when passing it is done by external influences, for example carrier wave detection or at protocol level with, for example, End System Hello (ESH). After detection, data transactions can be carried out. The position of the vehicle is determined autonomously in the vehicle (with dead reckoning). The quality of the position becomes progressively worse, which is why the position must be calibrated. In a real beacon system, calibration of the position of the vehicle is done when passing a beacon.

[0010] In an alternative access method (See for instance N. Wall et al : "Integrated Communications Architecture for Road Transport Informatics", Proceedings of the Vehicule Navigation and Information Systems Conference, Oct. 20-23, 1991) for the same information infrastructure through a cellular network such as GSM, a beacon passage must be logically initiated internally in the vehicle. This is because no real beacon is physically passed in a virtual system. Moreover, the position must be determined with a non-autonomous system since automatic external calibration capabilities are lacking when real beacons cannot be passed (are not accessible in the environment). The problem is to provide the vehicle with a valid position of sufficiently high quality and to determine when a virtual beacon can be passed (VBLS). The present invention has the aim of solving the above problem.

SOLUTION

[0011] The feature which may principally be regarded as characterizing the invention is that a unit (BLT) is arranged to extract a first position information produced by the system for a current virtual beacon, and that elements are arranged for determining if a passage exists or not in dependence on a comparison with a second position information relating to the position of the mobile and extracted from an external position determining system.

[0012] In one embodiment, the external position determining system can consist of a system known per se, for example the global positioning system GPS, the differential global positioning system DGPS, the said sys-

terms in combination with dead reckoning, and so forth.

[0013] In a further embodiment, the unit (BLT) serves a part area of an area which is covered by the mobile system, and the mobile system thereby specifies positions produced or calculated for the virtual beacons in the part area. The mobile system is arranged with a master unit which controls a number of part area units. A respective part area unit (BLT) specifies in table form the positions of virtual beacons within the part area, and the relevant table is updated with a real or virtual beacon address.

[0014] In a further embodiment, the master unit (NBLT) is provided with or has stored all access telephone numbers and positions for virtual beacons in the system.

[0015] The said comparison-effecting elements are arranged for producing a difference signal with the said comparison and to indicate, with a predetermined value of the difference signal, whether a passage of an affected virtual beacon exists. A certain predetermined position difference is allowed and all values of the signal under a predetermined value can indicate a passage. The signal value difference can be arranged to be adjustable.

ADVANTAGES

[0016] By means of what has been proposed above, an appropriate indication of whether a passage of a virtual beacon exists for a current mobile unit or not is obtained. Equipment known per se can be utilized for carrying out the ideas behind the invention. Thus, for example, similar processor and display units can be used in the mobile units or vehicles for both real and virtual beacon access. It can be mentioned here that real beacon access is developed and produced today by a number of enterprises. By means of the invention, the position obtained can be compared with positions stored centrally and/or in the vehicle for producing control nodes where the vehicle can take part in an information transfer.

[0017] The invention makes it possible to change the system by simple means due to the fact that virtual beacons can be moved, increased, shut down and so forth. Such a changeability is intended to occur preferably also during operation.

[0018] All beacon-based systems which operate in dual-mode operation with, for example, the mobile system GSN can be provided with VBLD when the system is used in GSN mode. If real beacons exist in the system, carrier waves or ESH indicate the presence of the beacons in question. In the absence of real beacons, virtual beacon locations must be defined, which is done by means of the present invention. The parameter AUP specifies an uncertainty parameter which can be related to the greatest position difference (spacing) between EPD and BLT which can be accepted as an indication when a virtual beacon is passed. AUP is thus an adjust-

able parameter which, when the value drops below it, generates an event, a virtual beacon passage. The event, a virtual beacon passage, is a novelty in this connection. From the point of view of the vehicle application this is functionally identical with a real beacon passage.

DESCRIPTION OF THE FIGURES

[0019] A currently proposed embodiment of an arrangement which shows the characteristics significant of the invention will be described below, at the same time referring to the attached drawing, in which:

Figure 1 basically shows a mobile system with virtual beacons and mobile units which can move within the part areas in a total area which is covered by the system, and

Figure 2 shows in a block diagram form a comparison function between the positions of the mobile units and the virtual beacons.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

[0020] In Figure 1, a coverage area for a mobile system known per se is specified by 1. The mobile system can consist of the RTI system mentioned in the introduction. This system is well known per se and will not be described in great detail here, apart from the connections between the system and the ideas of the present invention. Coverage within the area 1 is discontinuous and the part areas within the area 1 which is covered are specified by 2, 3, 4 and 5. A unit BLT (Beacon Location Table) belongs to each respective part area, for example part area 2. This BLT can be placed centrally within the area or in a respective mobile unit. The BLT unit specifies the positions of virtual beacons of the system in the nearest surrounding area or in the part area, for example part area 2. The BLT unit operates with a table which is updated on access of a real or virtual beacon.

[0021] For the virtual beacon system 1 according to Figure 1, a central master BLT unit, here called NBLT, is arranged. All access telephone numbers and positions of virtual beacons are stored in this NBLT. The virtual beacons of the systems can be moved or added to through changes in the NBLT, something which would be costly in a real beacon system. The changes can also be carried out during operation. The system changes come into force in the entire system with respective downloading to local BLTs.

[0022] In accordance with the invention, an external position determining system EPD is utilized. This can be of a type known per se in accordance with the above. The external position determining system EPD determines the positions of the mobile units. In accordance with the concept of the invention, it will be possible to determine the passage of a mobile M past a virtual bea-

con VB. The position of the said virtual beacon is specified in the system through the BLT unit, and the system can thus extract a first position information 11 which can be assigned to the position of a current virtual beacon. The EPD system can extract a second position information 12 for the mobile unit M which passes the said virtual beacon. In accordance with Figure 2, a comparison function exists in the system, which comparison information can be entered in the BLT and/or NBLT unit(s). The comparison function can be effected by a comparison element 6 of a type known per se. The comparison results in a signal or parameter AUP. Since the position from the EPD system has a degree of uncertainty, a certain error must be accepted in the AUP parameter. AUP stands for Area Uncertainty Parameter. The AUP parameter specifies the greatest position difference or spacing between EPD and BLT which is accepted as an indication that a virtual beacon is being passed.

[0023] The invention is not limited to the embodiment shown above by way of example, but can be subjected to modifications within the scope of the patent claims.

Claims

1. Arrangement for determining, in a system comprising mobile units (M), for example a road transport information system (RTI), and virtual beacons (radio beacons VB), the passage of a respective mobile unit past a respective beacon, characterized in that said arrangement includes a unit (BLT) which is arranged to extract a first position information (I1) produced by the system for a current virtual beacon (VB), and that said arrangement includes comparison-effecting elements (6), which are arranged to determine whether there is a passage or not in dependence on a comparison with a second position information (I2) relating to the position of the mobile and extracted from an external position determining system (EPD).
2. Arrangement according to Claim 1, characterized in that the external position determining system (EPI) consists of a system known per se, for example the global positioning system GPS, the differential global positioning system DGPS, the said systems in combination with dead reckoning, and so forth.
3. Arrangement according to Claim 1 or 2, characterized in that the unit (BLT) serves a part area (2, 3, 4 or 5) which is covered by the mobile system and thereby specifies positions, produced by the mobile system, for the virtual beacons (VB) in a respective part area, and that the mobile system is arranged with a master unit (MBLT) which controls a number of part area units (BLT).
4. Arrangement according to Claim 1, 2 or 3, charac-

terized in that a respective part area unit (PLT) in table form specifies virtual beacons within the part area (2, 3, 4 or 5) and that the table concerned is updated with a real and/or virtual beacon address.

5. Arrangement according to claim 3, characterized in that the master unit (NBLT) is provided with or has stored access telephone numbers and positions of virtual beacons, whereby a simple changeability is produced in that the virtual beacons of the system can be moved, increased, shut down etc., which changeability is intended also to occur preferably during operation of the system, and that said changes can be downloaded in a respective part area unit (BLT).
6. Arrangement according to any of the preceding claims, characterized in that a said comparison-effecting element (6) is intended to effect a difference signal or parameter (AUP) on comparison, and that a predetermined value or predetermined magnitude of the difference signal indicates whether a passage exists at the virtual beacon concerned.
7. Arrangement according to Claim 6, characterized in that a certain predetermined position difference is also calculated and that all values of the signal or parameter below the predetermined value or within a current value range indicate a passage.
8. Arrangement according to Claim 6 or 7, characterized in that the allowed signal value or parameter difference is arranged to be adjustable.
9. Arrangement according to any of the preceding claims, characterized in that when a passage of a current beacon has been established, the mobile unit/vehicle obtains data from the system, and that the mobile unit reports the traffic situation on the distance just travelled to the current beacon for enabling the beacon system to update the traffic situation, in addition to which an individual transaction or individual transactions for a range of applications can be carried out.
10. Arrangement according to any of the preceding claims, characterized in that processor and display units known per se can be used for both real and virtual beacon access.

Patentansprüche

1. Anordnung zum Bestimmen des Vorbeigangs einer jeweiligen Mobileinheit an einer jeweiligen Bake in einem System, das Mobileinheiten (M), z. B. ein Straßenverkehrsinformationssystem (RTI), und virtuelle Baken (Funkbaken VB) umfaßt, dadurch ge-

kennzeichnet, daß die Anordnung eine Einheit (BLT) einschließt, die so angeordnet ist, daß sie eine erste Positionsinformation (I1) extrahiert, die von dem System für eine aktuelle virtuelle Bake (VB) produziert wird, und daß die Anordnung vergleichsdurchführende Elemente (6) einschließt, die so angeordnet sind, daß sie bestimmen, ob ein Vorbeigang vorliegt oder nicht, in Abhängigkeit von einem Vergleich mit einer zweiten Positionsinformation (I2), die sich auf die Position der Mobileinheit bezieht und von einem externen Positionsbestimmungssystem (EPD) extrahiert wird.

2. Anordnung nach Anspruch 1, dadurch **gekennzeichnet**, daß das externe Positionsbestimmungssystem (EPI) aus einem an sich bekannten System besteht, z. B. dem Global Positioning System GPS, dem differentiellen Global Positioning System DGPS, diesen Systemen in Kombination mit Navigationsrechnung, usw.

3. Anordnung nach Anspruch 1 oder 2, dadurch **gekennzeichnet**, daß die Einheit (BLT) einen Teilbereich (2, 3, 4 oder 5) bedient, der von dem Mobilsystem abgedeckt wird, und dadurch von dem Mobilsystem erzeugte Positionen für die virtuellen Baken (VB) in einem jeweiligen Teilbereich spezifiziert, und daß das Mobilsystem mit einer Mastereinheit (MBLT) ausgerüstet ist, die eine Anzahl von Teilbereichseinheiten (BLT) steuert.

4. Anordnung nach Anspruch 1, 2 oder 3, dadurch **gekennzeichnet**, daß eine jeweilige Teilbereichseinheit (PLT) in Tabellenform virtuelle Baken innerhalb des Teilbereichs (2, 3, 4 oder 5) spezifiziert und daß die betreffende Tabelle mit einer reellen und/oder virtuellen Bakenadresse aktualisiert wird.

5. Anordnung nach Anspruch 3, dadurch **gekennzeichnet**, daß die Mastereinheit (NBLT) mit Zugangstelefonnummern und Positionen von virtuellen Baken versehen ist oder diese gespeichert enthält, wodurch eine einfache Änderungsmöglichkeit geschaffen wird derart, daß die virtuellen Baken des Systems bewegt, vermehrt, abgeschaltet usw. werden können, wobei diese Änderungsmöglichkeit vorzugsweise auch während des Betriebes des Systems auftreten soll, und daß die Änderungen in einer jeweiligen Teilbereichseinheit (BLT) heruntergeladen werden können.

6. Anordnung nach einem der vorangehenden Ansprüche, dadurch **gekennzeichnet**, daß ein vergleichsdurchführendes Element (6) bei Vergleich ein Differenzsignal oder einen Parameter (AUP) bewirken soll und daß ein vorgegebener Wert oder eine vorgegebene Größe des Differenzsignals anzeigt, ob ein Vorbeigang bei der betreffenden virtu-

ellen Bake vorliegt.

7. Anordnung nach Anspruch 6, dadurch **gekennzeichnet**, daß ferner eine bestimmte vorgegebene Positionsdifferenz berechnet wird und daß alle Werte des Signals oder Parameters unter dem vorgegebenen Wert oder innerhalb eines aktuellen Wertebereichs einen Vorbeigang anzeigen.

8. Anordnung nach Anspruch 6 oder 7, dadurch **gekennzeichnet**, daß die zulässige Signalwert- oder Parameterdifferenz einstellbar ist.

9. Anordnung nach einem der vorangehenden Ansprüche, dadurch **gekennzeichnet**, daß wenn ein Vorbeigang einer aktuellen Bake bestimmt worden ist, die Mobileinheit/Fahrzeug Daten von dem System erhält, und daß die Mobileinheit die Verkehrssituation auf der soeben durchfahrenen Strecke an die aktuelle Bake berichtet, damit das Bakensystem die Verkehrssituation aktualisieren kann, zusätzlich zu der möglichen Durchführung einer individuellen Transaktion oder individueller Transaktionen für eine Reihe von Anwendungen.

10. Anordnung nach einem der vorangehenden Ansprüche, dadurch **gekennzeichnet**, daß an sich bekannte Prozessor- und Displayeinheiten für den Zugriff auf reelle und virtuelle Baken benutzt werden können.

Revendications

1. Dispositif pour déterminer, dans un système comprenant des unités mobiles (M), par exemple un système d'informations de transport routier (RTI), et des balises virtuelles (radiobalises VB), le passage d'une unité mobile respective devant une balise respective, caractérisé en ce que ledit dispositif comprend une unité (BLT) qui est agencée pour extraire une première information de position (I1) produite par le système pour une balise virtuelle en cours (VB), et en ce que ledit dispositif comprend des éléments effectuant une comparaison (6) qui sont agencés pour déterminer s'il y a un passage ou non en fonction d'une comparaison avec une deuxième information de position (I2) relative à la position du mobile et extraite d'un système de détermination de position extérieur (EPD).

2. Dispositif selon la revendication 1, caractérisé en ce que le système de détermination de position extérieur (EPD) consiste en un système connu en lui-même, par exemple le système de positionnement global GPS, le système de positionnement global différentiel DGPS, lesdits systèmes en combinaison avec une détermination à l'estime, etc.

3. Dispositif selon la revendication 1 ou 2, caractérisé en ce que l'unité (BLT) dessert une zone partielle (2,3,4 ou 5) qui est couverte par le système mobile et spécifie ainsi des positions, produites par le système mobile, pour les balises virtuelles (VB) dans une zone partielle respective, et en ce que le système mobile est prévu avec une unité centrale (NBLT) qui commande une pluralité d'unités de zone partielle (BLT).
4. Dispositif selon la revendication 1,2 ou 3, caractérisé en ce qu'une unité de zone partielle respective (BLT) sous forme de table spécifie des balises virtuelles à l'intérieur de la zone partielle (2,3,4 ou 5) et en ce que la table concernée est mise à jour avec une adresse de balise réelle et/ou virtuelle.
5. Dispositif selon la revendication 3, caractérisé en ce que l'unité centrale (NBLT) reçoit ou stocke des numéros de téléphone d'accès et des positions de balises virtuelles, de sorte qu'on obtient une possibilité de changement simple en ce que les balises virtuelles du système peuvent être déplacées, augmentées, arrêtées, etc., cette possibilité de changement étant prévue également pour avoir lieu de préférence pendant le fonctionnement du système, et en ce que lesdits changements peuvent être téléchargés dans une unité de zone partielle respective (BLT).
6. Dispositif selon une quelconque des revendications précédentes, caractérisé en ce qu'un élément qui effectue une comparaison (6) est prévu pour produire un signal ou paramètre de différence (AUP) lors de la comparaison, et en ce qu'une valeur prédéterminée ou une grandeur prédéterminée du signal de différence indique si un passage existe ou non à la balise virtuelle concernée.
7. Dispositif selon la revendication 6, caractérisé en ce qu'une certaine différence de position prédéterminée est également calculée et en ce que toutes les valeurs du signal ou du paramètre inférieures à la valeur prédéterminée ou à l'intérieur d'une plage de valeurs en cours indiquent un passage.
8. Dispositif selon la revendication 6 ou 7, caractérisé en ce que la différence de valeur de signal ou de paramètre autorisée est prévue pour être réglable.
9. Dispositif selon une quelconque des revendications précédentes, caractérisé en ce que, lorsqu'un passage d'une balise en cours a été établi, l'unité/ véhicule mobile obtient des données à partir du système, et en ce que l'unité mobile signale la situation de trafic sur la distance qui vient d'être parcourue jusqu'à la balise en cours, pour permettre au système de balises de mettre à jour la situation de trafic
- et, en plus de cela, une transaction individuelle ou des transactions individuelles pour une gamme d'applications peuvent être effectuées.
10. Dispositif selon une quelconque des revendications précédentes, caractérisé en ce qu'on peut utiliser des unités de traitement et d'affichage connues en elles-mêmes, pour accès à la fois à des balises réelles et à des balises virtuelles.

Fig. 1

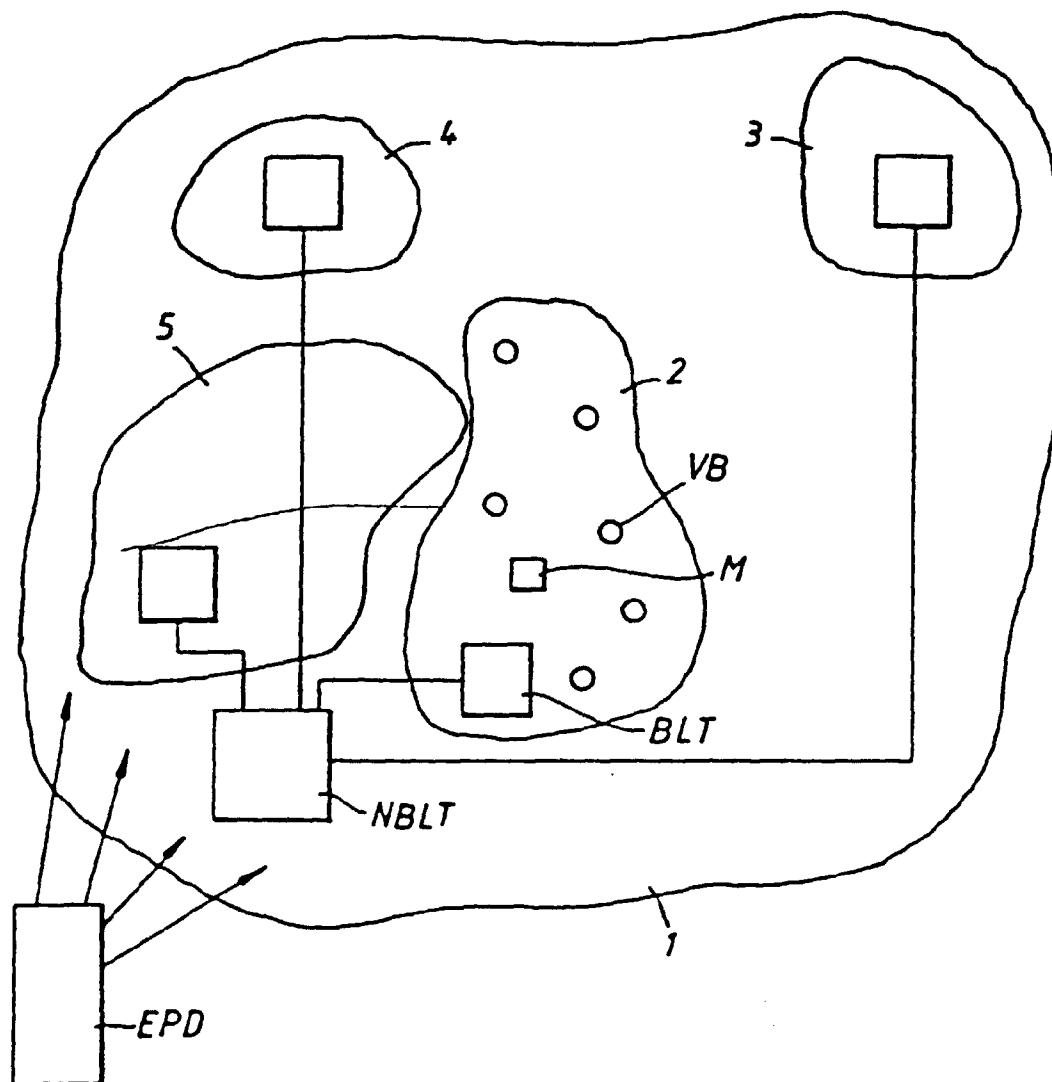


Fig. 2

