Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2918550 A1 2016/07/28

(21) 2 918 550

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(22) **Date de dépôt/Filing Date:** 2016/01/22

(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/07/28

(30) **Priorité/Priority:** 2015/01/28 (JP2015-014293)

(51) **Cl.Int./Int.Cl.** ***G01C 11/00*** (2006.01)

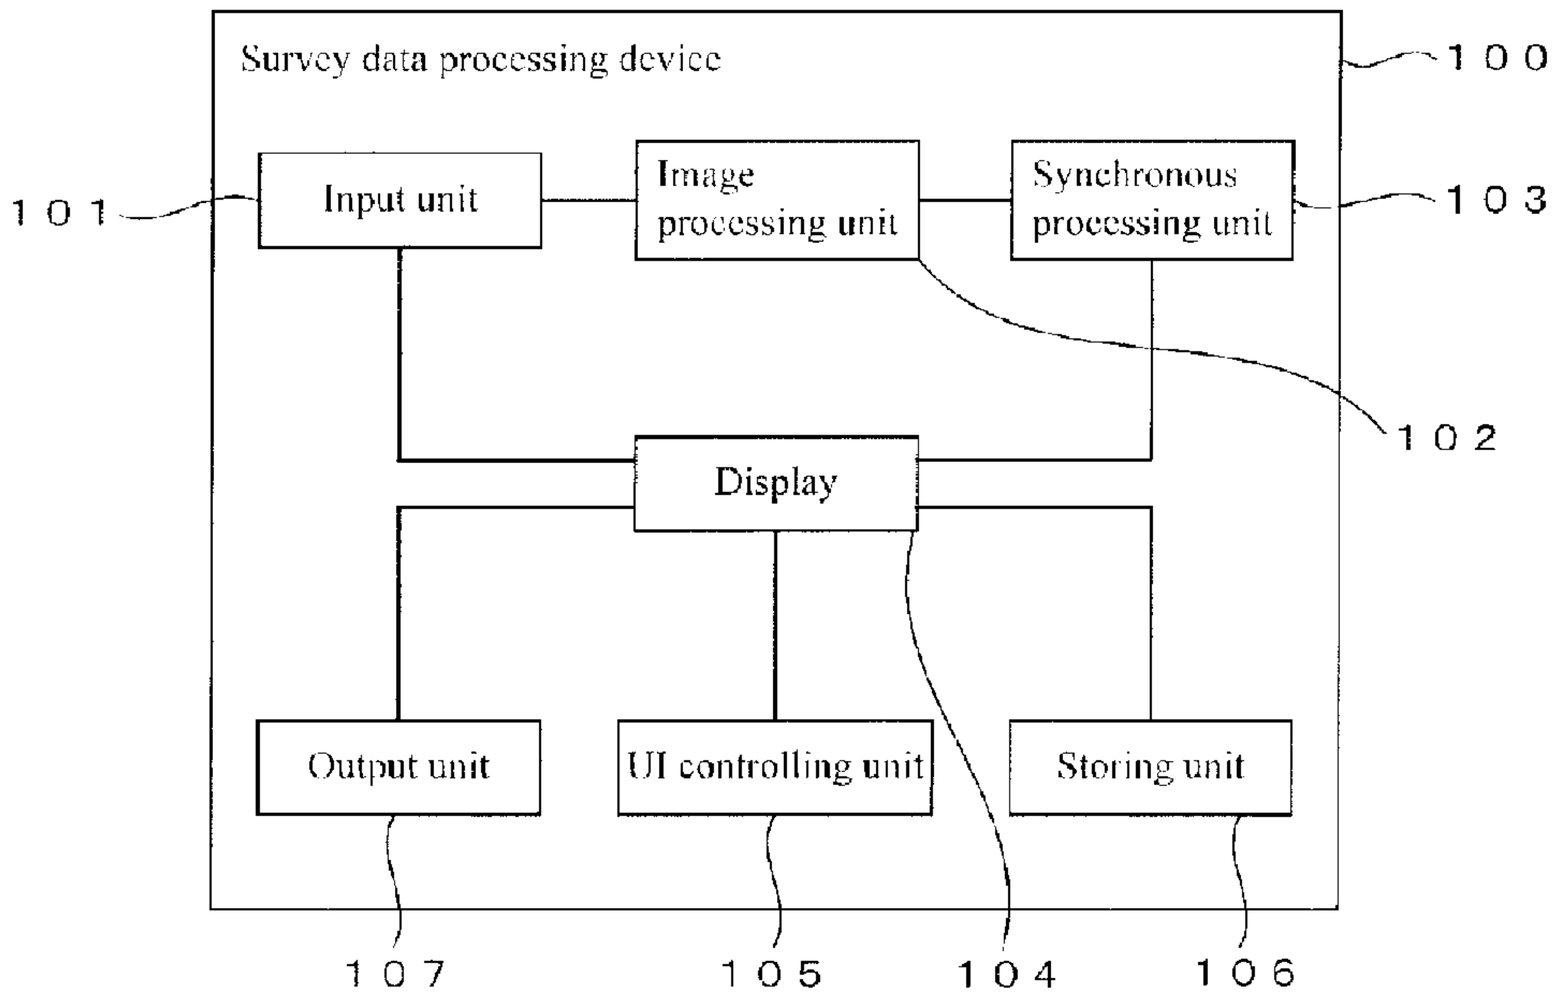
(71) **Demandeur/Applicant:**
KABUSHIKI KAISHA TOPCON, JP

(72) **Inventeurs/Inventors:**
SASAKI, DAISUKE, JP;
FUKAYA, NOBUYUKI, JP;
OOTANI, HITOSHI, JP;
OSARAGI, KAZUKI, JP;
SASAKI, TAKESHI, JP;
ANAI, TETSUJI, JP

(74) **Agent:** KIRBY EADES GALE BAKER

(54) **Titre : DISPOSITIF DE TRAITEMENT DES DONNEES DE SONDAGE, METHODE DE TRAITEMENT DES DONNEES DE SONDAGE ET PROGRAMME ASSOCIE**

(54) **Title: SURVEY DATA PROCESSING DEVICE, SURVEY DATA PROCESSING METHOD, AND PROGRAM THEREFOR**



(57) **Abrégé/Abstract:**
An operation burden in confirming a corresponding relationship between multiple still images and a traveled route is reduced. A survey data processing device includes a storing unit 106 and a UI controlling unit 105. The storing unit 105 stores survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body. The UI controlling unit 105 displays the flight route and at least one of the multiple still images on a screen. The displayed flight route and the displayed still image are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined, and a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

ABSTRACT

An operation burden in confirming a corresponding relationship between multiple still images and a traveled route is reduced. A survey data processing device includes a storing unit 106 and a UI controlling unit 105. The storing unit 105 stores survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body. The UI controlling unit 105 displays the flight route and at least one of the multiple still images on a screen. The displayed flight route and the displayed still image are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined, and a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

SURVEY DATA PROCESSING DEVICE, SURVEY DATA PROCESSING METHOD, AND PROGRAM THEREFOR

BACKGROUND OF THE INVENTION

Technical Field

The present invention relates to a surveying technique.

Background Art

For example, a technique for obtaining a three-dimensional model of the topography of an object based on image data (three-dimensional topographic data in which the topography of the object is modeled as electronic data) is publicly known (for example, refer to Japanese Unexamined Patent Application Laid-Open No. 0000-00005). The image data may be obtained by photographing a civil engineering worksite or the like from the air. In such a technique, information of photographing locations must be linked with the photographing data.

In the above technique, a method of using an autonomously flying unmanned air vehicle (UAV) equipped with a camera may be used. In this case, a relationship between an obtained still image (frame image in the case of using a moving image) and a location and an attitude of the camera (UAV) must be obtained.

SUMMARY OF THE INVENTION

However, there may be many cases in which the location data of the UAV cannot be perfectly synchronized with still images due to the costs and the

precisions of devices. Therefore, an operator must visually confirm the synchronization at the last step. Meanwhile, since there may be cases in which there are several hundred or more of still images, performing the above confirmation operation is complicated and imposes a heavy burden on the operator. In view of these circumstances, an object of the present invention is to provide a technique for reducing a burden of operation for confirming the corresponding relationship between multiple still images, which are photographed while traveling, and the traveled route of the photographing.

A first aspect of the present invention provides a survey data processing device including a storing unit and a UI controlling unit. The storing unit is configured to store survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body. The UI controlling unit is configured to display the flight route of the mobile body and at least one of the multiple still images on a screen. In this case, the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined. In addition, a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

According to the first aspect of the present invention, a UI (User Interface) image, by which the corresponding relationship between the flight route and the multiple still images is made easy to visually recognize, is obtained. Moreover, the moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

Therefore, by visually comparing this indication with the trajectory of the traveled route of the mobile body, whether flight route data and still image data of survey data are synchronized correctly is judged. Here, the survey data is a base data for displaying data, that is, survey data, in which the image data of multiple still images, which are photographed from the mobile body while flying, is correlated with the flight route of the mobile body. This operation is easily performed, and a burden on an operator in confirming the survey data is reduced.

According to a second aspect of the present invention, in the first aspect of the present invention, a mark for identifying a location at the time when the still image was photographed may be indicated in the displayed flight route. According to the second aspect of the present invention, the relationship between the flight route and the still images is more easily visually recognized.

According to a third aspect of the present invention, in the second aspect of the present invention, a corresponding still image may be selected when the mark for identifying the location at the time when the corresponding still image was photographed is selected. According to the third aspect of the present invention, a UI, by which the relationship between the flight route and the still images is made to be easily confirmed by an operator, is obtained.

A fourth aspect of the present invention provides a survey data processing method including: storing survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body, and displaying the flight route of the mobile body and at least one of the multiple still images on a screen. In

this case, the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined. In addition, a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

A fifth aspect of the present invention provides a computer program product including a non-transitory computer-readable medium storing computer-executable program codes. The computer-executable program codes include program code instructions for: storing survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body, and displaying the flight route of the mobile body and at least one of the multiple still images on a screen. In this case, the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined. In addition, a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

According to the present invention, a burden of operation for confirming the corresponding relationship between multiple still images, which are photographed while traveling, and the traveled route of the photographing, is reduced.

BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a block diagram of an embodiment.

Fig. 2 is a block diagram of an image processing unit.

Fig. 3 is a block diagram of a UI controlling unit.

Fig. 4 is an explanatory diagram showing a principle of template matching.

Fig. 5 is an explanatory diagram showing a principle of a processing for estimating a flight route from images.

Fig. 6 is a flow chart showing an example of a processing procedure.

Fig. 7 is a flow chart showing an example of a processing procedure.

Fig. 8 is a view showing a relationship between still images and a traveled route.

Fig. 9 is a view showing an example of a GUI image displayed on a screen.

Fig. 10 is a view showing an example of a GUI image displayed on a screen.

Fig. 11 is a view showing an example of a GUI image displayed on a screen.

Fig. 12 is a view showing an example of a GUI image displayed on a screen.

Fig. 13 is a view showing an example of a GUI image displayed on a screen.

Fig. 14 is a view showing an example of a GUI image displayed on a screen.

PREFERRED EMBODIMENTS OF THE INVENTION

Outline

In this embodiment, an autonomously flying unmanned air vehicle (UAV) with a piece of equipment mounted with a camera is used. The UAV is equipped with a GNSS unit (location identifying unit using a navigation satellite) and an IMU (inertial navigation unit), and it is capable of autonomous flight. The UAV consecutively photographs a ground surface by the camera while flying. Specifically, the UAV consecutively performs processing of photographing a first still image at time t1, a second still image at time t2, and a third still image at time t3 while flying. The interval of the photographing is determined as needed, and for example, it may be 2 seconds. Alternatively, a moving image may be photographed, and frame images constructing the moving image may be used as still images. That is, a moving image is constructed of multiple frame images that are aligned on a time axis, such as of a first frame image photographed at time t1, a second frame image photographed at time t2, and so on, and therefore, the frame images may be used as still images in this embodiment.

In the photographing, since the photographing is performed while flying, the positions of viewpoints shift little by little, whereby numerous still images including photographed areas that slightly differ from each other are obtained. The camera is equipped with a clock and records the photographing time, whereby image data of photographed still images, which are respectively linked with its photographing time, is obtained. The UAV has a function of recording data relating to the flight route that is measured by the GNSS unit and the IMU.

In this embodiment, the UAV records location information of the flight route at an interval of 0.2 seconds by using the GNSS. The data recording the flight route can be output from the UAV to the outside as log data after the flight. Meanwhile, the camera photographs still images at an interval of 2 seconds and stores the image data. The UAV and the camera are respectively equipped with a clock, but the clocks thereof are not synchronized with each other. Therefore, when the flight is completed, immediately after the image data, and the log data relating to the flight route, are respectively obtained from the camera and the UAV, the image data and the log data relating to the flight route do not correspond to each other. This embodiment relates to a technique of making the image data and the flight route correspond to each other by software processing.

Structure

Fig. 1 shows a survey data processing device 100 for performing a processing for calculating the relationship between the image data obtained from the camera and the flight route data obtained from the UAV. The survey data processing device 100 shown in Fig. 1 functions as a computer and includes a CPU, a solid electronic memory, a hard disk storage unit, various types of interfaces, and other arithmetic elements as necessary. Fig. 1 shows each kind of the functioning units, which are understood as functions. One or more of each kind of the functioning units shown in Fig. 1 may be constructed of software or may be constructed of dedicated hardware.

For example, the survey data processing device 100 may be constructed of dedicated hardware, or the functions of the functioning units shown in Fig. 1

may be performed by software by using a general purpose computer. In the case of using a general purpose computer, images (described later) are displayed on a display provided to or connected to the computer, and the operator performs various kinds of operations by using a UI (User Interface) that can be used in the computer. In addition, at least some of the functions of the survey data processing device 100 may be performed by a tablet computer (tablet terminal) or a smartphone.

The survey data processing device 100 includes an input unit 101, an image processing unit 102, a synchronous processing unit 103, a display 104, a UI (User Interface) controlling unit 105, a storing unit 106, and an output unit 107.

Image data of images, which are photographed by the camera mounted on the UAV while flying, log data (data of flight route recorded) of the UAV, and data relating to a tilt of the UAV measured by the IMU, are input to the input unit 101. The image processing unit 102 performs a processing for estimating the flight route of the UAV based on multiple still images, which are photographed by the UAV while flying. Fig. 2 shows a block diagram of the image processing unit 102. The image processing unit 102 includes a feature point extracting unit 111, a matching point identifying unit 112, a moving-direction vector feature extracting unit 113, a flight route estimating unit 114, and a normalizing processing unit 115.

The feature point extracting unit 111 extracts feature points from the still images. As the feature points, points that can be differentiated from surroundings, for example, edge portions and portions having colors that are

different from surroundings, are extracted. The extraction of the feature points is performed by software processing using a differential filter such as a Sobel filter, a Laplacian filter, a Prewitt filter, a Roberts filter, or the like.

The matching point identifying unit 112 identifies matching relationships between the feature points, which are extracted respectively from two still images. That is, the matching point identifying unit 112 performs a processing for identifying feature points, which are extracted from one still image, with feature points in another still image. This processing for identifying the matching relationships of the feature points is performed by using the template matching shown in Fig. 4, for example.

As the template matching, a SSDA method (Sequential Similarity Detection Algorithm), a cross-correlation coefficient method, or the like may be used. An example of the template matching will be described below. The template matching is a method in which coordinate data of images in two coordinate systems are compared with each other and a matching relationship between the two images is calculated by correlation relationship between the coordinate data. In the template matching, the matching relationship between feature points of two images seen from different viewpoints is calculated. Fig. 4 is an explanatory diagram for explaining the principle of the template matching. In this method, as shown in Fig. 4, a template image of $N_1 \times N_1$ pixels is moved on a search range $(M_1 - N_1+1)^2$ within an input image of $M_1 \times M_1$ pixels which is larger than the template image, and an upper left position of the template image is calculated so that the cross-correlation function C(a, b) denoted by the following First Formula represent the maximum value (that is,

the correlation degree becomes maximum).

First Formula

$$C(a,b)=\sum_{m_1=0}^{N_1-1}\sum_{n_1=0}^{N_1-1}\frac{\left\{I_{(a,b)}(m_1,n_1)-\overline{I}\right\}\left\{T(m_1,n_1)-\overline{T}\right\}}{\sqrt{I_{\sigma ab}T_{\sigma}}}$$

Here,

$$\overline{I}=\frac{1}{N_1^2}\sum_{m_1=0}^{N_1-1}\sum_{n_1=0}^{N_1-1}I_{(a,b)}(m_1,n_1)$$

$$\overline{T}=\frac{1}{N_1^2}\sum_{m_1=0}^{N_1-1}\sum_{n_1=0}^{N_1-1}T(m_1,n_1)$$

$$I_{\sigma ab}=\frac{1}{N_1^2}\sum_{m_1=0}^{N_1-1}\sum_{n_1=0}^{N_1-1}\left\{I_{(a,b)}(m_1,n_1)-\overline{I}\right\}^2$$

$$T_{\sigma}=\frac{1}{N_1^2}\sum_{m_1=0}^{N_1-1}\sum_{n_1=0}^{N_1-1}\left\{T(m_1,n_1)-\overline{T}\right\}^2$$

$I_{(a,b)}(m_1,n_1)$: Local image of input image

$T(m_1,n_1)$: Template image

The above processing is performed by changing the magnification of the one image and rotating the one image. In a condition in which the correlation degree is the maximum, the matched region of both images is calculated, and feature points in this region are extracted, whereby matching points are detected.

By using the template matching, a portion that matches between two compared images can be identified, and the matching relationship between the

two images can be calculated. In this method, the relative positional relationship between the two images is calculated so that the degree of the correlation relationship between the two images can be the maximum. The correlation relationship between the two images is calculated based on the feature points of the two images.

The moving-direction vector feature extracting unit 113 extracts features of vectors correlating the movement of the UAV (camera), based on changes in the still images, which are generated due to the elapse of time. The vectors are called "moving-direction vectors". By calculating trajectories of the moving-direction vectors in accordance with the elapse of time, a relative flight route of the UAV is calculated.

The processing performed by the moving-direction vector feature extracting unit 113 will be described hereinafter. First, to provide background information, a relationship between a still image obtained at each time and an actual flight route is described. Fig. 8 shows corresponding relationships between still images shifted and movement vectors obtained from the log data of the UAV. Fig. 8 shows consecutive still images Nos. 1 to 4, showing conditions in which the photographed location is slightly shifted every moment as the UAV flies. The flight route (changes in the movement vectors) obtained from the log data of the UAV is shown under the consecutive still images Nos. 1 to 4.

As shown in Fig. 8, changes in the still images correspond to the movement in the flight route. By using this phenomenon, the moving-direction vector feature extracting unit 113 performs a processing for

obtaining moving-direction vectors, which characterize movement in the still images relative to the camera, by analyzing the still images.

Fig. 5 schematically shows still images, which are respectively obtained at times t1, t2, and t3, and the times t1, t2, and t3 passed in this order. The still images shown in Fig. 5 show a simplified crossroad with a building standing on a corner. Fig. 5 shows a case in which a feature point X moved leftward from time t1 to time t2 and then further moved to a lower left side from time t2 to time t3.

In this case, the moving-direction vector feature extracting unit 113 focuses on the feature point X and extracts changes in the location thereof. For example, in this case, by comparing the still image at the time t1 with the still image at the time t2, a moving-direction vector A is obtained as a vector indicating the moving direction and the moving distance of the feature point X. Then, by comparing the still image at the time t2 with the still image at the time t3, a moving-direction vector B is obtained as a vector indicating the moving direction and the moving distance of the feature point X. Thereafter, the trajectories of the moving-direction vectors A and B are connected with each other, whereby a route C is obtained. Thus, by comparing each still image with a next still image that is photographed in a consecutive manner, moving-direction vectors (for example, the moving-direction vectors A and B shown in Fig. 5) for characterizing changes in the still images is obtained.

The flight route estimating unit 114 estimates the flight route of the UAV (traveled route of the camera) based on the moving-direction vectors. For example, considering the route C shown in Fig. 5, the UAV moves along a

route that is the reverse of the route indicated by the moving-direction vectors A and B relative to the ground surface. Therefore, the flight route of the UAV from the times t1 to t3 is indicated as shown by the flight route L. Although the above is described in the case of three instances of the times t1, t2, and t3, the trajectory of the flight route of the UAV is estimated by further performing the same processing on still images that are obtained at multiple times. The above processing is performed by the flight route estimating unit 114.

The estimated flight trajectory obtained at this stage does not have a true scale, and therefore, it is relative. That is, in the flight route obtained in accordance with the principle shown in Fig. 5, data relating to the flight distance is not included.

The normalizing processing unit 115 shown in Fig. 2 enlarges and reduces the estimated flight trajectory of the UAV, which is estimated by the flight route estimating unit 114, so as to adjust the difference in the scale from the actual flight route of the UAV, which is obtained from the log data of the UAV. That is, since the estimated flight route of the UAV obtained by the flight route estimating unit 114 is a relative flight trajectory that is not provided with a true scale, the scale is adjusted as described above so as to be made to correspond to the scale of the actual flight route obtained from the log data.

In general, flight of a UAV may be conducted along a route making a trajectory as shown in Fig. 9. Therefore, the estimated flight trajectory is enlarged or reduced so as to have a scale that is approximately the same as the scale of the actual trajectory as shown in Fig. 9. Thus, a trajectory of the estimated flight route, of which the scale is adjusted so as to be approximately

the same as the true scale, is obtained. The above is the processing performed by the normalizing processing unit 115.

Then, to return to Fig. 1, the synchronous processing unit 103 performs a processing for comparing the data of the estimated flight route of the UAV, which is estimated by the image processing unit 102, with the data of the flight route (log data), which is actually recorded by the UAV, and synchronizing (matching) these data with each other.

A specific example of the processing performed by the synchronous processing unit 103 is described below. The synchronous processing unit 103 matches a trajectory of a flight route A of the UAV, which is estimated by the image processing unit 102, with a flight route B, which is actually recorded, by rotating, parallel moving, enlarging, or reducing the flight route A. By performing the matching, the matching relationship between the flight routes A and B is clarified, and which still image was photographed at a specific position in the flight route is identified.

Specifically, since the relationship between the location and the time is determined in the flight route B, when the flight route A and the flight route B are matched with each other, the flight route A (flight route that is estimated by the image analysis) is provided with a true scale, and the relationship between the location and the time is clarified in the flight route A. Then, by clarifying the relationship between the location and the time in the flight route A, information of the photographing times and the photographing locations of the still images for the flight route A is obtained. That is, the photographing time and the photographing location of a specific still image are identified in the

image data that is obtained by the camera. The identified data of the photographing time and the photographing location, and the data relating to the tilt of the UAV at the time when the UAV photographed a corresponding image, are added to each image file as header information (for example, a geotag).

The display 104 displays various GUI (Graphical User Interface) images as shown in Figs. 9 to 14. The display 104 also performs displays, that are necessary for controlling the survey data processing device 100, and displays of various kinds of data. When a notebook computer is used as the survey data processing device 100, the display of the notebook computer may be used as the display 104.

The UI controlling unit 105 controls functions of GUI as shown in Figs. 9 to 14. Fig. 3 shows a block diagram of the UI controlling unit 105. The UI controlling unit 105 includes a route point selection receiving unit 121, a corresponding still image obtaining unit 122, a moving-direction indication embedding unit 123, and a display controlling unit 124 for displaying a moving-direction indication embedded still image.

The route point selection receiving unit 121 receives the contents when the operator selects a specific point (route point) of the flight route that is obtained from the log data. For example, Fig. 10 shows an example of a GUI image displayed on the display 104. A flight route obtained from the log data is shown on the right side in Fig. 10, and a still image obtained from image data is shown on the left side in Fig. 10. Here, the still image shown on the left side was photographed at a position at a specific point (marker point with a cloverleaf shape) of the flight route on the right side. The position of the

marker with the cloverleaf shape can be selected by controlling the GUI by the operator. The contents of the operation are received by the route point selection receiving unit 121.

The corresponding still image obtaining unit 122 obtains a still image (still image photographed by the camera), which corresponds to the specific position of the flight route that is received by the route point selection receiving unit 121, from the image data. The moving-direction indication embedding unit 123 performs a processing for embedding a mark (in the case shown in Fig. 10, an arrow) in the still image that is obtained by the corresponding still image obtaining unit 122, for indicating the moving direction of the UAV (camera). The moving direction of the UAV is calculated by the principle shown in Fig. 5. That is, by comparing still images with each other, which are photographed in a consecutive manner, relative movements of feature points between the still images are detected, and the moving direction and the moving distance of the UAV are calculated therefrom. By this processing, the moving direction and the moving distance of the UAV are calculated based on a starting point in a preceding still image, and they are displayed by an arrow (vector display) in a next still image. This processing is performed by the moving-direction indication embedding unit 123.

The display controlling unit 124 performs controlling for displaying the still image, in which a mark for indicating the moving direction of the UAV is embedded, on the display 104. An example of a still image, which is displayed on the display 104 by the display controlling unit 124, is shown on the left side of Fig. 10.

Then, to return to Fig. 1, the storing unit 106 stores various data, which are necessary for operating the survey data processing device 100, and various data, which are obtained as a result of the operation. For example, the storing unit 106 stores image data obtained by the camera, the log data of the UAV, various kinds of programs for operating the survey data processing device 100, intermediate data to be processed by the survey data processing device 100, and data obtained as a result of the processing. The output unit 107 outputs various data, which are obtained by the survey data processing device 100, and various data, which are used in the survey data processing device 100, to the outside.

Example of Processing

Fig. 6 shows an example of a processing procedure. When the processing is started, image data is input (step S101), and the log data is also input (step S102). After the image data is input, feature points are extracted in each of the still images (step S103). The processing of this step is performed by the feature point extracting unit 111 shown in Fig. 2. After the feature points are extracted, the feature points, which match between still images that are photographed in a consecutive manner, are identified (step S104). The processing of this step is performed by the matching point identifying unit 112.

After the matching points are identified, features of moving-direction vectors are extracted by using the method exemplified in Fig. 5 (step S105). The processing of this step is performed by the moving-direction vector feature extracting unit moving direction vector feature extracting unit 113 shown in Fig. 2. Next, the procedure advances to step S106, and a flight route of the UAV is calculated based on the moving-direction vectors in accordance with the

principle shown in the lower side in Fig. 5. The processing of this step is performed by the flight route estimating unit 114 shown in Fig. 2.

After the flight route is estimated, a normalizing processing (step S107) is performed, whereby the scale of the flight route, which is obtained from the log data 102, and the scale of the flight route, which is estimated in step S106, are made to correspond with each other. Then, the estimated flight route is in parallel moved, rotated, enlarged, or reduced, so as to match with the flight route obtained from the log data 102 (step S108). The matching is performed by the least-squares method.

In the processing of this step, the location of the estimated flight route is calculated by the least-squares method so that the total of distances between the vectors for indicating the estimated flight route, which is obtained by the method shown in Fig. 5, and the vectors for indicating the flight route, which is obtained from the log data, will be minimum. Naturally, the estimated flight route and the flight route obtained from the log data may be matched with each other by another method. By performing step S108, survey data, in which the photographed multiple still images are linked with the flight route that is obtained by the UAV, is obtained. The survey data is stored in the storing unit 106 shown in Fig. 1.

By matching the flight route, which is obtained from the log data 102, with the flight route, which is estimated in step S106, the corresponding relationship between the flight route and the photographed still images is determined. As a result, the GUI images as exemplified in Figs. 9 to 14 can be displayed (step S109).

Figs. 9 to 14 will be described hereinafter. Selected locations W, which were selected prior to the flight, and an actual flight route obtained from the log data, are shown on the right side in Fig. 9. On the other hand, a still image (expected to having been photographed at the location) corresponding to the location, which is selected in the flight route on the right side by the cloverleaf-shaped marker, is shown on the left side in Fig. 9.

An actual flight route obtained from the log data is shown on the right side in Fig. 10. Here, the arrow marked points correspond to the locations where the still images were photographed, respectively. When the operator selects the arrow mark, the selected point is changed into a cloverleaf-shaped marker, and a corresponding still image is shown on the left side. At this time, an arrow for indicating the direction (flight direction) of the UAV is shown in the still image on the left side. The same processing is also performed in the case shown in Figs. 11 to 14.

An example of a processing procedure relating to Figs. 10 to 14 will be described below. Here, Fig. 10 is described as a typical example. Fig. 7 shows an example of the processing procedure in this case. First, as a preparation, the processing shown in Fig. 6 is performed, and the image data and the log data are synchronized (matched).

When the operator selects a specific photographing location (specific arrow marked position) of the flight route on the right side in the GUI image in Fig. 10 (step S111), a corresponding still image is obtained (step S112). The processing of step S111 is performed by the route point selection receiving unit 121 shown in Fig. 3, and the processing of step S112 is performed by the

corresponding still image obtaining unit 122 shown in Fig. 3.

After step S112, the procedure advances to step S113, and a processing for embedding an arrow (moving-direction indication) in the still image obtained in step S112 for indicating the flight direction of the UAV is performed. This processing is performed by the moving-direction indication embedding unit 123 shown in Fig. 3. Next, the procedure advances to step S114, and a processing for displaying the still image, in which the arrow (moving-direction indication) for indicating the flight direction of the UAV is embedded, on the display 104 shown in Fig. 1. This processing is performed by the display controlling unit 124 shown in Fig. 3.

Although it depends on the performances of the GNSS unit and the IMU equipped on the UAV, the log data obtained by the UAV contains a margin of error in most cases. In particular, when a device of low cost type is used, this tendency increases. In addition, the interval of obtaining the location information by the UAV does not necessarily coincide with the photographing interval of the camera. When general-use products are used together, there may be cases in which the time information of the log data differs from the time information of the image data, in the first place. Therefore, there may be cases in which the location selected by the operator does not correspond to the still image shown on the left side in Fig. 10. That is, there is a possibility that the matching is not perfectly performed, and therefore, a still image, which is different from a still image photographed at the selected location by several frames (a still image photographed at a location that is slightly different from the selected location), may be selected and displayed.

By using the images shown in Figs. 10 to 14, such a frame shift is detected. In this case, the shift can be corrected manually by the operator. The detection of the shift is performed as follows. As shown in Figs. 10 to 14, the operator selects a flight location along the flight route and confirms the still image shown on the left side at the same time. At this time, an arrow for indicating the flight direction of the UAV is shown in the still image. In addition, a moving distance from the location, at which a preceding still image was photographed, is added to the arrow.

By looking at the changes from Fig. 11 to Fig. 12 and then from Fig. 12 to Fig. 13, change in the direction of the arrow shown in the still image according to the turn of the UAV is observed. By comparing the change in the route on the right side with the change in the direction of the arrow in the still image on the left side at turning, the correctness of the corresponding relationship between the flight route and the still image is examined. For example, if the direction of the UAV is clearly changed in the flight route on the right side, but no change in the direction of the arrow can be recognized in the still image on the left side, between two timings that are consecutive or close to each other, mismatch of the relationship between the flight route and the still image is known. In addition, the mismatched direction is known from the difference between the timings when the change appears in the flight route and the still image, respectively.

For example, when the GUI images shown in Figs. 11 to 14 are displayed in the time sequence order, a change in the direction of the arrow in the still image on the left side may be observed slightly after a change in the

direction of the UAV is observed in the flight route on the right side. In this case, a still image, which is photographed at a location subsequent to the actual location in the fight route, is made to correspond to the flight route incorrectly. In this case, by shifting the corresponding relationship by the corresponding amount of the time shift, a corrected corresponding relationship between the image data and the log data is obtained.

As described above, the operation for confirming the synchronization between the still images and the flight route is visually performed on the screen and is easily conduced. Therefore, the burden on the operator is lightened. In particular, a shift in the synchronized data can be easily and correctly recognized by looking at portions at which the UAV turned. Accordingly, the operation is performed with high precision by a small burden.

What is claimed is:

1. A survey data processing device comprising:

a storing unit configured to store survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body; and

a UI controlling unit configured to display the flight route of the mobile body and at least one of the multiple still images on a screen,

wherein the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined, and a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

2. The survey data processing device according to claim 1, wherein a mark for identifying a location at the time when the still image was photographed is indicated in the displayed flight route.

3. The survey data processing device according to claim 2, wherein a corresponding still image is selected when the mark for identifying the location at the time when the corresponding still image was photographed is selected.

4. A survey data processing method comprising:

storing survey data, in which image data of multiple still images that are

photographed from a mobile body while flying is correlated with a flight route of the mobile body; and

displaying the flight route of the mobile body and at least one of the multiple still images on a screen,

wherein the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined, and a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

5. A computer program product comprising a non-transitory computer-readable medium storing computer-executable program codes, the computer-executable program codes comprising program code instructions for:

storing survey data, in which image data of multiple still images that are photographed from a mobile body while flying is correlated with a flight route of the mobile body; and

displaying the flight route of the mobile body and at least one of the multiple still images on a screen,

wherein the flight route and at least one of the multiple still images are displayed on the same screen at the same time in a condition in which a corresponding relationship between the flight route and the multiple still images is determined, and a moving direction of the mobile body that photographed the displayed still image is indicated in the displayed still image.

Fig. 1

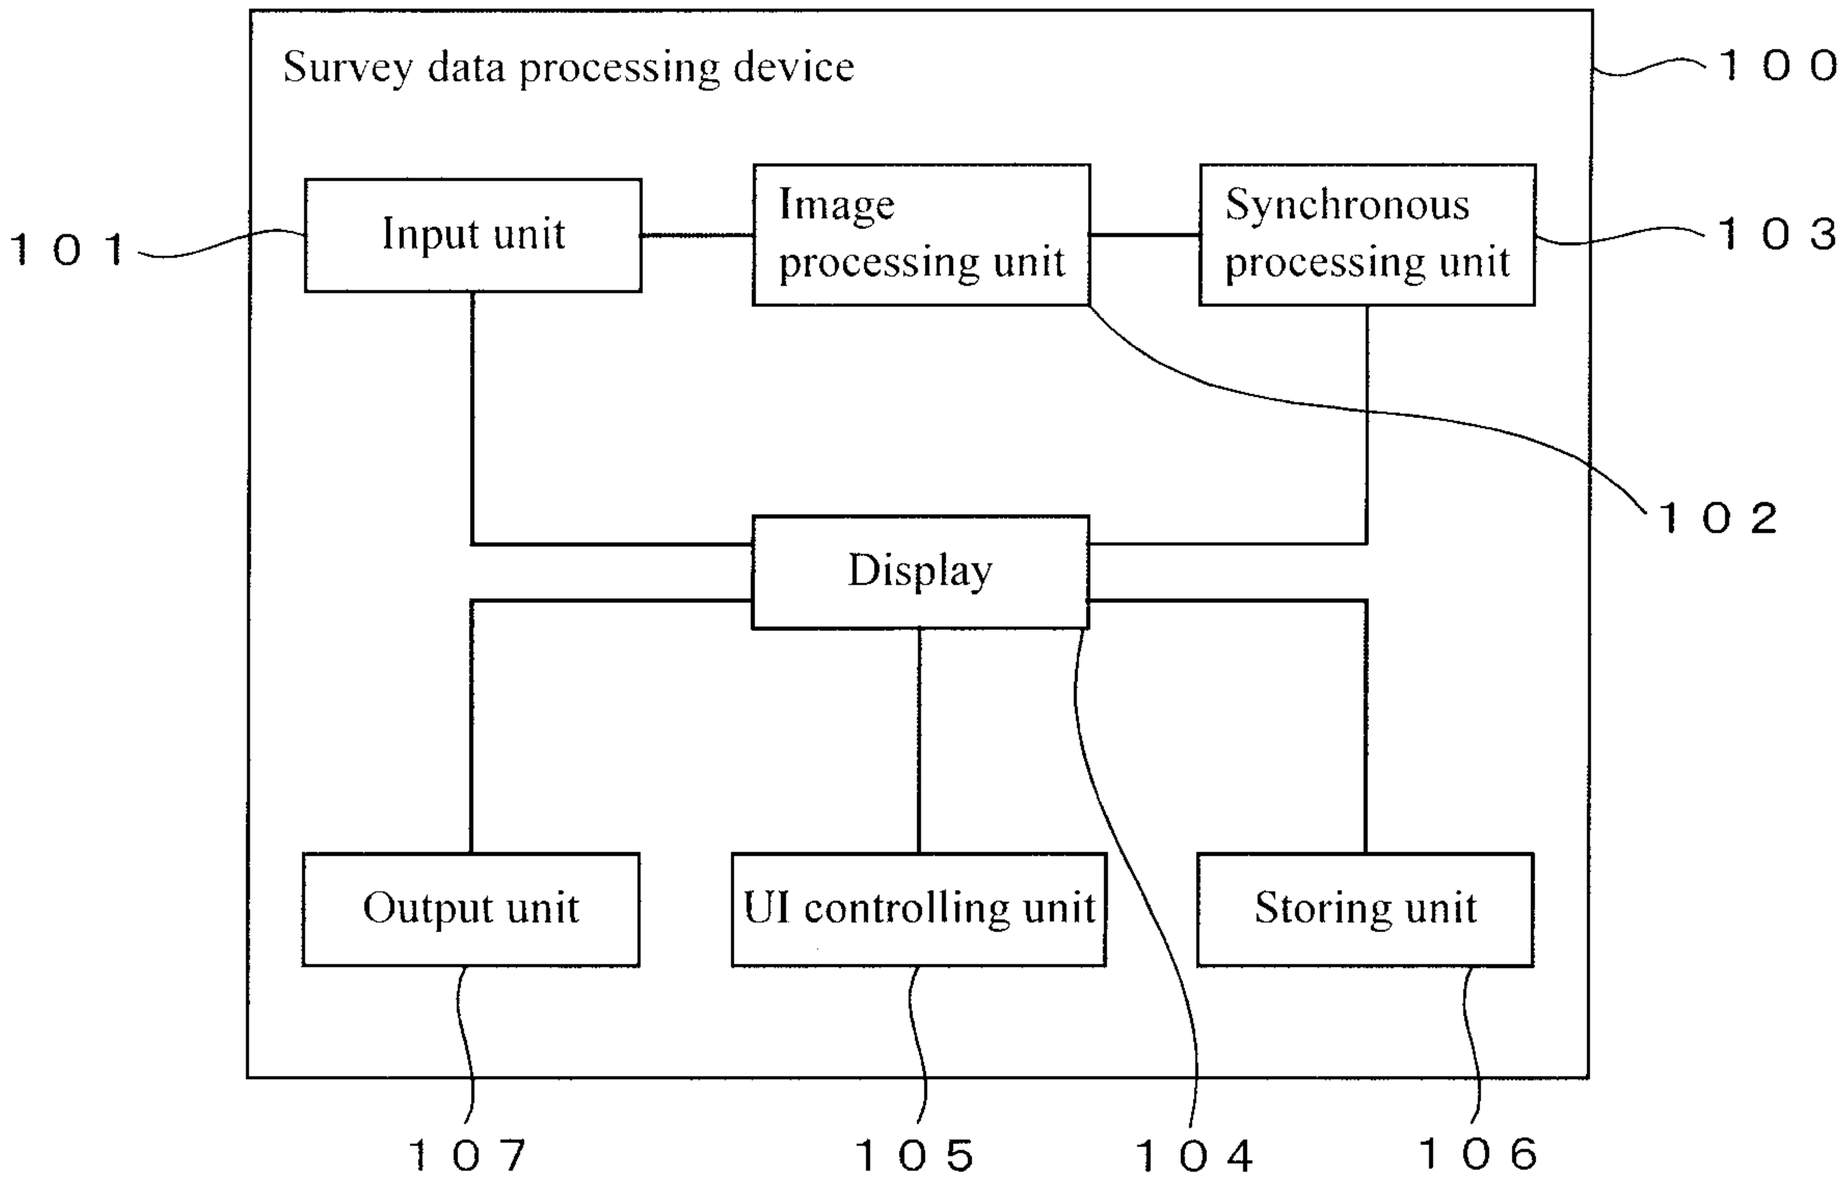

Survey data processing device
100
101
Input unit
Image processing unit
Synchronous processing unit
103
102
Display
Output unit
UI controlling unit
Storing unit
107
105
104
106

Fig. 2

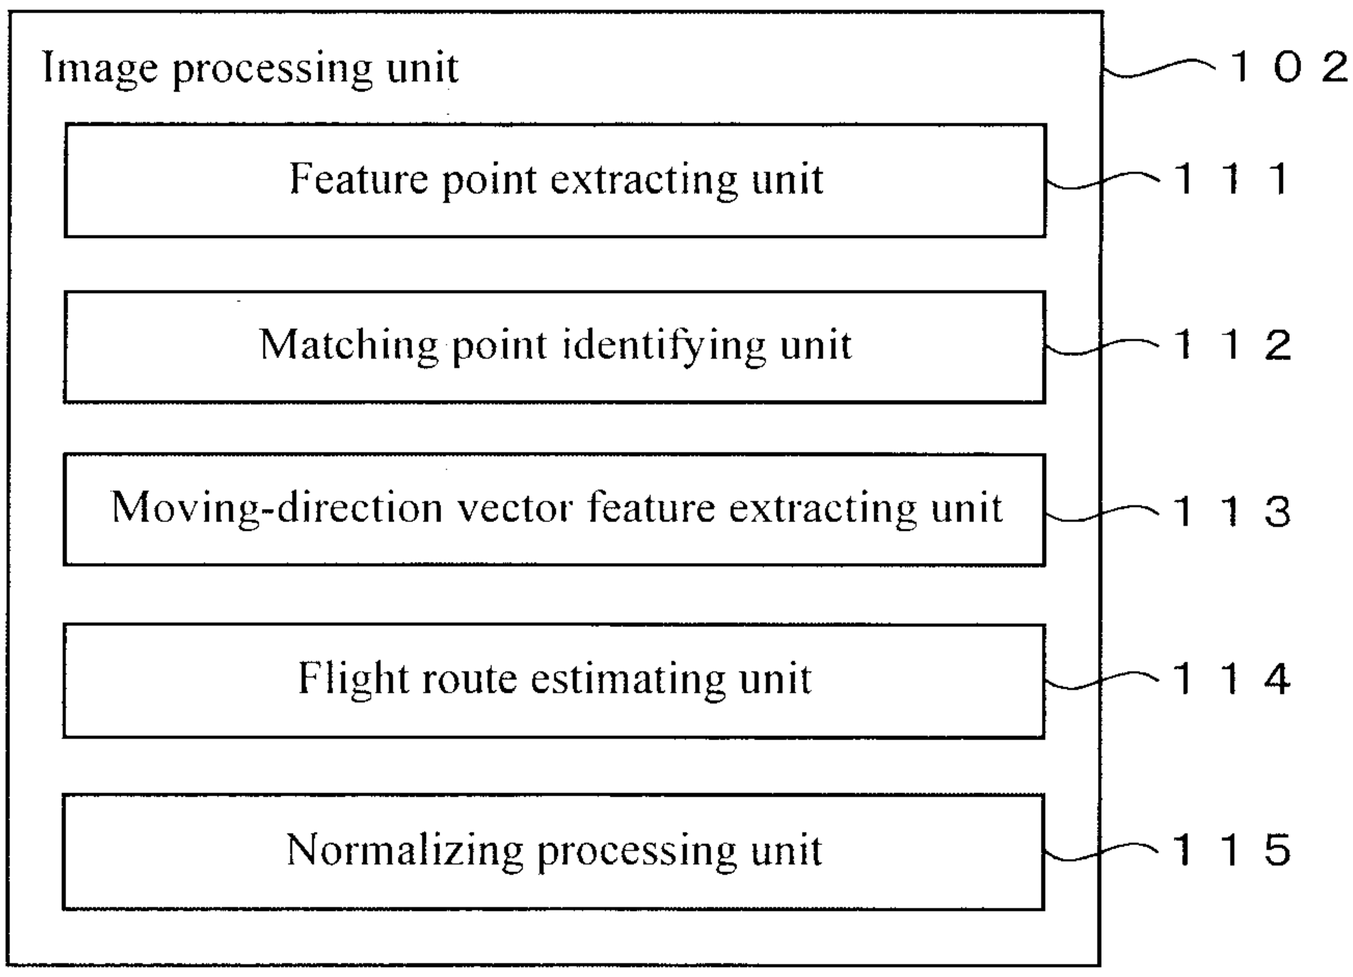

Image processing unit
102
Feature point extracting unit
111
Matching point identifying unit
112
Moving-direction vector feature extracting unit
113
Flight route estimating unit
114
Normalizing processing unit
115

Fig. 3

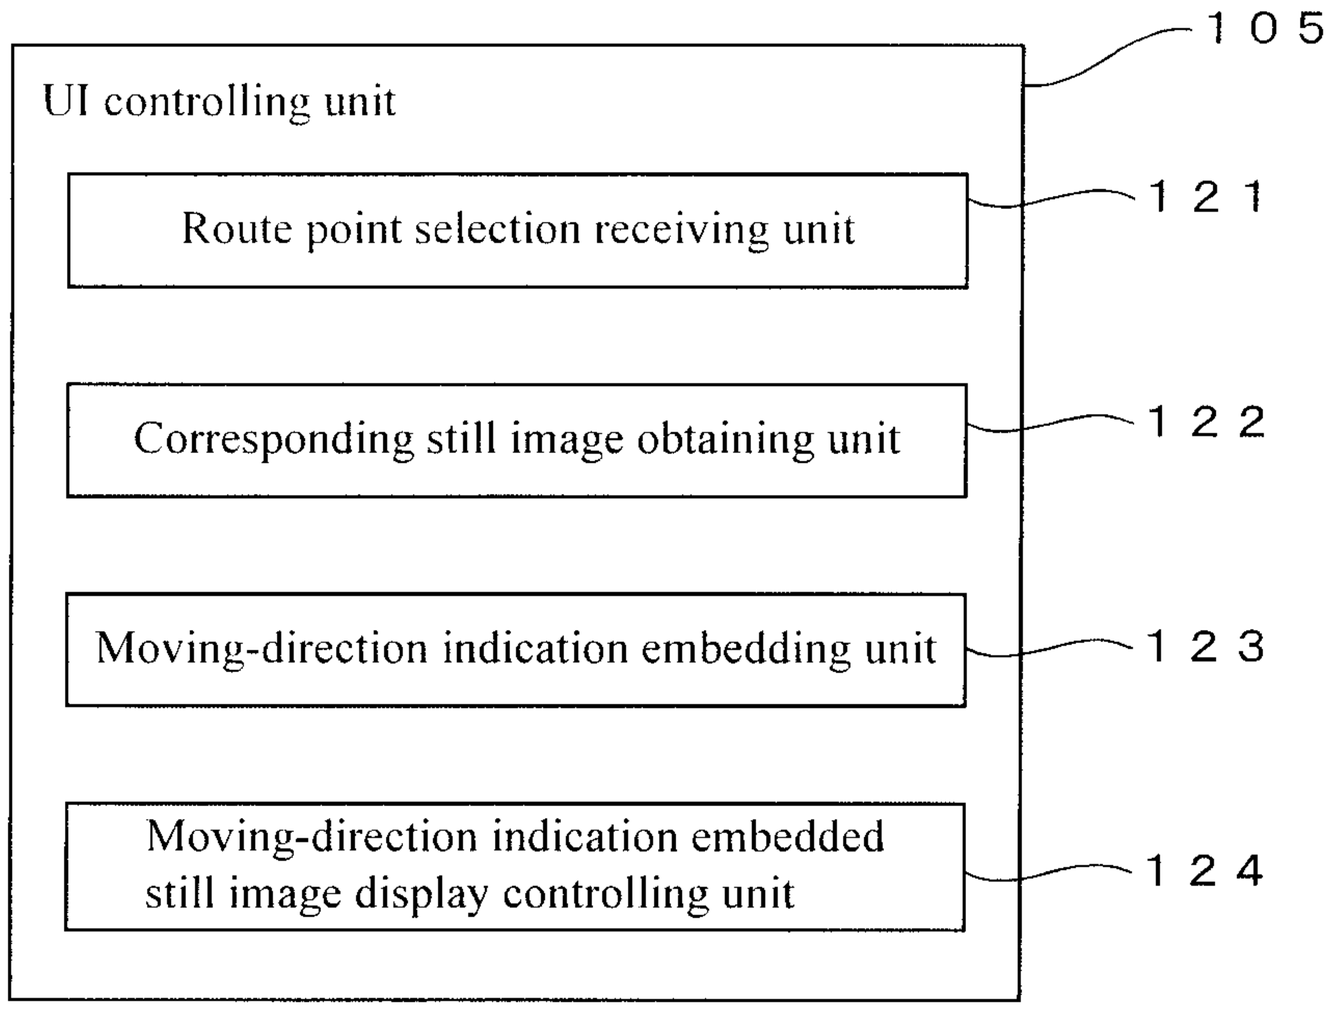

105
UI controlling unit
121
Route point selection receiving unit
122
Corresponding still image obtaining unit
123
Moving-direction indication embedding unit
124
Moving-direction indication embedded still image display controlling unit

Fig. 4

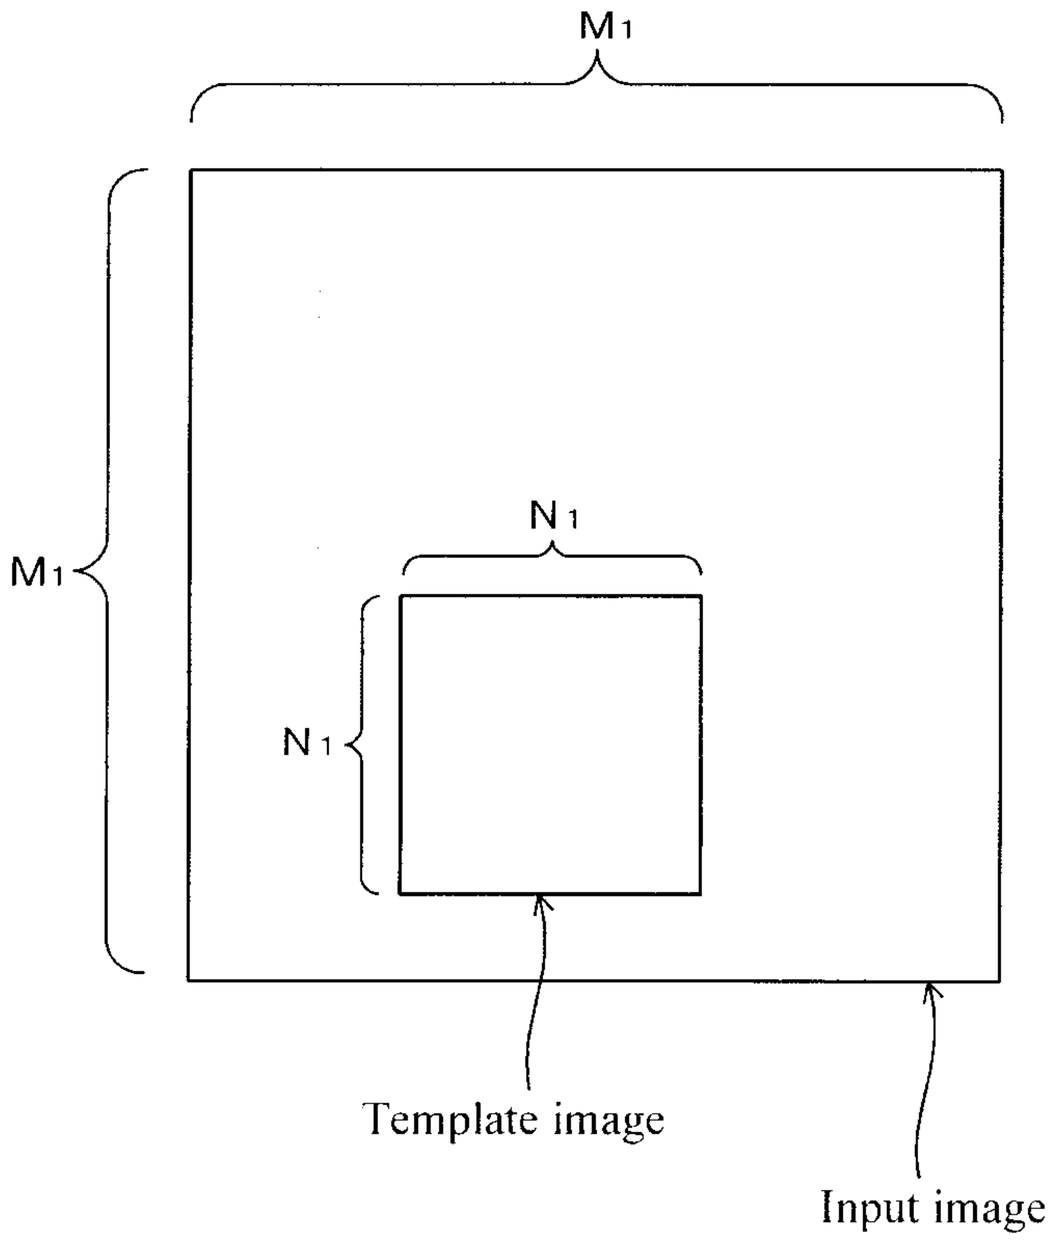

M1
M1
N1
N1
Template image
Input image

Fig. 5

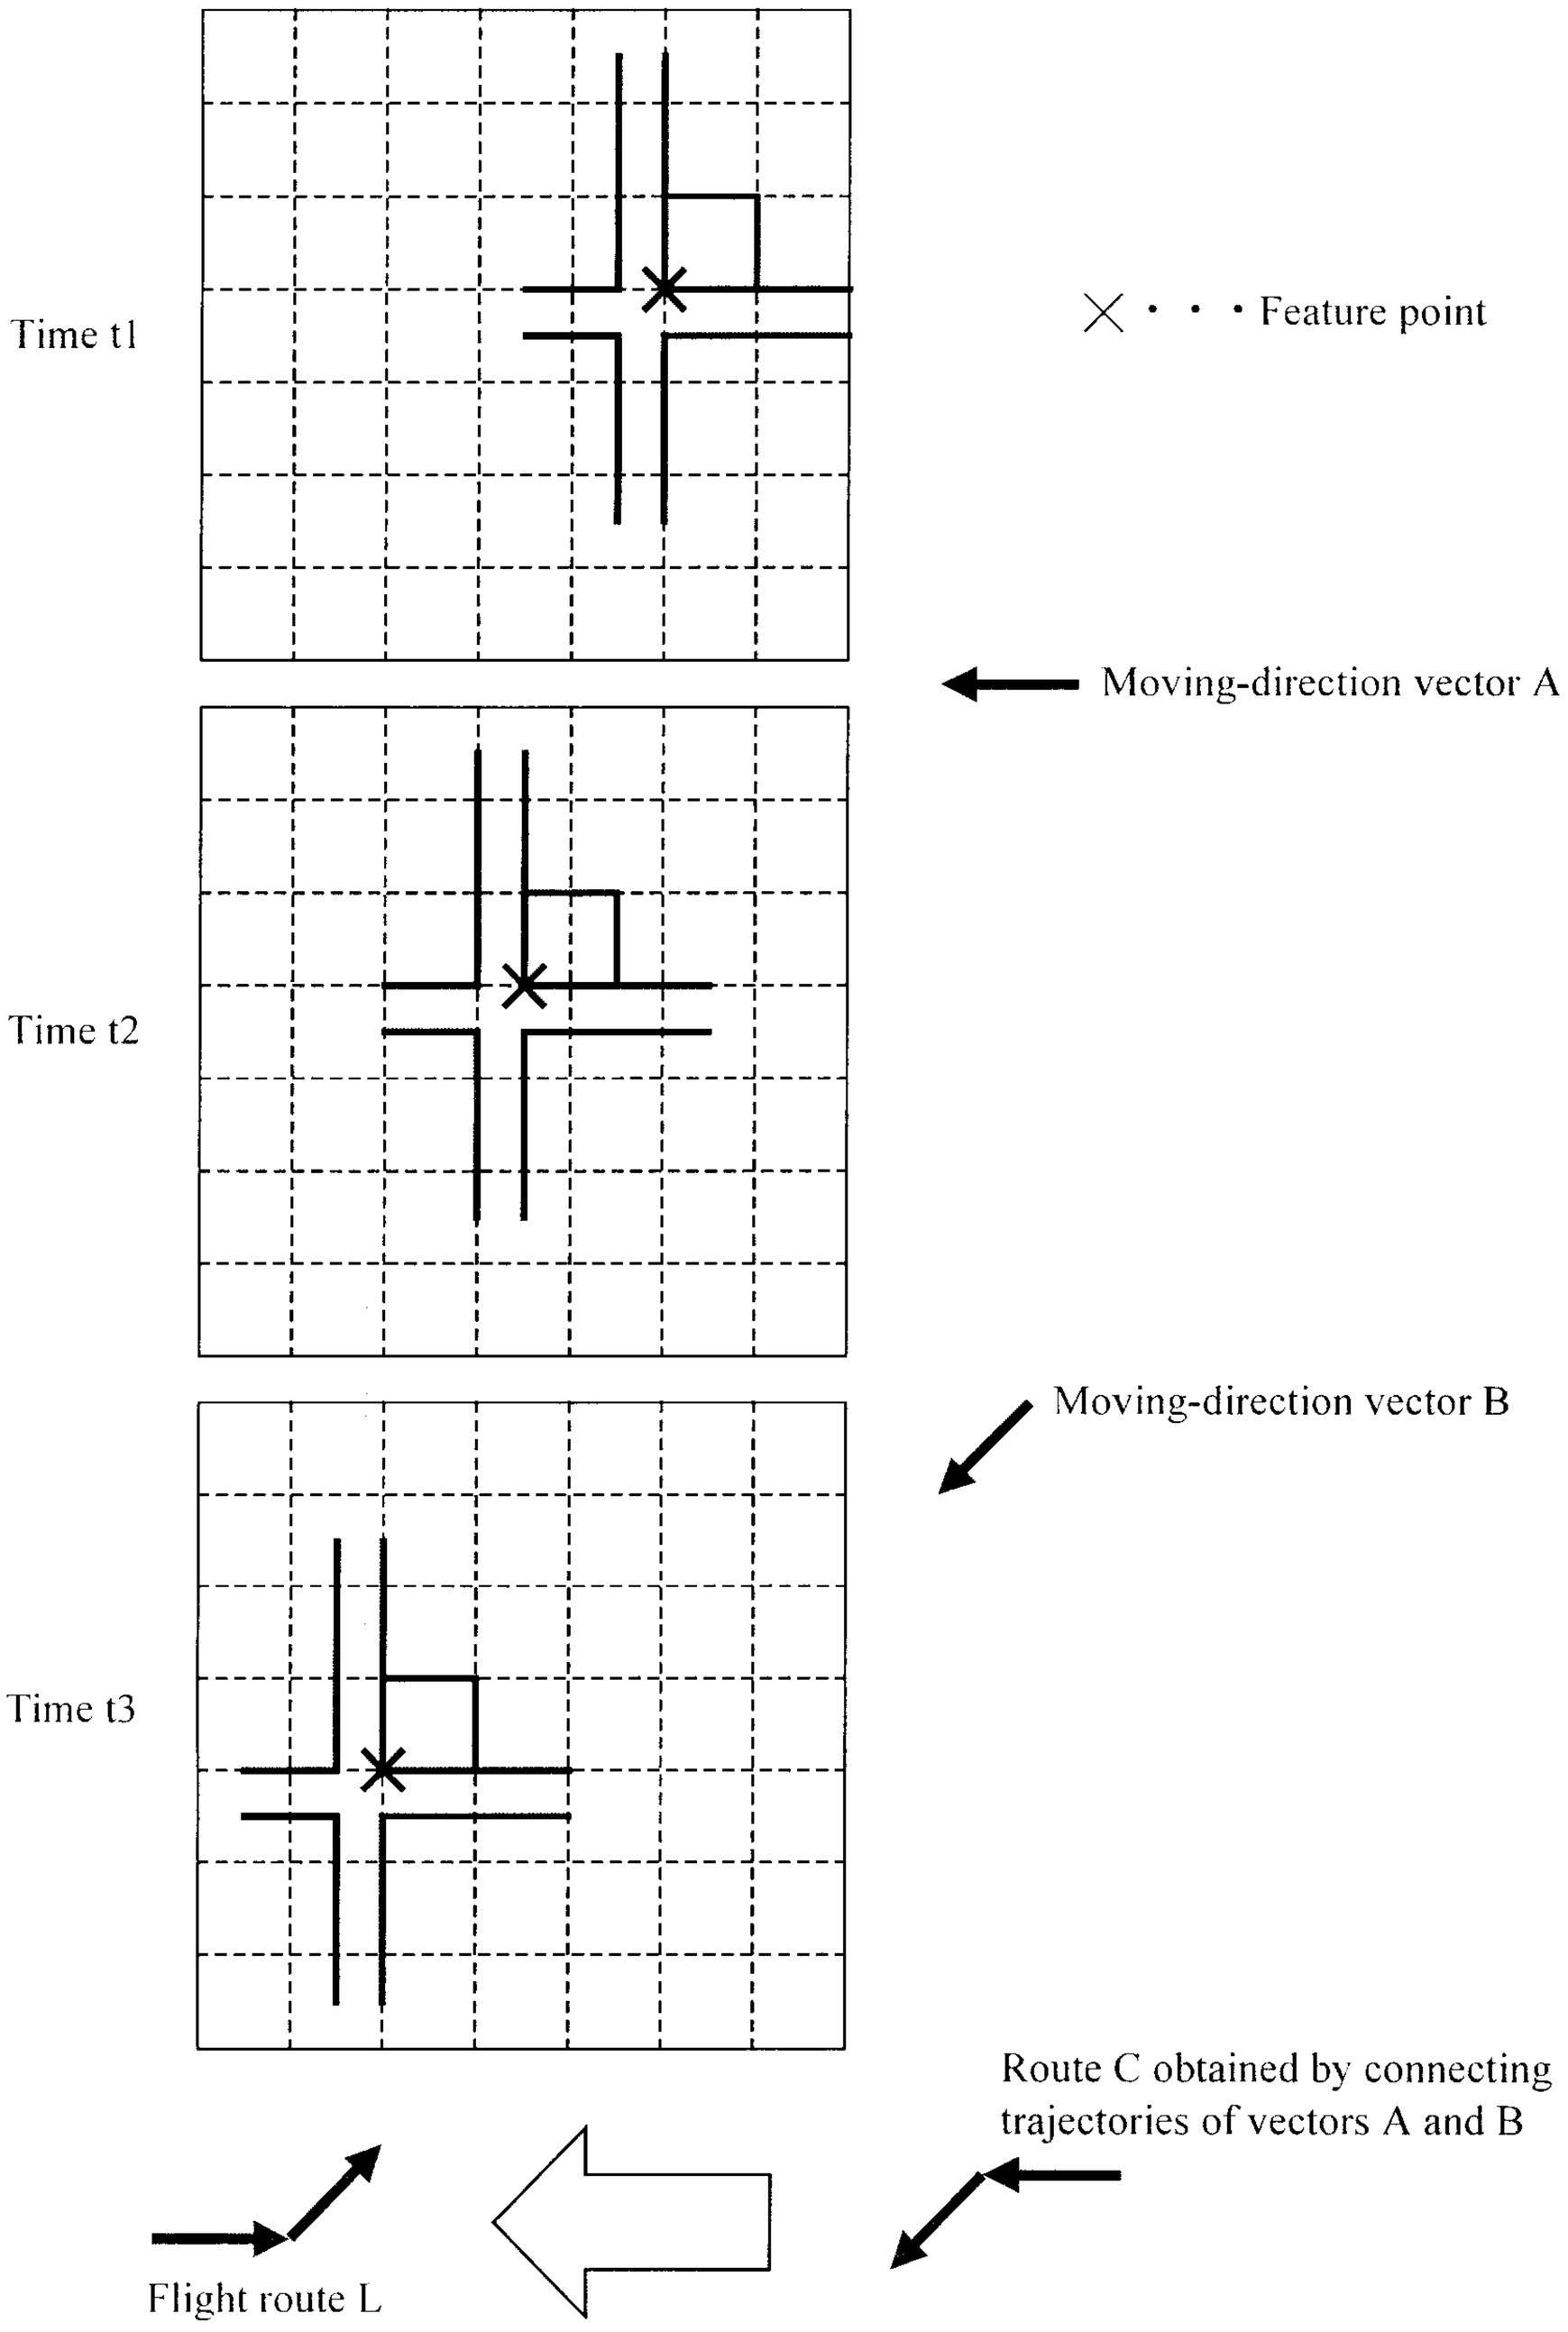

Time t1
× • • • Feature point
Moving-direction vector A
Time t2
Moving-direction vector B
Time t3
Route C obtained by connecting trajectories of vectors A and B
Flight route L

Fig. 6

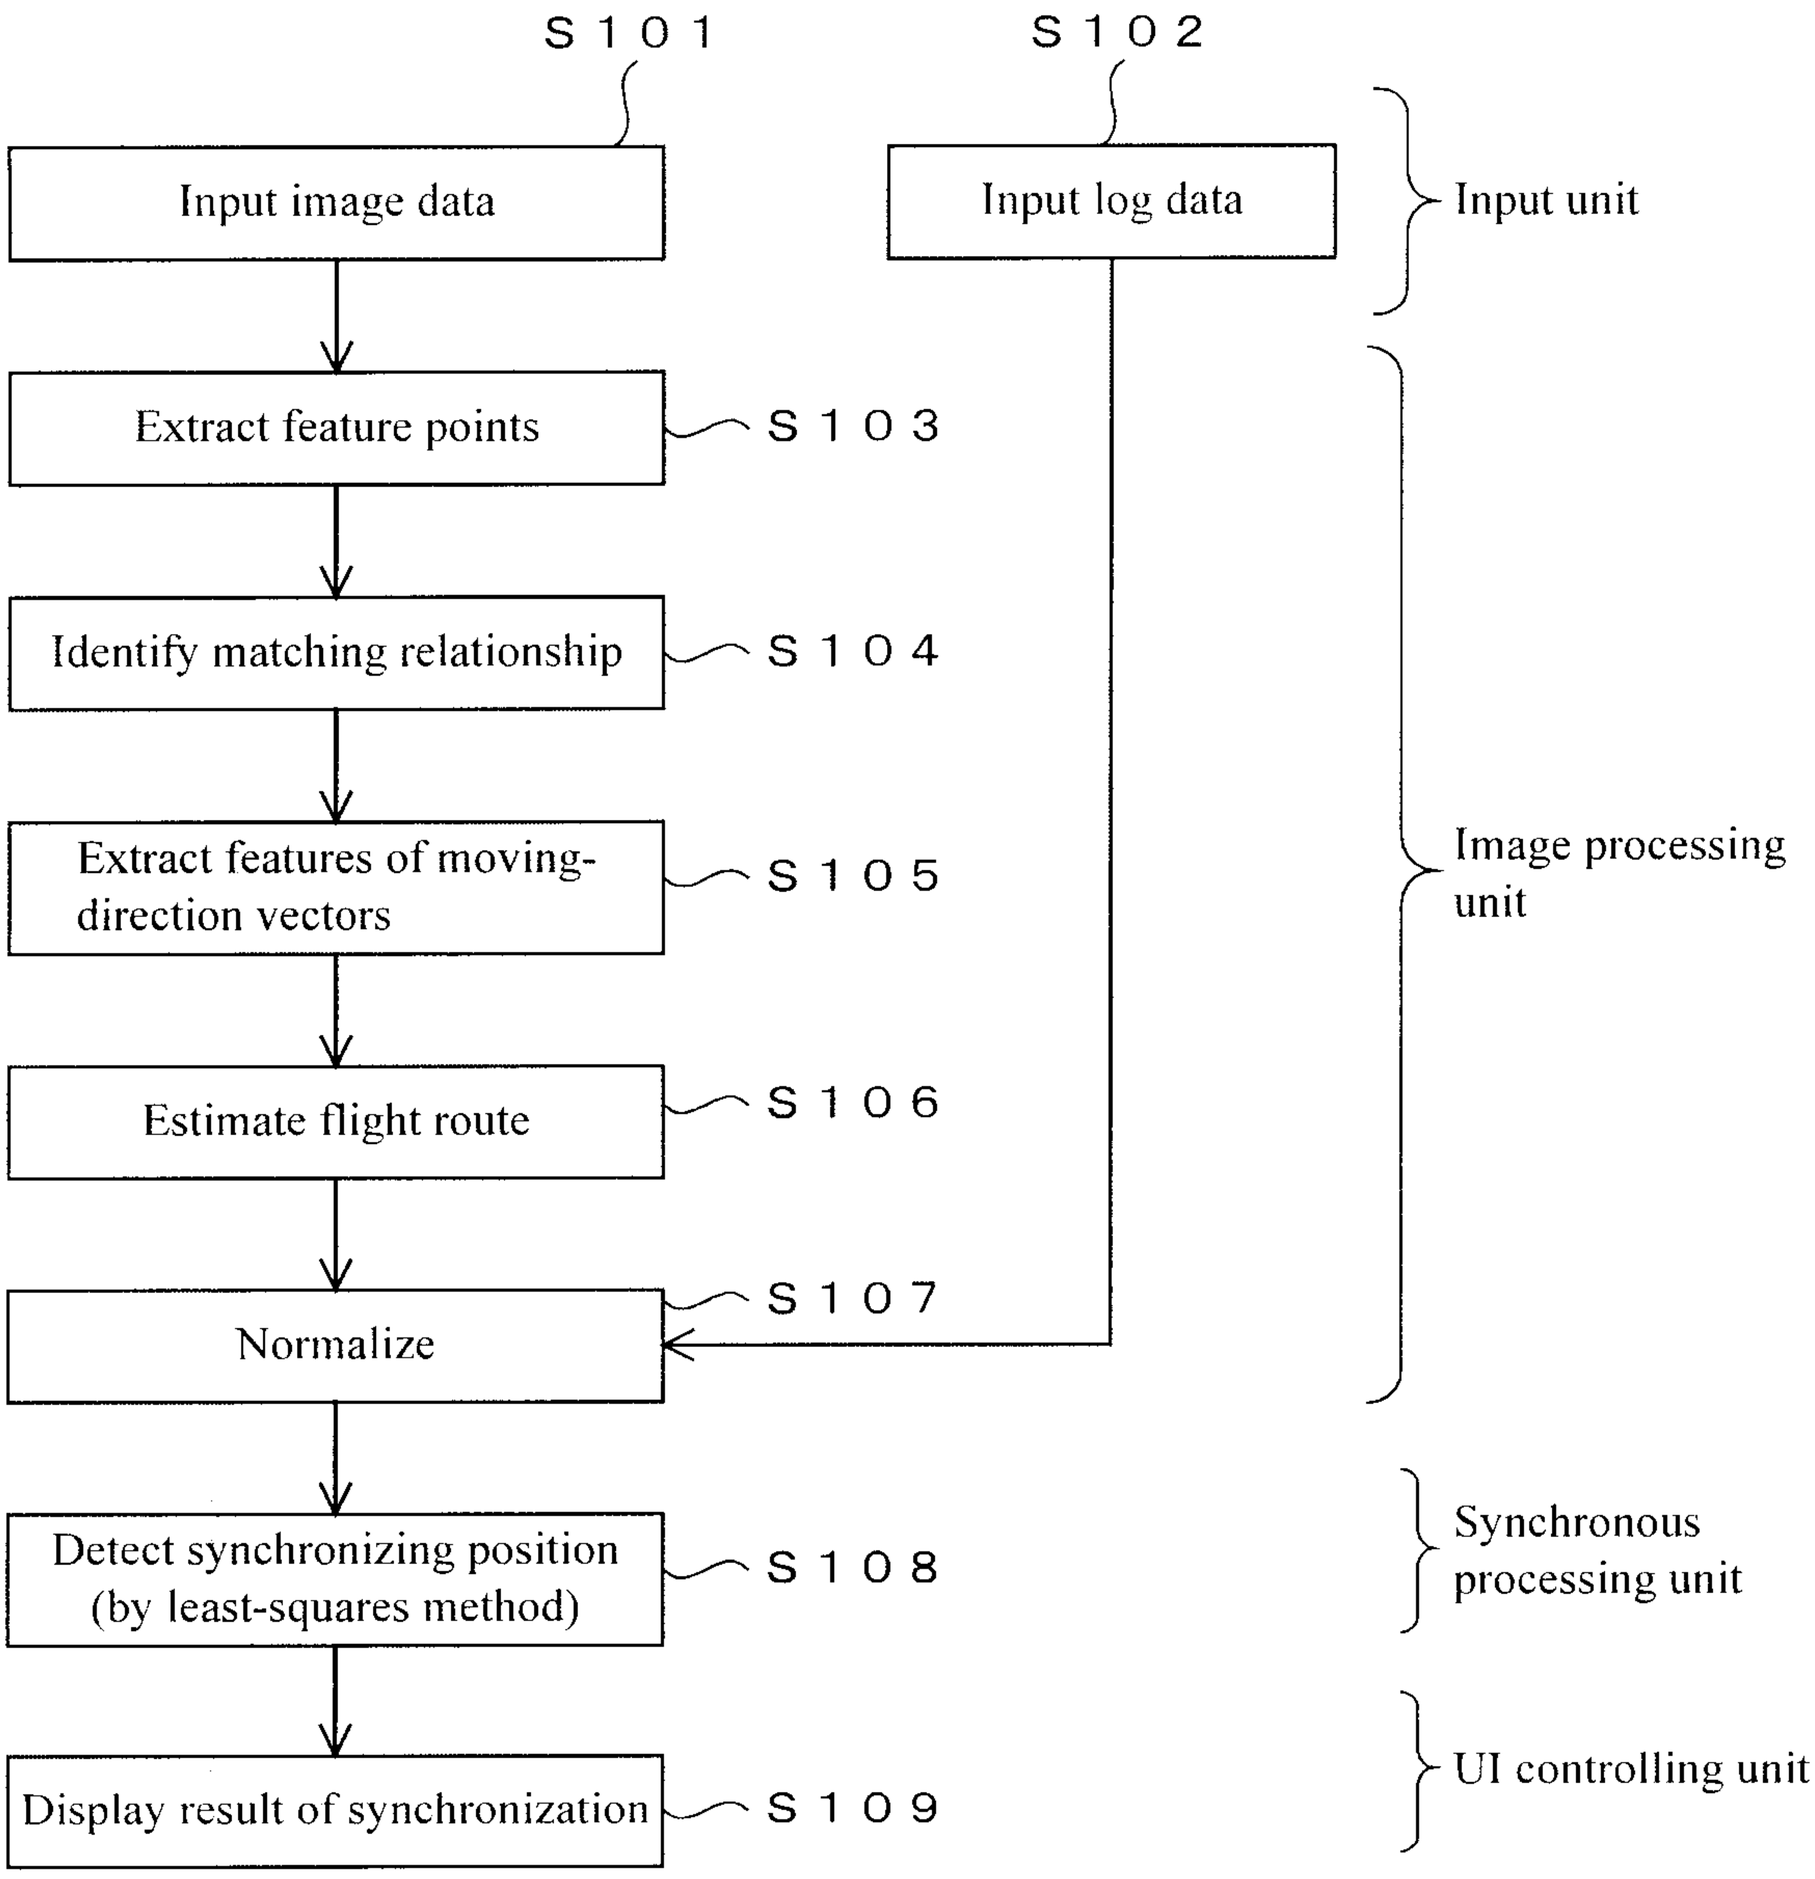

S101
S102
Input image data
Input log data
Input unit
Extract feature points
S103
Identify matching relationship
S104
Extract features of moving-direction vectors
S105
Estimate flight route
S106
Normalize
S107
Image processing unit
Detect synchronizing position (by least-squares method)
S108
Synchronous processing unit
Display result of synchronization
S109
UI controlling unit

Fig. 7

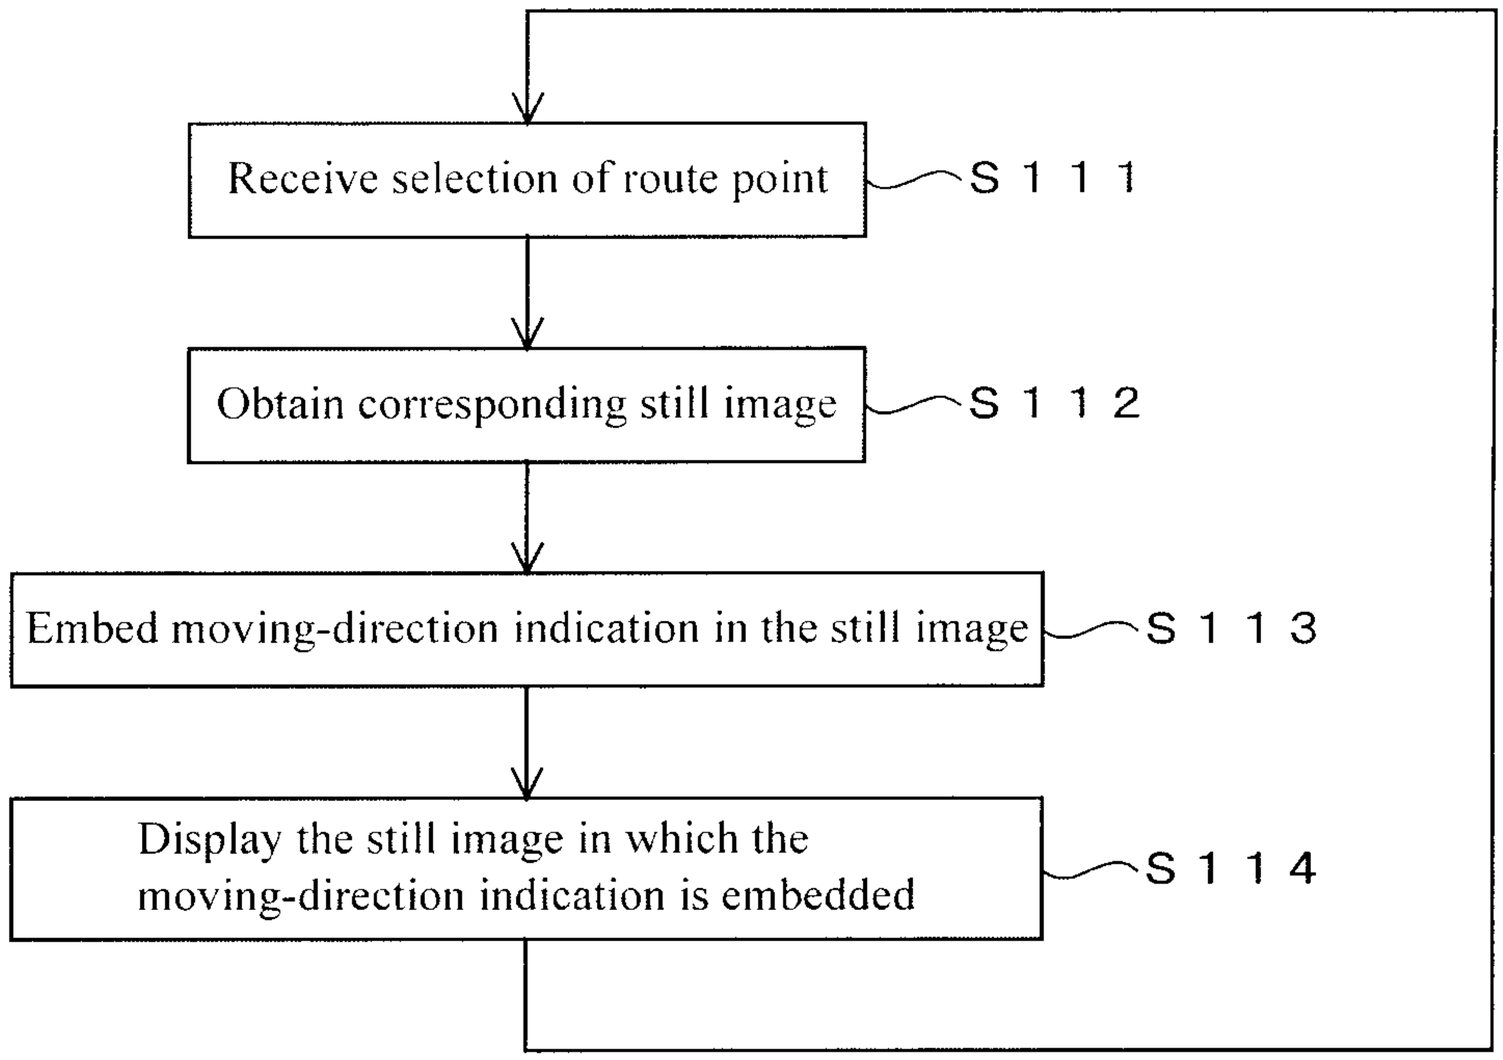

Receive selection of route point
S 1 1 1
Obtain corresponding still image
S 1 1 2
Embed moving-direction indication in the still image
S 1 1 3
Display the still image in which the moving-direction indication is embedded
S 1 1 4

Fig. 8

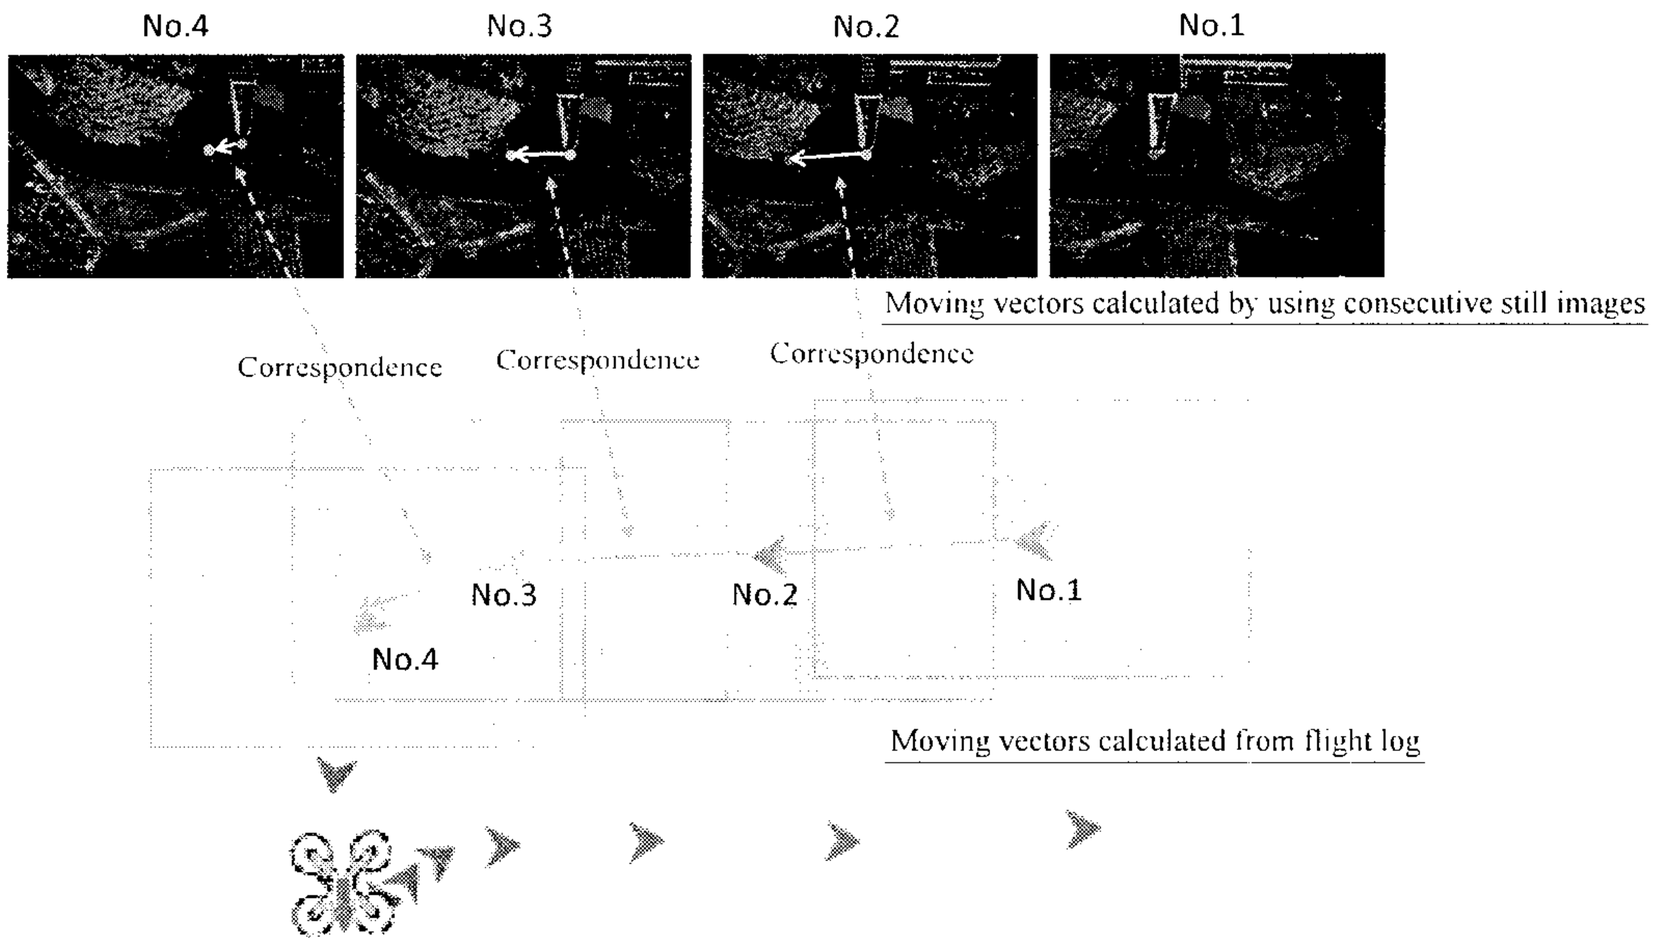

No.4
No.3
No.2
No.1
Moving vectors calculated by using consecutive still images
Correspondence
Correspondence
Correspondence
No.3
No.2
No.1
No.4
Moving vectors calculated from flight log

Fig. 9

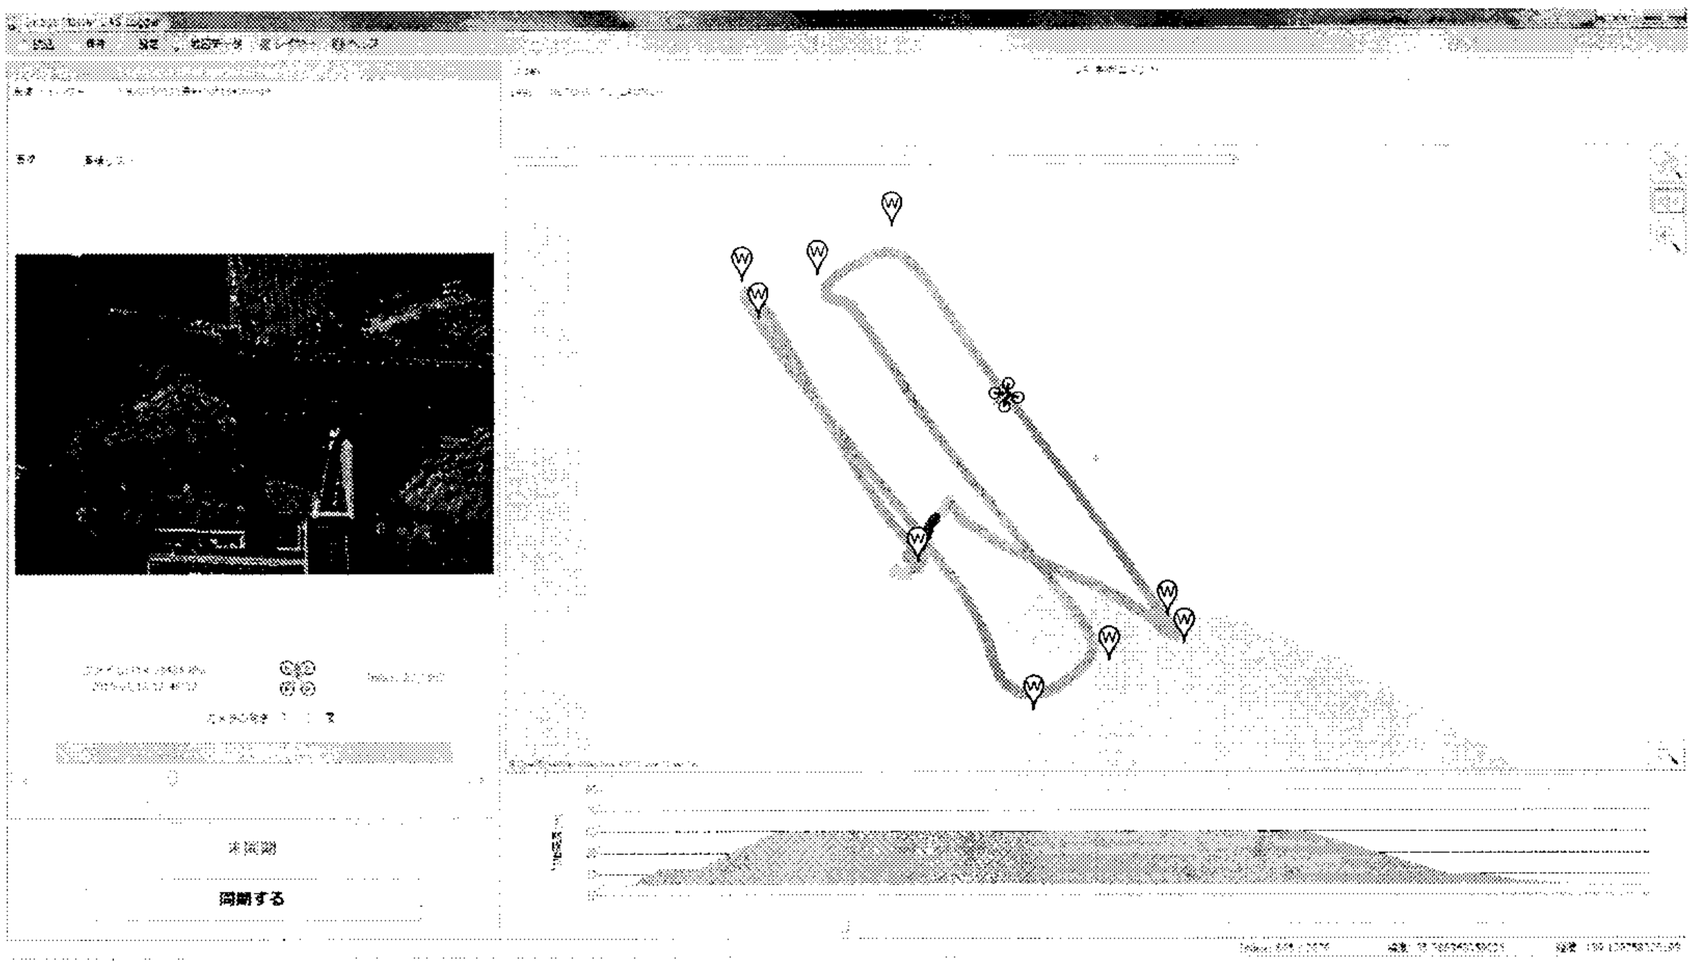


Fig. 10

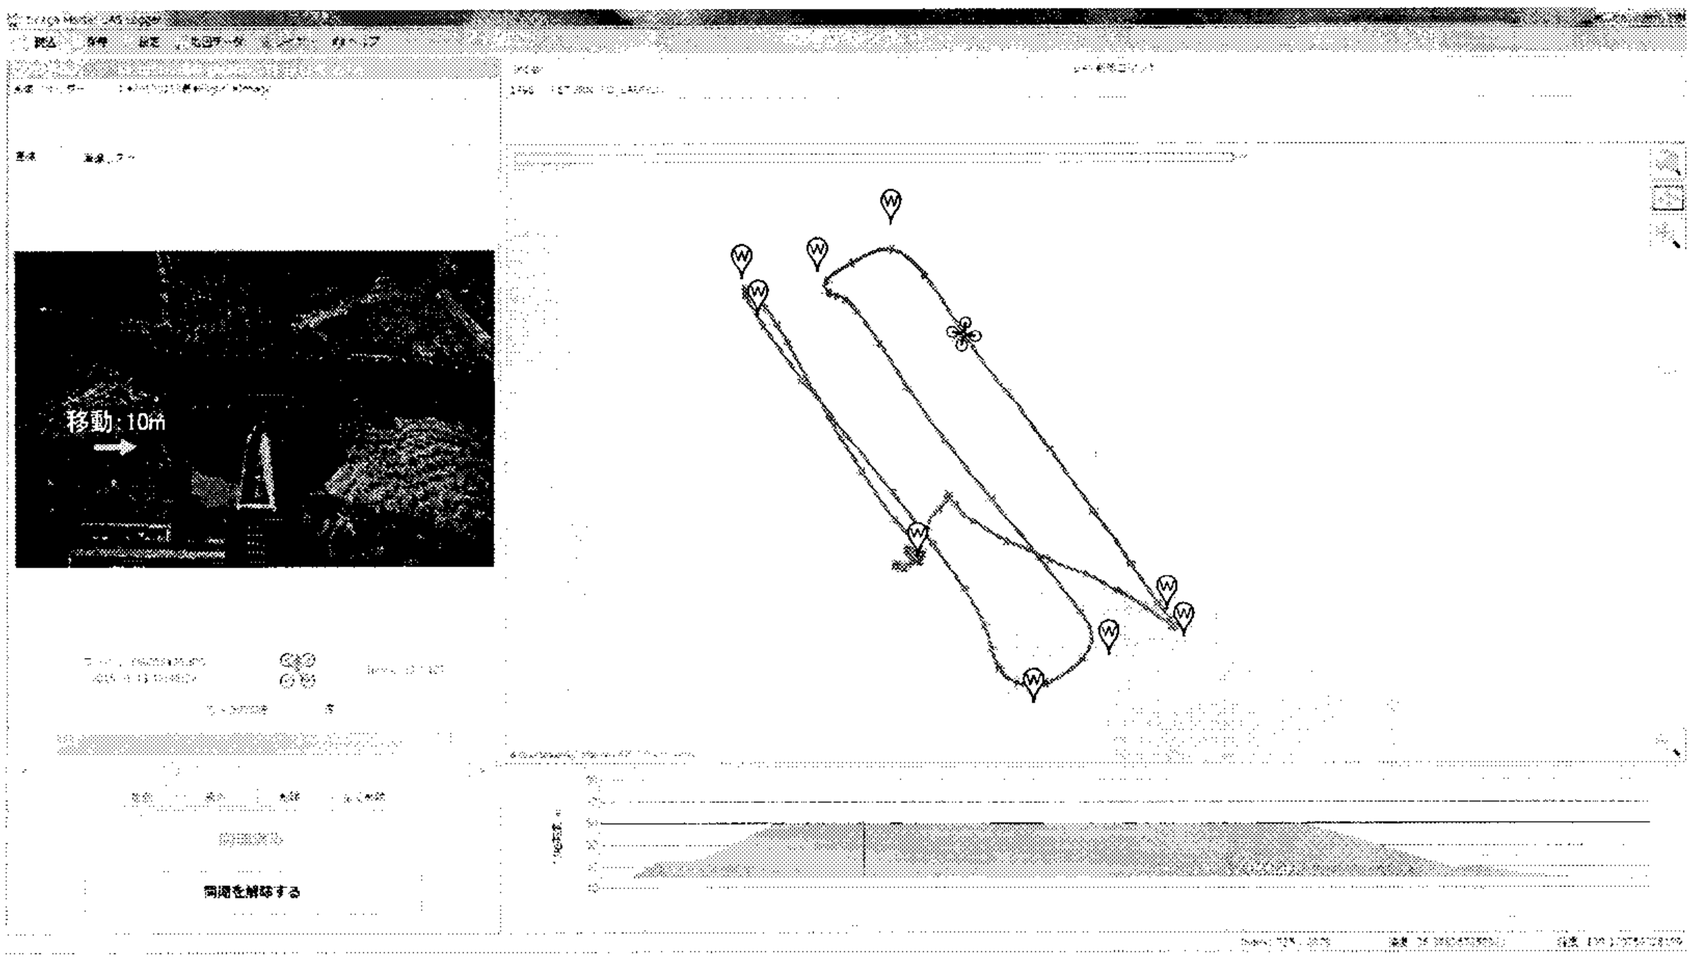


Fig. 11

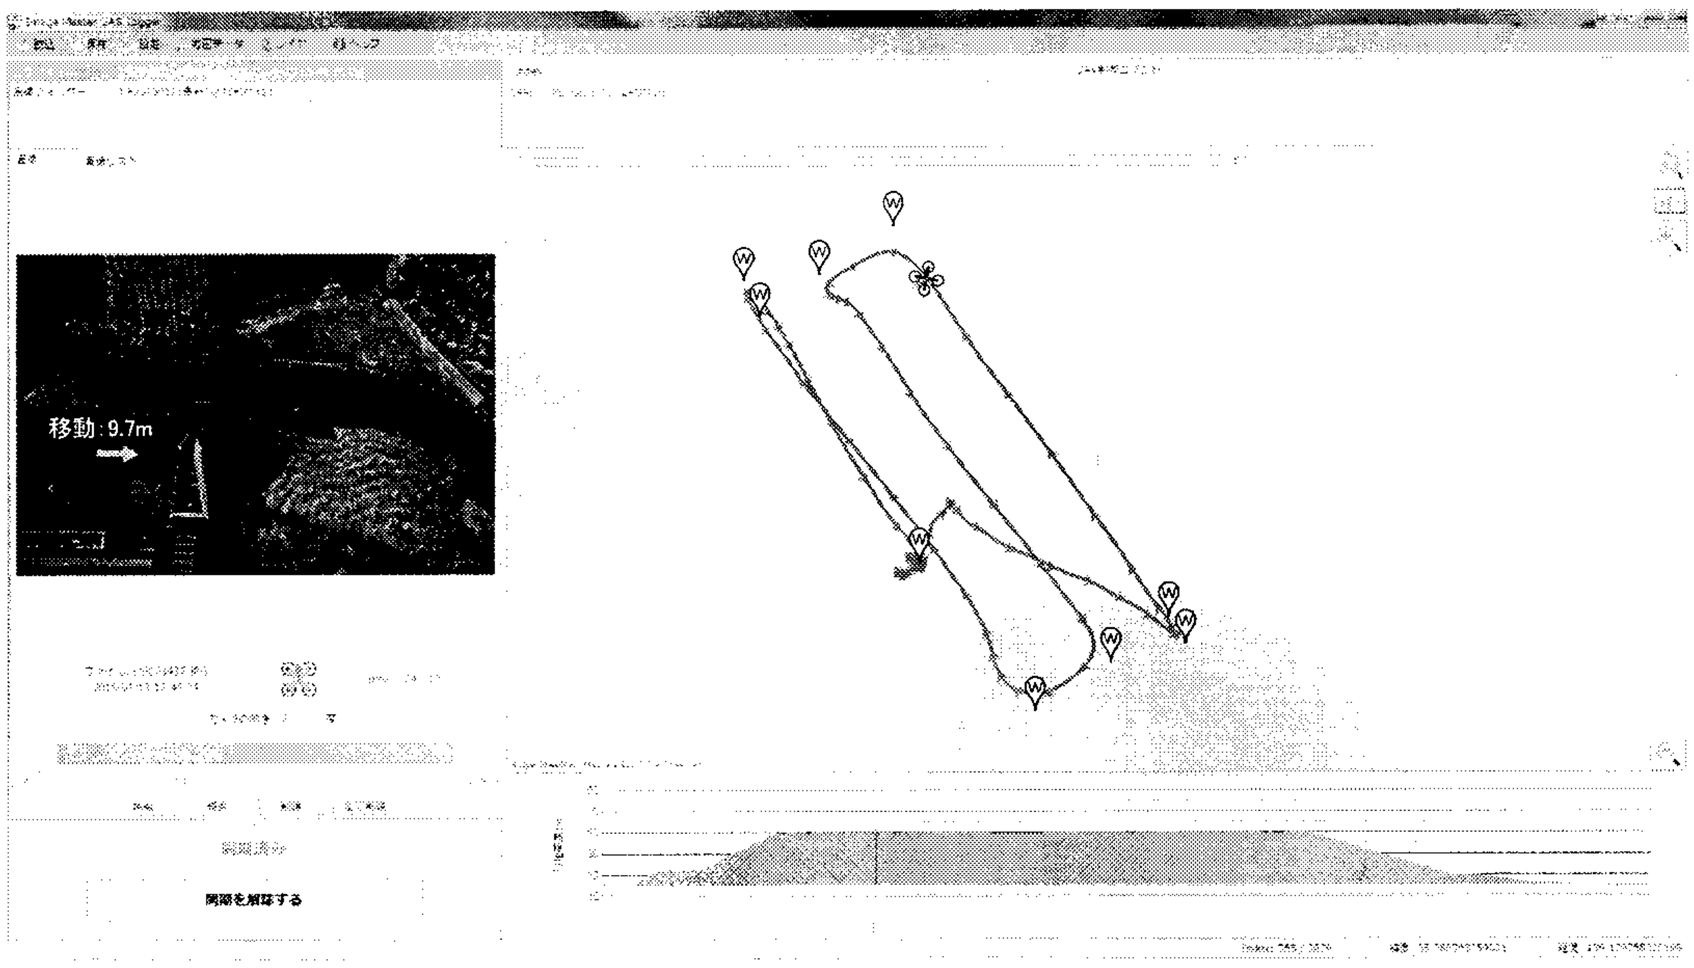


Fig. 12

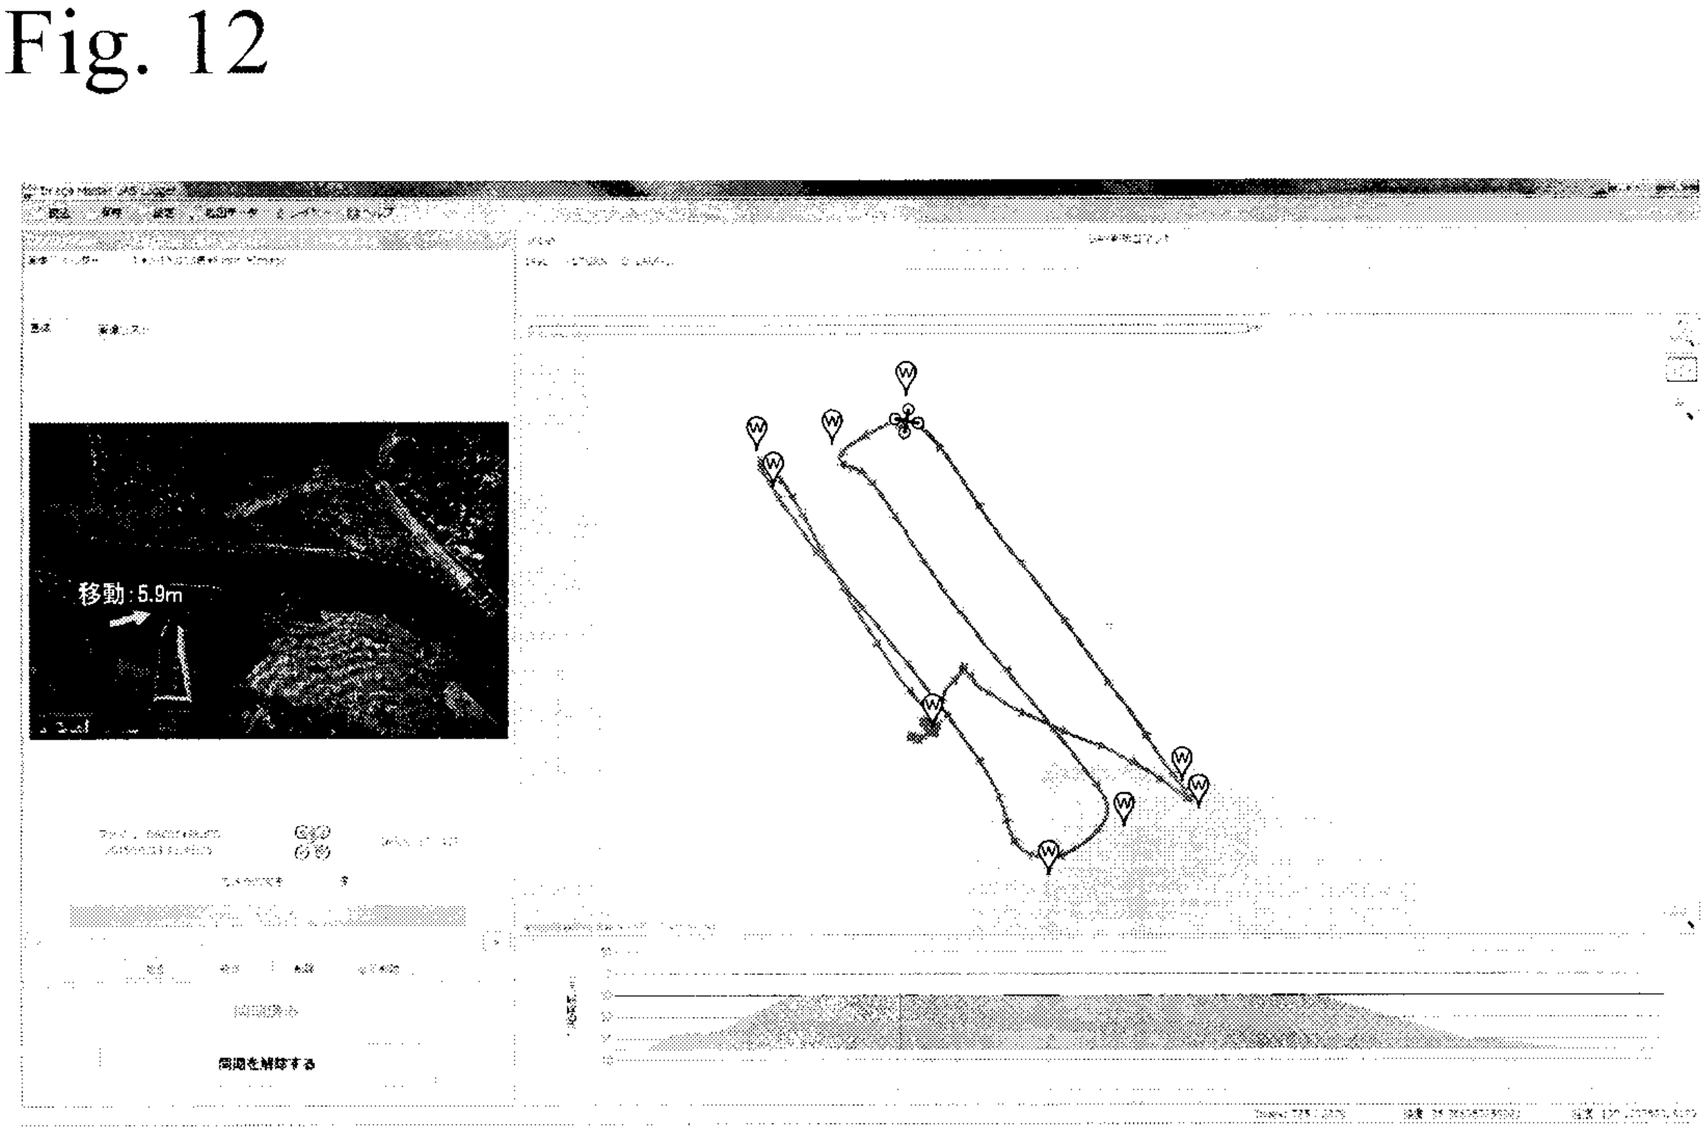


Fig. 13

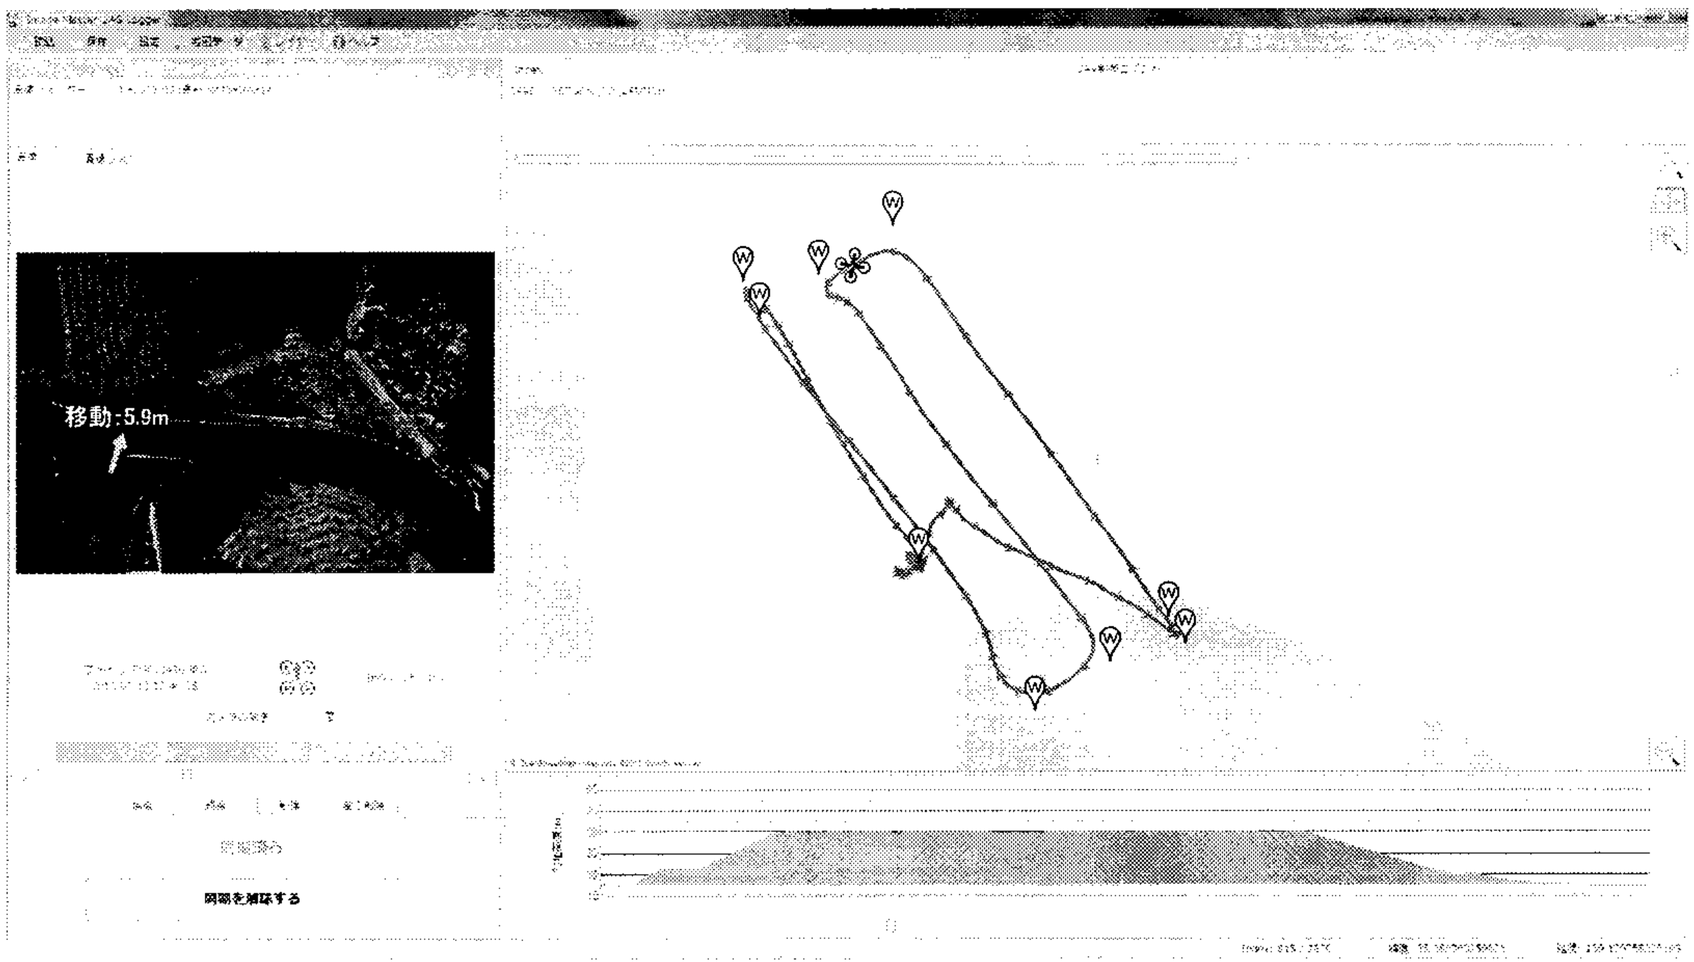
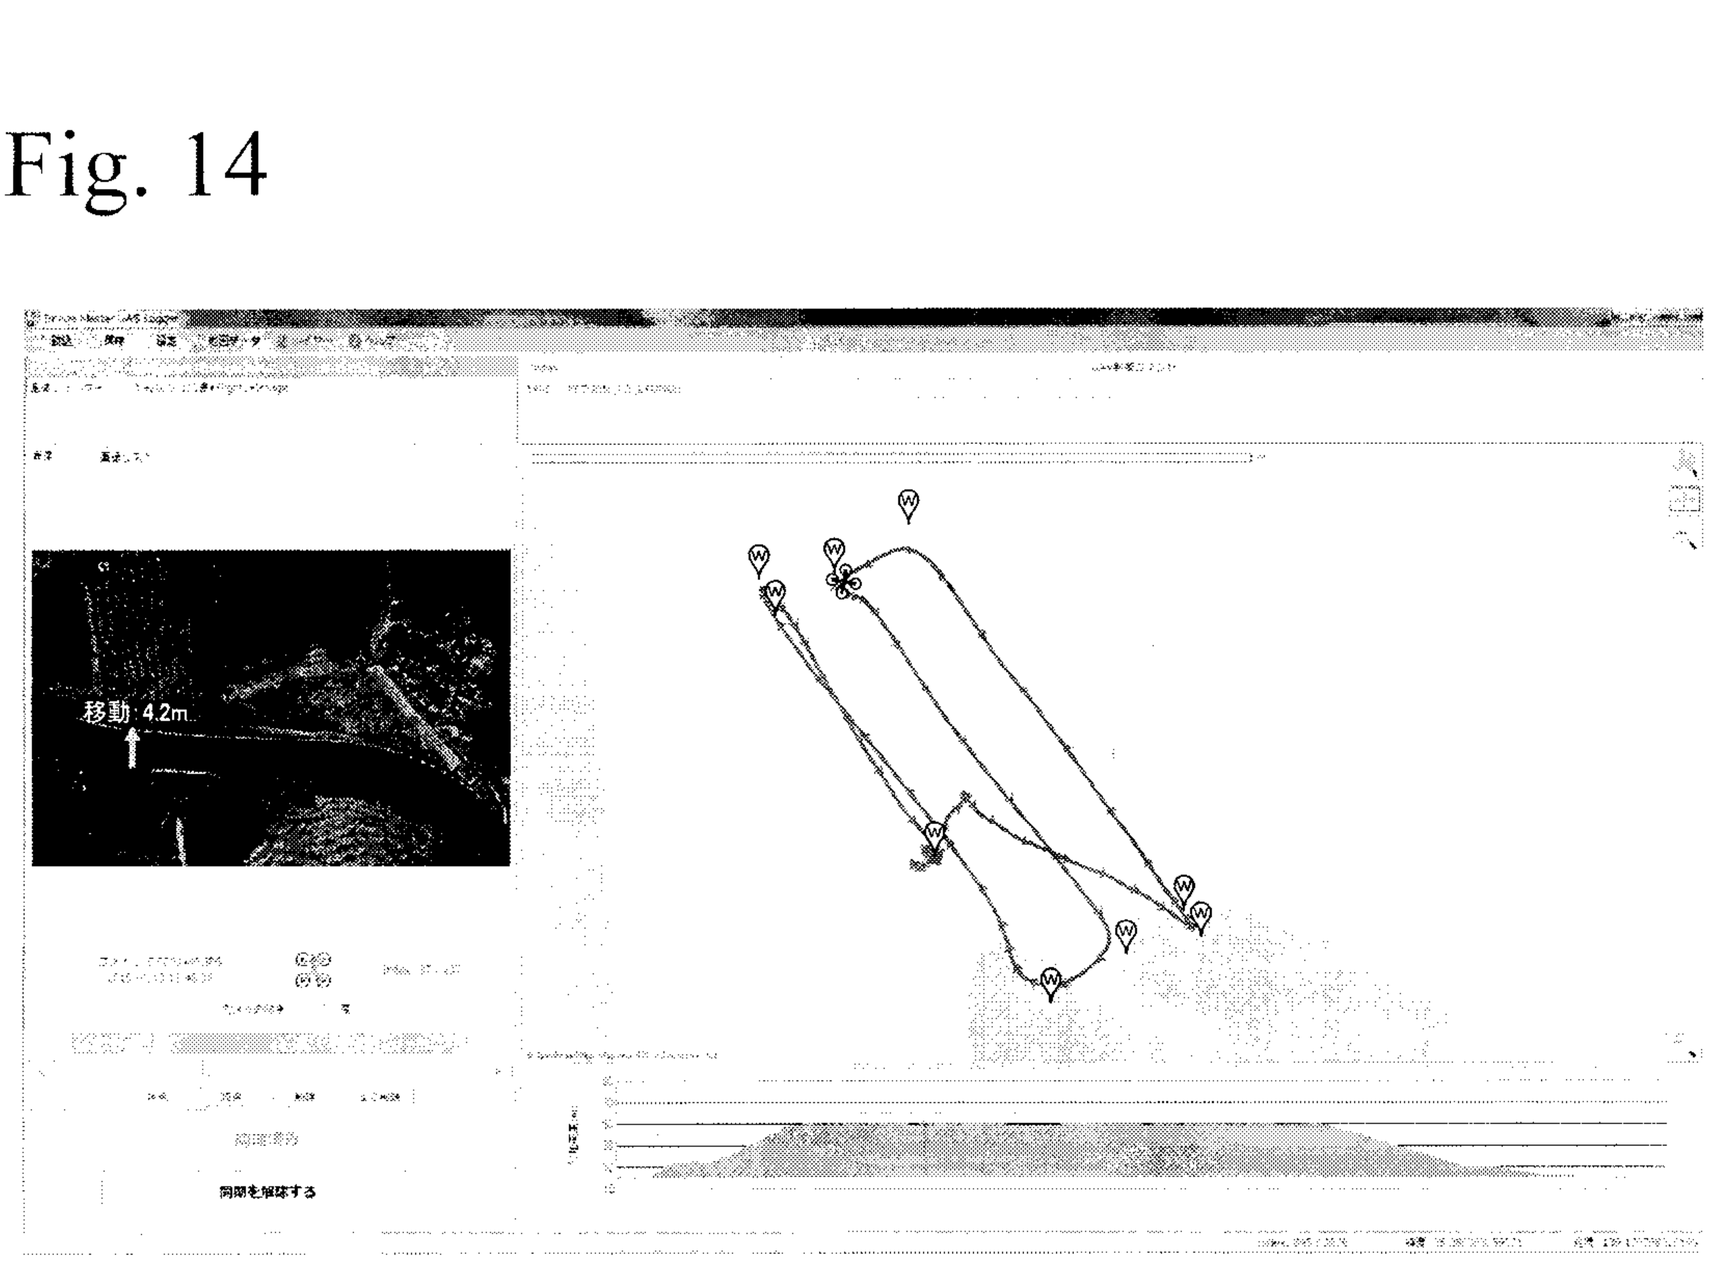
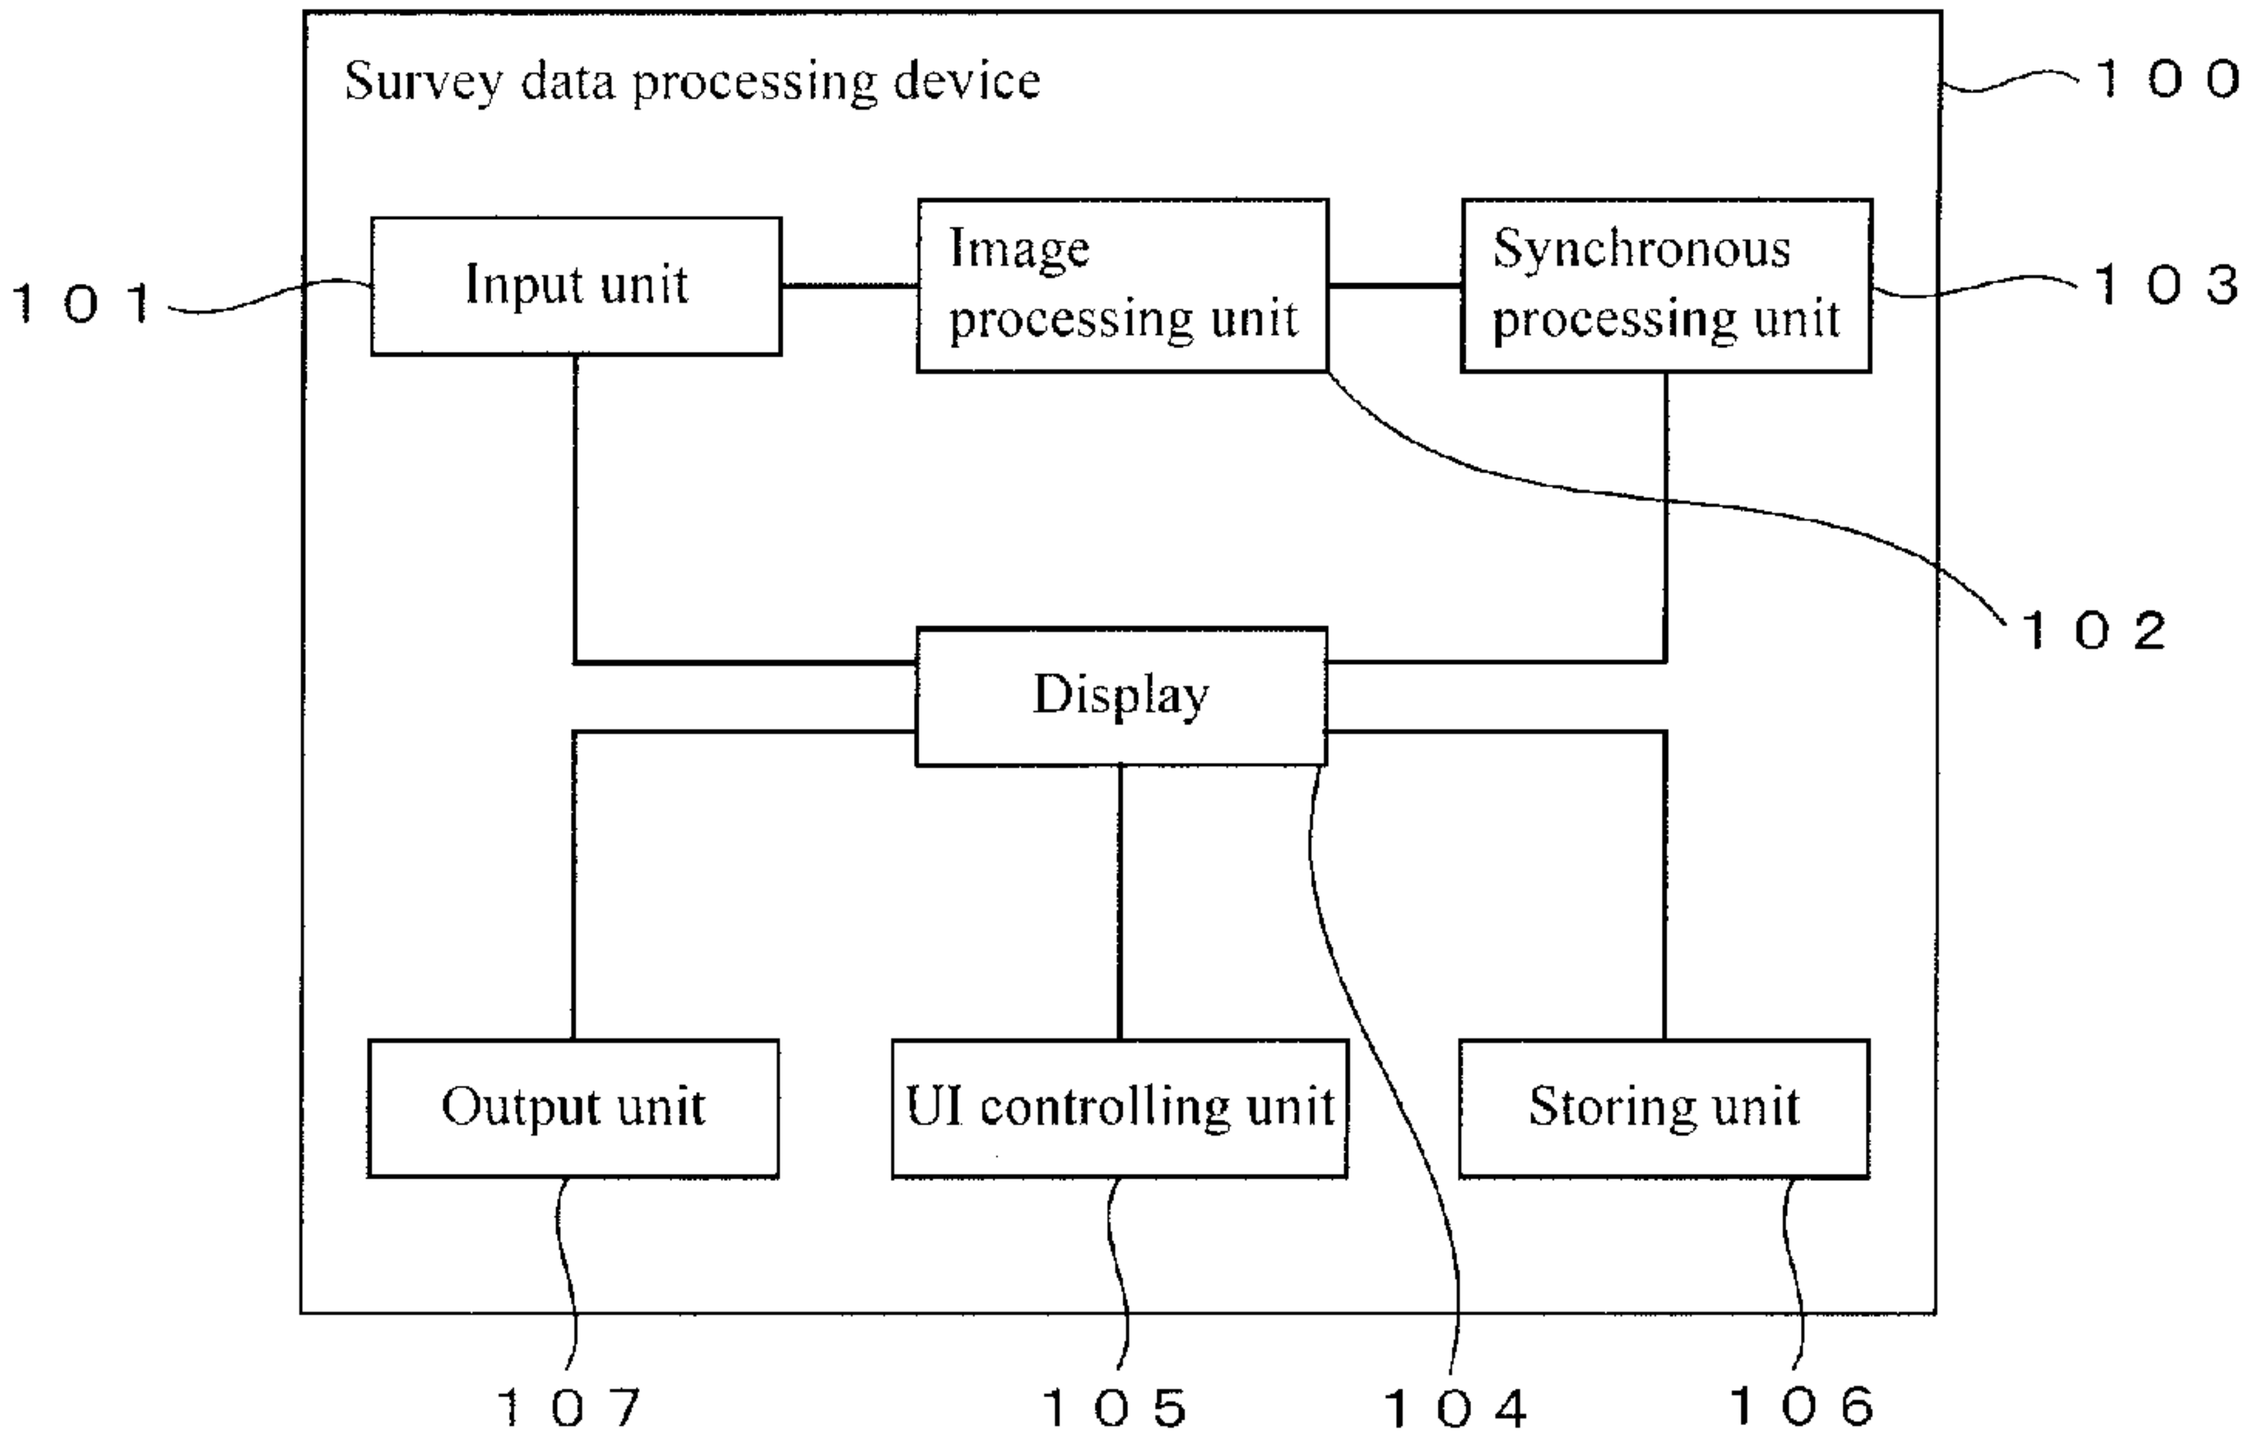


Fig. 14




Survey data processing device
100
101
Input unit
Image processing unit
Synchronous processing unit
103
102
Display
Output unit
UI controlling unit
Storing unit
107
105
104
106