




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/66</b>		A1	(11) International Publication Number: <b>WO 97/09809</b>
			(43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/US96/14129 (22) International Filing Date: 3 September 1996 (03.09.96) (30) Priority Data: 08/525,897      8 September 1995 (08.09.95)      US 08/562,206      22 November 1995 (22.11.95)      US (71) Applicant: SPRINT COMMUNICATIONS COMPANY, L.P. [US/US]; 8140 Ward Parkway, Kansas City, MO 64114-0417 (US). (72) Inventor: CHRISTIE, Joseph, Michael; 536 Green Avenue, San Bruno, CA 94066 (US). (74) Agent: DICKY, Steven, R.; Hovey, Williams, Timmons & Collins, Suite 400, 2405 Grand Boulevard, Kansas City, MO 64108 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

(54) Title: ATM TRANSPORT SYSTEM

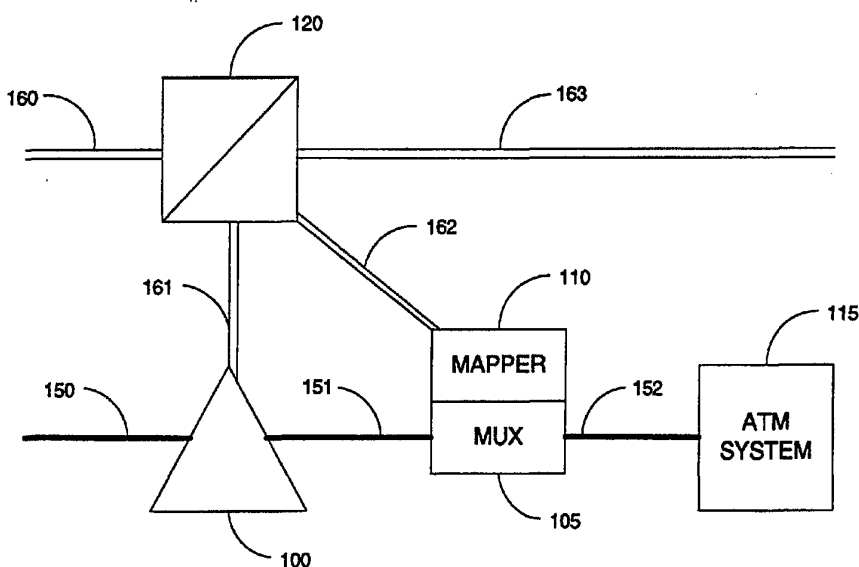

## (57) Abstract

An ATM transport system (105, 110, 115) transports user information from a continuous signal transport system (100). The ATM transport system (105, 110, 115) uses telecommunications signaling associated with the continuous signals to determine if the continuous signals are transporting any user information. If so, ATM cells containing user information are generated and transmitted. An ATM interworking multiplexer (105) and a processor (110) are included in the system.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

ATM TRANSPORT SYSTEM

5

10

Background

At present, Asynchronous Transfer Mode (ATM) technology is being used to provide high speed transport for traffic carried by older transport formats such as DS1 and DS0. This ATM transport technique uses an ATM interworking multiplexer (ATM  
15 mux) to convert telecommunications traffic from the older formats into ATM cells that can be transported over broadband connections. At the terminating end of the broadband system, the ATM cells are re-converted back into the older format by another ATM mux for delivery to the older transport system.

Many older transport formats require the transmission of a continuous signal  
20 even when no user traffic is being transported. For example, a DS0 connection continuously transmits a 64,000 bit/second signal whether or not the DS0 connection is transporting any user traffic. This causes a problem in the above-described transport scenario. The ATM mux will convert the DS0 signal into ATM cells for transport, and since the DS0 signal is continuous, a continuous stream of ATM cells must be  
25 transported by the ATM network. This occurs even when no user traffic is being transported. The idle DS0 signal is still transported in empty ATM cells. Methods to detect these idle continuous signals that do not transport user information have included analyzing information samples from the continuous signals to detect idle codes. However, these idle codes may be emulated by user information such as voice or data.

This causes problems when trying to determine whether or not a signal carries user information.

The current situation represents a waste of resources. At present, there is a need for an ATM system that can transport continuous signal formats when they carry user  
5 traffic, but not when they do not carry user traffic.

### Summary

The invention includes an asynchronous transfer mode (ATM) system for transporting user information in ATM cells. The ATM cells contain a virtual path  
10 identification/virtual channel identification (VPI/VCI). The user information is from a continuous-signal transport system that produces telecommunications signaling related to the continuous signal. The continuous signal is associated with the VPI/VCI.

The system comprises a processor and ATM interworking multiplexer. The processor receives telecommunications signaling and detects, based on the  
15 telecommunications signaling, when the continuous signal is transporting user information and when the continuous signal is not transporting user information. The processor associates the continuous signal with the VPI/VCI. The processor also provides a control instruction to enable the VPI/VCI when the continuous signal is transporting user information, and provides a control instruction to disable the VPI/VCI  
20 when the continuous signal is not transporting user information.

The ATM interworking multiplexer is coupled to the processor. The ATM interworking multiplexer receives the continuous signal and associates it with the VPI/VCI. The ATM interworking multiplexer receives the control instructions from the processor and generates and transmits ATM cells containing the VPI/VCI and the user  
25 information in response to the enabling control instruction. The ATM interworking multiplexer stops generating and transmitting ATM cells containing the VPI/VCI in response to the disabling control instruction.

The invention has many variations. The telecommunications signaling protocol could be Signaling System #7. The processor might use an SS7 Initial Address Message  
30 (IAM) to detect when the continuous signal transports user information. The processor

might use a Circuit Identification Code (CIC) in the SS7 IAM to identify the continuous signal and to associate the continuous signal with the VPI/VCI. The processor might use a an SS7 Release message (REL) or Release Complete message (RLC) to detect when the continuous signal no longer transports user information.

5           The invention might include a Signal Transfer Point (STP) that is linked to the processor and that transfers telecommunications signaling to the processor. The STP might transfer copies of Signaling System #7 (SS7) message routing labels to the processor. The STP might transfer copies of SS7 Initial Address Message (IAM), Release message (REL), or Release Complete message (RLC) routing labels to the  
10          processor. The STP might transfer copies of SS7 routing labels to the processor that have particular Originating Point Codes (OPCs) and Destination Point Codes (DPCs).

          The ATM interworking multiplexer might receive a continuous DS3 signal or a continuous DS1 signal. The ATM interworking multiplexer might transmit the ATM cells over a SONET connection. In some embodiments, the ATM interworking  
15          multiplexer supports multiple signals. Individual VPI/VCIs would correspond to individual continuous signals. The ATM interworking multiplexer would include: a continuous signal interface to receive the continuous signals, an ATM Adaption Layer (AAL) to convert the continuous signals into ATM cells with corresponding VPI/VCIs, an ATM interface to transmit the ATM cells, and a control interface to receive the  
20          control instructions and control the AAL to generate and transmit cells with enabled VPI/VCIs and to stop the generation and transmission of ATM cells with a disabled VPI/VCIs.

          The invention provides the advantage of having the ATM system only transport cells that actually carry user information. Cells containing the continuous signal, but no  
25          user information are not transmitted. This provides for efficient allocation and use of bandwidth in the ATM system.

#### Brief Description of the Drawings

          Figure 1 is a block diagram of a version of the present invention.  
30          Figure 2 is a block diagram of a version of the present invention.

Detailed Description

For purposes of clarity, the term "connection" will be used to refer to the transmission media used to carry user traffic. The term "link" will be used to refer to the transmission media used to carry signaling. On the Figures, connections are shown by  
5 a single line and signaling links are shown by double lines.

Figure 1 depicts a version of the present invention. Shown are switch 100, ATM interworking multiplexer (mux) 105, mapper 110, ATM system 115, and signal transfer point (STP) 120. These components are connected by connections 150-152 and linked by links 160-163 as shown. Those skilled in the art are aware that large networks have  
10 many more components than are shown, but the number of these components has been restricted for clarity. The invention is fully applicable to a large network.

Switch 100 is a conventional switch that transmits user traffic within continuous signals. Examples of continuous signals are DS3, DS1, or DS0 signals. Connections 150 and 151 are conventional transmission media that propagate continuous signals in  
15 order to transport user information. ATM system 115 and connection 152 are conventional components that transport ATM cells. The components mentioned in this paragraph are well known in the art.

Telecommunications signaling is used to set-up and tear down connections for a call. STP 120 routes the signaling over signaling links 160-163. The invention is  
20 described in terms of signaling system #7 (SS7), but those skilled in the art are aware of other signaling systems that could also be used with the invention. Signaling links 160-163 could be well known SS7 links. STP 120 is a signaling device, for example, it could be a conventional STP that has been altered in accord with the invention. In other embodiments described later, no alteration of the STP would be required.

25 In this embodiment, STP 120 is altered to copy the routing labels of particular SS7 messages and transmit them to mapper 110 over link 162. The routing label of an SS7 message carries routing information for the signaling message such as the origination point code (OPC) and destination point code (DPC) of the message. The routing label contains a circuit identification code (CIC) and a message type. The CIC  
30 identifies the actual circuit that carries the user traffic on a given call. Typically, the CIC

identifies a DS0 connection. The message type identifies the type of message. In SS7, the initial address message (IAM) is used to set-up the call, and the release message (REL) and/or the release complete message (RLC) is used to tear down the call. Typically, an REL causes a call connection to be released and the RLC is an acknowledgment of the release. But occasionally, the REL is not received and the RLC actually causes the release of a call connection.

Mapper 110 would only need the IAMs, and RELs for calls that use connection 151. To get a more robust system, the RLCs could also be used. The RLC would act as an acknowledgment when the REL is received, but would be used to for tear down when no REL is received. Alternatively, the use of the RLC could be omitted if the unreceived REL messages still allowed for tolerable performance.

Those skilled in the art will be familiar with various ways to select these routing labels. A discrimination function could select the proper messages based on the message type, the OPC, and/or the DPC. For example, messages type would be screened for IAM, REL, or RLC codes. These messages would then be screened for the OPC or DPC of switch 100. Additional screening criteria will be appreciated by those skilled in the art. The discrimination function could be in STP 120, in mapper 110, or distributed in between the two. For example, STP 110 could send only IAM, REL, and RLC routing labels to mapper 110, and mapper 110 would only use routing labels that had an OPC/DPC combination associated with connection 151.

Mapper 110 would typically be a processor that has conventional interface software that is functional to receive and process the routing labels provided by STP 120; however, other processing configurations that support the requirements of the invention are also contemplated. In addition, mapper 110 would be functional to use the OPC, DPC, and CIC of the signaling messages to retrieve pre-defined virtual connection associated with the particular CIC. The virtual connection would be identified by the combination of a virtual path identification (VPI) and virtual channel identification (VCI). ATM VPIs and VCIs are well known. Typically each DS0 on one side of mux 105 would have a corresponding VPI/VCI on the other.

In addition, mapper 110 would be functional to send control messages to mux 105. For call-set up, the control message would instruct mux 105 to enable the VPI/VCI associated with the call. For call tear down, the control message would instruct mux 105 to disable the VPI/VCI associated with call

5 Mux 105 would be configured to interwork the DS0s on connection 151 with their corresponding VPI/VCIs on connection 152. Mux 105 would convert user traffic from the DS0 into ATM cells that identify the corresponding VPI/VCI. Mux 105 would then transmit the ATM cells over connection 152 to ATM system 120. Mux 105 is also functional to perform reciprocal processing for ATM cells from connection 152 that  
10 contain user information that is bound for transport over connection 151. Mux 105 would be functional to enable and disable VPI/VCIs as instructed by the control messages from mapper 110. This means that ATM cells would only be transmitted over an enabled VPI/VCI. If the VPI/VCI is disabled, mux 105 would not transmit cells on that virtual connection.

15 In one embodiment, the system would operate as follows for a call incoming over connection 150. A DS0 on connection 150 would be seized for a call connection to switch 100. An IAM would be received over link 160 and routed by STP 120 over link 161 to switch 100. Switch 100 would process the IAM and select a DS0 on connection 151. Switch 100 would generate another IAM for transfer to the network over link 161  
20 and STP 120.

STP 120 would check the message type, OPC, and DPC to determine that this was an IAM from switch 100 concerning connection 151. As a result STP 120 would copy the routing label of the IAM and transfer it to mapper 115 over link 162. Mapper 115 would identify the VPI/VCI that corresponds to the OPC/DPC/CIC in the IAM.  
25 Mapper 110 would then send a control message to mux 105 instructing mux 105 to enable the VPI/VCI. Once the VPI/VCI was enabled, mux 105 would begin to transmit ATM cells using the VPI/VCI over connection 152 to ATM system 115. The cells would contain information from the DS0 on connection 151 identified by the IAM routing label.



When the call is terminated, an REL would be transmitted over the signaling system to switch 100. STP 120 would check the message type and the DPC to determine that this was an REL to switch 100 concerning connection 151. As a result, STP 120 would copy the routing label of the REL and transfer it to mapper 110 over link 162. Mapper 110 would identify the VPI/VCI that corresponded to the OPC/DPC/CIC in the REL. Mapper 110 would then send a control message to mux 105 instructing it to disable the VPI/VCI. As a result, mux 105 would not transmit cells over the disabled VPI/VCI. If RLCs are used, they would act as an acknowledgment for the REL, and if the REL was not received, then the RLC would be used in the same way the REL is used above.

A similar procedure would occur for calls that are set-up from the opposite direction -- from ATM system 115 to connection 150. In this case, VCI/VPIs would be enabled/disabled based on the IAMs and RELs (and possibly RLCs) that are related to connection 151.

The invention has a significant advantage because virtual connections are only used when they are needed during a call and are disabled when the call is over. This prevents the mux from transmitting empty cells that do not contain any user traffic. This allows for a more efficient allocation and use of bandwidth in the ATM network.

Figure 2 shows a more detailed version of the mux and the mapper. Shown are continuous signal interface 200, ATM adaption layer (AAL) 205, ATM interface 210, control interface 215, and mapper 220. Also shown are continuous signal connection 251, ATM connection 252 and signaling link 262.

Continuous signal connection 251 transports user traffic using continuous signals with an example being DS3 signals. ATM connection 252 transports ATM cells with one example being a SONET connection. An example of signaling link 262 would be an SS7 link. Continuous signal interface 200 is operable to receive user information in continuous signal formats, such as the DS3 format. Signals such as DS3 and DS1 are typically demuxed into component DS0 signals by continuous signal interface 200.

AAL 205 comprises both a convergence sublayer and a segmentation and reassembly (SAR) layer. AAL 205 is operational to accept the user information from

continuous signal interface 200 and convert the information into ATM cells. AAL 205 would select the VPI/VCI for the ATM cells based the particular incoming connection. For example, a particular incoming DS0 would use a pre-assigned VPI/VCI. AALs are known in the art and information about AALs is provided by International  
5 Telecommunications Union (ITU) document I.363.1. An AAL for voice is also described in patent application serial number 08/395,745, filed on February 28, 1995, entitled "Cell Processing for Voice Transmission", and hereby incorporated by reference into this application. ATM interface 210 is operational to accept ATM cells and transmit them over ATM connection 252

10 Control interface 215 is functional to accept control messages from mapper 220 and cause particular VPI/VCIs to be enabled/disabled. This could be done by having AAL 205 verify that the VPI/VCI is enabled before generating cells. This could also be done by having ATM interface 210 screen out ATM cells with a disabled VPI/VCI. Those skilled in the art will appreciate various ways to suppress cell transmission over  
15 disabled VPI/VCIs.

Mapper 220 is functional to accept routing labels from signaling link 262 and determine if a VPI/VCI should be enabled or disabled. Mapper 220 would require interface software to operate over link 162 and to communicate with control interface 215. Mapper 220 may have discrimination logic to select appropriate routing labels for  
20 further processing. These elements have been discussed above.

The system operates as follows. Signaling message routing labels arrive on link 262 and are processed by mapper 220. As discussed, this may require some discrimination to determine if the routing label should be processed by mapper 220. Only routing labels associated with the set-up and tear down of calls using connection  
25 251 need to be processed.

Mapper 220 would determine the affected VPI/VCI using the OPC, DPC, and CIC. If the message type was for an IAM, an enable VPI/VCI control message would be sent to control interface 215. If the message type was for an REL (or possibly an RLC), a disable VPI/VCI control message would be sent to control interface 215. In  
30 this way, ATM cells would only be transmitted during the actual call. When the call is

terminated, the VPI/VCI is disabled so that empty cells are not transmitted. When another call requires the VPI/VCI, it would be enabled allowing cell transmission. This saves significant bandwidth over prior systems that transmitted cells regardless of whether or not an actual call required the connection.

5           Those skilled in the art will appreciate variations of the above described embodiment. In some embodiments, other signaling, such as C7 or UNI signaling could be used instead of SS7. In some embodiments, the location of message discrimination might be in the mapper, or in the STP, or distributed in both. In some embodiments, the switch could be programmed to forward copies of the appropriate routing labels to the  
10   mapper. A conventional STP could be used in this case. In some embodiments, the actual messages may be passed through the mapper so that no copies need to be made. The mapper would passively read the pertinent information. In some embodiments, the mapper function could reside at the switch, the STP, or independently of other components. In these cases, the mapper would communicate with the mux over a  
15   conventional control channel. Also, multiple mappers could be used or a single mapper could be used to control multiple muxes. In addition to these embodiments, other variations will be appreciated by those skilled in the art. As such, the scope of the invention is not limited to the specified embodiments, but is only restricted to the following claims.

Claims:

1. An asynchronous transfer mode (ATM) system for transporting user information in ATM cells that contain a virtual path identification/virtual channel identification (VPI/VCI), wherein the user information is from a continuous-signal transport system that uses a continuous signal to transport the user information and that produces telecommunications signaling related to the continuous signal, and wherein the continuous signal is associated with the VPI/VCI, the system comprises;
- 5 a processor that is operational to receive the telecommunications signaling and to detect, based on the telecommunications signaling, when the continuous signal is transporting the user information and when the continuous signal is not transporting the user information, wherein the processor is operational to associate the continuous signal with the VPI/VCI, to provide a control instruction to enable the VPI/VCI when the continuous signal is transporting the user information, and to provide a control instruction to disable the VPI/VCI when the continuous signal is not transporting the user information; and
- 10 an ATM interworking multiplexer connected to the continuous signal transport system and coupled to the processor, wherein the ATM interworking multiplexer is operational to receive the continuous signal from the continuous signal transport system, to associate the continuous signal with the VPI/VCI, to receive the control instructions from the processor, to generate and transmit ATM cells containing the VPI/VCI and the user information in response to the enabling control instruction, and to stop generating and transmitting ATM cells containing the VPI/VCI in response to the disabling control instruction.
- 15 20 25
2. The system of claim 1 wherein the telecommunications signaling protocol is Signaling System #7.

-11-

3. The system of claim 2 wherein the processor is operational to use at least a portion of an SS7 Initial Address Message (IAM) to detect when the continuous signal transports user information.

5 4. The system of claim 3 wherein the processor is operational to use a Circuit Identification Code (CIC) in the SS7 IAM to identify the continuous signal.

5. The system of claim 4 wherein the processor is operational to use the CIC to associate the continuous signal with the VPI/VCI.

10

6. The system of claim 3 wherein the processor is operational to use at least a portion of an SS7 Release message (REL) to detect when the continuous signal no longer transports user information.

15 7. The system of claim 3 wherein the processor is operational to use at least a portion of an SS7 Release Complete message (RLC) to detect when the continuous signal no longer transports user information.

20 8. The system of claim 1 further comprising a Signal Transfer Point (STP) that is linked to the processor and is operational to transfer the telecommunications signaling to the processor.

9. The system of claim 8 wherein the STP is operational to transfer copies of Signaling System #7 (SS7) message routing labels to the processor.

25

10. The system of claim 9 wherein the STP is operational to transfer copies of SS7 Initial Address Message (IAM) and Release message (REL) routing labels to the processor.

-12-

11. The system of claim 9 wherein the STP is operational to transfer copies of SS7 Release Complete message (RLC) routing labels to the processor.

5 12. The system of claim 9 wherein the STP is operational to transfer copies of SS7 routing labels to the processor that have particular Originating Point Codes (OPCs) and Destination Point Codes (DPCs).

10 13 The system of claim 1 further comprising a switch that is linked to the processor and is operational to transfer the telecommunications signaling to the processor, and wherein the switch is connected to the ATM interworking multiplexer and is operational to transmit the continuous signal to the ATM interworking multiplexer.

15 14. The system of claim 1 wherein the ATM interworking multiplexer is operational to receive a continuous DS3 signal.

15 15. The system of claim 1 wherein the ATM interworking multiplexer is operational to receive a continuous DS1 signal.

20 16. The system of claim 1 wherein the ATM interworking multiplexer is functional to transmit the ATM cells over a SONET connection.

17. An asynchronous transfer mode (ATM) interworking multiplexer for use in a telecommunications system to interwork a plurality of continuous signals with an ATM signal, wherein the ATM signal is comprised of a plurality of ATM cells that each contain one of a plurality of virtual path identifications/virtual channel identifications (VPI/VCIs), wherein individual VPI/VCIs correspond to individual continuous signals, wherein the telecommunications system provides control instructions to the ATM interworking multiplexer to enable a particular VPI/VCI when the corresponding continuous signal is transporting user information, and wherein the telecommunications system provides control instructions to the ATM interworking multiplexer to disable a particular VPI/VCI when the corresponding continuous signal is not transporting user information; the ATM interworking multiplexer comprises;
- a continuous signal interface that is operational to receive the continuous signals from the telecommunications system;
  - an ATM Adaption Layer (AAL) that is coupled to the continuous signal interface and is operational to convert the continuous signals into ATM cells with corresponding VPI/VCIs;
  - an ATM interface that is coupled to the AAL and is operational to transmit the ATM cells to the telecommunications system; and
  - a control interface that is coupled to the AAL and is operational to receive the control instructions from the telecommunications system and control the AAL to generate and transmit cells with enabled VPI/VCIs and to stop the generation and transmission of ATM cells with a disabled VPI/VCIs.

18. A method of transporting user information in ATM cells in an asynchronous transfer mode (ATM) system, wherein the ATM cells contain a virtual path identification and a virtual channel identification (VPI/VCI), wherein the user information is from a continuous-signal transport system that uses a continuous signal to transport the user information and that transmits telecommunications signaling related to the continuous signal, and wherein the continuous signal corresponds to the VPI/VCI, the method comprising;

receiving the continuous signal and the telecommunications signaling from the continuous signal transport system;

10 detecting when the continuous signal is transporting the user information based on the telecommunications signaling;

associating the continuous signal with the corresponding VPI/VCI in response to detecting that the continuous signal is transporting the user information;

generating and transmitting ATM cells containing the corresponding VPI/VCI and the user information in response to detecting that the continuous signal is transporting the user information and associating the continuous signal with the corresponding VPI/VCI;

detecting when the continuous signal is not transporting the user information based on the telecommunications signaling; and

20 stopping the generation and transmission of ATM cells containing the corresponding VPI/VCI and the user information in response to detecting that the continuous signal is not transporting the user information.

19. The method of claim 18 wherein the telecommunications signaling transmitted by the continuous signal transport system is Signaling System #7 (SS7).



20. The method of claim 19 wherein;  
detecting when the continuous signal is transporting the user information is based  
on an SS7 Initial Address Message (IAM),  
associating the continuous signal with the corresponding VPI/VCI is based on  
5 the Circuit Identification Code (CIC) in the IAM; and  
detecting when the continuous signal is not transporting the user information is  
based on an SS7 Release Message (REL).
21. The method of claim 19 wherein;  
10 detecting when the continuous signal is transporting the user information is based  
on an SS7 Initial Address Message (IAM),  
associating the continuous signal with the corresponding VPI/VCI is based on  
the Circuit Identification Code (CIC) in the IAM; and  
detecting when the continuous signal is not transporting the user information is  
15 based on an SS7 Release Complete message (RLC).

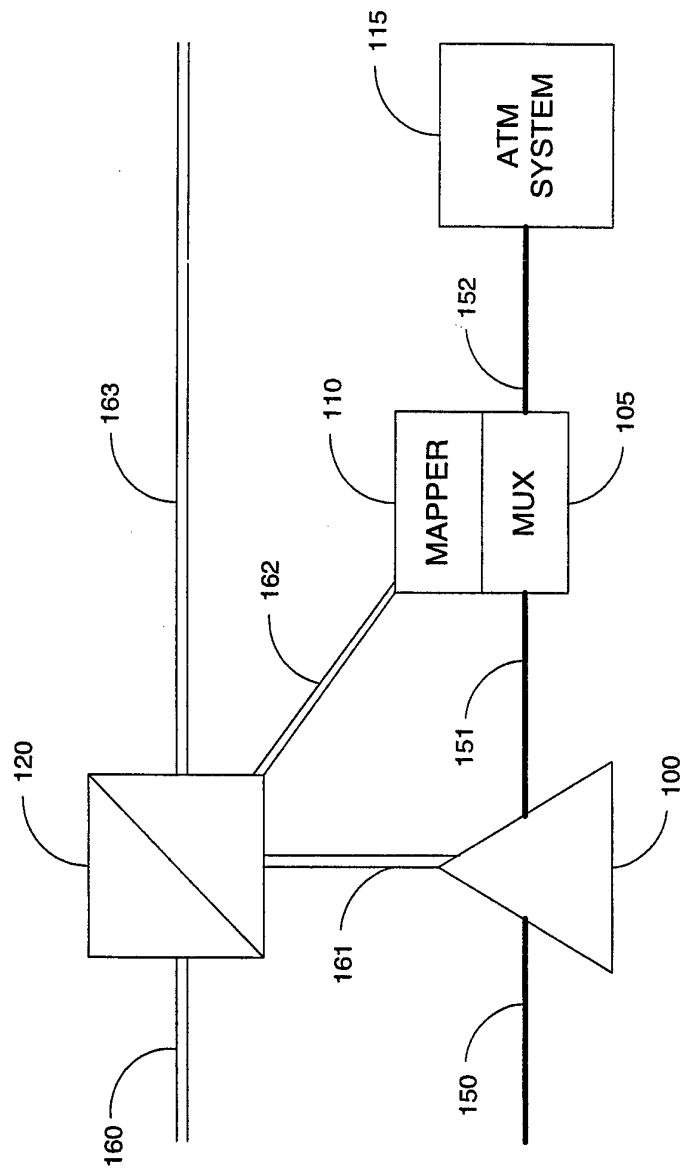


FIGURE 1

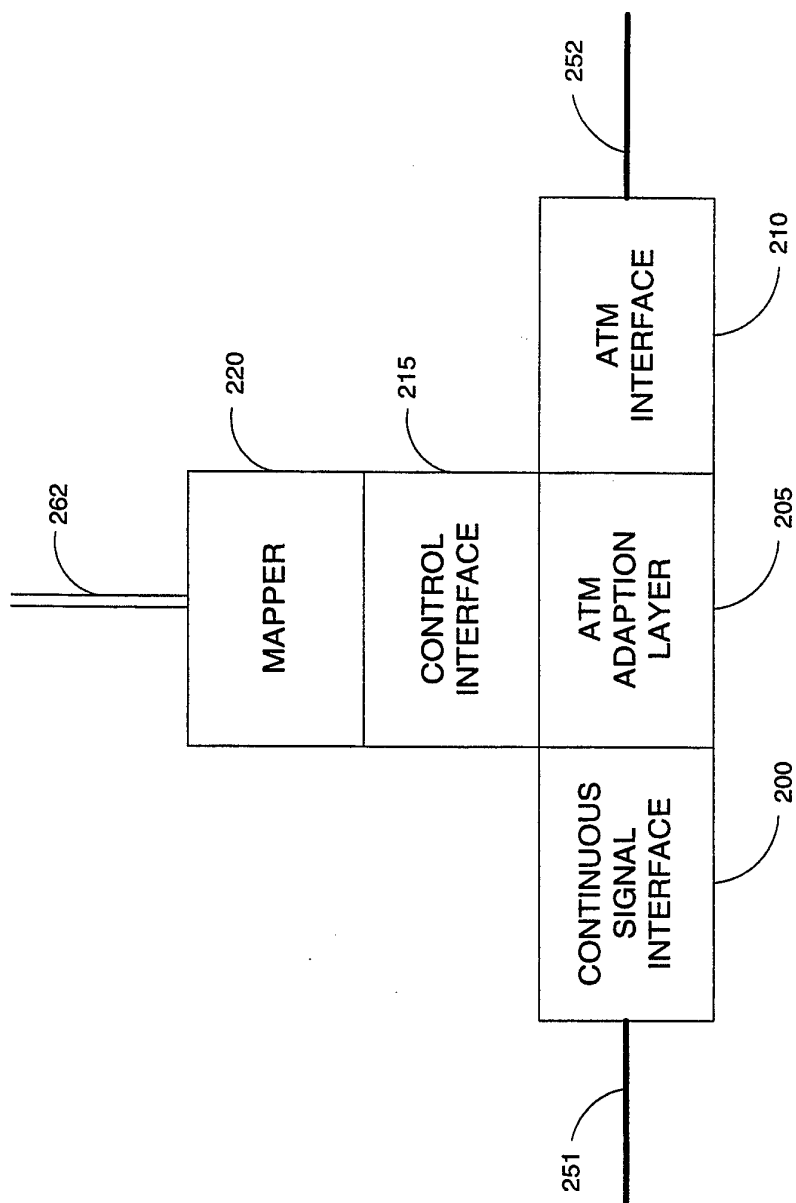


FIGURE 2

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/14129

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :H04L 12/66

US CL :370/58.2

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/58.2, 60, 60.1, 79, 80, 94.2, 99, 110.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

search terms: ATM, DS#, SS7

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,204,857 (Obara) 20 April 1993, see fig. 1 and col.10 lines 6-64	1-21
A, P	US 5,483,527 (DOSHI ET AL.) 09 JANUARY 1996	1-21

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

23 OCTOBER 1996

Date of mailing of the international search report

06 NOV 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

RUSSELL W BLUM

Telephone No. (703) 305-4700

BRIAN A. HARDEN  
PARALEGAL SPECIALIST  
GROUP 2400