




(86) **Date de dépôt PCT/PCT Filing Date:** 2008/07/23
(87) **Date publication PCT/PCT Publication Date:** 2009/03/05
(45) **Date de délivrance/Issue Date:** 2014/10/07
(85) **Entrée phase nationale/National Entry:** 2010/02/25
(86) **N° demande PCT/PCT Application No.:** EP 2008/059631
(87) **N° publication PCT/PCT Publication No.:** 2009/027157
(30) **Priorité/Priority:** 2007/08/30 (DE10 2007 041 145.8)

(51) **Cl.Int./Int.Cl. H04L 12/26** (2006.01),
H04L 29/06 (2006.01)
(72) **Inventeurs/Inventors:**
HARTMANN, SIEGFRIED, DE;
KRUMBOECK, JOERG, DE
(73) **Propriétaire/Owner:**
SIEMENS ENTERPRISE COMMUNICATIONS GMBH &
CO. KG, DE
(74) **Agent:** MARKS & CLERK

(54) **Titre : PROCÉDE POUR ANALYSER DES FLUX DE DONNÉES TRANSMIS SIMULTANÉMENT, ET CODES**
(54) **Title: METHOD FOR ANALYZING SIMULTANEOUSLY TRANSMITTED, ENCODED DATA STREAMS**

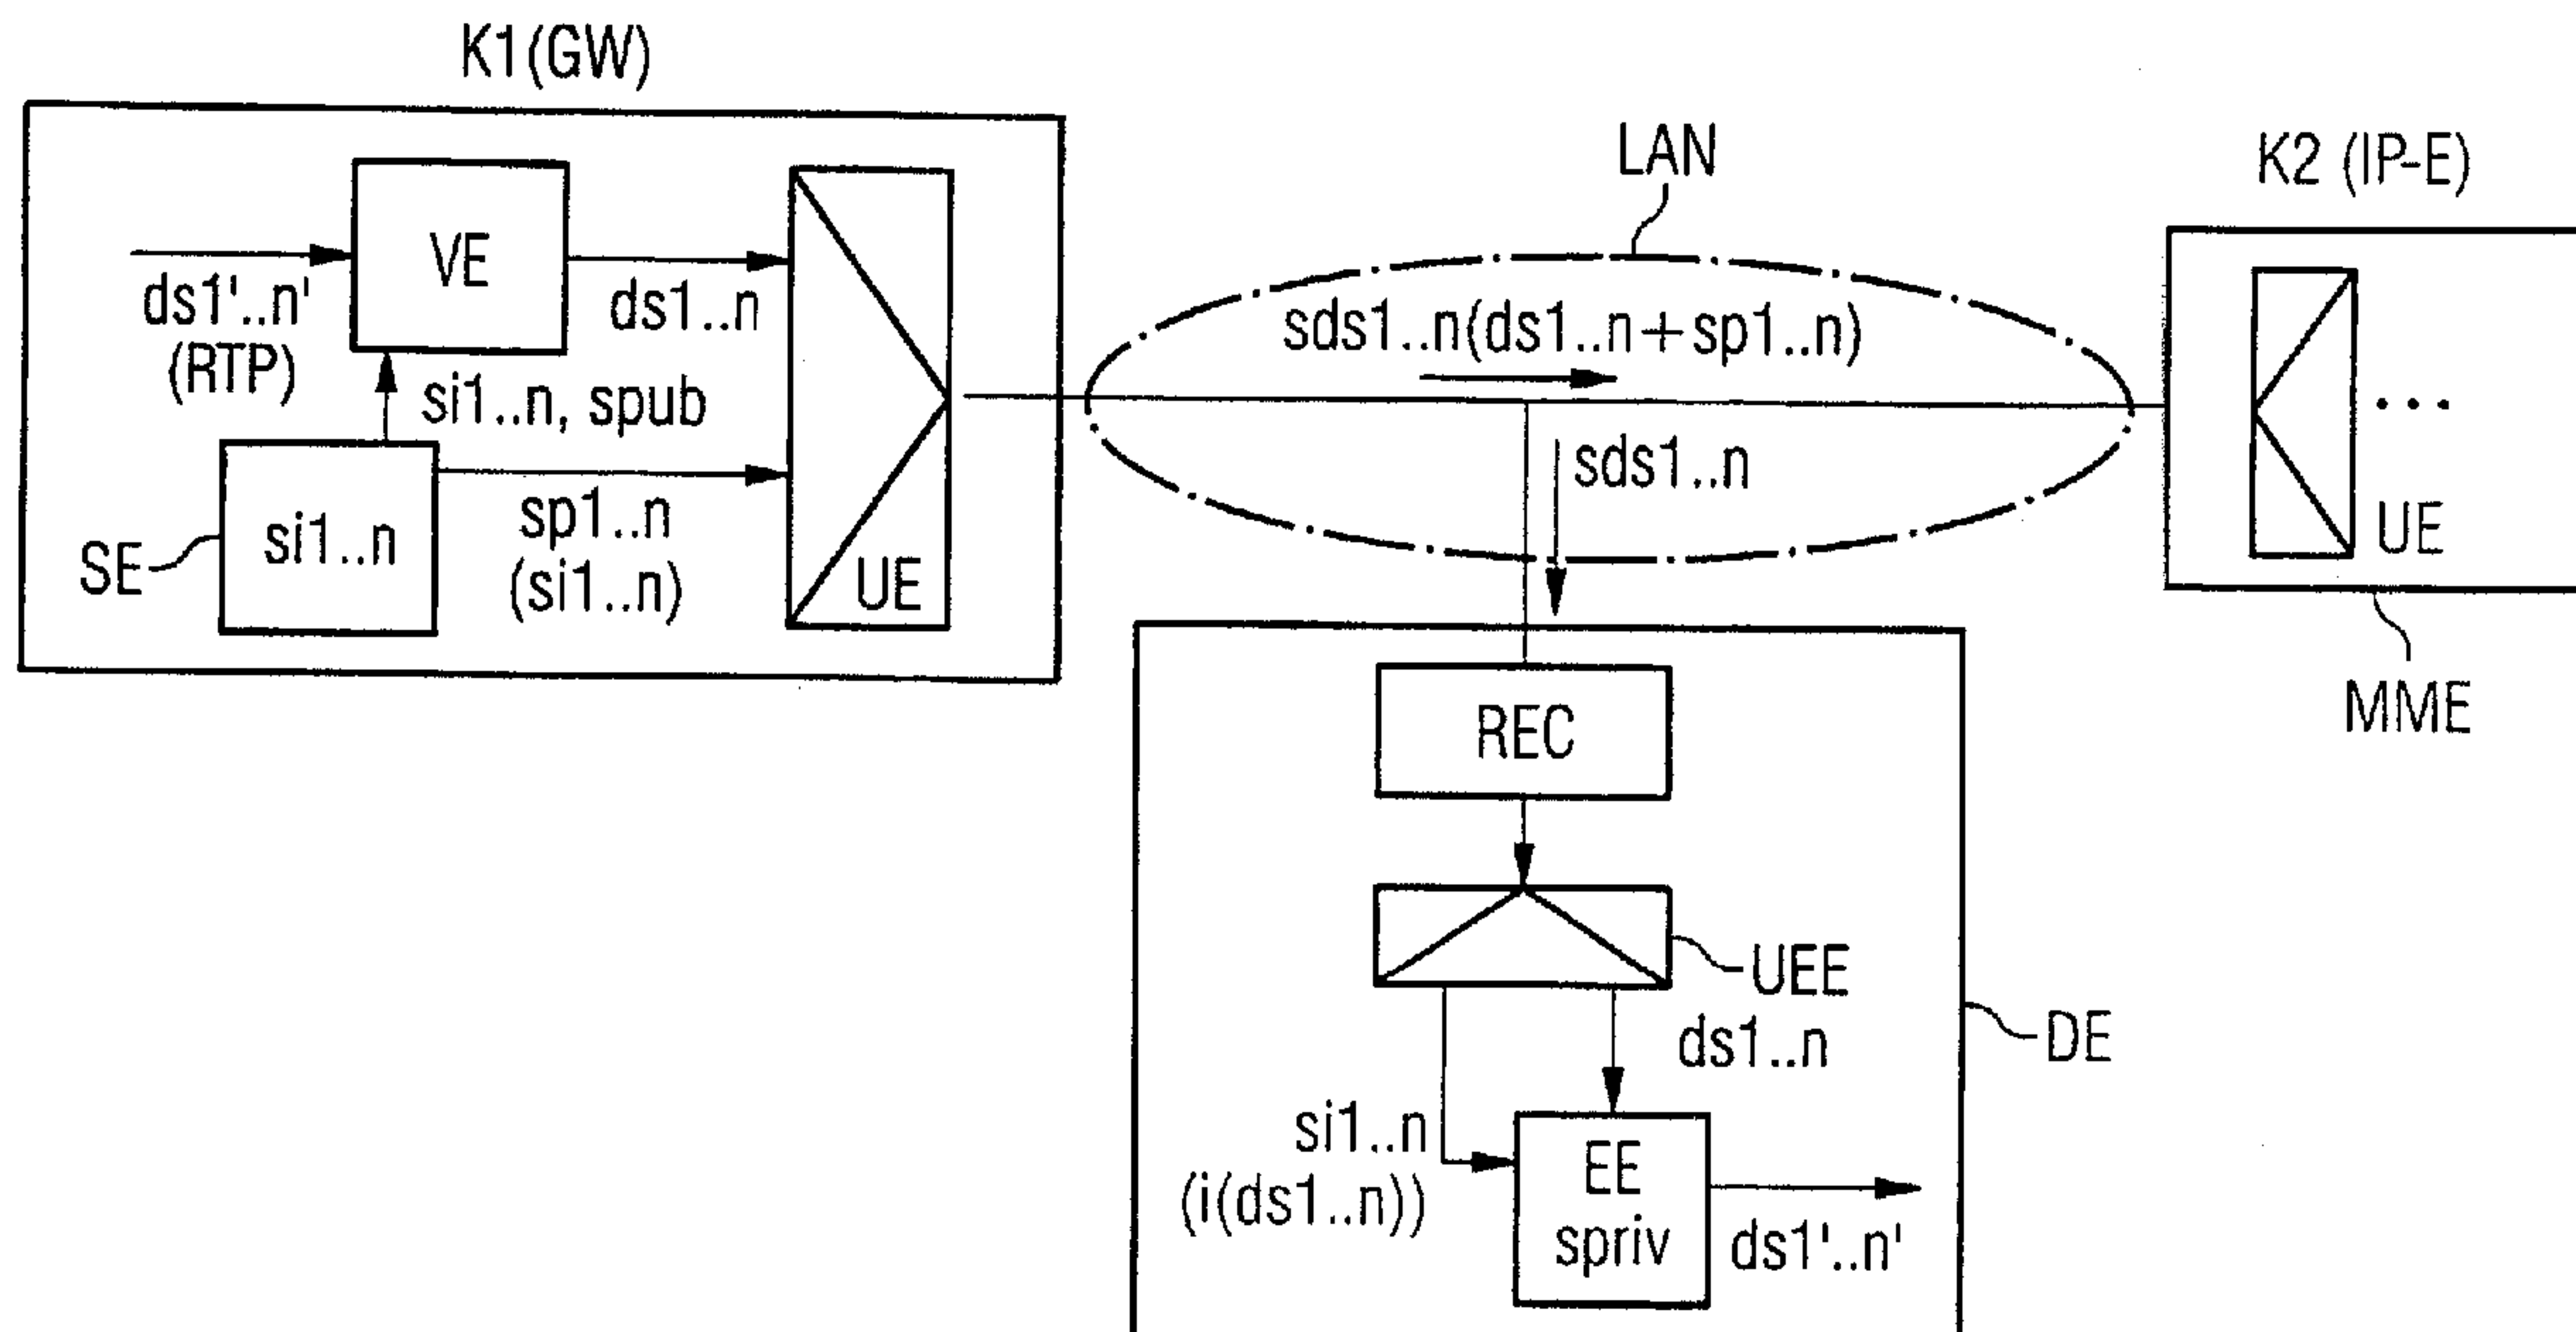

(57) **Abrégé/Abstract:**

In a data stream individually encoded data stream (dsl..n), data packets formed as key data packets (spl..n) are to be inserted, with which the data stream-individual key information (sil..n) is transmitted with the associated data stream (dsl..n). For analyzing and/or recording, at least one key data packet (spl..n) is searched for in the associated data stream (dsl..n), and the data stream-individual key information (sil..n) is determined. By means of the data stream-individual key information (sil..n), the associated data stream (dsl..n) is decoded. The generation and insertion of key information (sil..n) can be achieved with minor administrative effort, thus considerably reducing the effort for the analysis or diagnosis (dsl..n) of the simultaneously transmitted, encoded data streams (dsl..n). Advantageously, the insertion of key data packets can only be activated or initiated if the diagnosis or analysis and/or recording of the data streams is currently carried out.



(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
5. März 2009 (05.03.2009)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2009/027157 A1(51) Internationale Patentklassifikation:
H04L 12/26 (2006.01) **H04L 29/06** (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2008/059631

(22) Internationales Anmeldedatum:
23. Juli 2008 (23.07.2008)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch


(30) Angaben zur Priorität:
10 2007 041 145.8 30. August 2007 (30.08.2007) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): **SIEMENS ENTERPRISE COMMUNICATIONS
GMBH & CO. KG** [DE/DE]; Hofmannstr. 51, 81379
München (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **HARTMANN,
Siegfried** [DE/DE]; Arnoldstr. 11, 85402 Kranzberg (DE).
KRUMBÖCK, Jörg [DE/DE]; Apostel-Paulus-Strasse
27, 10823 Berlin (DE).(74) Anwalt: **MAIER, Daniel**; Postfach 22 16 34, 80506
München (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY,
BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ,
LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK,
MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM,
ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, ZA, ZM, ZW.(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF,

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD FOR ANALYZING SIMULTANEOUSLY TRANSMITTED, ENCODED DATA STREAMS

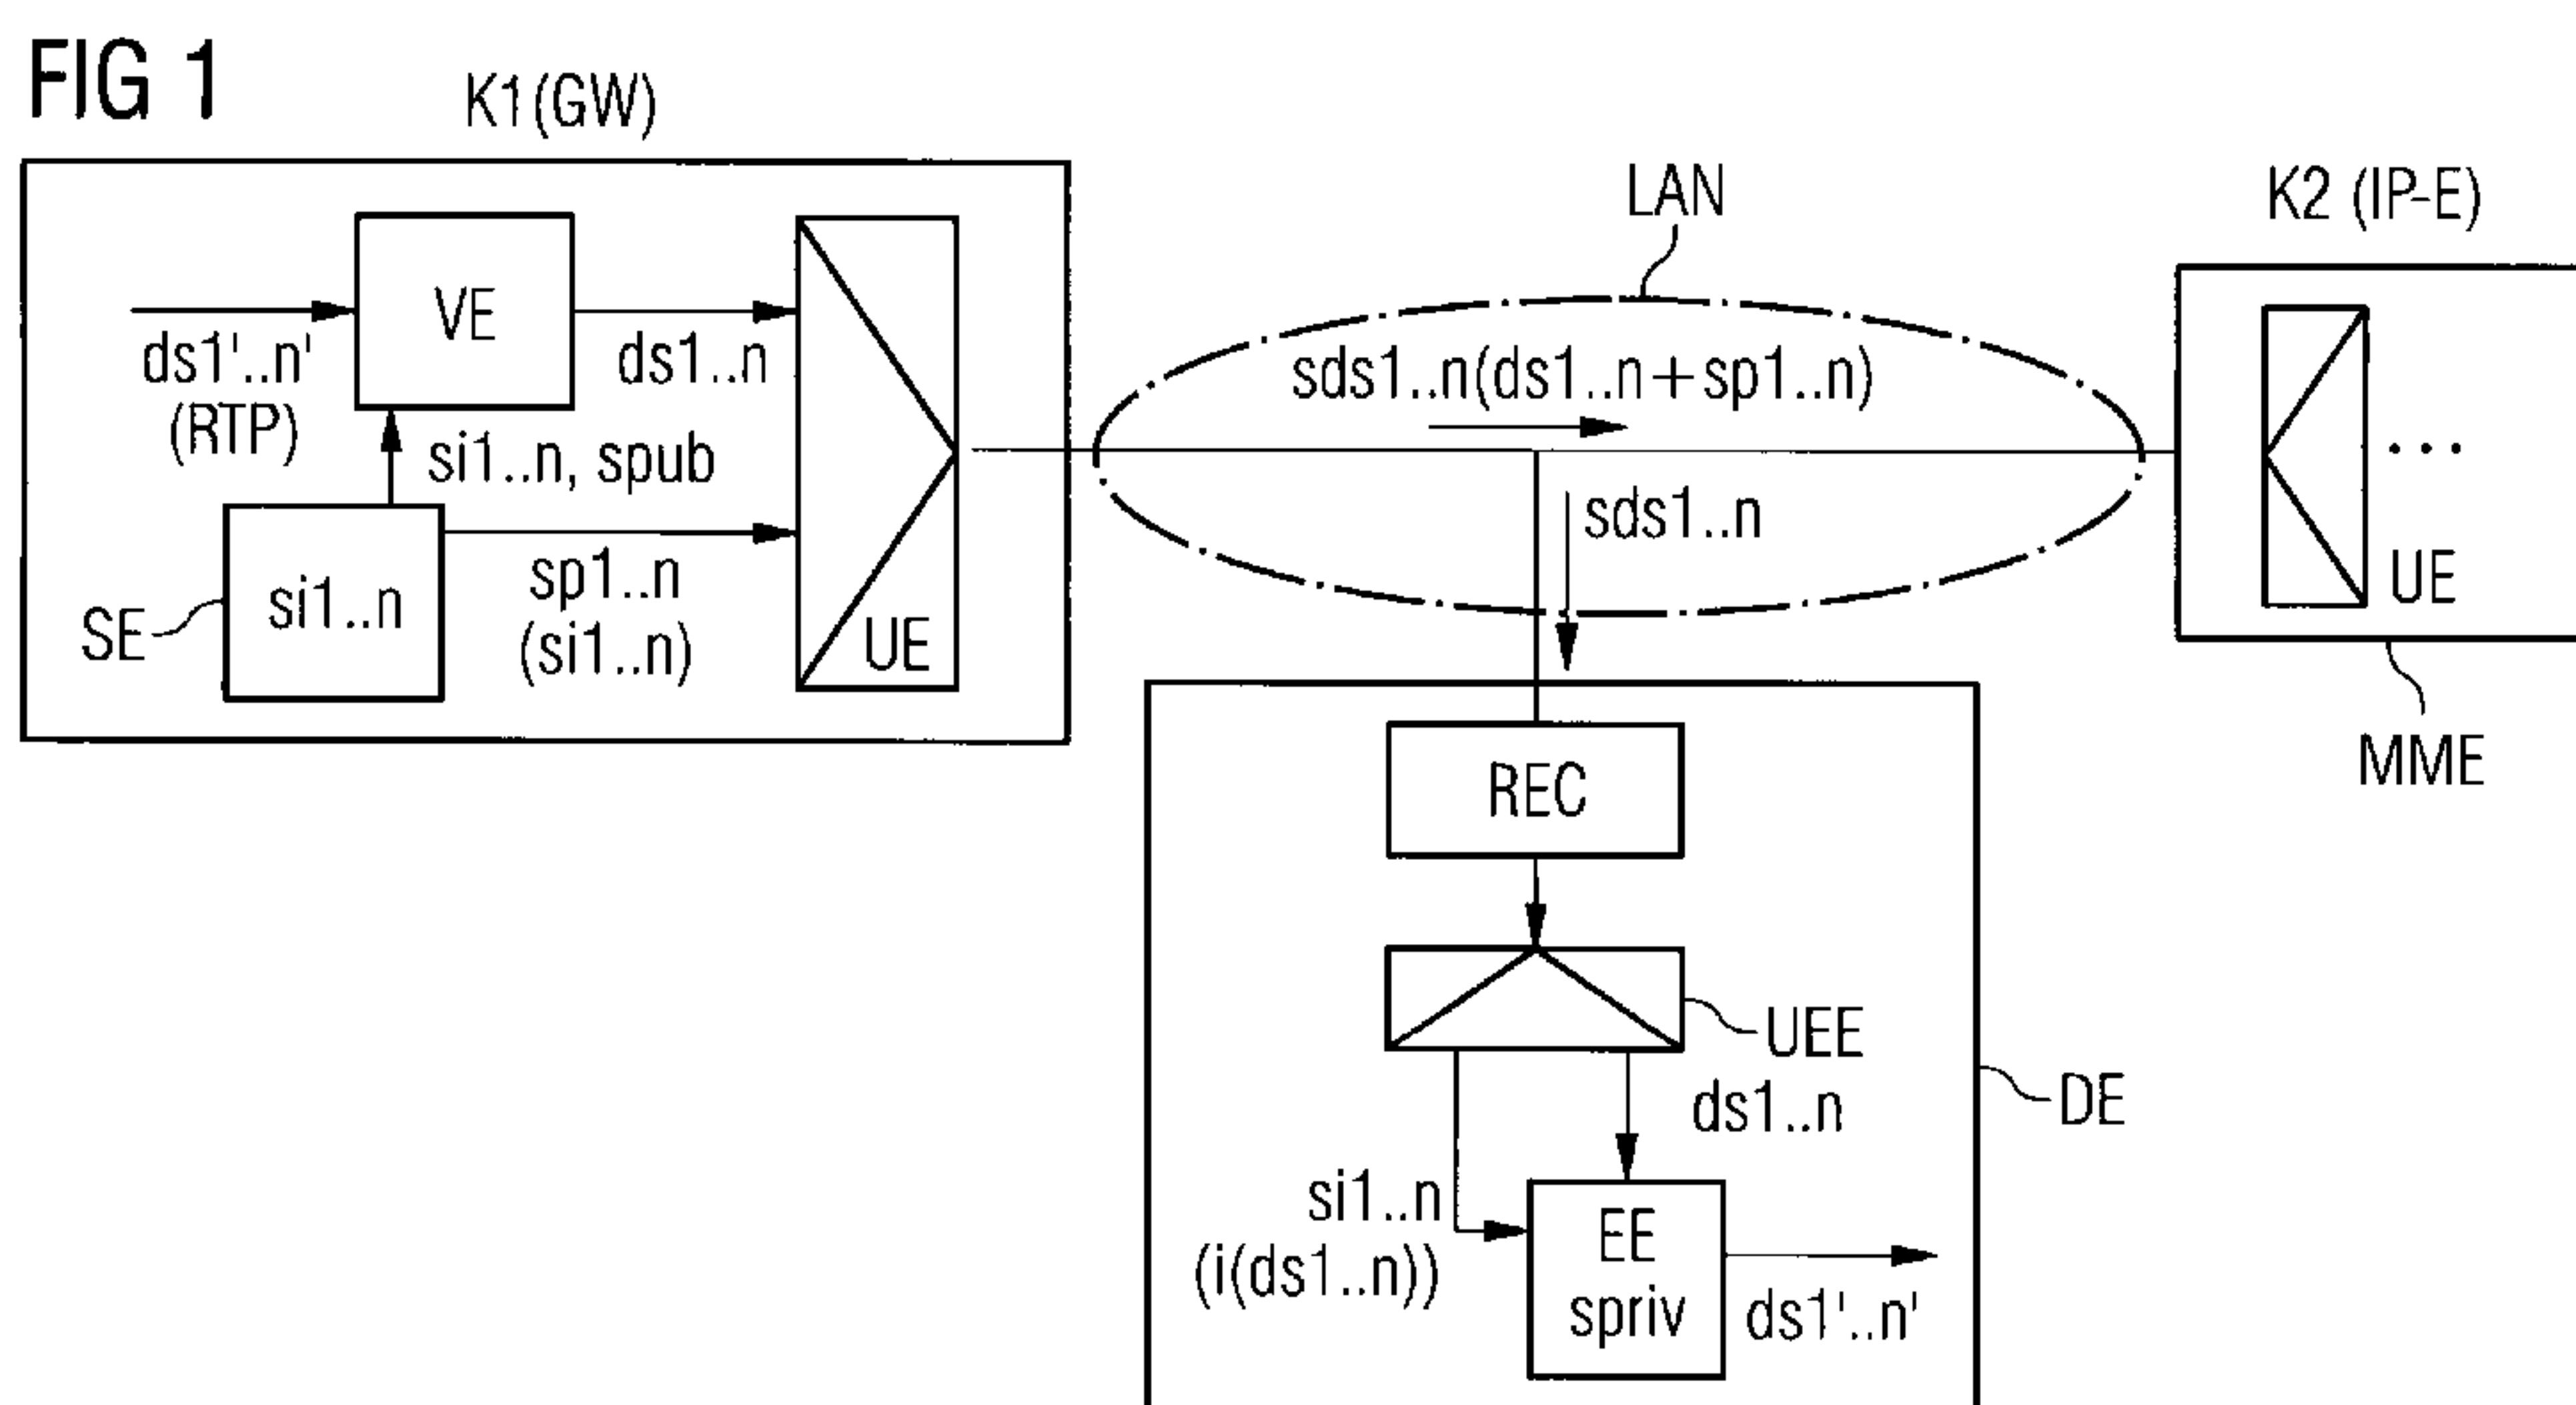(54) Bezeichnung: VERFAHREN ZUM ANALYSIEREN VON GLEICHZEITIG ÜBERTRAGENEN, VERSCHLÜSSELTEN
DATENSTRÖMEN

(57) **Abstract:** In a data stream individually encoded data stream (dsl..n), data packets formed as key data packets (spl..n) are to be inserted, with which the data stream-individual key information (sil..n) is transmitted with the associated data stream (dsl..n). For analyzing and/or recording, at least one key data packet (spl..n) is searched for in the associated data stream (dsl..n), and the data stream-individual key information (sil..n) is determined. By means of the data stream-individual key information (sil..n), the associated data stream (dsl..n) is decoded. The generation and insertion of key information (sil..n) can be achieved with minor administrative effort, thus considerably reducing the effort for the analysis or diagnosis (dsl..n) of the simultaneously transmitted, encoded data streams (dsl..n). Advantageously, the insertion of key data packets can only be activated or initiated if the diagnosis or analysis and/or recording of the data streams is currently carried out.

[Fortsetzung auf der nächsten Seite]

WO 2009/027157 A1

WO 2009/027157 A1



BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN,
TD, TG).

Veröffentlicht:

— *mit internationalem Recherchenbericht*

(57) Zusammenfassung: In jeweils einen datenstromindividuell verschlüsselten Datenstrom (dsl..n) werden als Schlüsseldatenpakete (spl..n) gebildete Datenpakete eingefügt werden, mit dem die datenstromindividuelle Schlüsselinformation (sil..n) mit dem jeweiligen Datenstrom (dsl..n) übertragen wird. Für eine Analyse und/oder Aufzeichnung wird zumindest ein Schlüsseldatenpaket (spl..n) in dem jeweiligen Datenstrom (dsl..n) gesucht und die datenstromindividuelle Schlüsselinformation (sil..n) ermittelt und mit Hilfe der datenstromindividuellen Schlüsselinformation (sil..n) wird der zugehörige Datenstrom (dsl..n) entschlüsselt. Das Bilden und Einfügen von Schlüsselinformation (sil..n) kann mit geringem administrativem Aufwand erfolgen, wodurch der Aufwand für die Analyse bzw. Diagnose der gleichzeitig übertragenen, verschlüsselten Datenströme (dsl..n) erheblich reduziert wird. Vorteilhaft kann das Einfügen von Schlüsseldatenpaketen nur dann aktiviert bzw. veranlasst werden, wenn die Diagnose bzw. Analyse und/oder Aufzeichnung der Datenströme aktuell durchgeführt wird.

Description

Method For Analyzing Simultaneously Transmitted, Encoded Data Streams

In communication networks, especially in Voice Over IP communication networks, the RTP (Real Time Protocol) is often used to transmit data streams or multimedia data streams consisting of data packets, i.e., user information or speech information. The RTP is defined in RFC standard 1889, or since 2003 in RFC standard 3550. Due to increased security requirements, data streams have been transmitted encrypted for quite some time, and the secure RTP used for this is described in RFC standard 3711. In this context, the key information required for encryption is assigned and used on a data-stream-specific basis. As an example, for a multimedia session between two endpoints on an IP-based communication network, an audio and a video data stream are each transmitted in one transmission direction. Related to both transmission directions, four data streams are transmitted within a multimedia session, each of which is encrypted separately, i.e., encrypted data-stream-specifically. The key information for that particular session or data stream is assigned or processed during connection signaling—using the SIP (Session Initiation Protocol), for example—with a special key used to encrypt the connection signaling—Preshared Secrets, for example—which cannot be recognized even if the data stream is hacked.

In communication networks, multiple data streams or multimedia data streams are generally transmitted through a transmission leg or transmission segment. For problem situations arising in communication networks, analysis or diagnosis of the transmitted data streams is necessary in order to locate or delimit errors. For error analysis or diagnosis, reconstruction of the unencrypted data streams is usually necessary. An analysis or diagnosis is often performed on transmission segments with multiple data streams transmitted simultaneously using the RTP, so that the key information in the data streams (RTP data streams, for example), is not available and cannot be determined even during connection signaling, because the signaling information and the key information are re-encrypted, and the key information used is not available.

The intent on which the invention is based is to improve the analysis or diagnosis of individual or simultaneously transmitted data streams containing data packets, with data streams generated and encrypted data-stream-specifically according to a network protocol for data stream transmission. This intent is achieved as described herein.

The primary aspect of the invented method lies in the fact that data packets generated as key data packets are inserted into each generated data stream, and they transmit the data-stream-specific key information for that data stream. For an analysis, at least one key data packet is searched for in the data stream, and the data-stream-specific key information is determined; using that data-stream-specific key information, the associated data stream is decrypted.

An important advantage of the invention is that key information can be generated and inserted with minimal administrative effort, and the effort required to analyze or diagnose simultaneously transmitted data streams is significantly reduced. Another advantage is that the insertion of key data packets can be activated or initiated only if diagnosis or analysis of the data streams is currently in progress.

According to one embodiment of the invention, a data packet type for key data packets is determined in the network protocol, so that when the data stream is received according to the network protocol, the key data packets are discarded. This ensures that key information cannot be read when data packets are transmitted to a network protocol-compliant data receiver according to the network protocol. As an alternative, a data packet type that is new to the network protocol can be defined for the key data packets, or an unused data packet type can be provided, which is not read when data packets are transmitted to a network protocol-compliant receiver according to the network protocol.

According to another preferred embodiment of the invention, the key data packet is represented by a data packet in whose header or expanded header the key information is inserted, and the generated header information is of a type such that the key information is discarded when the data stream is received according to the network protocol.

2a

According to an aspect of the present invention there is provided a method for decrypting at least one encrypted data stream (ds1..n) containing data packets, in which a data stream (ds1..n) is data-stream-specifically generated and data-stream-specifically encrypted according to a network protocol (SRTP) for encrypting and transmitting data streams,

- wherein data packets generated as key data packets (sp1..n) are inserted in each generated and encrypted data stream (ds1..n), and the data-stream-specific key information (si1..n) is transmitted for each data stream (ds1..n),
- wherein at least one key data packet (sp1..n) in each data stream (ds1..n) that contains key data packets (sp1..n) is searched for and the data-stream-specific key information (si1..n) is determined, and
- wherein the associated encrypted data stream (ds1..n) is decrypted using the data-stream-specific key information (si1..n).

According to another aspect of the present invention there is provided an arrangement for decrypting at least one encrypted data stream (ds1..n) that contains data packets, wherein a data stream (ds1..n) is data-stream-specifically generated and data-stream-specifically encrypted according to a network protocol (SRTP) for encrypting and transmitting data streams (ds1..n):

- with a key unit (SE) for generating key data packets (sp1..n) for each data stream (ds1..n), such that the data-stream-specific key information (si1..n) for each data stream (ds1..n) is contained in the key data packets (sp1..n),
- with a transmission unit (UE) for inserting the key data packets (ds1..n) into each generated data stream (ds1..n),
- with a monitoring unit (UEE) that searched for at least one key data packet (sp1..n) in each data stream (ds1..n) and determines the connection-specific key information (si1..n), and
- with a decryption unit (EE) for decrypting each data stream (ds1..n) that contains key data packets (sp1..n), using the associated connection-specific key information (si1..n).

According to a further aspect of the present invention there is provided a method for decrypting at least one encrypted data stream comprising a first data stream containing

2b

data packets wherein the first data stream is a data stream that is specifically generated and specifically encrypted according to a network protocol for encrypting and transmitting data streams, the method comprising:

generating key data packets for the first data stream, each of the key data packets having a header in which at least one piece of key information is included so that there is at least one piece of key information within each of the key data packets, the at least one piece of key information containing information needed to decrypt at least a portion of the first data stream;

inserting said key data packets in the first data stream;

transmitting the data packets and the key data packets of the first data stream;

searching for at least one of the key data packets in the first data stream by searching for data packets having a predefined payload type that is assigned to the key data packets;

determining key information from the at least one key data packet found via the searching; and

decrypting at least a portion of the first data stream using the determined key information.

In some embodiments, the method further comprises discarding the key data packets after the key information is determined according to the network protocol.

In some embodiments, the data packet payload type defines a data packet type, the data packet type selected from the group consisting of a data packet type that is new to the network protocol and an unused data packet type.

In some embodiments, key information is within a user data portion of each of the key data packets.

In some embodiments, the inserting of the key data packets occurs continuously.

In some embodiments, the method further comprises encrypting at least one of the key data packets so that additional key information is included within the encrypted at least one key data packet.

2c

In some embodiments, the method further comprises representing the additional key information as an asymmetrical piece of key information, so that a piece of key information is provided for encrypting key data packets that is different from that used to decrypt the data stream.

In some embodiments, the network protocol is Secured Real Time Protocol.

In some embodiments, the method further comprises activating and subsequently deactivating the insertion of key data packets for analysis and/or recording of the data streams.

In some embodiments, the header being of a type such that the at least one piece of key information is discarded when the data stream is received in accordance with the network protocol.

In some embodiments, the header is an expanded header.

In some embodiments, the method further comprises discarding the at least one key data packets found via the searching after determining the key information.

In some embodiments, the key data packets are of a type such that a network protocol compliant data receiver cannot read the key information of the key data packets, the network protocol compliant data receiver being a multimedia terminal.

In some embodiments, the key data packets are of a type such that a network protocol compliant data receiver does not read the key information of the key data packets in accordance with the network protocol, the network protocol compliant data receiver being a multimedia terminal.

In some embodiments, the key data packets are inserted into the first data stream via a data packet multiplexer.

2d

According to a further aspect of the present invention there is provided an arrangement for decrypting at least one encrypted data stream comprising a first data stream that contains data packets, wherein the first data stream is data-stream-specifically generated and data-stream-specifically encrypted according to a network protocol for encrypting and transmitting data streams, the arrangement comprising:

a gateway connected to a network, the gateway generating key data packets for the first data stream, each of the key data packets having a header in which at least one piece of key information is included so that there is at least one piece of key information within each of the key data packets, the at least one piece of key information containing information needed to decrypt at least a portion of the first data stream, the gateway inserting said key data packets in the first data stream and transmitting the data packets and the key data packets of the first data stream, the first data stream being transmitted from the gateway to a multimedia terminal;

a diagnosis unit connected to a network to which the gateway is connected, the diagnosis unit searching for at least one of the key data packets in the first data stream by searching for data packets having a predefined payload type that is assigned to the key data packets, the diagnosis unit determining the key information from the at least one key data packet found via the searching and decrypting the first data stream using the determined key information so that at least a portion of the first data stream is at least one of diagnosable and analyzable.

In some embodiments, the inserting of the key data packets occurs continuously.

In some embodiments, the diagnosis unit comprises a recording unit, the recording unit recording the first data stream.

In some embodiments, the gateway inserts the key data packets into the first data stream such that the insertion is adjustable so that at least one of analysis and recording of the first data stream is activateable and deactivateable.

The following text further explains the invention and its developments, with reference to two drawings. They consist of:

Figure 1, a schematic showing one communication arrangement for applying the invented method, and

Figure 2, a key data packet suitable for the communication arrangement according to the invention.

Figure 1 is a schematic diagram showing an example of a communication arrangement in which the invented method is used, including only components in which the invented method is implemented or which are necessary in order to clarify the invented method.

The communication arrangement is suitable for Voice Over IP, i.e., for transmitting spoken information in the IP protocol, with signaling by means of the standardized H.323 or SIP protocol. For speech and/or video transmission, use of the RTP (Real Time Protocol) is preferred, with speech and/or video information transmitted directly between the components that are connected by signaling. The RTP protocol is defined in RFC standard 1889 or 3550 and consists of a protocol for continuous transmission of real-time data, e.g., audiovisual or multimedia data over IP-based networks. Under this protocol, data packets to be transmitted are coded and inserted for transmission over IP-based networks in data packets, with each session having at least one data stream ds or multiple data streams assigned to it. The RTP protocol is suitable for transmission of individual data streams ds as well as for simultaneous transmission of multiple data streams $ds1..n$ or data packets. For the execution example given here, it is assumed that multiple data streams $ds1..n$, i.e. multimedia streams, are transmitted simultaneously between components of an IP-based network.

Due to increased security requirements for transmitting data streams ds , it has become increasingly common to encrypt data streams ds , especially data streams ds transmitted according to the RTP protocol. Key information si , which is recognized by the components between which the data streams are transmitted in an IP-based network, is used for this encryption. A protocol for encrypting RTP data streams is defined in the SRTP protocol (Secure Real Time Protocol) according to RFC standard 3711. It uses a symmetrical encryption system that offers a high degree of security.

The communication arrangement consists of a first component $K1$ that is represented in the execution example by a Gateway GW . The Gateway GW can, for example, be connected via a local network LAN —hereafter designated as LAN and represented in Figure 1 by a dash-and-dot outlined oval—to a second component $K2$, which in the execution example is represented by an Internet endpoint $IP-E$ such as a multimedia terminal MME . The LAN can consist physically and procedurally of an Ethernet, for example.

For the execution example, it is further assumed that multiple data streams $ds1'..n'$ or multimedia data streams generated according to the RTP are to be transmitted simultaneously from the Gateway GW to the Internet endpoint $IP-E$. As an example, the multiple data streams $ds1'..n'$ are generated as audio data streams and video data streams, and both an audio and a video data stream can be assigned to each session. In addition, the data streams $ds1'..n'$ generated according to the RTP protocol are encrypted data-stream-specifically, using an encryption unit VE . This means that, for each data stream $ds1'..n'$, a different piece of key information $si1..n$ is designated for encryption. RTP data streams ds are encrypted preferably using the SRTP protocol according to RFC standard 3711.

According to the invention, the encrypted data streams $ds1..n$ from the data-stream-specifically encrypted data streams $ds1..n$ should be decrypted for analysis of the data streams by a diagnosis unit DE . Normally a diagnosis unit DE is not involved in the

signaling between the connection-generating components of an IP-based network, so as part of the signaling the used key information si is processed for each individual data stream. Of course, signaling could also be analyzed by the diagnosis unit DE, but the key information $si1..n$ for the data streams $ds1..n$ could not be determined, because the signaling and the key information $si1..n$ are encrypted again and the pieces of key information for these encryptions are not available to the diagnosis unit, nor can they be determined from the signaling information. This means that the diagnosis unit DE has no information about the key information si used in the data streams $ds1..n$.

So that data streams $ds1..n$ generated according to the SRTP protocol can still be decrypted, the invented method is used, with the invented method applied in the execution example to the simultaneous transmission of multiple data streams $ds1..n$ generated according to the SRTP protocol from the Gateway GW to the IP endpoint IP-E. The methods and components described below apply to the opposite transmission direction.

In the Gateway GW, the data streams $ds1'..n'$ are encrypted in an encryption unit VE according to the SRTP protocol. The required key information $si1..n$ is stored in a key unit SE and is available from the key unit SE, which is designated in Figure 1 by an arrow marked with $si1..n$. This means that a piece of key information $si1..n$ is designated for each data stream $ds1'..n'$, i.e., the data streams $ds1'..n'$ are encrypted data-stream-specifically.

Also in the key unit SE, key data packets $sp1..n$ are generated for each data stream $ds1..n$, and the key information $si1..n$ needed to decrypt the data-stream-specifically encrypted data streams $ds1..n$ is inserted in the key data packets $sp1..n$. The key data packets $sp1..n$ and the encrypted data streams $ds1..n$ are sent to a transmission unit UE. In the transmission unit UE, the key data packets $sp1..n$ are inserted data-stream-specifically into the data streams $ds1..n$, i.e., the first key data packets $sp1$ are inserted into the first data stream $ds1$, the second key data packets $sp2$ into the second data stream $ds2$, etc. Preferentially, key data packets $sp1..n$ are inserted continuously into each of the

encrypted data streams $ds1..n$. The key data packets $sp1..n$ are normally inserted into the data streams $ds1..n$ by a data packet multiplexer, represented in Figure 1 by a multiplexer triangle.

For increased security when transmitting key data packets $sp1..n$, the key data packets ($sp1..n$) can also be encrypted. Additional key information is needed for this, and it is generated using a public key $spub$ and a private key $spriv$. In this case, the public key $spub$ for the additional encryption is provided in the key unit SE in the Gateway GW and is sent to the transmission unit UE for encrypting the key data packets $sp1..n$, shown in Figure 1 as an arrow marked $spub$. The private key $spriv$ is provided to the diagnosis unit DE by the decryption unit EE and is used to decrypt the additional encrypted key data packets ($sdp1..n$), shown in Figure 1 by the designation $spriv$ in the decryption unit EE.

The data streams $sds1..n$ containing key data packets $sp1..n$ are transmitted over the LAN to the IP endpoint IP-E. A diagnosis unit DE connected to the LAN is provided for the purpose of diagnosing or analyzing the data streams $sds1..n$. So that the data streams $sds1..n$ containing the key data packets $sp1..n$ can be analyzed, the encrypted data streams $sds1..n$ must be decrypted. As explained previously, for each encrypted data stream $ds1..n$, the key information $si1..n$ needed for decryption is necessary. Because the key data packets $sp1..n$ containing the key information $si1..n$ are inserted into the data streams $sds1..n$ according to the invention, the key data packets $sp1..n$ in each data stream $ds1..n$ are searched for, read, and stored in the diagnosis unit DE with the help of a monitoring unit UEE. Preferentially, the entire key data packet $sp1..n$ would not be sent and stored, but rather only the key information $si1..n$ contained in it. Together with each piece of key information $si1..n$, a piece of information $i(ds1..n)$ from the key data packets $sp1..n$ must also be determined and stored, for which the data stream $sds1..n$ that contains the key data packets $sp1..n$ is provided with the key information $si1..n$ for decryption. For the following execution example it is assumed that, with the help of a demultiplexer function provided in the monitoring unit UEE—shown in Figure 1 as a triangle—the key data packets $sp1..n$ that were found are eliminated from the data streams $sds1..n$ containing the

key data packets $sp_{1..n}$ after determination and storage of the key information $si_{1..n}$, and only the encrypted data streams $sds_{1..n}$ are sent to a decryption unit EE.

The key information $si_{1..n}$, including the information $i(ds_{1..n})$ is also sent to the decryption unit ESE. In this unit, using the key information $si_{1..n}$, i.e., with the decryption information and the information $i(ds_{1..n})$, the encrypted data streams $sds_{1..n}$ are decrypted. After decryption, the unencrypted data streams $ds_{1'..n'}$ are ready for diagnosis or analysis in the diagnosis unit DE.

Preferentially, the diagnosis unit DE is provided with a recording unit REC inserted between the LAN and the diagnosis unit DE, for example, in which the data streams $sds_{1..n}$ containing the key data packets $sp_{1..n}$ can be recorded. The recorded data streams $sds_{1..n}$ can then be analyzed or diagnosed at a later time; they can be recorded at night, for example, and diagnosed later during the day. Alternatively, the recording unit REC can also be inserted after the encrypted data streams $sds_{1..n}$ are decrypted—not shown—so that the data streams $ds_{1'..n'}$ are unencrypted when readied for diagnosis or analysis.

Figure 2 shows the protocol structure of a key data packet sp , in which a piece of key information si is inserted. The key data packet sp is generated according to the standard RTP and includes an RTPH header portion according to RFC 3550—known as a header in the industry—and an RTPP user data portion known as the payload. The RTP protocol is embedded in a UDP protocol, whose header UDPH is added into the RTP protocol header RTPH. Because an IP-based transmission is involved, the UDP protocol is packed into an IP protocol IPP, to which an IP header IPH is added. When there is a transmission over the LAN, especially an Ethernet LAN, the corresponding protocol element is still referenced—shown only partially for clarity.

In the header RTP of the RTP protocol, the information about the payload type PT shows information that is important to the invented method. According to the invention, the payload type PT used is designated in the RTP protocol, but no payload type PT is assigned to it. A payload type PT of “19” is defined in the standardization phase, but it is

later designated as unused and then as “reserved.” Therefore, to designate an RTP data packet as a key data packet sp1..n, the use of payload type 19 is preferred.

The payload type PT is positioned in the standardized RTP header RTPH as shown in Table 1, with the numbering 0..9 represents a byte.

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|V=2|P|X|  CC  |M|   PT   |      sequence number      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Table 1

The key information $si_{1..n}$ for each data stream $ds_{1..n}$ is inserted in the user data portion RTPP of a key data packet sp . Table 2 shows the key information si used for decryption according to the standardized SRTP, with the numbering $0..9$ representing a byte.

[illegible]

Table 2

As part of this process, the information from Table 1 is assigned according to the standard and the following definitions.

Version:

Version of the tracebeacon.

BeaconType:

In

Content of the tracebeacon.

F:

Indicate if the lengths of the variable fields is fixed to their maximum values (the lengths are fixed if F==1).

Rsv:

Reserved bits.

NbCtx:

Indicates the number of contexts contained in the packet. A context is an association between a direction (Tx/Rx) and an SSRC. It has been judged that a maximum of 15 contexts should suffice for the current purposes.

NbKeys:

Indicates the number of keys contained in the packet.

SCIAuthTagLen:

The length of the authentication tag appended to the tracebeacon. This length will always be zero for now as the authentication is not expected to be used in the short-term.

KEK SPI Len:

Length in bytes of the SPI needed to retrieve the key that encrypted the KEK. This length can be zero if the Encrypted KEK is not present in the tracebeacon.

Encrypted KEK length:

Length of the symmetric key encrypted using RSA, in bytes. This length can be zero if the tracebeacon does not contain this key. Since the Encrypted KEK can be the longest part of the tracebeacon, sending the Encrypted KEK in, say, one tracebeacon out of two can result in appreciable gains in the average size of the tracebeacons sent.

Contexts:

Configuration information for the contexts (see the next diagrams).

Keys:

Configuration information for the keys (see the next diagrams).

Encrypted KEK:

Symmetric key encrypted using RSA. This field can take up to 256 bytes when the public key has 2048 bits and does not need to end on a 32 bits boundary. This field is also optional as it can have a length of zero

KEK SPI:

Identifier that allows to retrieve the key needed to decrypt the KEK. In your case this field corresponds to a Certificate Id. This field does not need to end on a 32 bits boundary. Like the Encrypted KEK this field is optional, as it can have a length of zero.

SCI Authentication tag:

The authentication tag of the tracebeacon. The authenticated portion of the tracebeacon will be the first eight bytes, the contexts and keys sections. This field is optional, as the authentication tag length can be zero. It is indeed not expected to be present for this version of the tracebeacon.

Using the previously described key information $si1..n$ according to the standardized SRTP protocol, the encrypted data streams $ds1..n$ are decrypted, i.e. transformed back into the original data streams $ds1'..n'$. The data streams $ds1'..n'$ can be processed in the diagnosis unit DE using the implemented diagnosis routines—not shown.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for decrypting at least one encrypted data stream comprising a first data stream containing data packets wherein the first data stream is a data stream that is specifically generated and specifically encrypted according to a network protocol for encrypting and transmitting data streams, the method comprising:

generating key data packets for the first data stream, each of the key data packets having a header in which at least one piece of key information is included so that there is at least one piece of key information within each of the key data packets, the at least one piece of key information containing information needed to decrypt at least a portion of the first data stream;

inserting said key data packets in the first data stream;

transmitting the data packets and the key data packets of the first data stream;

searching for at least one of the key data packets in the first data stream by searching for data packets having a predefined payload type that is assigned to the key data packets;

determining key information from the at least one key data packet found via the searching; and

decrypting at least a portion of the first data stream using the determined key information.

2. The method of claim 1, further comprising discarding the key data packets after the key information is determined according to the network protocol.

3. The method of claim 2, wherein the data packet payload type defines a data packet type, the data packet type selected from the group consisting of a data packet type that is new to the network protocol and an unused data packet type.

4. The method of claim 1, wherein key information is within a user data portion of each of the key data packets.

5. The method of claim 1, wherein the inserting of the key data packets occurs continuously.
6. The method of claim 1, comprising encrypting at least one of the key data packets so that additional key information is included within the encrypted at least one key data packet.
7. The method of claim 6, comprising representing the additional key information as an asymmetrical piece of key information, so that a piece of key information is provided for encrypting key data packets that is different from that used to decrypt the data stream.
8. The method of claim 1, wherein the network protocol is Secured Real Time Protocol.
9. The method of claim 1, comprising activating and subsequently deactivating the insertion of key data packets for analysis and/or recording of the data streams.
10. The method of claim 1, wherein the header being of a type such that the at least one piece of key information is discarded when the data stream is received in accordance with the network protocol.
11. The method of claim 1 wherein the header is an expanded header.
12. The method of claim 1 further comprising discarding the at least one key data packets found via the searching after determining the key information.
13. The method of claim 1 wherein the key data packets are of a type such that a network protocol compliant data receiver cannot read the key information of the key data packets, the network protocol compliant data receiver being a multimedia terminal.
14. The method of claim 1 wherein the key data packets are of a type such that a network protocol compliant data receiver does not read the key information of the key

data packets in accordance with the network protocol, the network protocol compliant data receiver being a multimedia terminal.

15. The method of claim 1 wherein the key data packets are inserted into the first data stream via a data packet multiplexer.

16. An arrangement for decrypting at least one encrypted data stream comprising a first data stream that contains data packets, wherein the first data stream is data-stream-specifically generated and data-stream-specifically encrypted according to a network protocol for encrypting and transmitting data streams, the arrangement comprising:



a gateway connected to a network, the gateway generating key data packets for the first data stream, each of the key data packets having a header in which at least one piece of key information is included so that there is at least one piece of key information within each of the key data packets, the at least one piece of key information containing information needed to decrypt at least a portion of the first data stream, the gateway inserting said key data packets in the first data stream and transmitting the data packets and the key data packets of the first data stream, the first data stream being transmitted from the gateway to a multimedia terminal;

a diagnosis unit connected to a network to which the gateway is connected, the diagnosis unit searching for at least one of the key data packets in the first data stream by searching for data packets having a predefined payload type that is assigned to the key data packets, the diagnosis unit determining the key information from the at least one key data packet found via the searching and decrypting the first data stream using the determined key information so that at least a portion of the first data stream is at least one of diagnosable and analyzable.


17. The arrangement of claim 16, wherein the wherein the inserting of the key data packets occurs continuously.

18. The arrangement of claim 16, wherein the diagnosis unit comprises a recording unit, the recording unit recording the first data stream.


19. The arrangement of claim 16, wherein the gateway inserts the key data packets into the first data stream such that the insertion is adjustable so that at least one of analysis and recording of the first data stream is activateable and deactivateable.

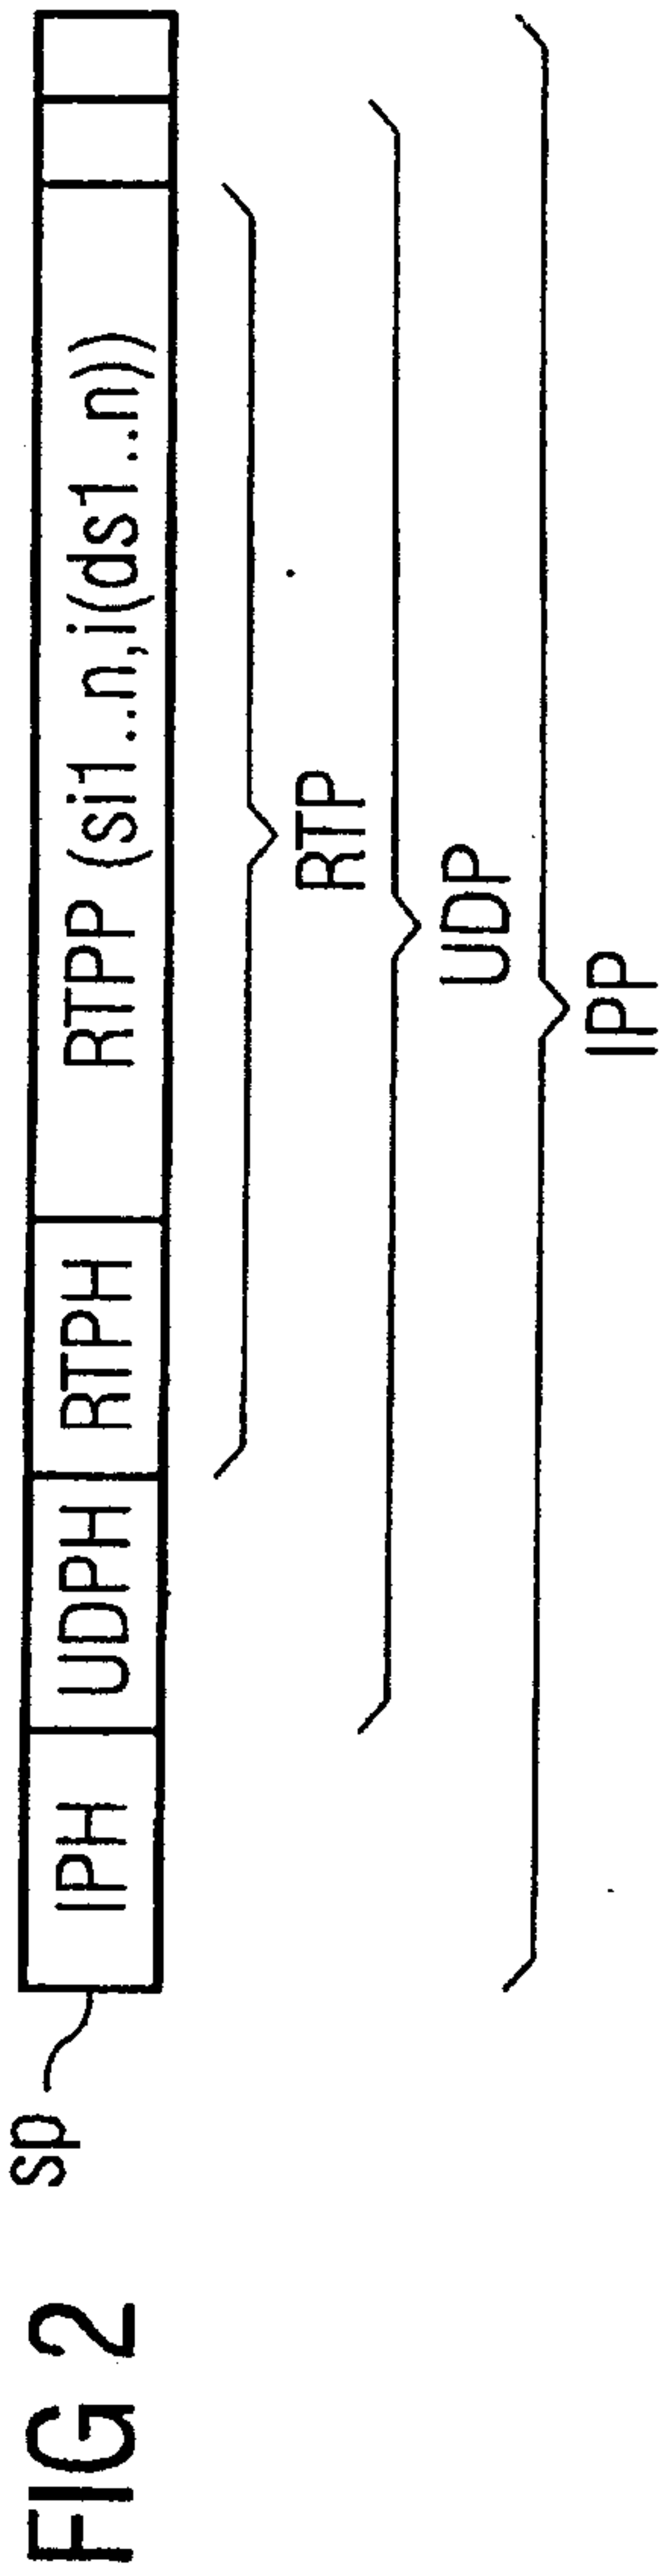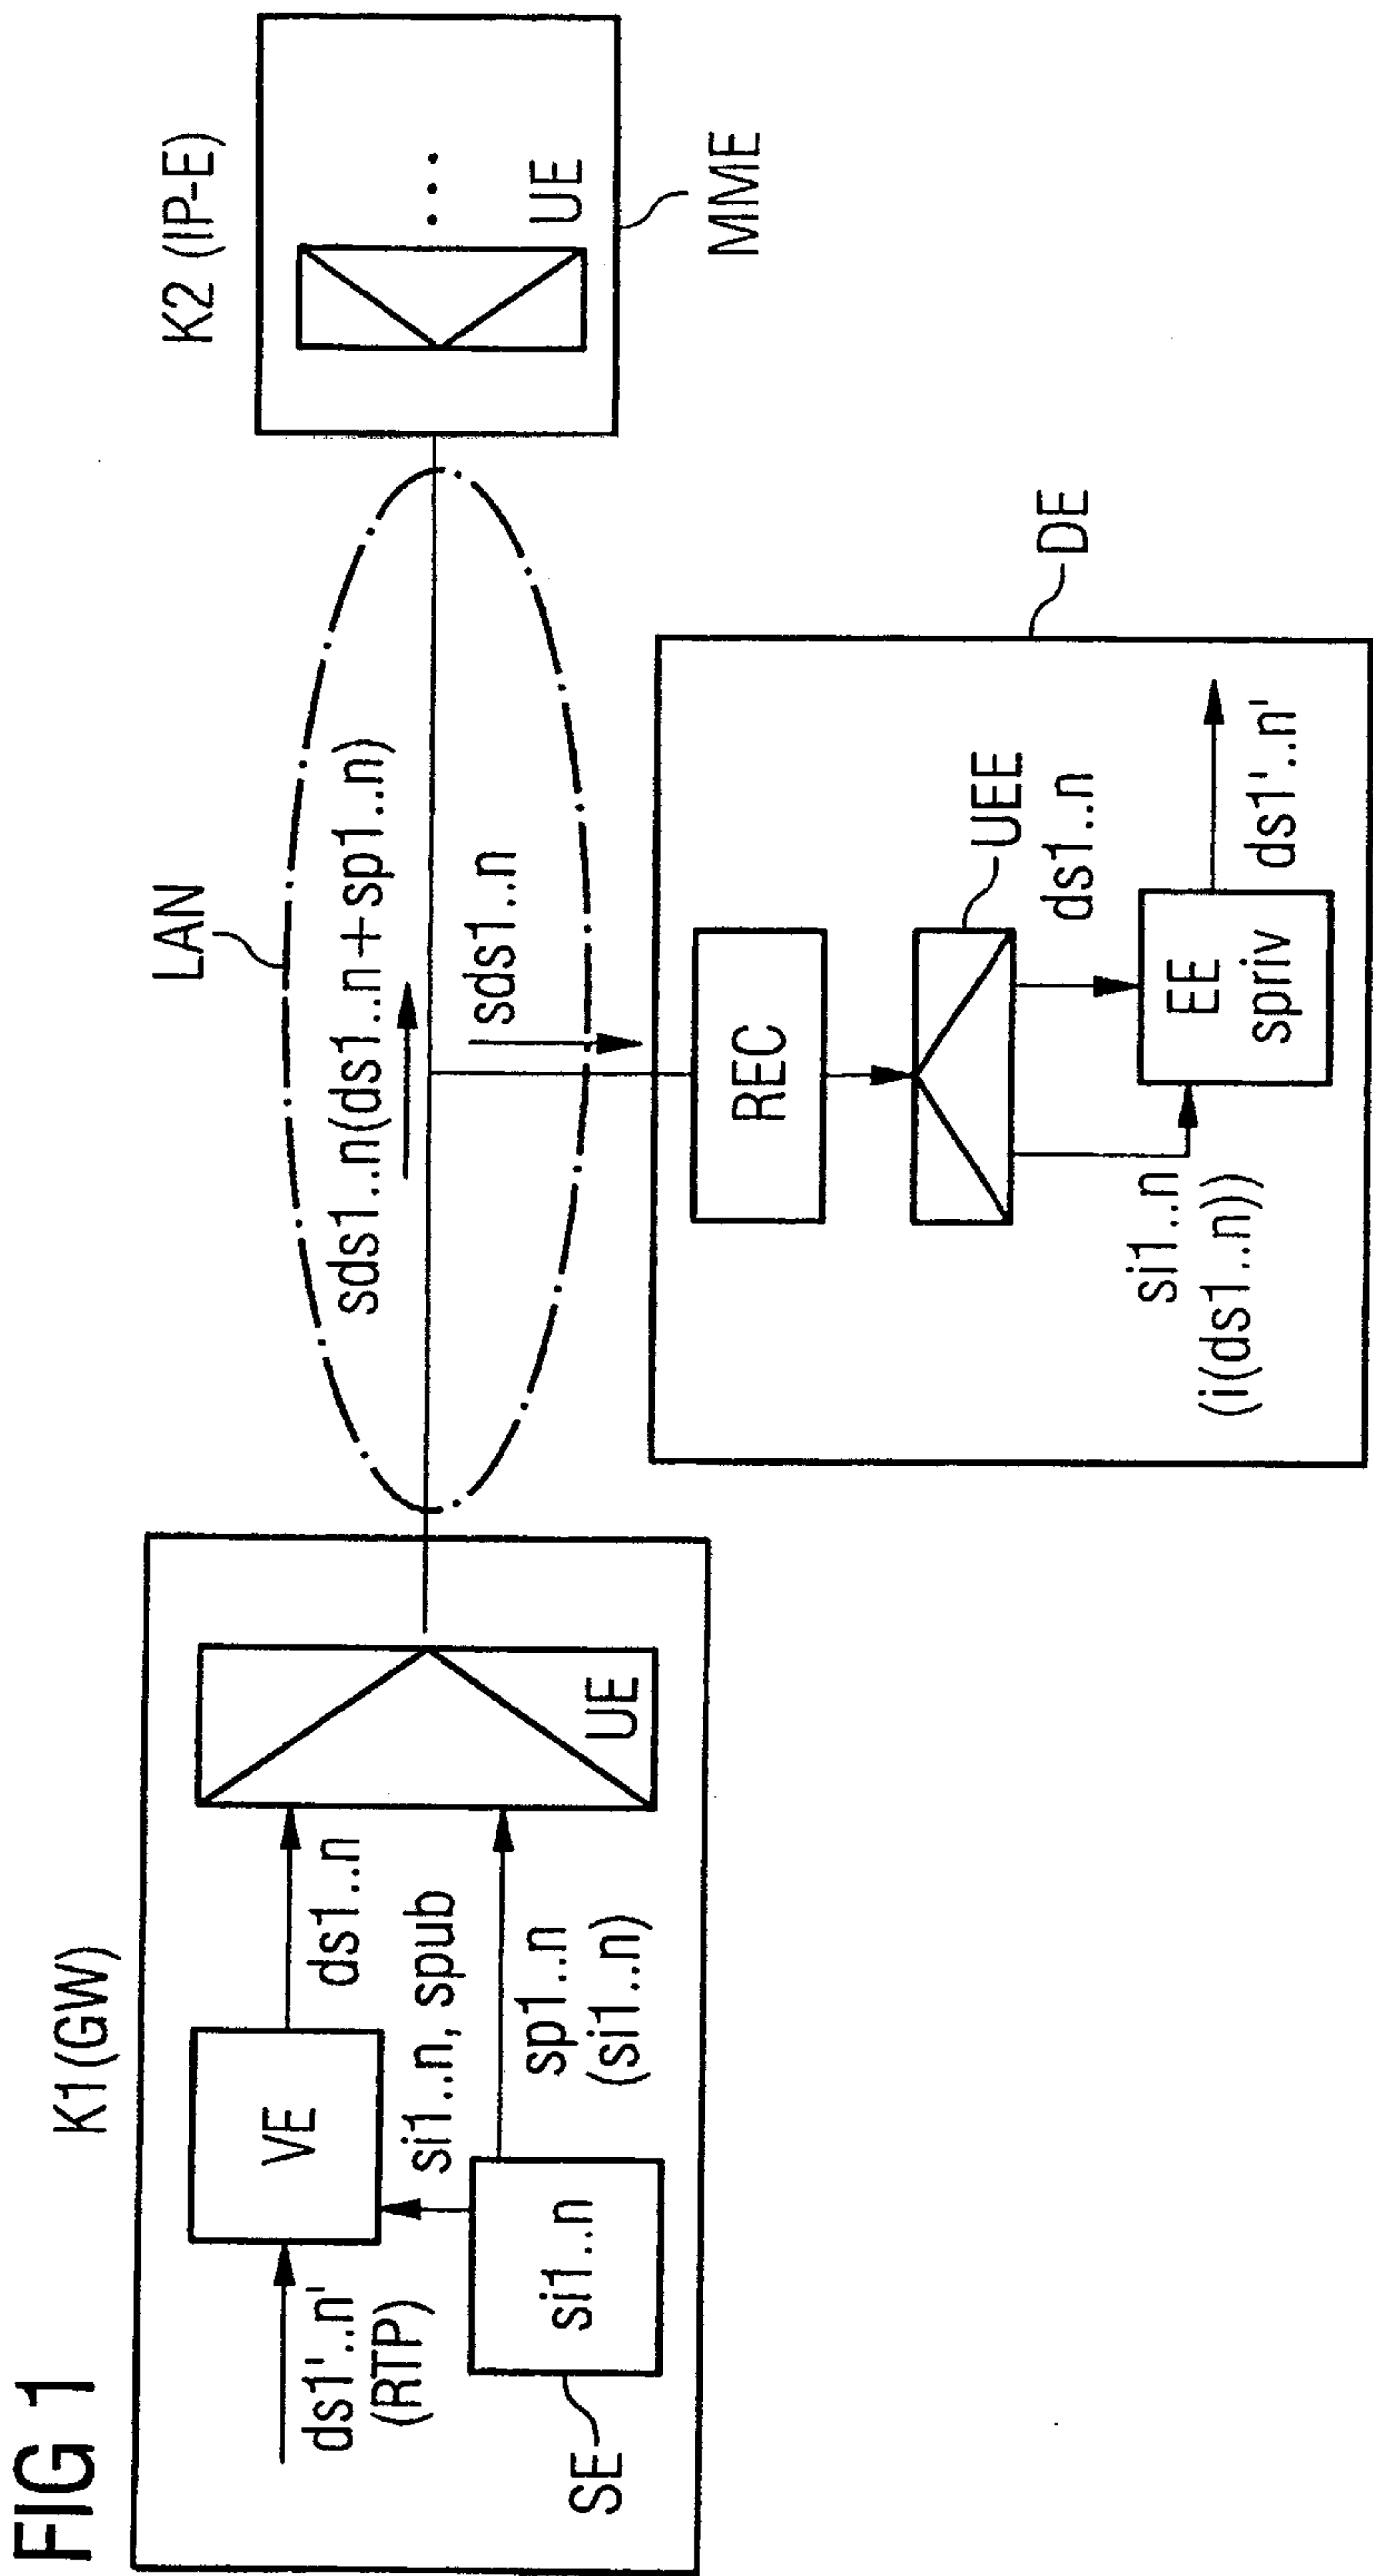


K1 (GW)

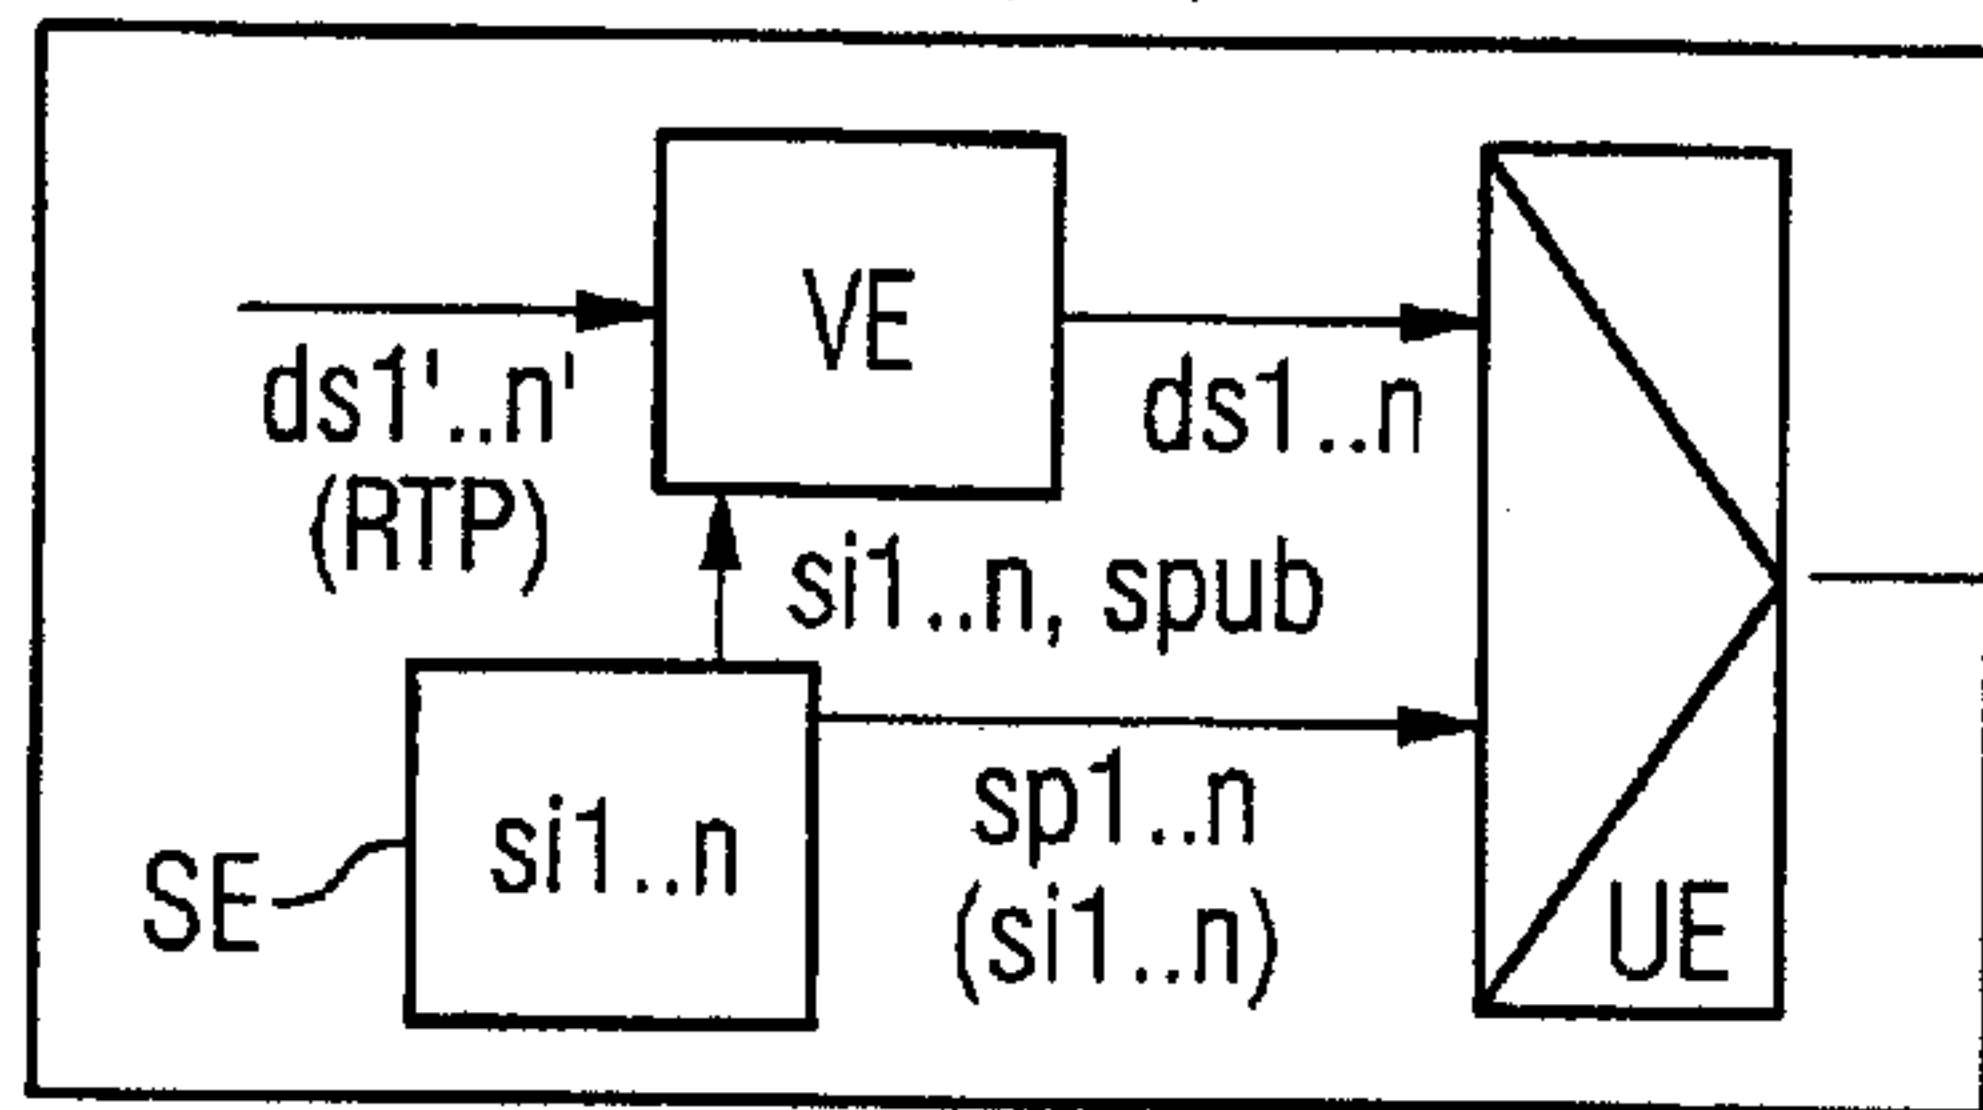

LAN

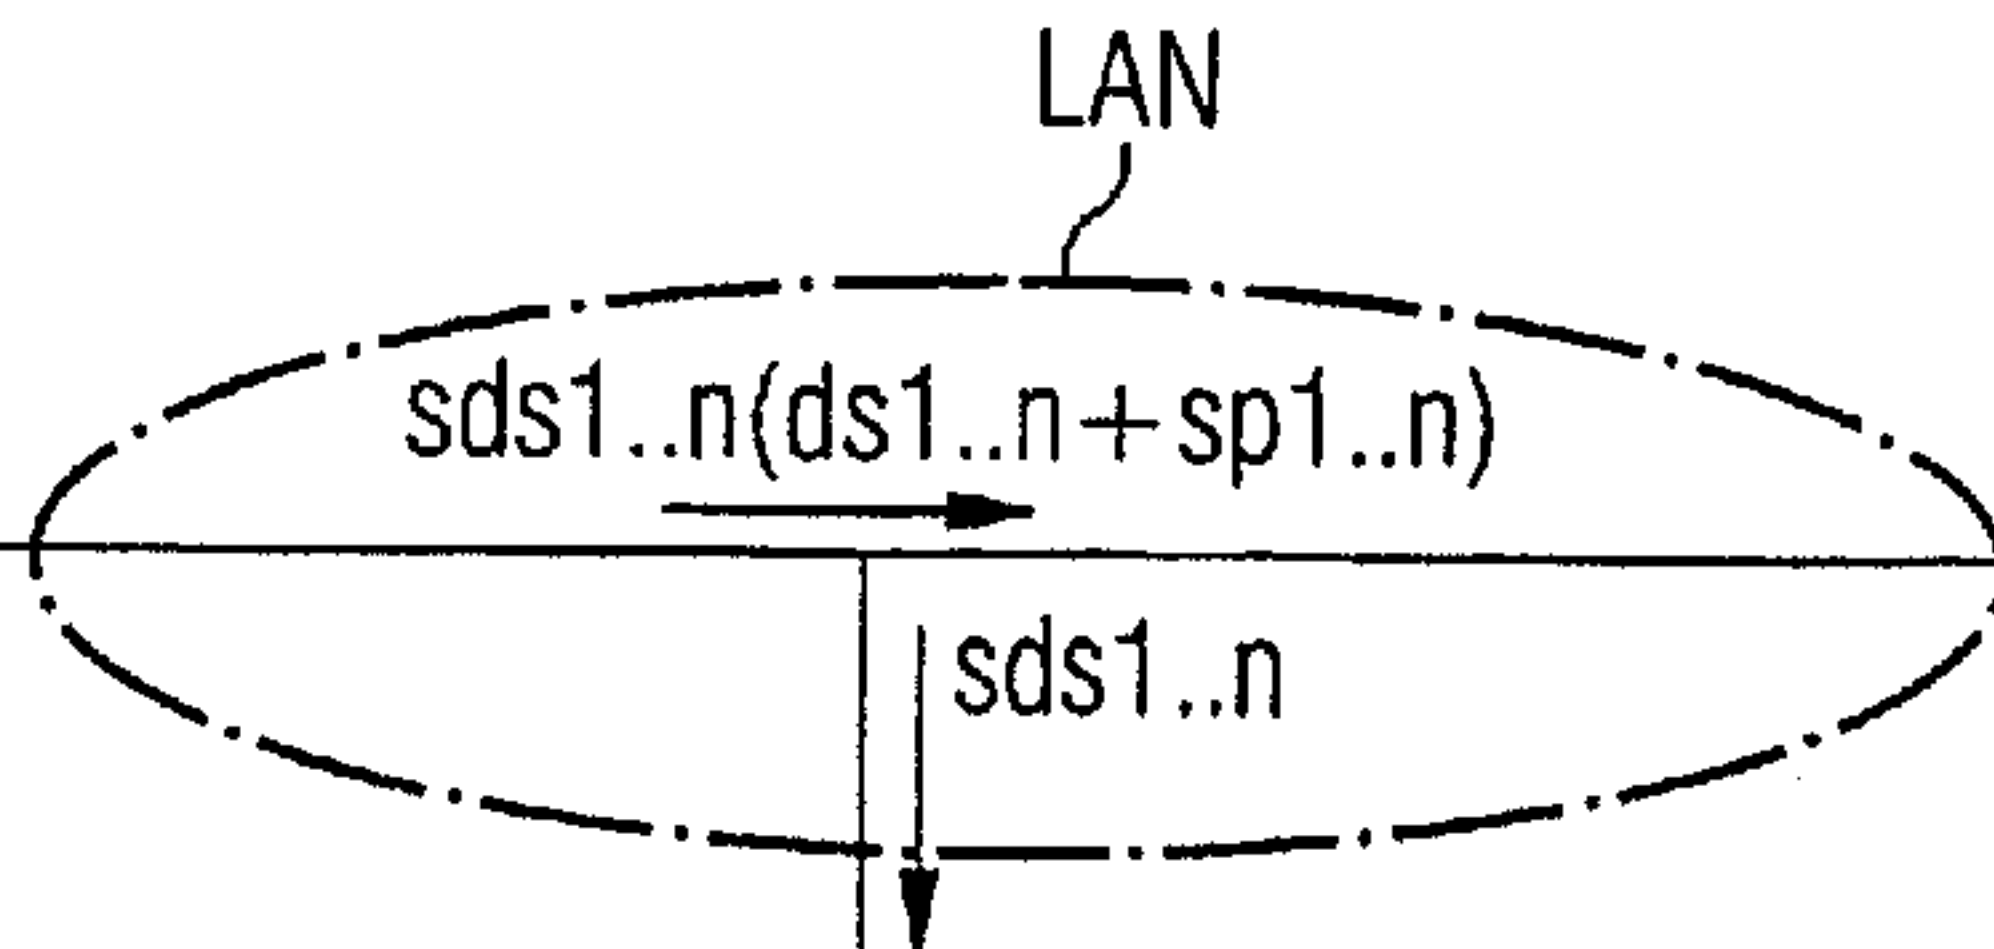

K2 (IP-E)

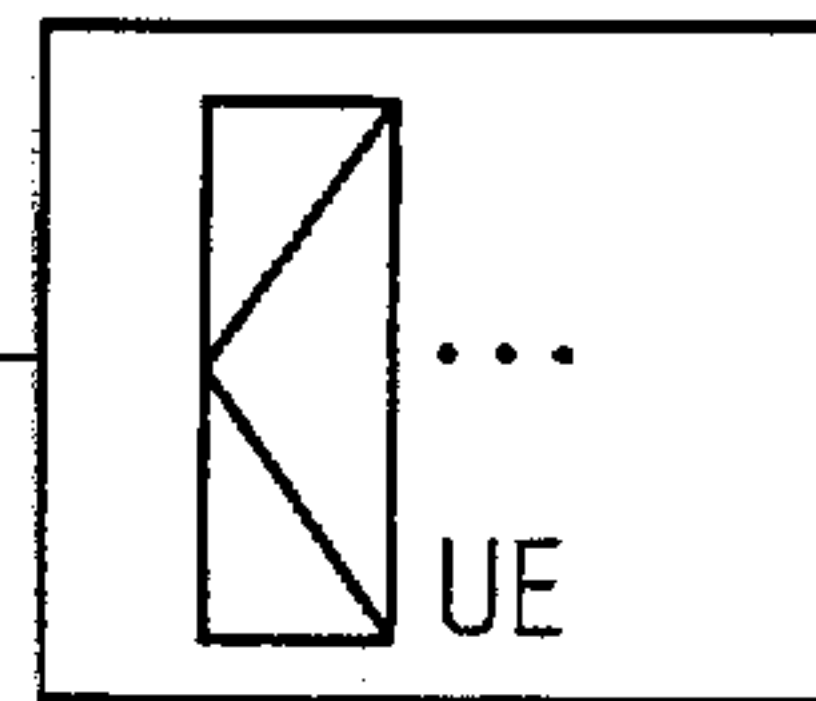

MME

