



(51) International Patent Classification:

E21B 43/26 (2006.01) *E21B 43/11* (2006.01)
E21B 43/247 (2006.01) *E21B 34/06* (2006.01)

(21) International Application Number:

PCT/US2015/019261

(22) International Filing Date:

6 March 2015 (06.03.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/202,974 10 March 2014 (10.03.2014) US

(71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; P.O. Box 4740, Houston, TX 77210 (US).(72) Inventors: **MAILAND, Jason, C.**; 59 Tree Crest Circle,
The Woodlands, TX 77381 (US). **MATTHEWS, Daniel, S.**; 18403 Arbormont Drive, Cypress, Texas 77429 (US).
ROSNEBLATT, Steve; 3600 Montrose Boulevard, No. 502,
Houston, TX 77006 (US).(74) Agent: **PORTER, Andre, J.**; Intellectual Property Coun-
sel, Baker Hughes Incorporated, P.O. Box 4740, Houston,
TX 77210-4740 (US).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: PRESSURE ACTUATED FRACK BALL RELEASING TOOL

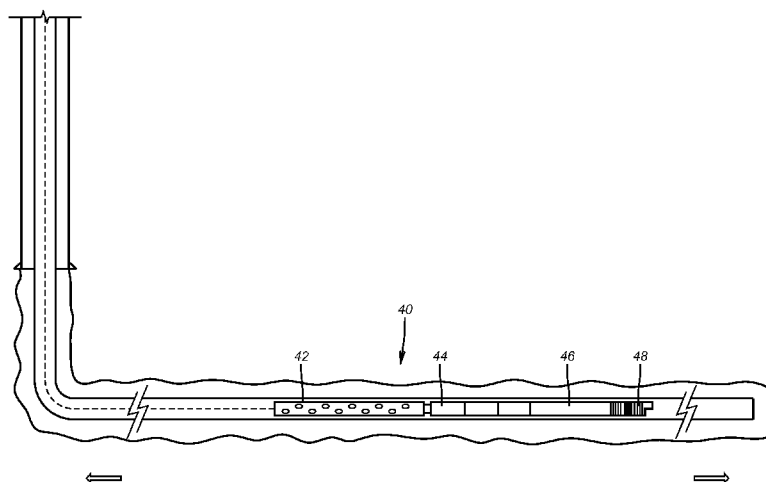


FIG. 12

(57) Abstract: In a fracking context the object that will ultimately block a passage in an isolation device is introduced into the zone with the bottom hole assembly. The object is not released until the guns fire to create a pressure spike in the borehole that triggers the object retaining device to release the object. The retaining device is placed in close proximity to the isolation device and its setting tool to allow a larger object and passage in the isolation device to be used. If the guns misfire, the object is not released and comes out with the guns. The replacement guns can be pumped in because the passage in the isolation device has stayed open during the misfire. Direct and indirect object release in response to pressure created from the firing of the guns is contemplated.



PRESSURE ACTUATED FRACK BALL RELEASING TOOL

FIELD OF THE INVENTION

[0001] The field of the invention is plug and perforate methods of sequential zone fracturing and more particularly devices and methods that allow retrieval of a frack plug occluding object designed to selectively plug an isolation device in the event the guns misfire and new guns need to be run in after the original guns are removed.

BACKGROUND OF THE INVENTION

[0002] In typical plug and perforate systems the bottom hole assembly (BHA) comprises an isolation device with a passage through it and a surrounding seat on the passage for an object to land on the seat and obstruct the passage. The object can be delivered with the isolation device or pumped to the isolation device after the perforating guns are shot and removed from the borehole with the setting tool for the isolation device. Delivering the object with the isolation device has the advantage of saving time to get the passage in the isolation device closed as compared to pumping down an object from the surface. However, this prior method has a drawback if the guns misfire. In essence, if the guns misfire they must be removed and new guns run in to the desired location which is frequently in a horizontal portion of the wellbore. Thus, gravity is not much help in running in the replacement guns. Furthermore, if the object was run in with the isolation device, then the object would be forced against the seat in the passage of the isolation device if any effort to use pressure or flow to deliver the replacement guns was employed. The closing off of the passage in the isolation device means the replacement guns cannot be delivered on wireline with a pressure or flow assist and that alternative means such as coiled tubing or tractors have to be used to get the guns into position. This adds enormous expense to the operation and creates issues of delay. Even if the object is dropped after the misfired gun is removed, it still takes time to pump the object from the surface to the seat on the isolation device that is thousands of meters away costing time and additional fluid displacement.

[0003] In the past one way to cut the time to get an object seated on a seat in an isolation device was to include a ball release device above the guns. The

idea in US 2013/0175053 was to release the object into the annulus from above the fired gun and have the object make its way around the fired gun and the isolation device setting tool to a seat on a passage in the isolation device. A physical pull on the wireline sheared an unnumbered pin and allowed a ball 24 to escape through a lateral opening 28 to make its way toward the isolation device 14. There are many issues with this design. Frequently the guns 18 have very low clearance around them to the casing 12, which means the ball 24 will not fit in the annular space or would have to be so small that the passage in the isolation device 14 would also have to be small. A smaller passage in the isolation device could mean delays if a replacement gun has to be delivered with flow after an original gun misfires. The spent perforating gun could also have burrs and sharp edges that could hang up or damage the object so badly that it might not seal at all when landing in the seat. Finally, in a horizontal run the object may not actually land on the seat if the seat surrounding the passage in the isolation device is considerably smaller than the casing inside diameter, a condition made necessary by the object being small enough to travel past the gun in the surrounding annulus around the gun.

[0004] Generally related to operation of lateral passages that can be selectively opened in a fracking context are US2013/0024030 and US2013/0020065.

[0005] What is needed is a device and method that allows retention of the object that is designed to go onto a seat for a passage in an isolation until such time as the gun actually fires. The reason is that if the guns misfire and need to be replaced, it will still be possible to deliver the replacement guns with pressure or flow because the passage in the isolation device will be open because the object has been retrieved with the misfired guns. What is also provided is a launcher for the object that is placed in close proximity of the isolation device which allows the use of a larger object than when the launcher is above the guns and has to deliver the object into an annulus between the gun and the casing after the gun fires. What is also provided is an object launching device that responds directly or indirectly to the concussive pressure shock created by the guns initially firing so that the object is only released if the guns actually fire. This allows for the object to be retrieved without release if the guns misfire so that the replacement guns can be delivered with flow through

the still open passage in the isolation device. On the other hand, if the guns fire then the pressure that is built up from the firing will release the object allowing the start of fracturing after the guns and setting tool for the isolation device are pulled out. Those skilled in the art will further appreciate additional aspects of the invention from a review of the description of the preferred embodiment and the associated drawings while recognizing that the full scope of the invention is to be determined by the appended claims.

SUMMARY OF THE INVENTION

[0006] In a fracking context the object that will ultimately block a passage in an isolation device is introduced into the zone with the bottom hole assembly. The object is not released until the guns fire to create a pressure spike in the borehole that triggers the object retaining device to release the object. The retaining device is placed in close proximity to the isolation device and its setting tool to allow a larger object and passage in the isolation device to be used. If the guns misfire, the object is not released and comes out with the guns. The replacement guns can be pumped in because the passage in the isolation device has stayed open during the misfire. Direct and indirect object release in response to pressure created from the firing of the guns is contemplated.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a prior art section view of a cemented production tubing in a horizontal portion of a borehole;

[0008] FIG. 2 is the view of FIG. 1 showing the bottom hole assembly in position;

[0009] FIG. 3 is the view of FIG. 2 with the frack plug set and the guns separated from the set plug while the ball for the plug is also released and floating;

[0010] FIG. 4 is the view of FIG. 3 shows the guns being fired;

[0011] FIG. 5 is the view of FIG. 4 showing the BHA removed;

[0012] FIG. 6 is the view of FIG. 5 showing the ball seated in the frack plug as pressure is built up to fracture the perforations created by the guns;

[0013] FIG. 7 is a prior art view of a horizontal portion of a borehole with cemented casing to illustrate the problem of gun misfire;

[0014] FIG. 8 is the view of FIG. 7 showing the BHA run into position;

- [0015] FIG. 9 is the view of FIG. 8 showing the frack plug set and the frack ball released;
- [0016] FIG. 10 is the view of FIG. 9 showing the guns having misfired;
- [0017] FIG. 11 is the view of FIG. 10 with the BHA removed and the frack ball on the seat of the frack plug preventing a replacement gun from being delivered on wireline with a pressure assist;
- [0018] FIG. 12 shows the present invention with the BHA in position and the ball release tool between the setting tool and the frack plug;
- [0019] FIG. 13 is the view of FIG. 12 with the frack plug set;
- [0020] FIG. 14 is the view of FIG. 13 with the guns being pulled after a misfire with the frack ball still in the release tool;
- [0021] FIG. 15 is the view of FIG. 14 with the substituted guns in the hole and where the shock wave from firing is starting to migrate from the guns;
- [0022] FIG. 15a is a detailed view of the ball releasing tool in a direct pressure actuated embodiment;
- [0023] FIG. 16 is the view of FIG. 15 with the shock wave migrating to the release tool for a ball release;
- [0024] FIG. 16a shows the ball release tool just as the shock wave reaches it;
- [0025] FIG. 17 is the view of FIG. 16 with the guns fired and the ball released from the ball release tool;
- [0026] FIG. 17a shows a detail of the ball release tool in the ball released position;
- [0027] FIG. 18 is the view of FIG. 17 showing the BHA removed;
- [0028] FIG. 19 is the view of FIG. 18 showing fracking with the plug ball on the seat of the frack plug; and
- [0029] FIGS. 20a-20b are an alternative embodiment to the ball release tool that responds to a pressure spike by moving other parts from a breakable barrier to drive the ball from the ball release tool.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0030] FIGS. 1-6 illustrate a known way of doing a plug and perforate fracturing technique in a horizontal cemented production casing **10**. FIG. 2 shows the BHA **12** in the desired location of the casing **10**. The BHA **12** comprises perforating guns **14** followed by a setting tool **16** and a frack plug

18. The BHA 12 is run in on wireline 20. In FIG. 3 the setting tool 16 has set the frack plug 18 and released from the frack plug 18 so that the frack ball 22 is released. The wireline 20 provides power to the setting tool 16 which can be an E-4 setting tool sold by Baker Hughes Incorporated. The BHA 12 that is suspended by wireline 20 is aided in travelling into the horizontal portion of the well by pressure from the surface that creates flow to carry the BHA 12 into the horizontal portion of the borehole. At this time the frack plug is unset and flow can get past it and into an already perforated zone that is lower or into the formation if it is the initial zone to be perforated. The frack plug 18 has a through passage and surrounding ball seat 24 on which ball 22 lands to close the passage when there is flow urging the ball 22 toward the seat around passage 24. FIG. 4 shows the guns 14 being fired to create the perforations 26. FIG. 5 shows the BHA 12 removed from the casing 10. Note that the ball 22 is still floating because there is no applied pressure from the surface that creates flow in the direction of arrow 28. In FIG. 6 the pressure represented by arrows 28 is applied that forces ball 22 against the ball seat on passage 24 so that pressure is built up onto the perforations 26 to frack them.

[0031] The sequence of FIGS. 7-11 represent an illustration of what can go wrong if the guns 14 misfire. FIG. 7 is the same as FIG. 1 showing the cemented casing 10 in a horizontal portion of the well 30. The same BHA 12 is run in as in FIG. 2 as is shown in FIG. 8. The frack plug 18 is set in FIG. 9 and an attempt to fire the guns 14 after a release of the setting tool 16 from the plug 18 results in a misfire of the guns. However, the ball 22 is released in this separation process between the setting tool 16 and the frack plug 18. The problem now created when the BHA 12 is pulled out is evident by looking at FIG. 11. There is a need to run in a replacement BHA 12' into the position formerly occupied by the original BHA 12 that had the guns 14 that misfired. The problem is that the ball 22 is blocking the passage 24 by sitting on the associated seat if there is any pressure applied in the casing 10. With the misfire there are no perforations 26 and the zone below is effectively isolated by the frack plug 18. What this means is that it will not be possible to use pressure that creates a flow to carry the BHA 12' into the lateral or horizontal portion 30. This means that the alternative is to deliver the BHA 12' with coiled tubing or a tractor (not shown). Delivering the BHA 12' using either of

these techniques is slow and therefore expensive. In the case of coiled tubing, there may also be issues of space for the coiled tubing unit at the wellsite particularly in offshore applications. Tractors are far slower than a delivery on wireline with a flow assist. A flow assist is not possible in an unperforated section of a casing that has a frack plug **18** in a set position with a ball **22** landed on the seat surrounding its passage **24**.

[0032] With the above as a background, the present invention will be described in greater detail starting with FIG. 12 where the BHA **40** that comprises perforating guns **42**, a plug setting tool **44** and a ball release tool **46** are disposed above the frack plug **48**. In FIG. 13 the frack plug **48** is set as before. In FIG. 14 the release tool separates from the frack plug **48** while still retaining the frack ball **50**. If the guns **42** misfire at this point then the frack plug **48** has a clear through passage **52** because the ball **50** has not obstructed it. The BHA **40** with the ball **50** can be pulled from the casing **54** with wireline **56**.

[0033] On the other hand if the guns fire as shown in FIG. 15 then the perforations **58** are made. The operation of the guns creates a pressure wave **60** that migrates in the direction of arrow **62** toward the ball release tool **46** that is disposed between the setting tool **44** and the frack plug **48**. FIG. 16 shows the pressure wave **60** reaching the ball releasing tool **46** so that the ball **50** is released from the release tool **46**. Preferably the ball **50** is in alignment with the passage **52** in the frack plug **48** to facilitate seating the ball on a seat that surrounds the passage **52**. This is shown in FIG. 17. The BHA **40** is now removed as shown in FIG. 18 and the perforations **58** are fracked as represented by pressure arrows **64**.

[0034] Thus one aspect of the present invention is a method that allows retention of an object that can be a ball or plug or other shape that is designed to land in the passage of a frack plug, in the event the guns do not fire, and despite the fact that portions of the BHA have released from the frack plug **48** when that plug was set by the setting tool **44**. The release of the frack ball **50** is dependent on the guns firing to create a signal that allows the ball release tool **46** to release the ball **50**. Thus if the guns fire there is no problem in releasing the ball because there will be a flow path to allow a replacement gun to be wireline delivered with a flow assist. The gun can have multiple stages

that sequentially fire so it possible to get one or more but not all stages to fire. In that event the gun has to be pulled and a new gun or the same gun redressed have to be run in later. In either case the method allows the completion process to continue. A misfire on the initial stage firing will not result in a ball release so that the next gun can be delivered on wireline with a flow assist with flow going through the frack plug that has an open passage. If at least one stage fires the ball is released but a subsequent gun can still be delivered on a wireline with a flow assist because the stage that did fire creates a fluid path for the flow assist to move the replacement gun into position.

[0035] In another aspect of the invention the placement of the ball release tool 46 immediately adjacent the frack plug 48 allows the use of a larger passage 52 through the frack plug 48 as well as a larger associated ball, or plug or dart 50. This is because unlike Madero US 2013/0175053 the ball does not need to travel in an annular space past the guns. The ball 50 is delivered below the guns 42 so it can be larger than a ball that has to travel in an annular gap which can be very small. The ability to use a larger passage in the frack plug 48 also speeds the delivery of a replacement gun if the original gun misfires because there is less pressure drop for the flow going through the passage of the frack plug 48 when the replacement gun is delivered. The release tool 46 can be up against the frack plug 48 or spaced from frack plug 48 with no intervening equipment in between. Alternatively, the ball can drop through another tool disposed between the release tool 46 and the frack plug 48.

[0036] Referring to FIG. 15a a direct responding release tool 46 is shown. Direct means the pressure wave 60 has enough force to break a breakable member 70 such that well pressure in the surrounding annulus 72 can be brought to bear on the piston 74 that has a surrounding seal 76 so that an upper sealed variable volume chamber is defined and grows in volume as pressure from annulus 72 displaces the piston 74 and its associated push rod 78 to contact the ball 50 and push it past a retainer 80. Piston 74 pushes against variable volume chamber 75 that is initially at atmospheric pressure. When barrier 70 breaks there is a pressure differential on the piston 74 that is enhanced by the low pressure in chamber 75. FIG. 16a shows the shock wave 60 arriving at the breakable member 70 and breaking through and FIG. 17a

shows the resulting movement of all the parts that will launch the ball **50** in the manner described above. Those skilled in the art will appreciate that FIGS. 15a-17a are schematic and intend to portray both direct and indirect actuation using the developed pressure from the discharge of the guns. In an indirect system, the generated pressure from shooting off the guns is sensed with a sensor that is powered with a stored energy source such as a battery to then take action to get parts moving to eject the ball **50**. This can be accomplished by forcibly breaking the breakable member **70** or actuating a motor that moves piston **74** or in other ways getting part movement sufficient to expel the ball **50** so that it lands on the passage **52** of the frack plug **48** to allow subsequent pressure buildup for fracking represented by arrows **64**. FIGS. 20a-20b generically illustrates an indirect system which processes the existence of the pressure wave to either harness it for part movement or to trigger part movement in other ways that release the ball. Thus an indirect system can still employ wellbore hydrostatic but the opening of access to the hydrostatic pressure is done with a sensed pressure signal that opens access to annulus pressure. In FIG. 20a instead of barrier **70** there is a pressure sensing module **100** to sense the presence of the pressure wave **60** and use that signal to operate a valve **102** that opens passage **104** to drive the piston **74** in the manner previously described. Alternatively, such a sensed pressure can provide power to a motor from a stored power supply that moves a mechanical element that expels the ball **50**.

[0037] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below:

We claim:

1. A completion assembly for a subterranean location, comprising:
a body disposed at the subterranean location;
an object selectively retained by said body with a retainer;
an actuation assembly in said body responsive to a pressure change at the subterranean location to defeat said retainer for release of said object from said body.
2. The assembly of claim 1, further comprising:
at least one perforating gun, said gun, when firing, creating said pressure change in the form of a pressure wave that operates said actuation assembly.
3. The assembly of claim 1, further comprising:
said actuation assembly isolated from pressure at the subterranean location with a removable barrier.
4. The assembly of claim 3, further comprising:
said barrier is directly removed with said pressure wave.
5. The assembly of claim 3, further comprising:
said barrier is indirectly removed with said pressure wave.
6. The assembly of claim 4, further comprising:
a piston assembly that movably reacts to pressure at the subterranean location after said barrier is removed by said pressure wave such that movement of said piston assembly releases said object.
7. The assembly of claim 6, wherein:
said piston assembly contacts said object as a result of said movement.
8. The assembly of claim 7, wherein:
said piston assembly forces said object through a retainer to release said object.
9. The assembly of claim 8, wherein:
said retainer comprises at least one spring.
10. The assembly of claim 6, wherein:
said piston assembly defines opposed variable volume chambers on opposed sides thereof;

whereupon removal of said barrier communicates a first of said chambers with the pressure at the subterranean location which enlarges said first chamber as a second of said chambers on the opposite side of said piston assembly is reduced in volume.

11. The assembly of claim 10, wherein:
said second chamber is initially at atmospheric pressure.
12. The assembly of claim 1, wherein:
said body further comprises a pressure sensor to sense the presence of said pressure change and uses said sensed pressure change to cause said actuation assembly to move.
13. The assembly of claim 12, wherein:
said sensed pressure change triggers movement of a device that breaks a barrier to allow pressure to move a piston of said actuation assembly.
14. The assembly of claim 12, wherein:
movement of said actuation assembly forces said object from a passage in said body by defeating a retainer for said object.
15. The assembly of claim 13, further comprising:
a piston assembly that sees pressure at the subterranean location after said barrier is removed by said device such that movement of said piston assembly releases said object.
16. The assembly of claim 1, wherein:
said object comprises a ball or plug or a dart.
17. A method of release of an object to land on a tool, comprising:
positioning an actuation assembly comprising the object and the tool at a desired subterranean location;
releasing the object from said actuation assembly to land on the tool in response to a pressure wave at the subterranean location.
18. The method of claim 17, comprising:
creating said pressure wave with setting off at least one perforating gun.
19. The method of claim 18, comprising:
breaking a barrier that isolates an actuating piston with said pressure wave.

20. The method of claim 17, comprising:
sensing the pressure wave;
using said sensing to move an actuating assembly against the object to overcome defeat a retainer for the object.
21. The method of claim 19, comprising:
communicating said pressure wave to the actuating piston to drive the piston as a result of breaking said barrier.
22. A well treatment method of treating a wellbore formation, comprising:
positioning a tool string comprising one or more perforating guns, an actuation assembly comprising an object and a tool at a desired subterranean location within casing;
perforating the casing and generating a pressure change by firing at least one perforating gun;
releasing the object from the actuation assembly to land on the tool in response to said pressure change.
23. The method of claim 22, comprising:
providing a borehole isolation device with a seat around a through passage as said tool;
releasing said object to land on said seat to close said passage to isolate one part of a borehole from another.
24. The method of claim 22, comprising:
stimulating, acidizing or fracturing a formation through perforations made by said perforating gun.
25. The method of claim 24, comprising:
using a ball or plug as said object;
releasing said ball or plug only if said perforating gun fires.
26. A well treatment method of treating a wellbore formation, comprising:
positioning a tool string comprising a plurality of tools, said plurality of tools further comprising an actuation assembly comprising an object, and an isolation tool having an open passage therethrough at a desired subterranean location within casing;
setting said isolation tool and releasing said tool string from said isolation tool;
generating a pressure change in the after said setting and releasing;

releasing the object in response to said pressure change from said actuation assembly to land on the isolation tool to close said passage in said isolation tool as a first operation;


performing a second operation of stimulation, fracturing or acidizing through casing perforations or shifting a sleeve.

27. The method of claim **26**, comprising:

generating said pressure change when creating said perforations.


28. The method of claim **27**, comprising:

using at least one perforating gun to create said perforations.

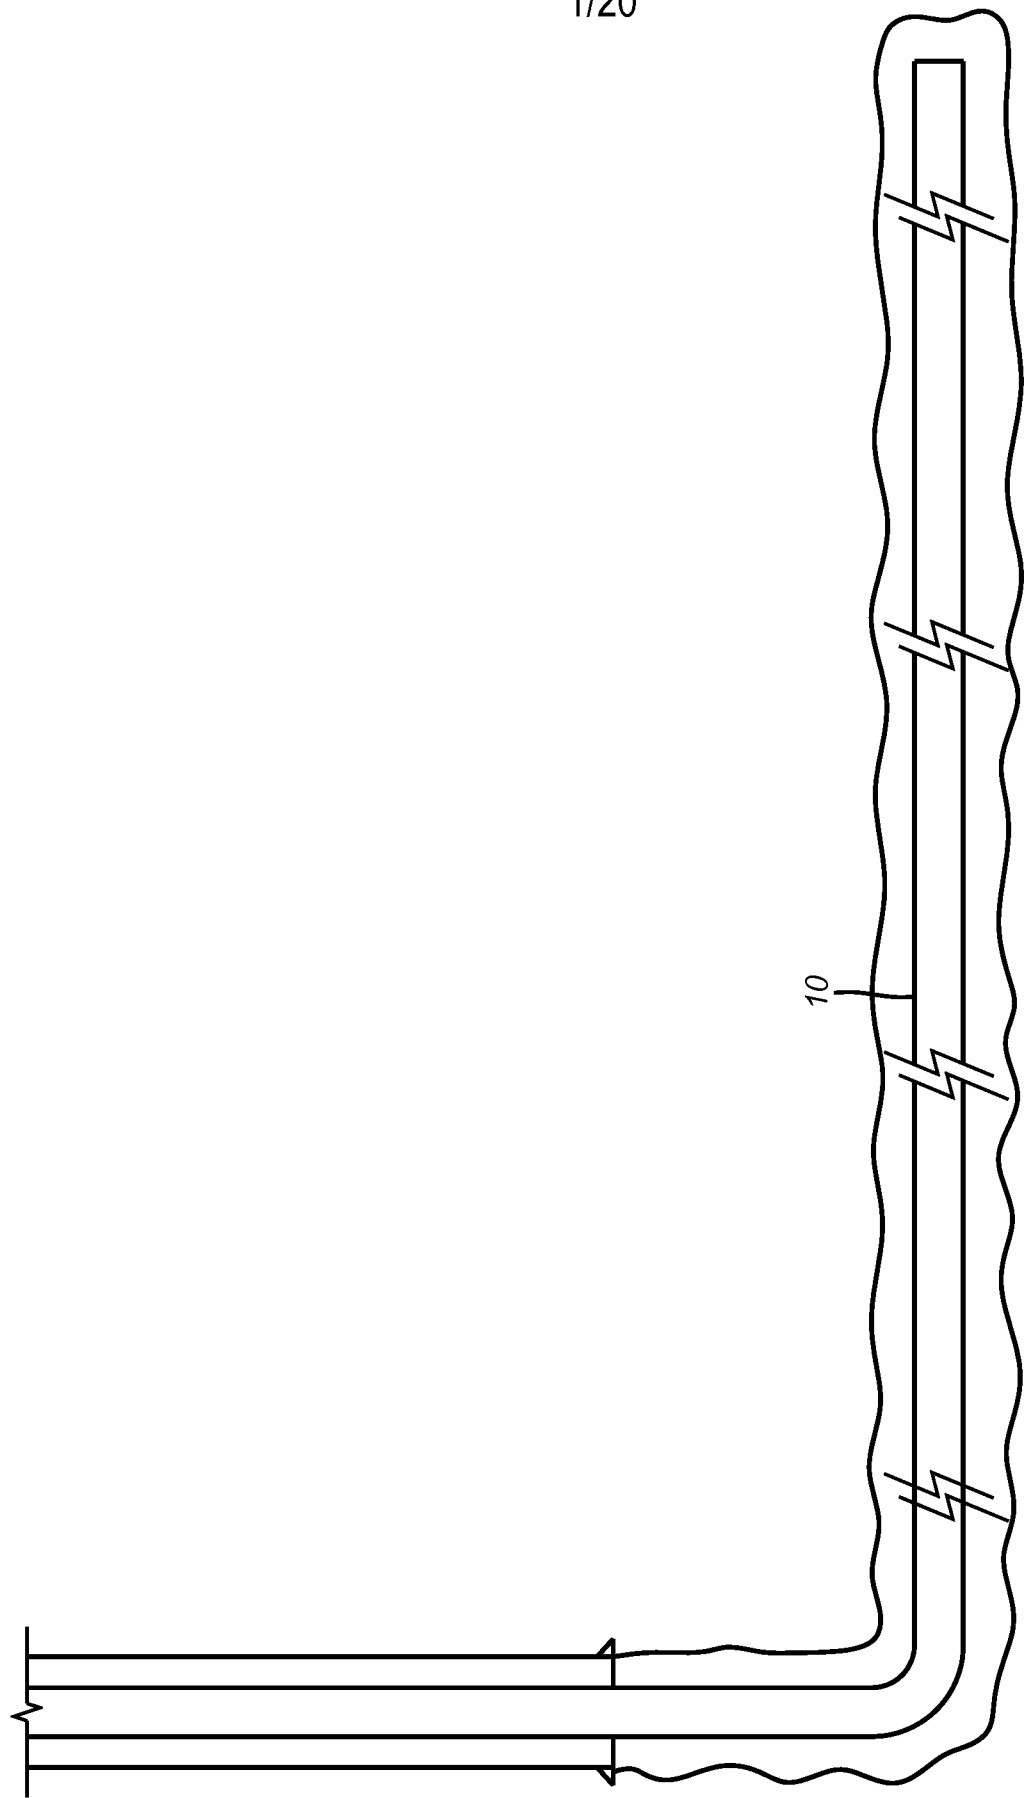

(PRIOR ART)
FIG. 1

2/20

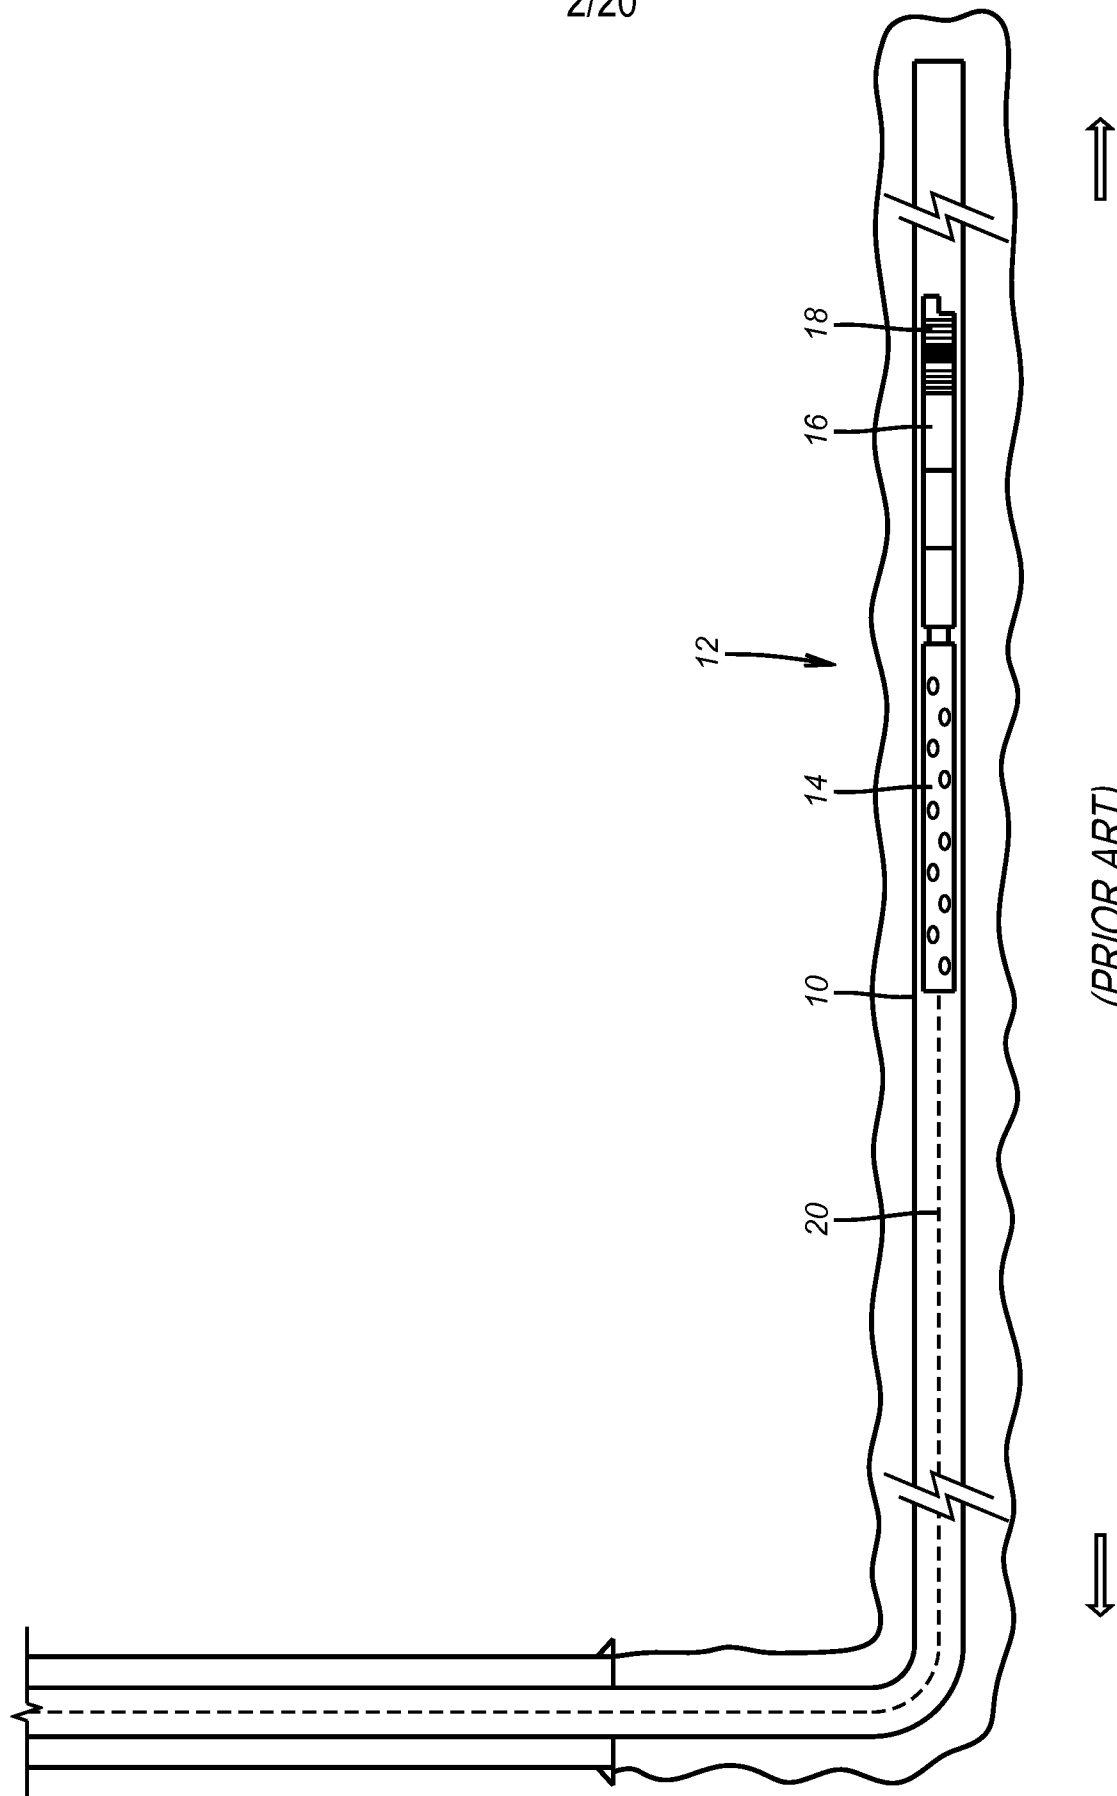

(PRIOR ART)
FIG. 2



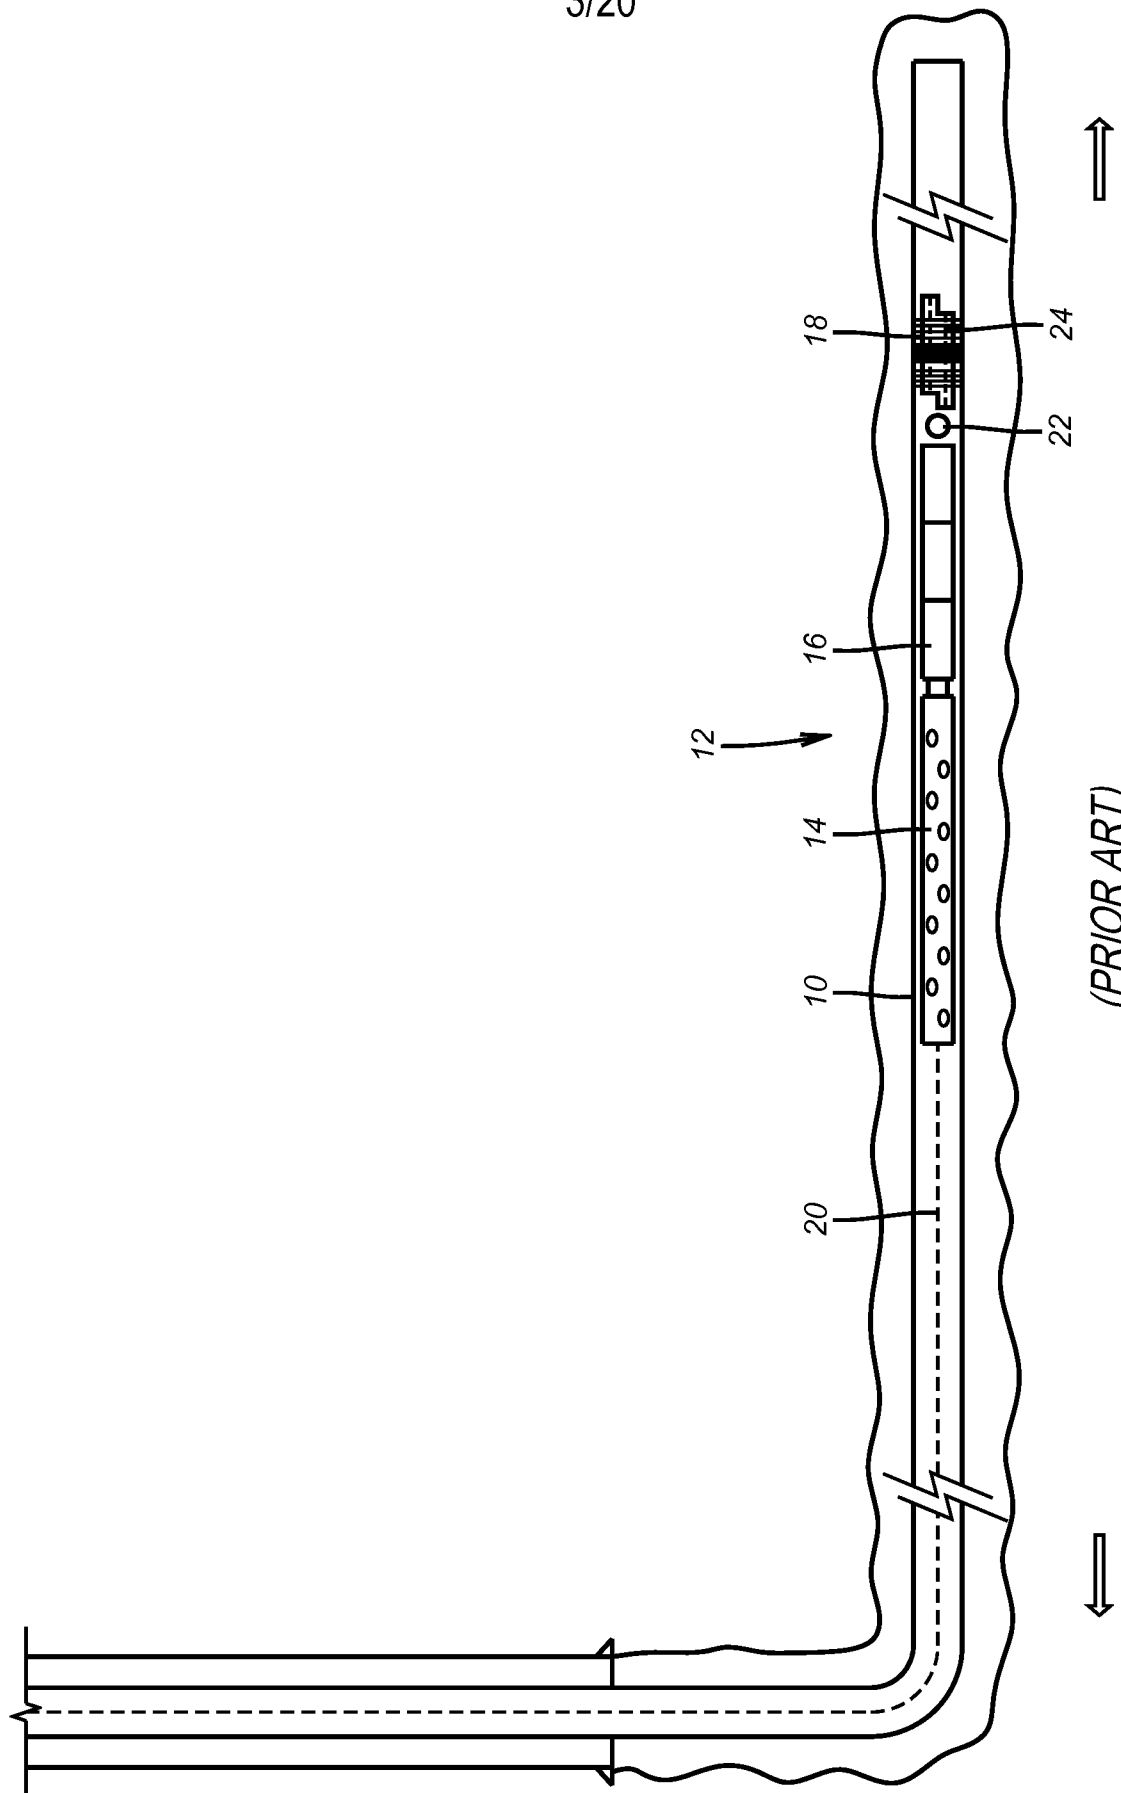


FIG. 3
(PRIOR ART)

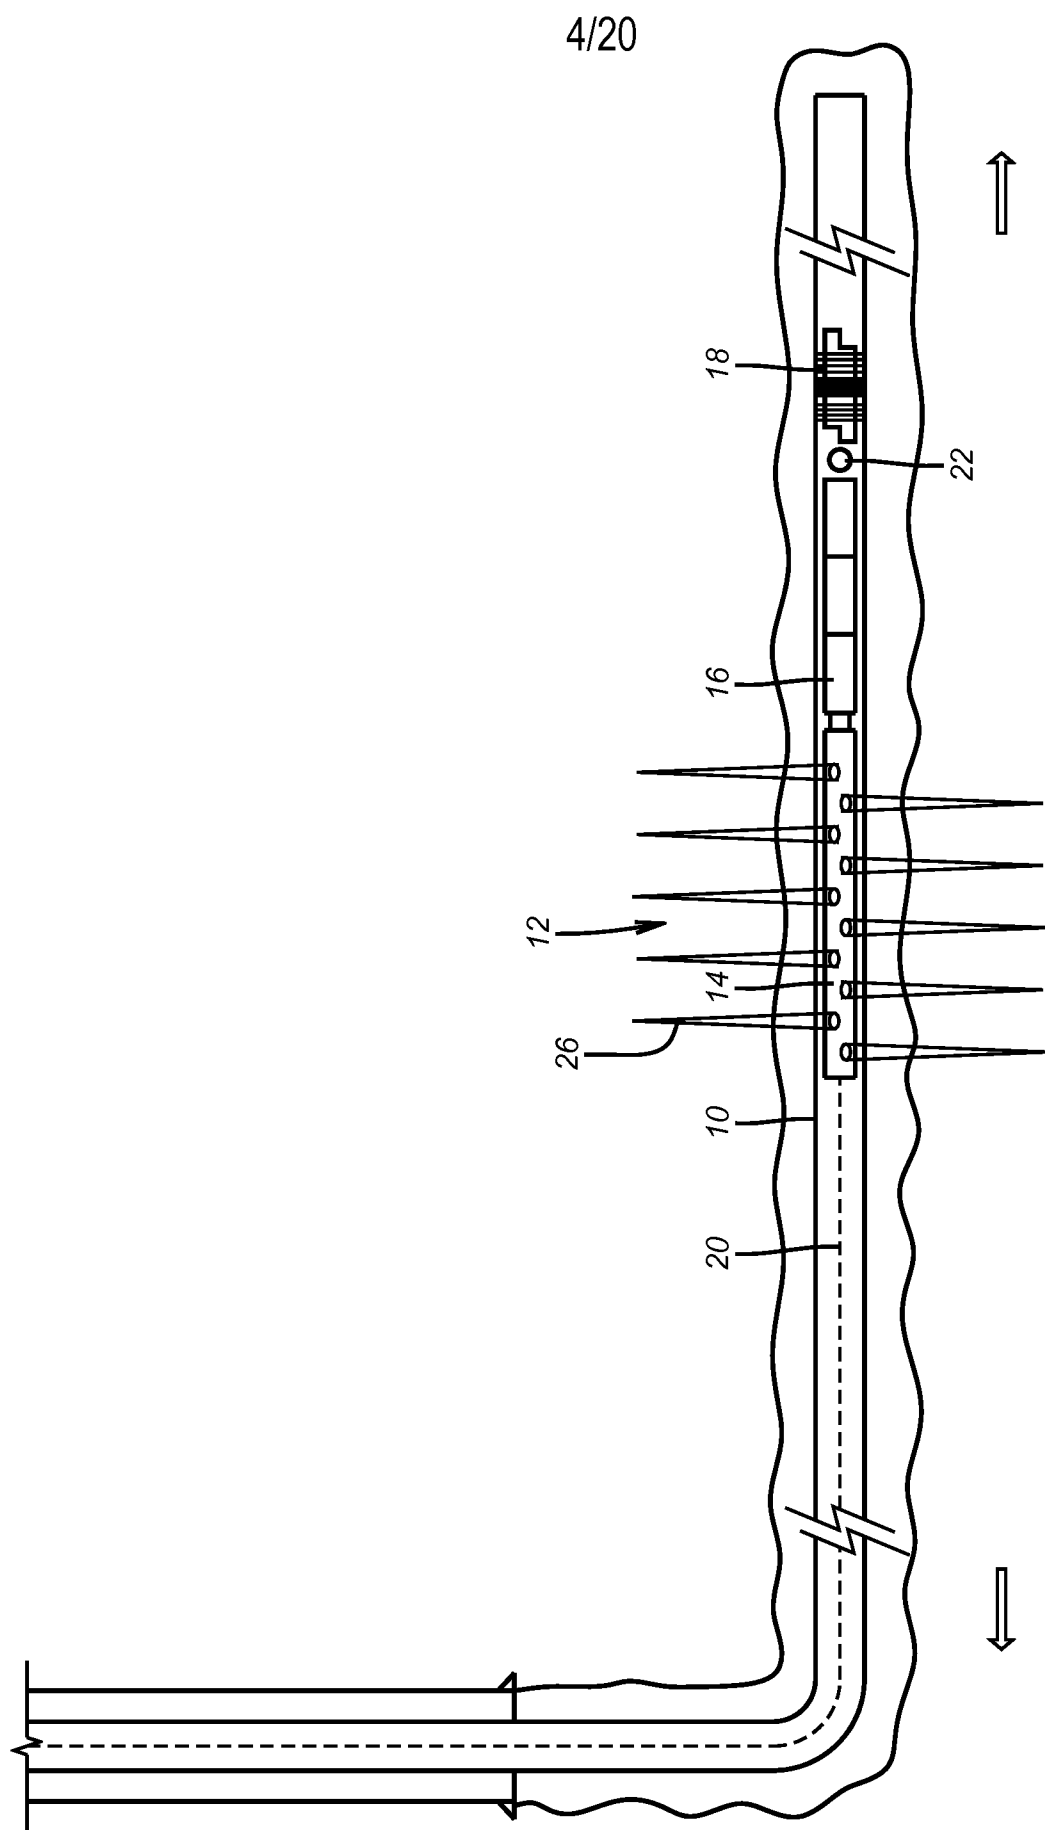


(PRIOR ART)
FIG. 4

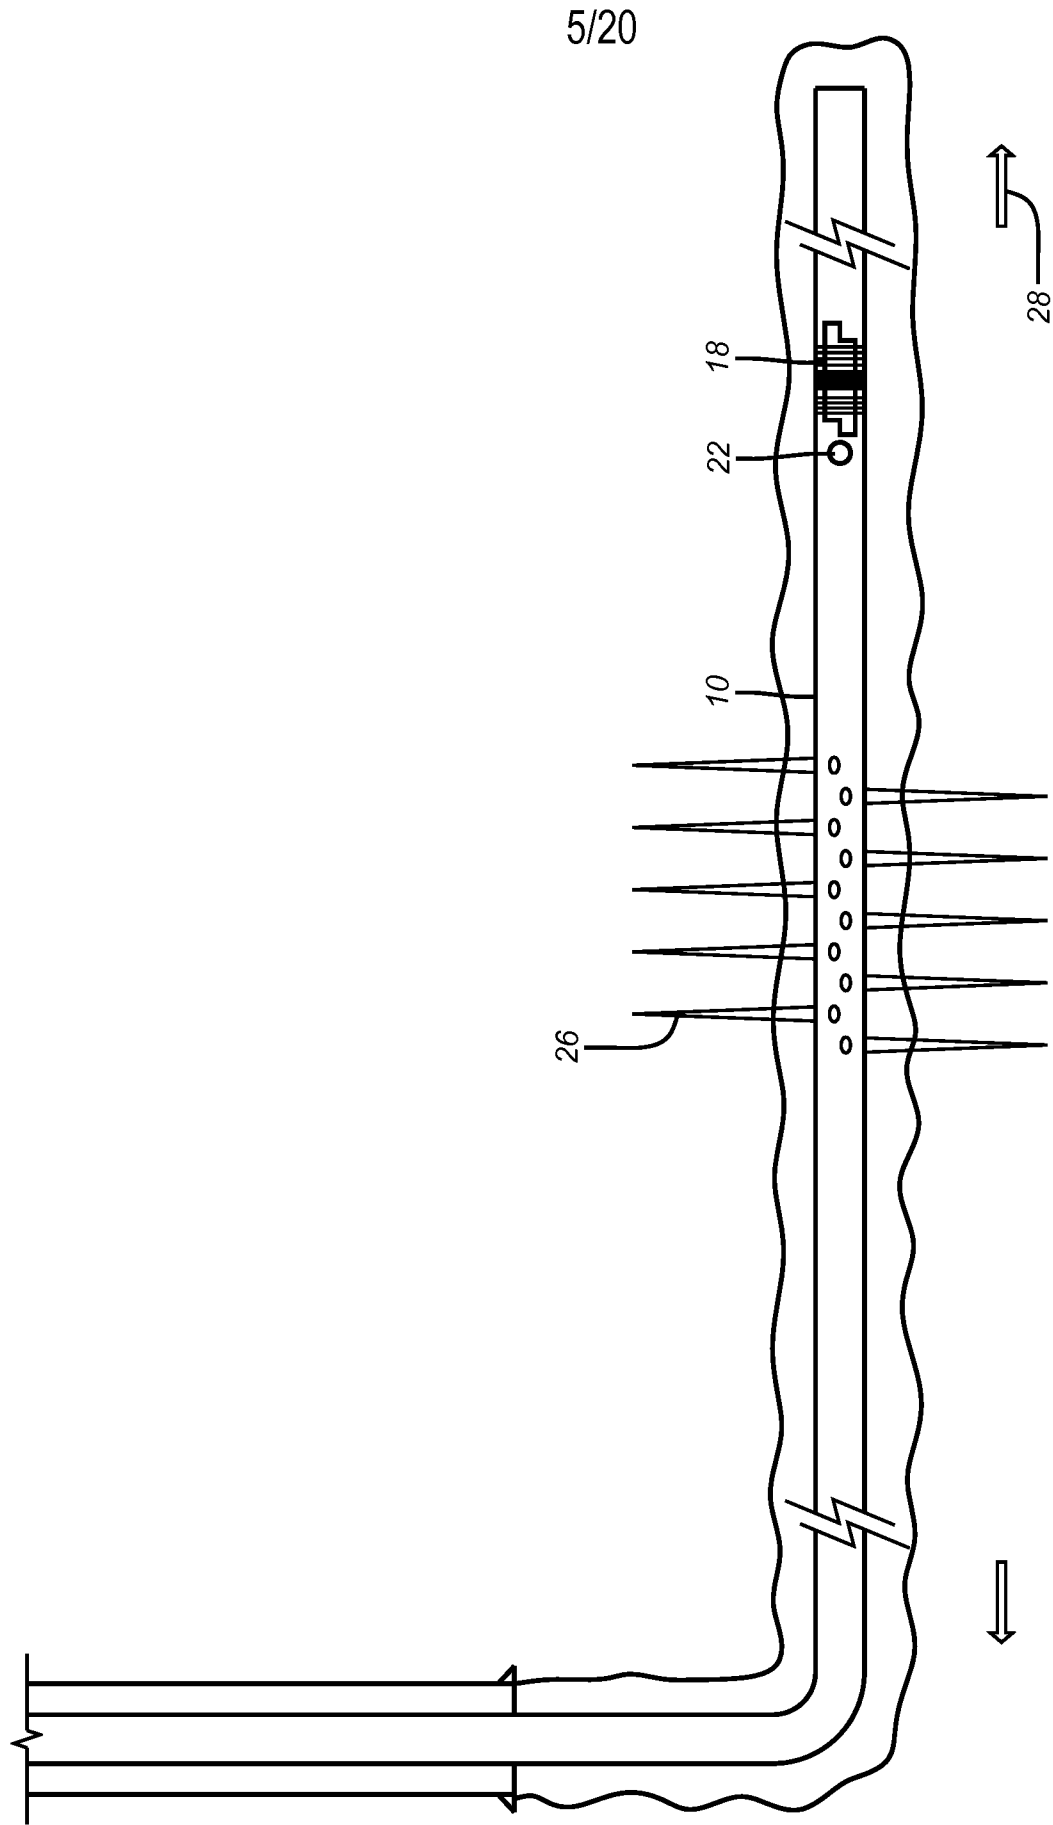

(PRIOR ART)


FIG. 5

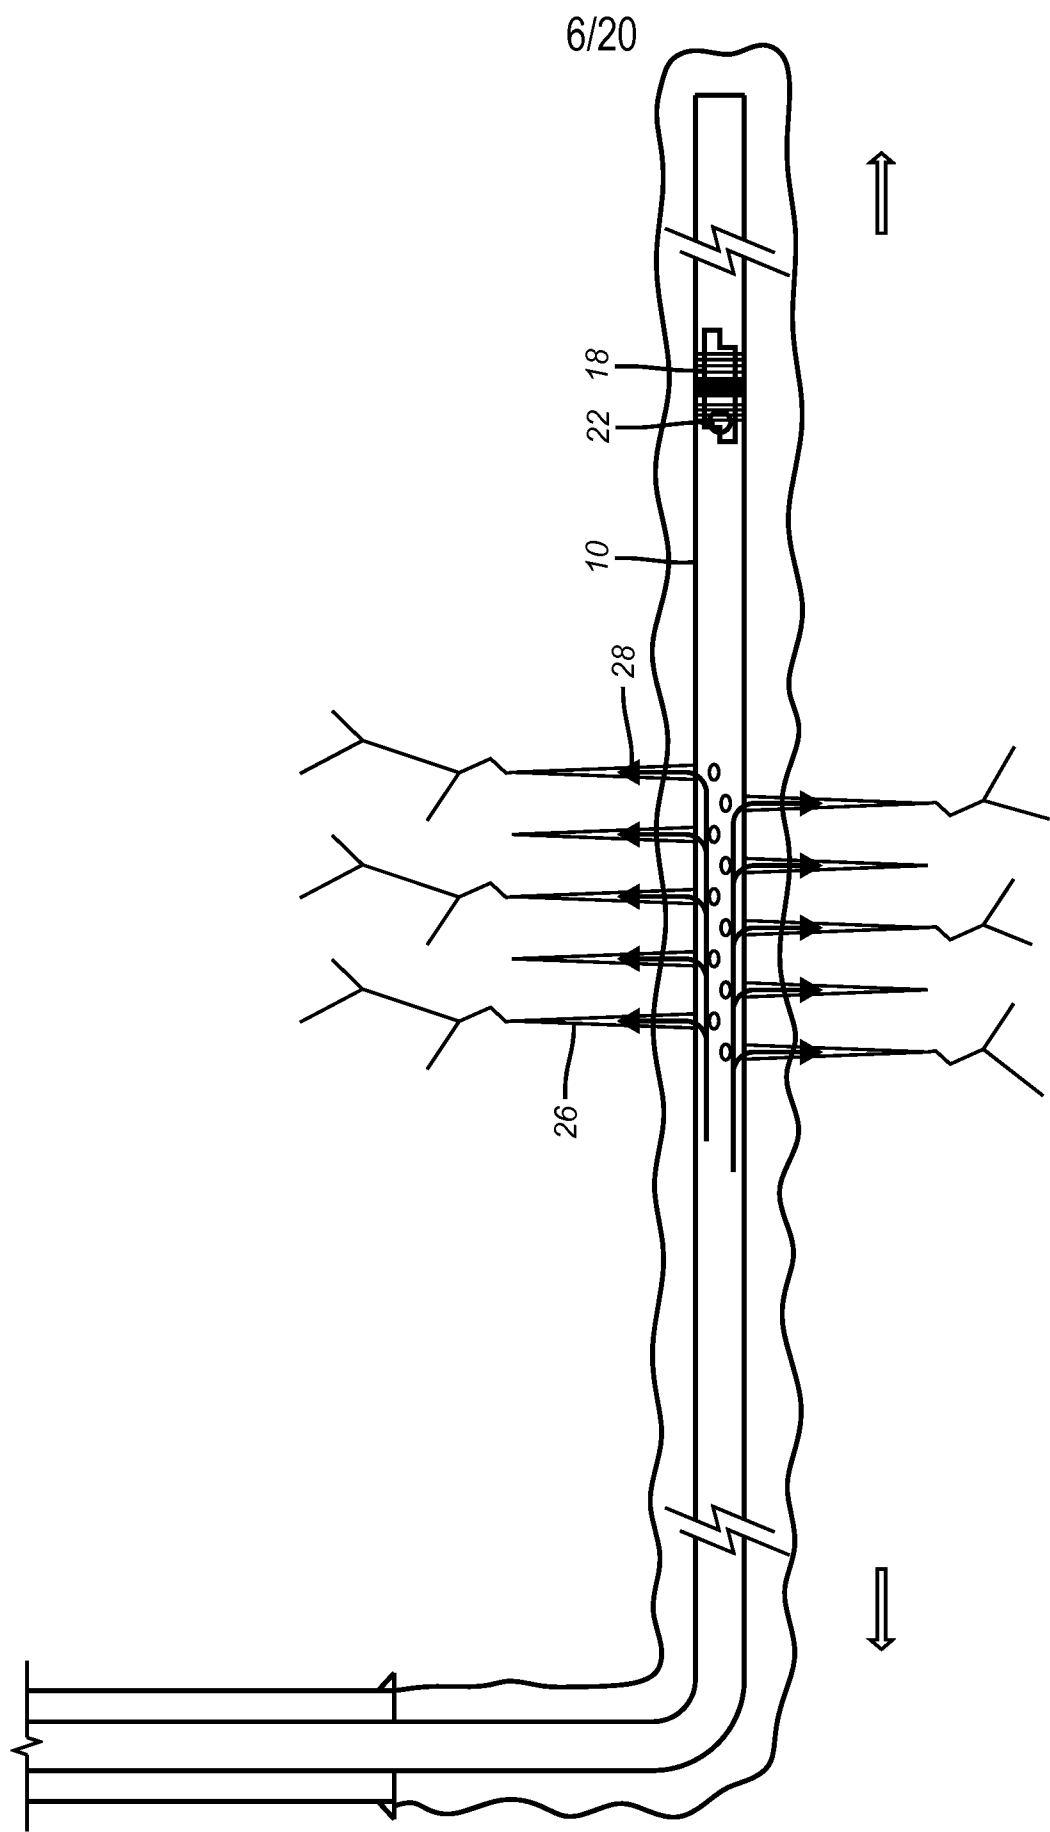

(PRIOR ART)


FIG. 6

7/20

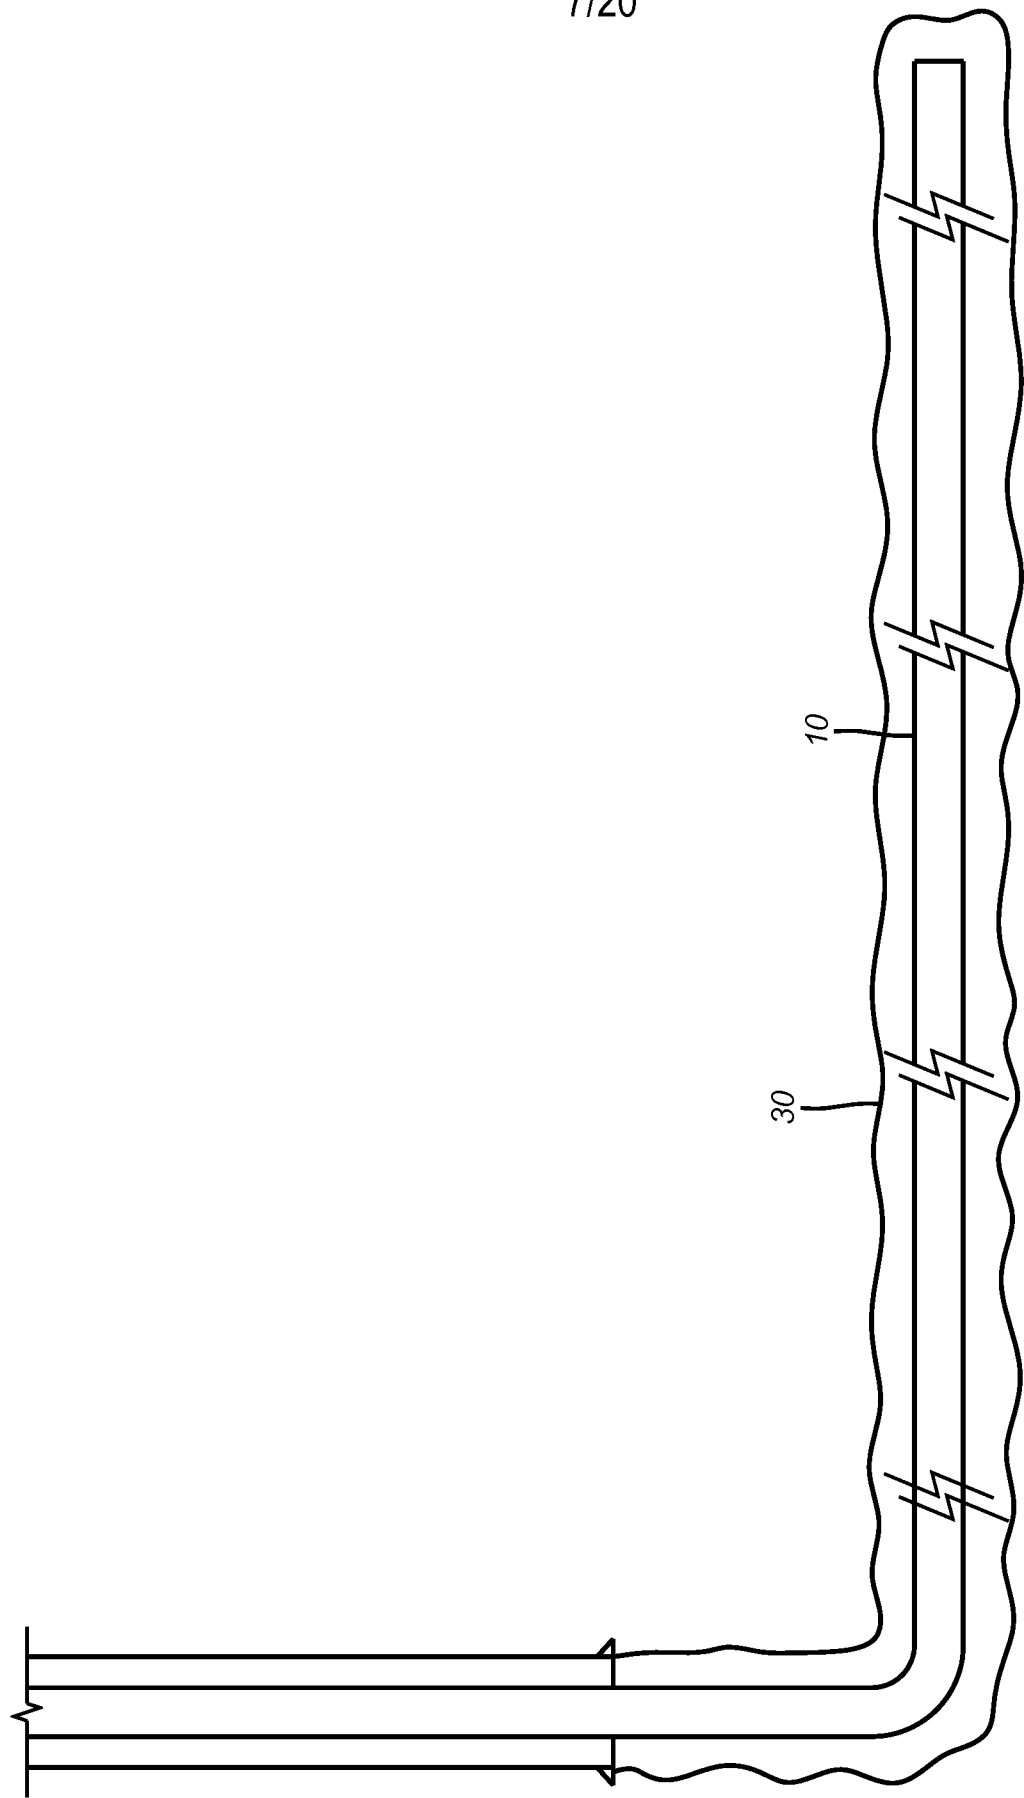


(PRIOR ART)
FIG. 7

8/20

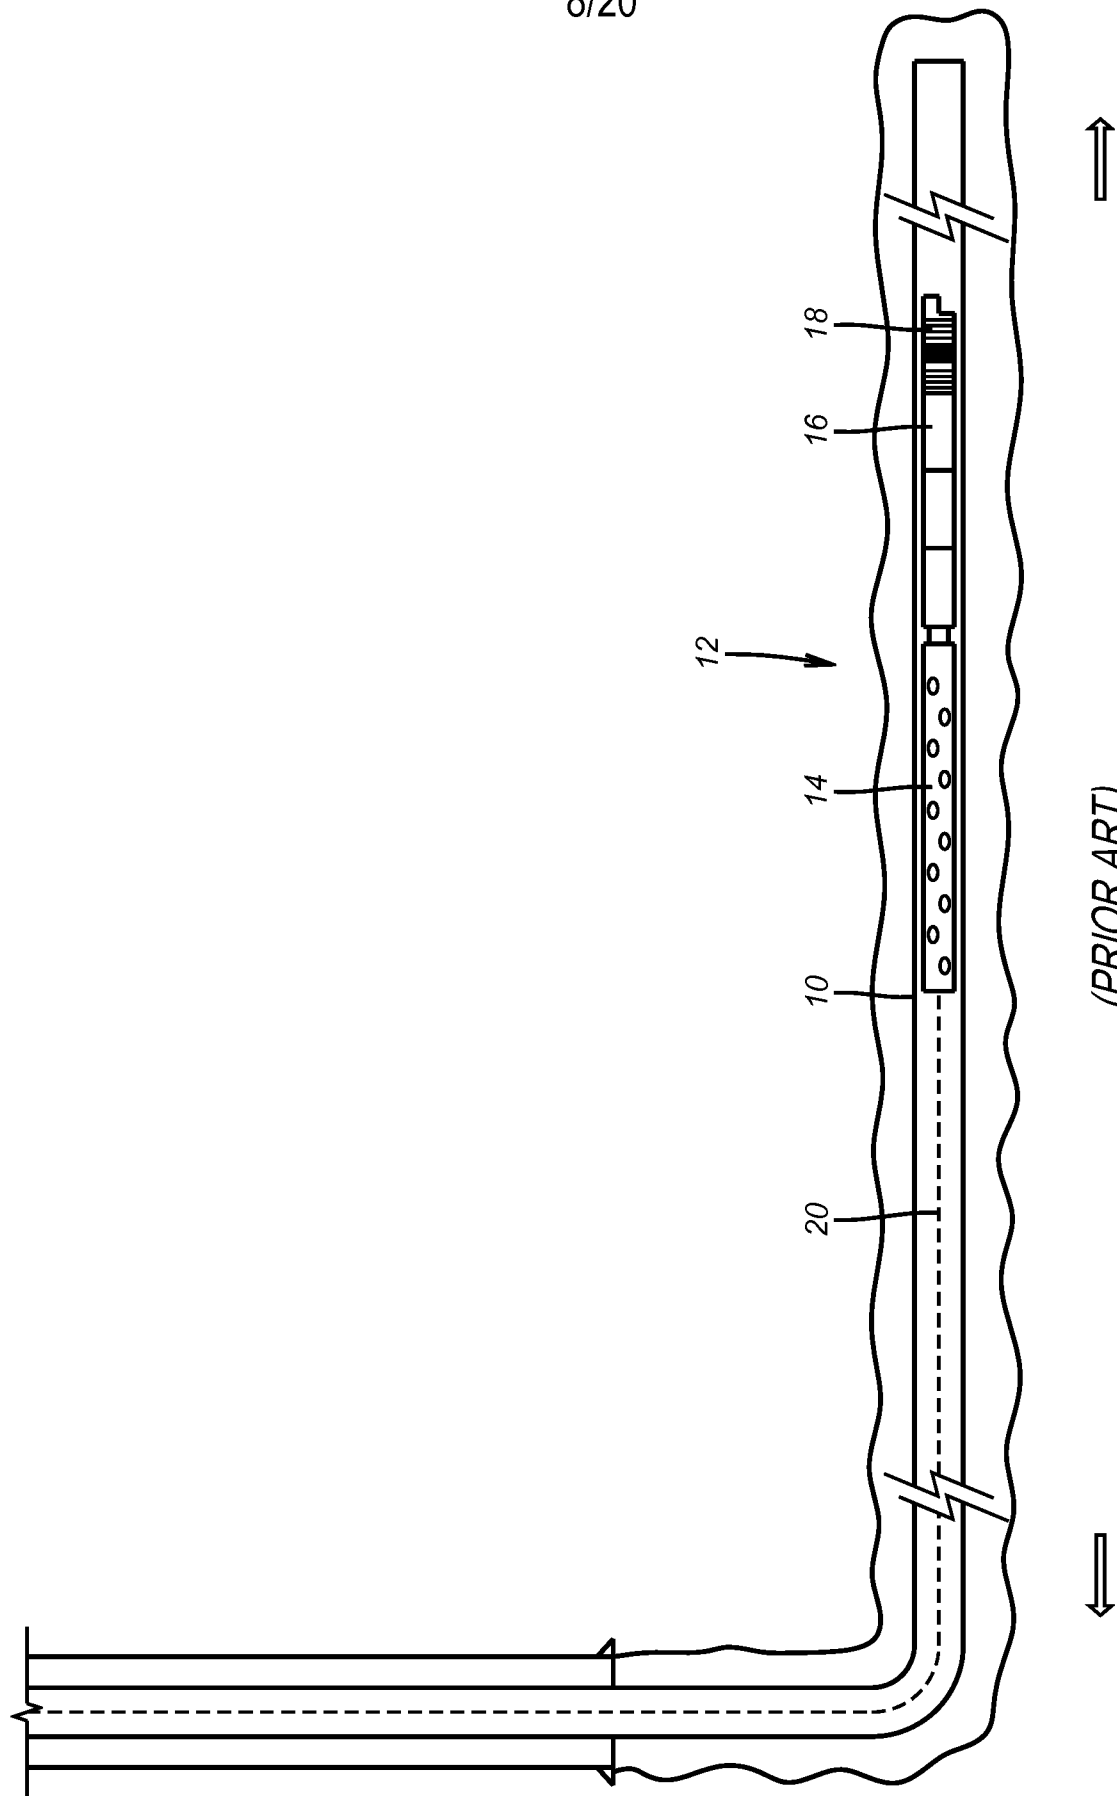


(PRIOR ART)
FIG. 8

9/20

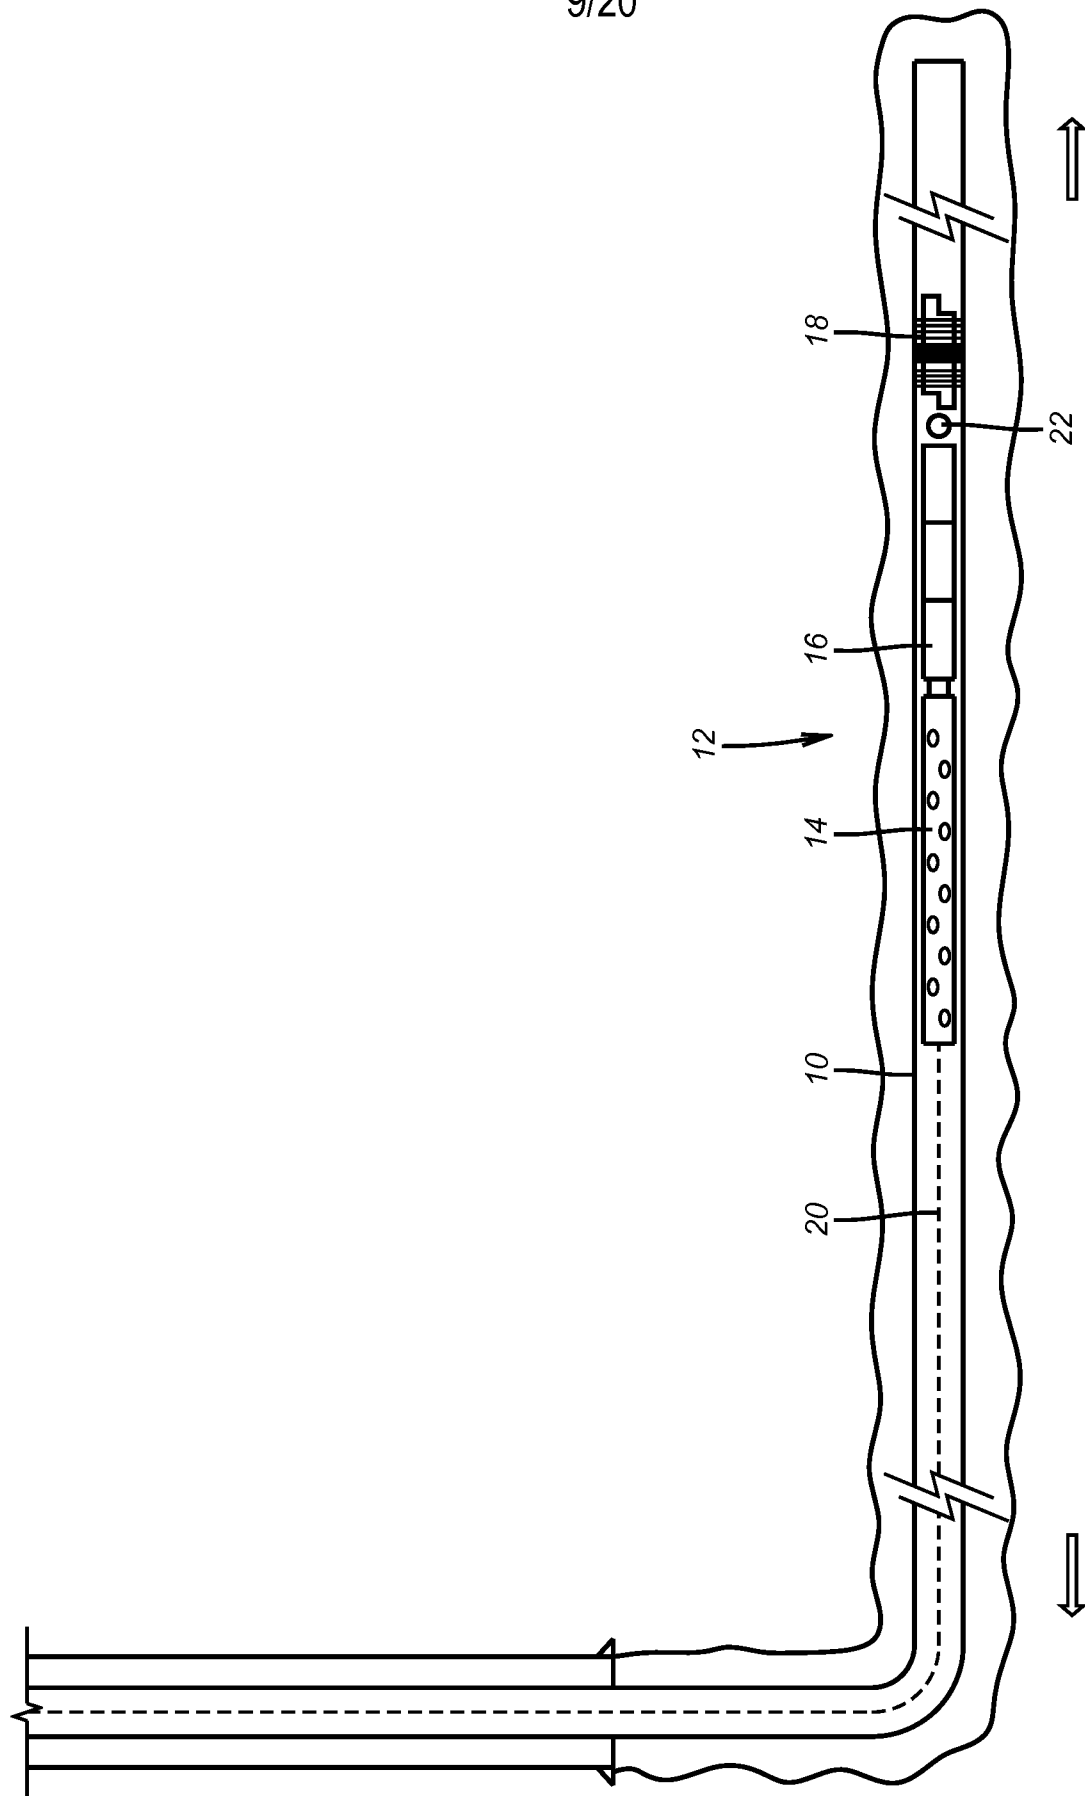

(PRIOR ART)

FIG. 9

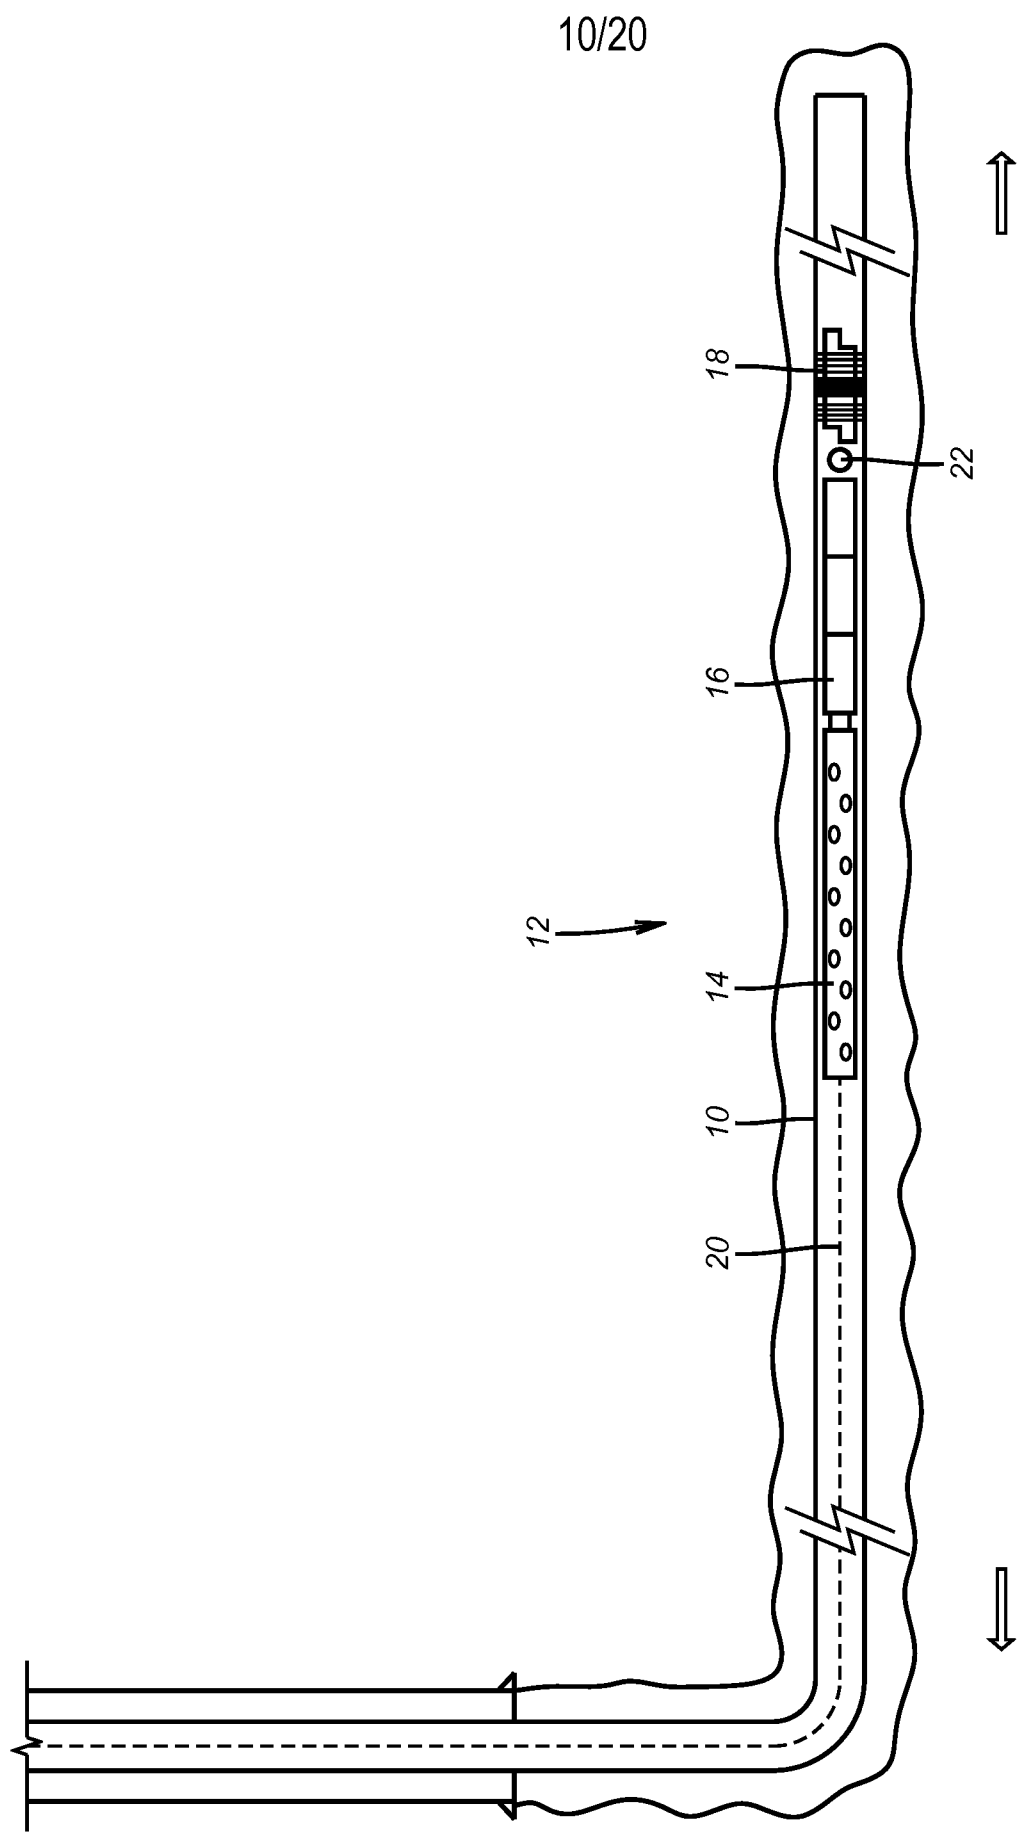

(PRIOR ART)
FIG. 10

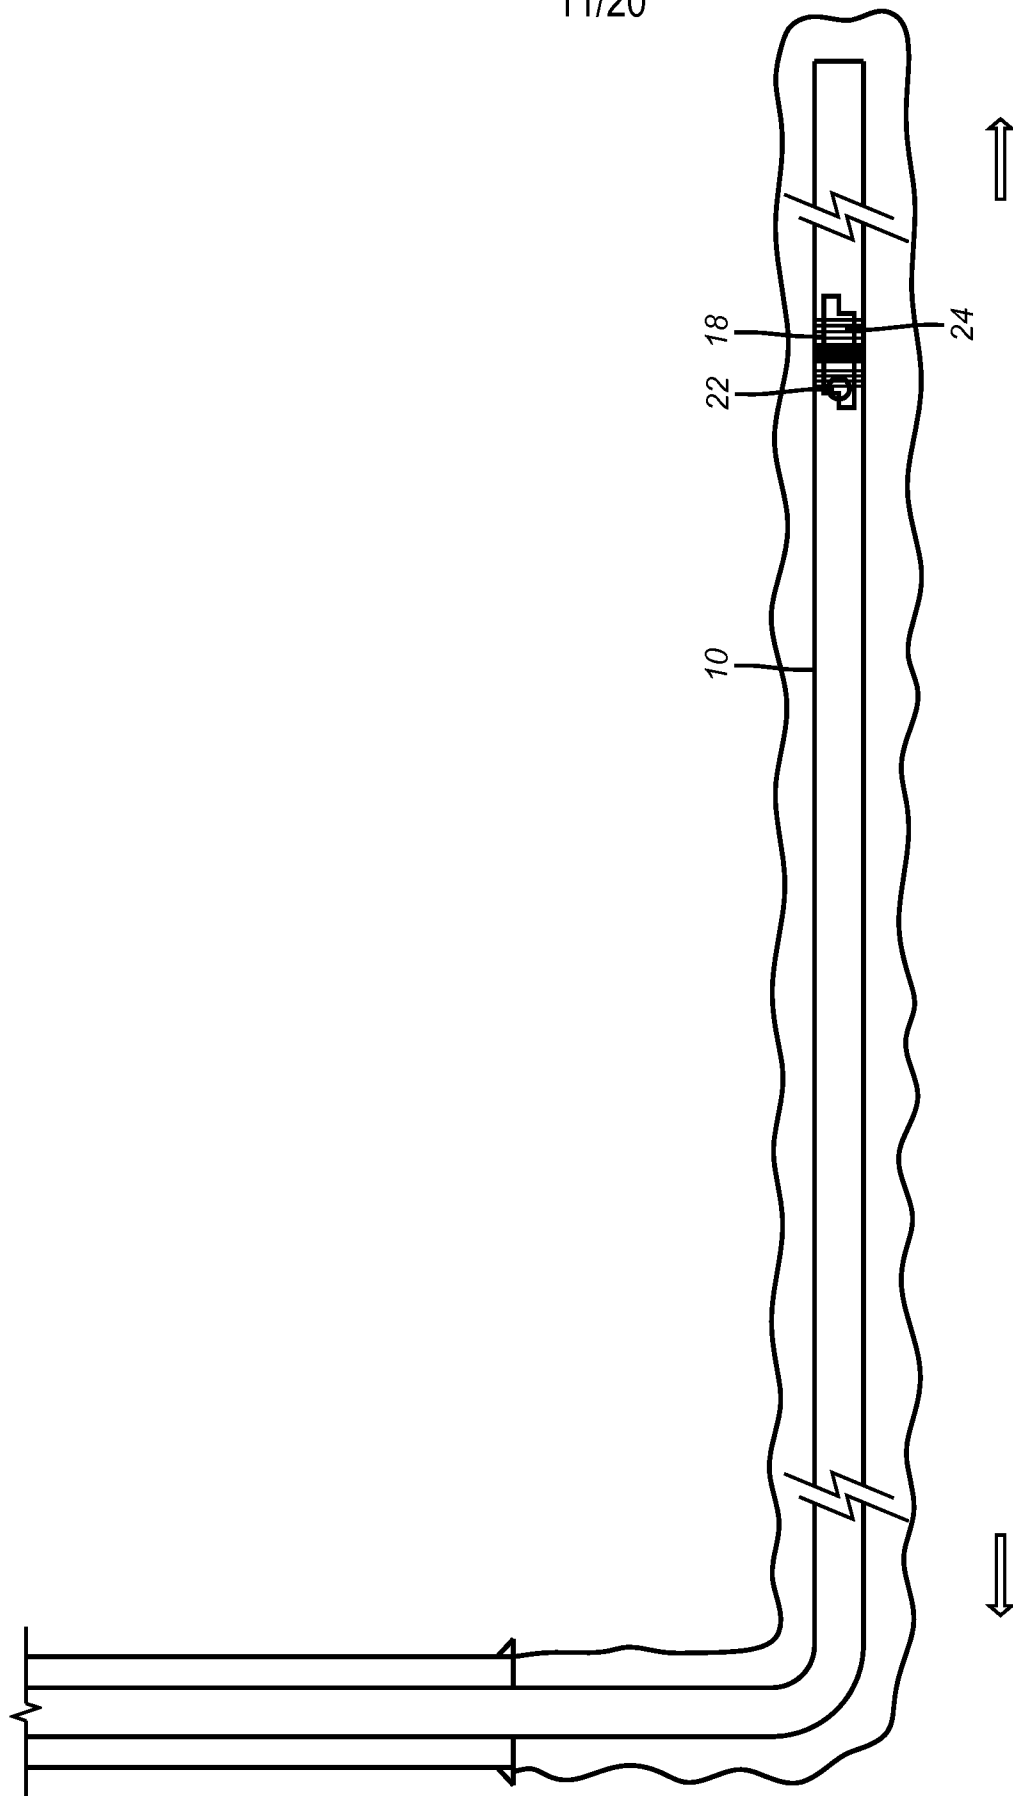


FIG. 11
(PRIOR ART)

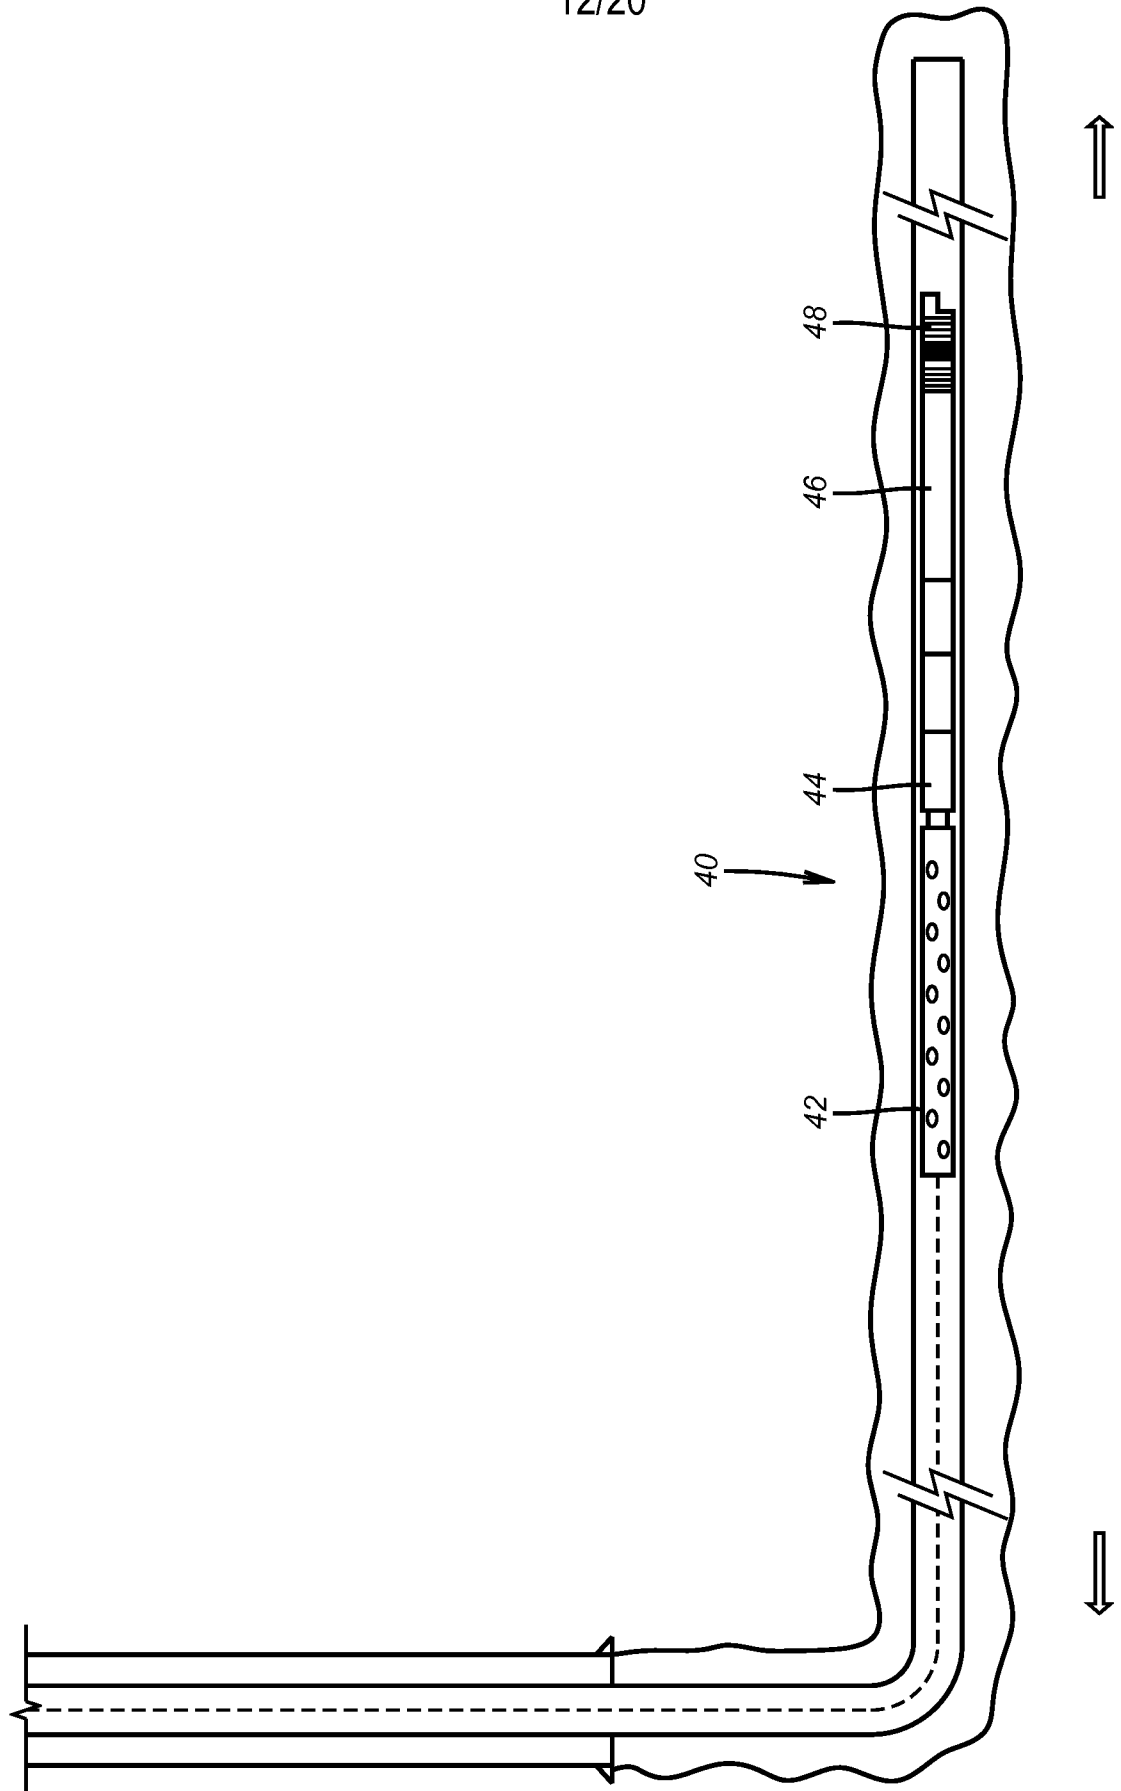


FIG. 12

13/20

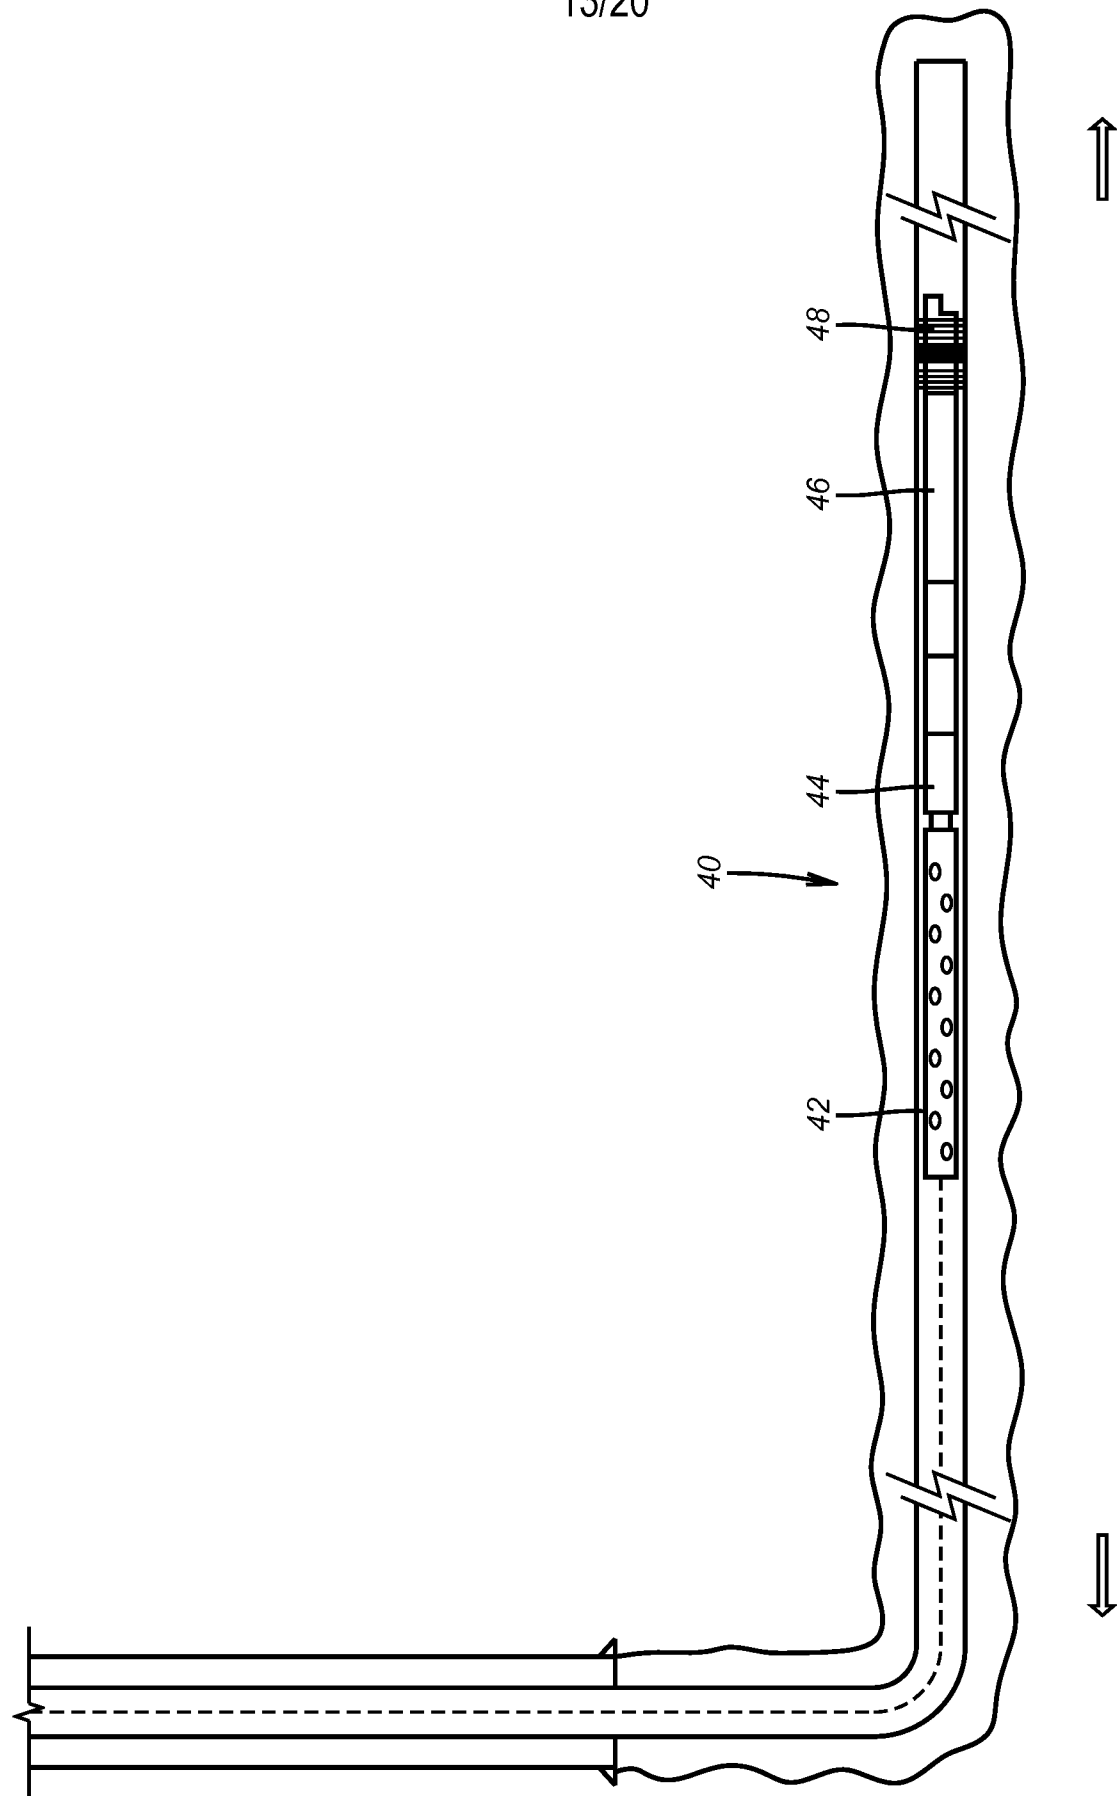


FIG. 13

14/20

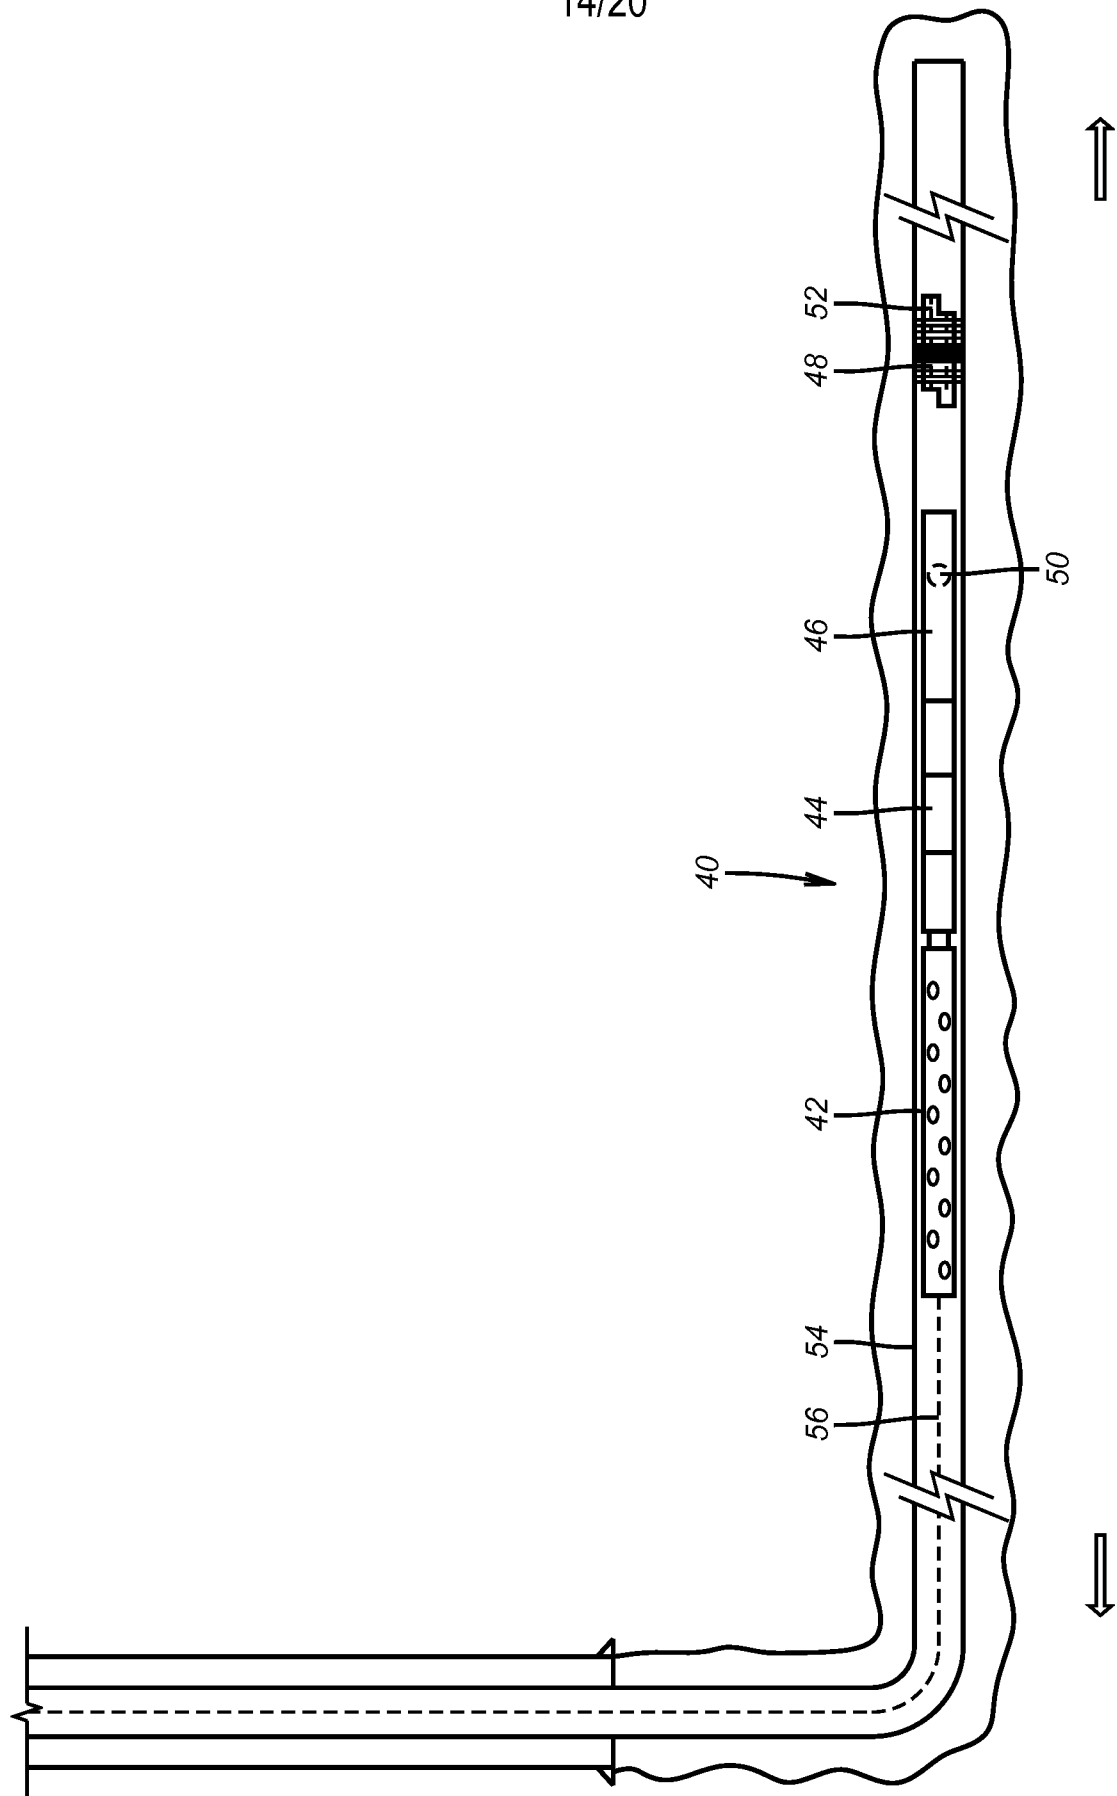


FIG. 14

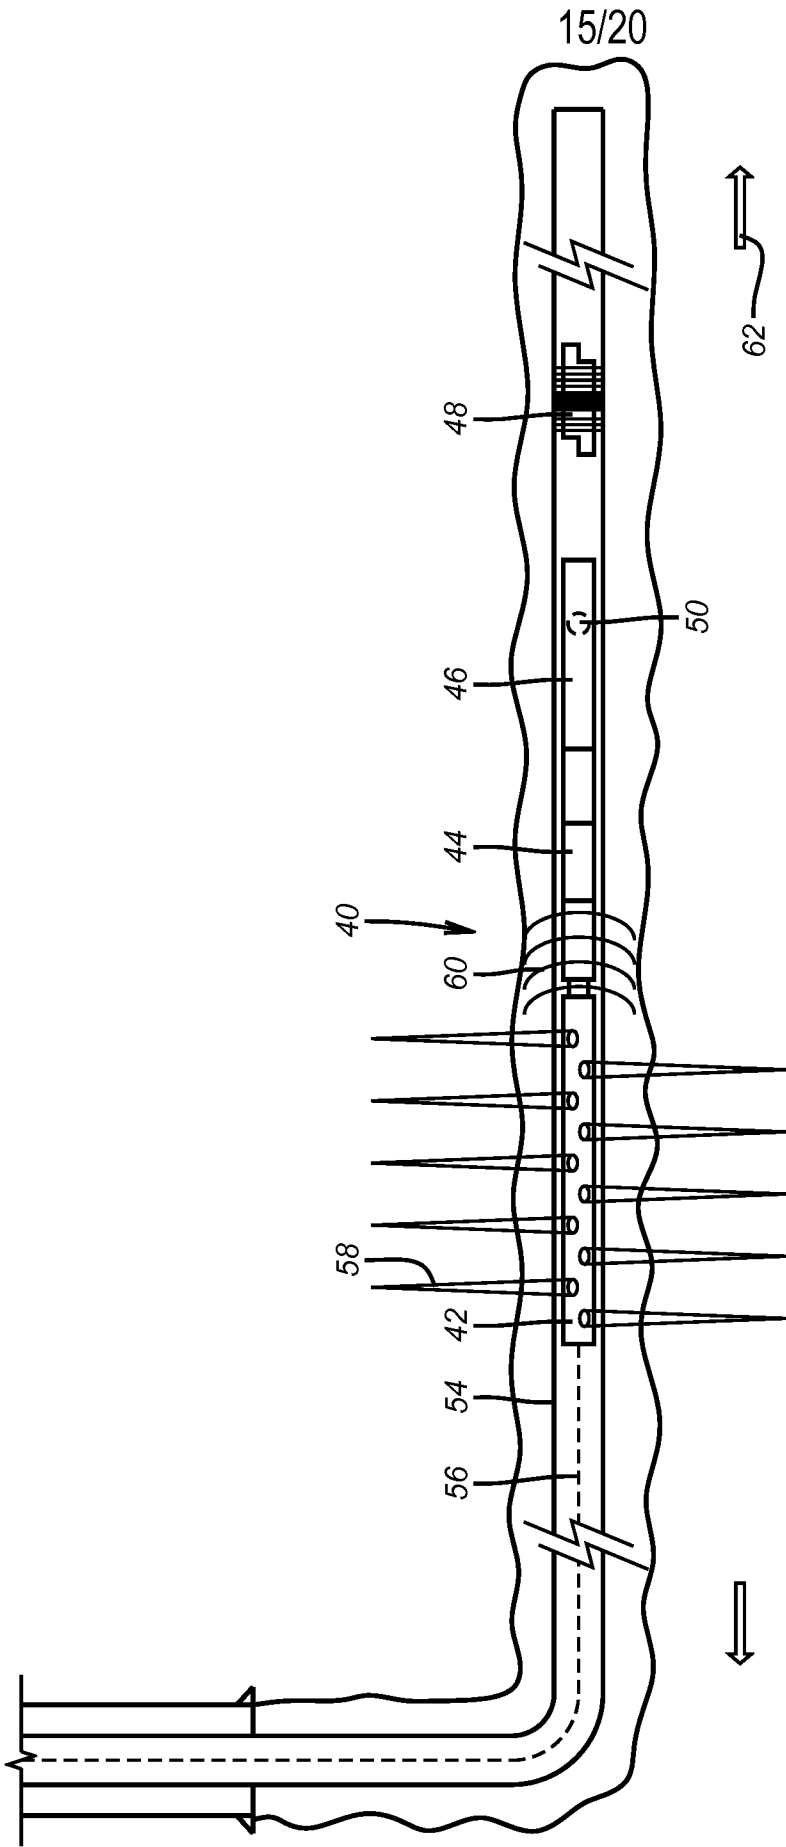


FIG. 15

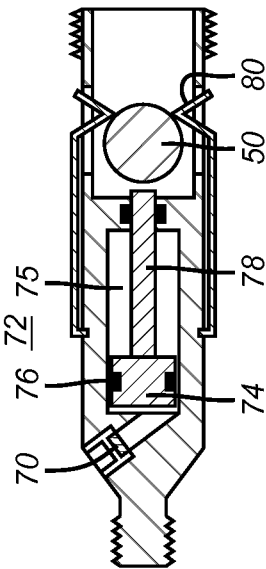


FIG. 15a

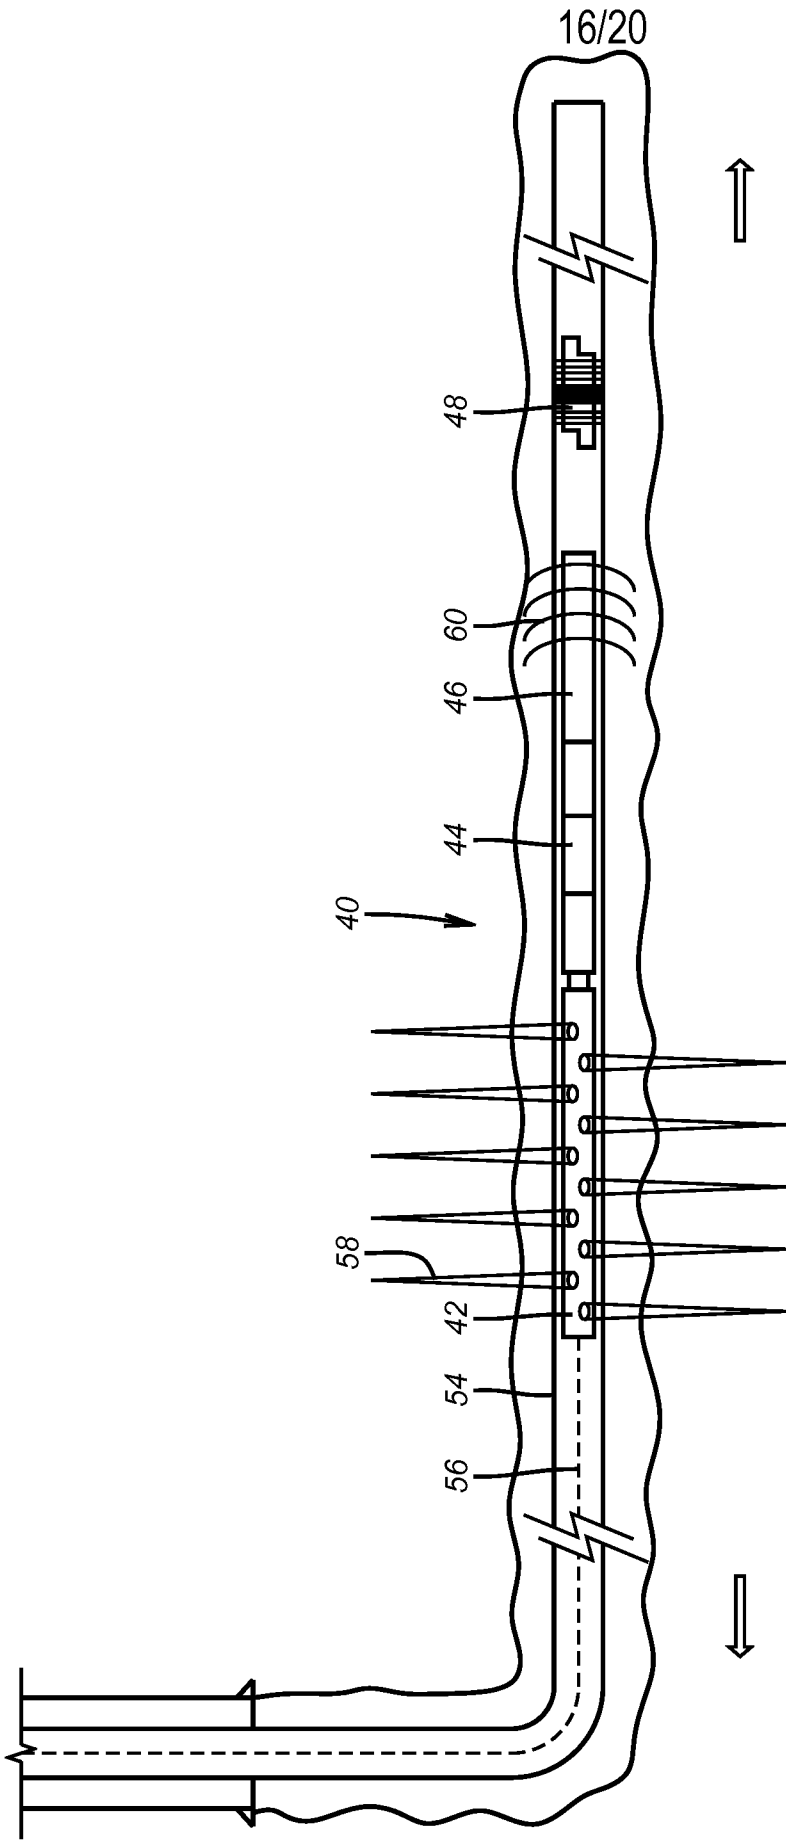


FIG. 16

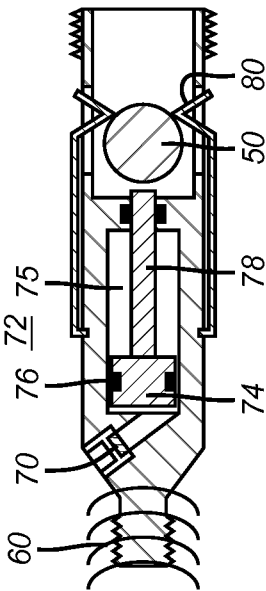


FIG. 16a

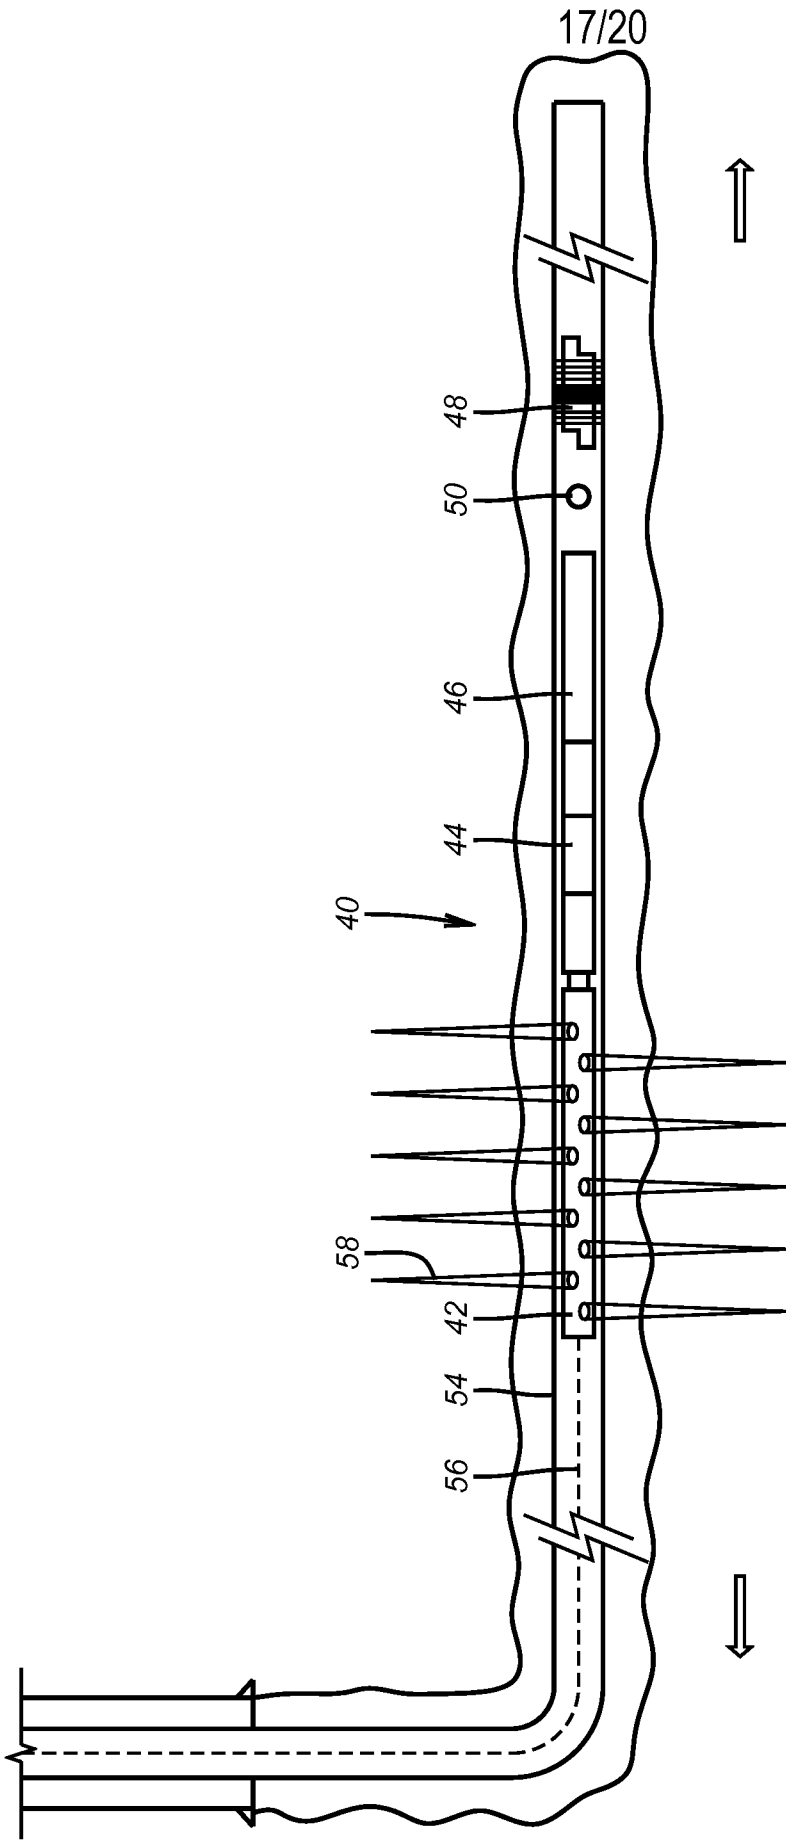


FIG. 17

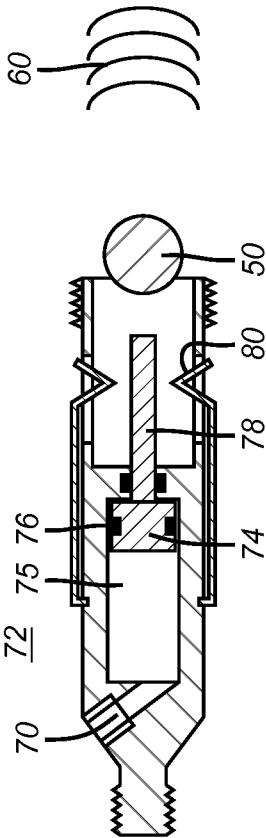


FIG. 17a

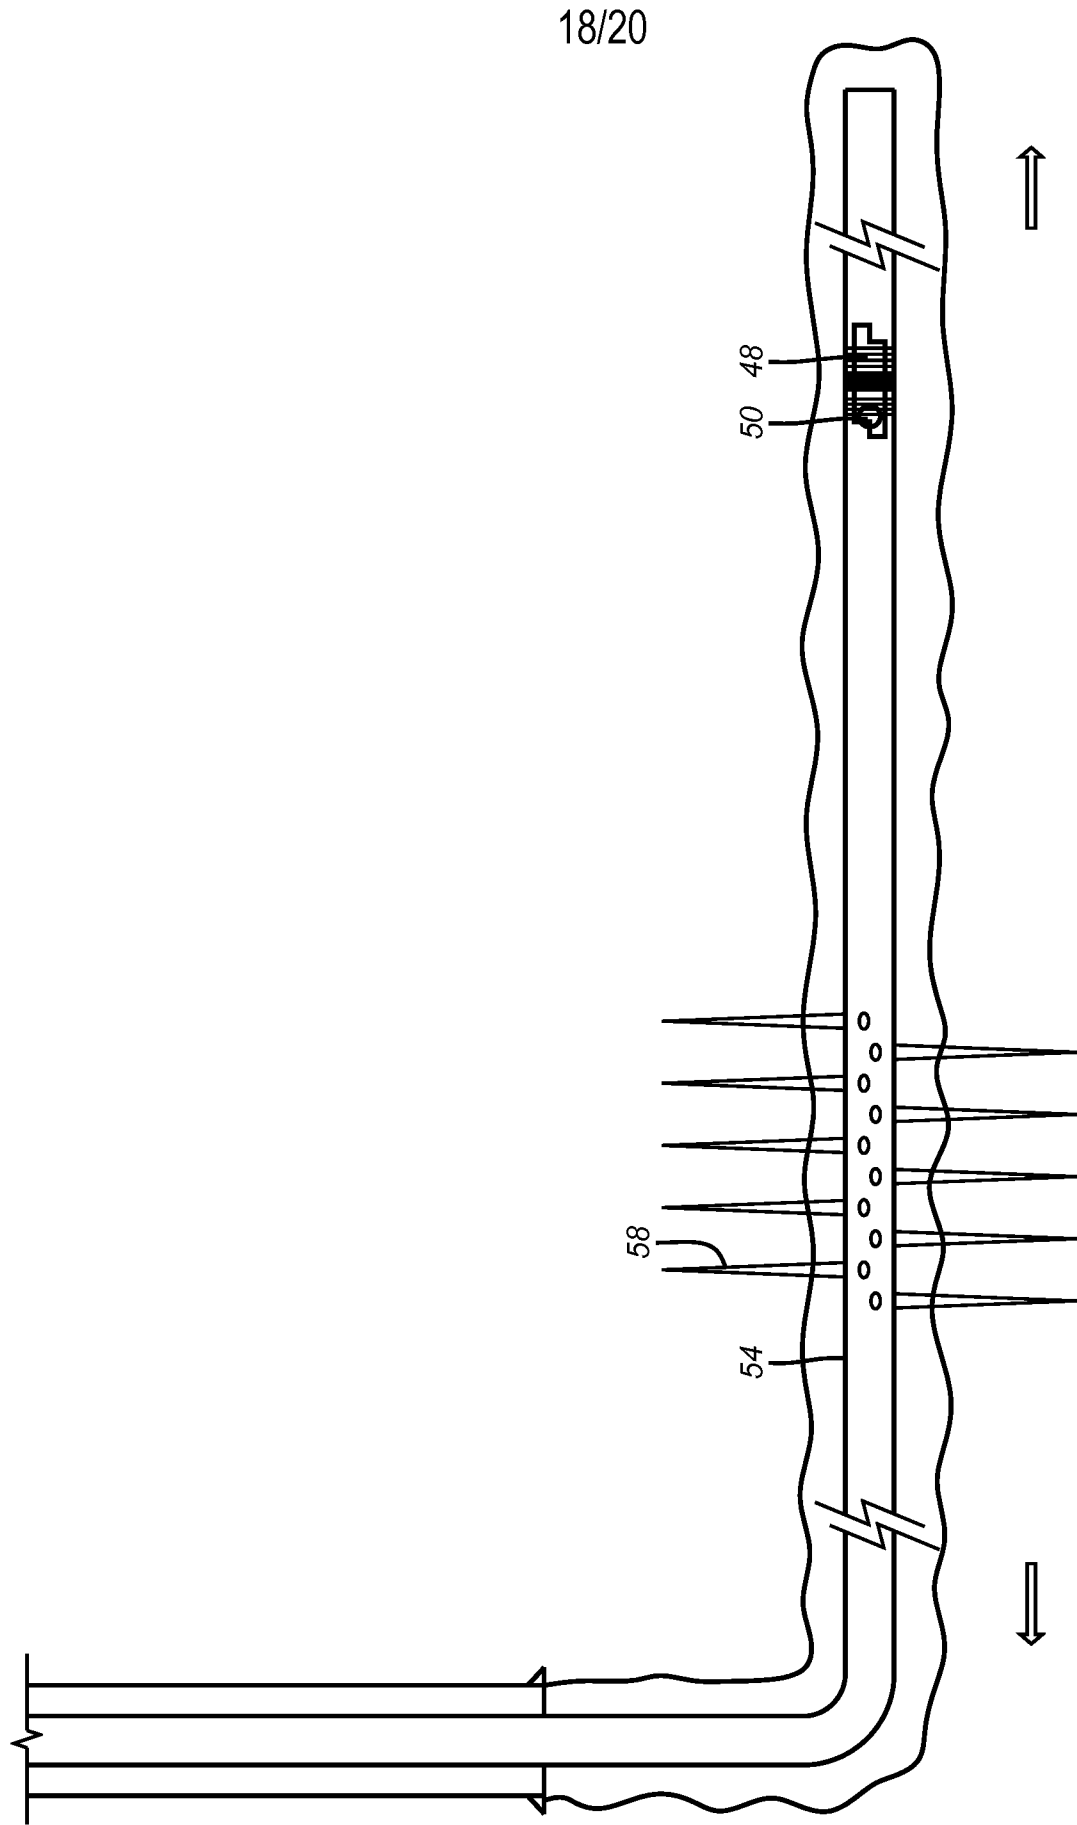


FIG. 18

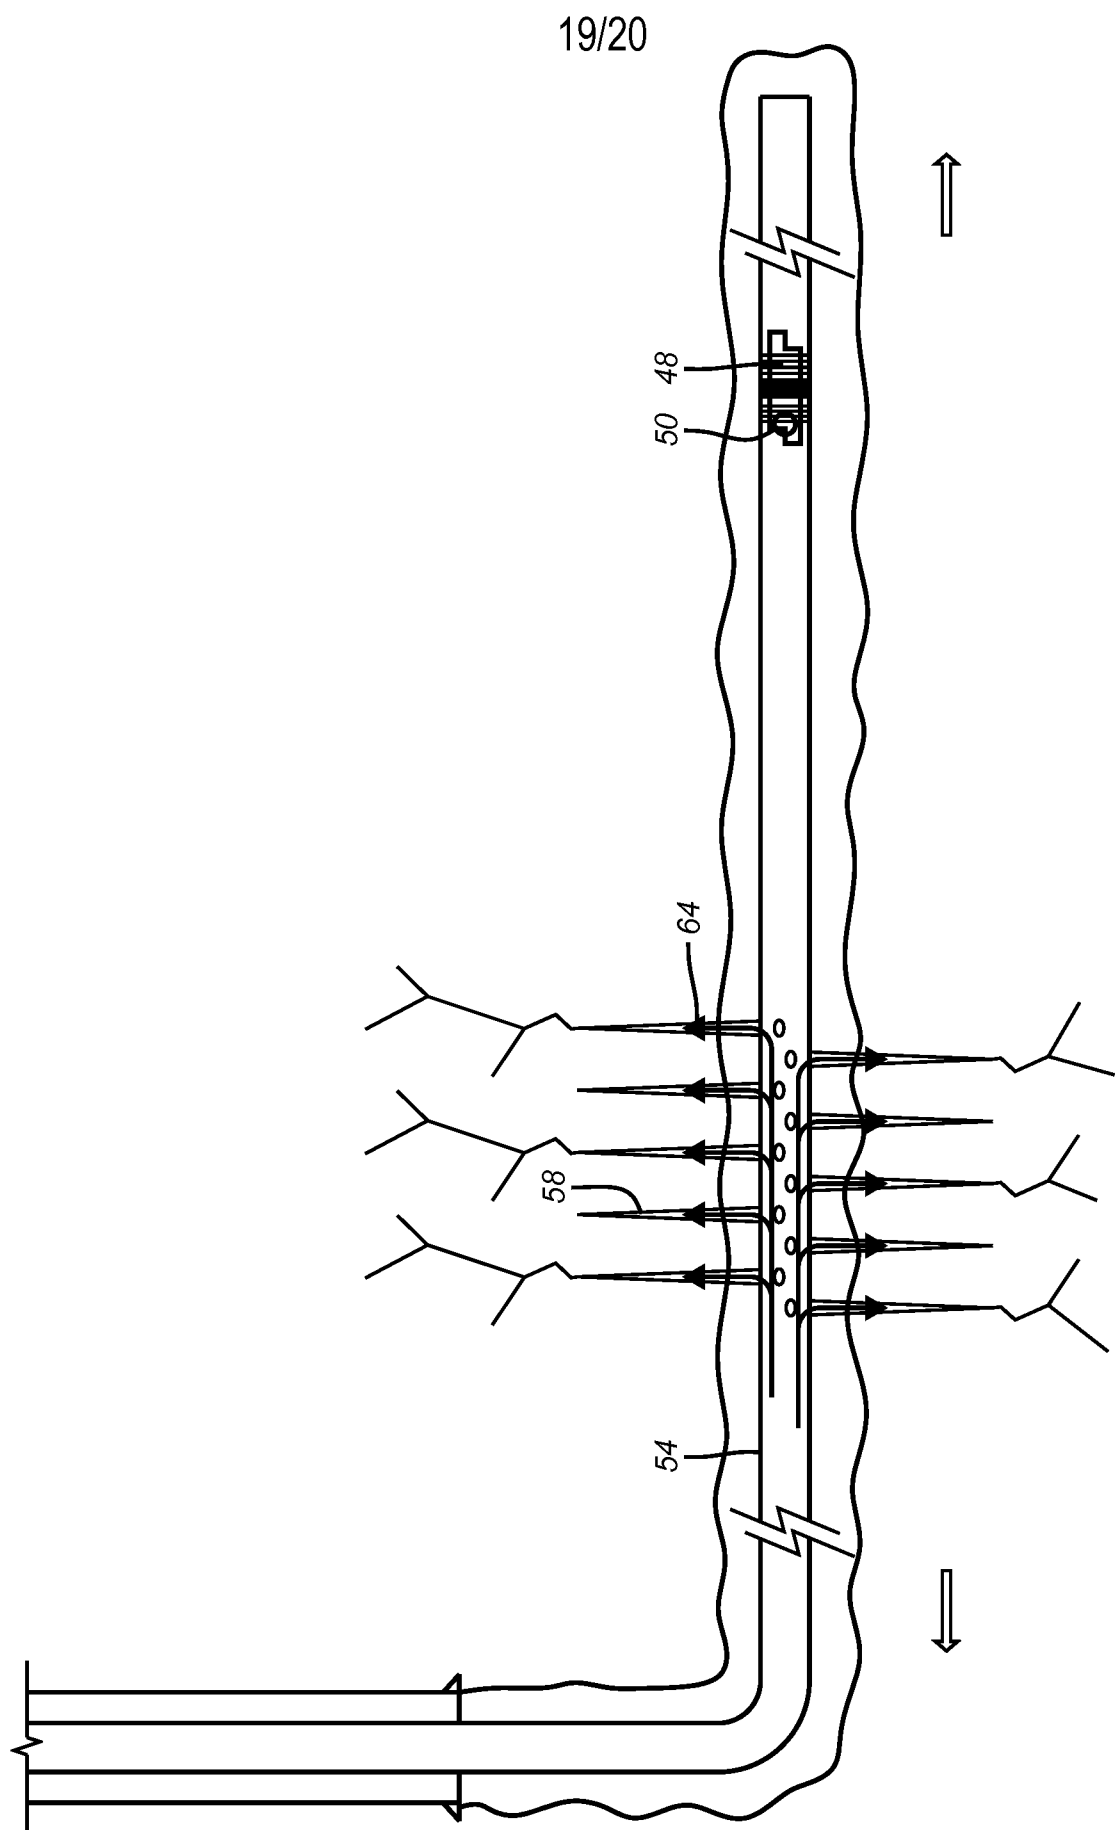


FIG. 19

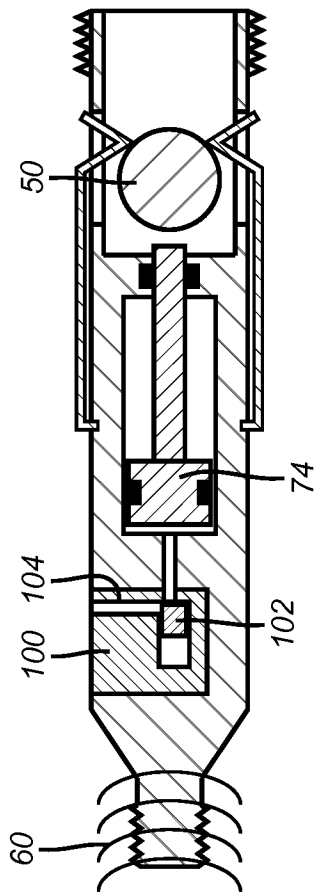


FIG. 20a

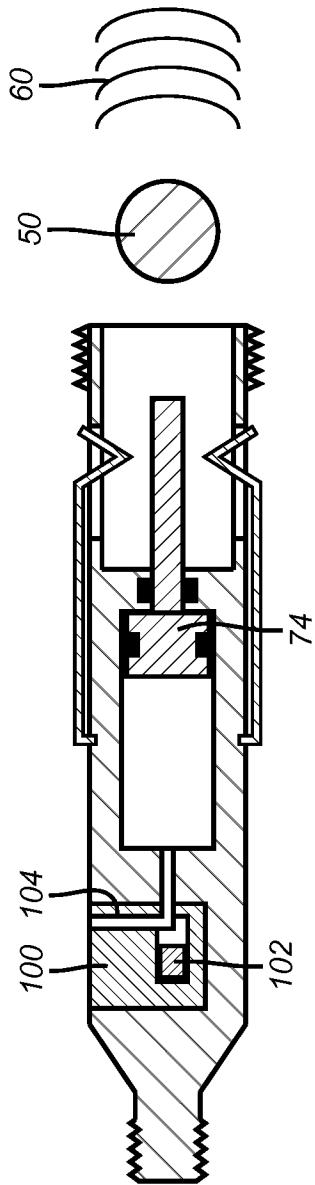


FIG. 20b

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/019261**A. CLASSIFICATION OF SUBJECT MATTER****E21B 43/26(2006.01)i, E21B 43/247(2006.01)i, E21B 43/11(2006.01)i, E21B 34/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 43/26; E21B 33/10; E21B 23/14; E21B 34/06; E21B 34/10; E21B 34/00; E21B 23/00; E21B 33/12; E21B 43/247; E21B 43/11

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: wellbore, perforating gun, completion assembly, body, object, ball, actuation assembly, pressure change, retainer, release, barrier, and isolate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012-0175133 A1 (NIKIFORUK, KEVIN JAMES) 12 July 2012 See paragraphs [0055]-[0061] and figures 4, 10.	1, 16-17
A		2-15, 18-28
A	US 2009-0159297 A1 (FOULD et al.) 25 June 2009 See paragraphs [0035]-[0039] and figures 7-9.	1-28
A	US 2004-0055753 A1 (DAVIS et al.) 25 March 2004 See paragraphs [0008]-[0011] and figures 1-3.	1-28
A	US 2008-0053660 A1 (ANGMAN, PER G.) 06 March 2008 See abstract and claims 1, 22.	1-28
A	US 6220360 B1 (CONNELL et al.) 24 April 2001 See column 4, line 38 - column 7, line 12 and figures 2-4.	1-28



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 May 2015 (14.05.2015)

Date of mailing of the international search report

01 June 2015 (01.06.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

RHEE, Jun Ho

Telephone No. +82-42-481-8288



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/019261

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0175133 A1	12/07/2012	None	
US 2009-0159297 A1	25/06/2009	AU 2008-343302 A1 AU 2008-343302 B2 CN 101952541 A EP 2229499 A2 MX 2010006646 A RU 2010130413 A RU 2491410 C2 US 7624810 B2 WO 2009-085813 A2 WO 2009-085813 A3	09/07/2009 29/05/2014 19/01/2011 22/09/2010 13/08/2010 27/01/2012 27/08/2013 01/12/2009 09/07/2009 10/06/2010
US 2004-0055753 A1	25/03/2004	AU 2003-273337 A1 AU 2003-273337 B2 CA 2498694 A1 CA 2498694 C CA 2655469 A1 CA 2655469 C GB 2409225 A GB 2409225 B NO 20051285 A NO 20051285 D0 NO 331765 B1 US 7100700 B2 WO 2004-031533 A2 WO 2004-031533 A3	23/04/2004 30/10/2008 15/04/2004 06/04/2010 15/04/2004 23/11/2010 22/06/2005 25/04/2007 19/04/2005 11/03/2005 26/03/2012 05/09/2006 15/04/2004 01/07/2004
US 2008-0053660 A1	06/03/2008	CA 2560333 A1 CA 2560333 C CA 2560828 A1 EP 1730383 A1 EP 1730383 A4 EP 1730383 B1 US 2008-0230224 A1 US 7694730 B2 US 7878237 B2 WO 2005-090740 A1	29/09/2005 21/08/2012 19/03/2008 13/12/2006 19/11/2008 08/06/2011 25/09/2008 13/04/2010 01/02/2011 29/09/2005
US 6220360 B1	24/04/2001	CA 2339707 A1 EP 1132565 A2 EP 1132565 A3 NO 20011188 A NO 20011188 D0	09/09/2001 12/09/2001 19/11/2003 10/09/2001 08/03/2001