



(19) **United States**

(12) **Patent Application Publication**
BROWN

(10) **Pub. No.: US 2002/0026771 A1**

(43) **Pub. Date: Mar. 7, 2002**

(54) **METHOD OF ENCAPSULATION**

Publication Classification

(76) Inventor: **MALCOLM DAVID BROWN,**
MUNDFORD (GB)

(51) **Int. Cl.⁷ B65B 47/00**

(52) **U.S. Cl. 53/454**

(57) **ABSTRACT**

Correspondence Address:
MORGAN & FINNEGAN
345 PARK AVENUE
NEW YORK, NY 10154

(*) Notice: This is a publication of a continued prosecution application (CPA) filed under 37 CFR 1.53(d).

A method of encapsulation is characterized by supplying to an encapsulation unit (22) two films (14, 16) of like material capable of deforming elastically at least when partially solvated, and applying solvent to at least one of the films prior to encapsulation to cause partial solvation of the material surface, such that the partially solvated surface can adhere to and seal with the film material. In the encapsulation unit, the substance to be encapsulated e.g. a cosmetic oil or vitamin preparation is supplied between the films, the films are formed, typically by a molding process, into suitably shaped capsule portions which can adhere to each other as a result of the adhesive action of the partially solvated surface(s), and which seal together encapsulating the supplied substance, forming a capsule. The invention enables encapsulation using materials other than gelatin, such as polyvinyl alcohol. Also disclosed is encapsulation apparatus and the resulting capsules.


(21) Appl. No.: **09/155,257**

(22) PCT Filed: **Mar. 25, 1997**

(86) PCT No.: **PCT/GB97/00838**

(30) **Foreign Application Priority Data**

Mar. 26, 1996 (GB) 9606371.4

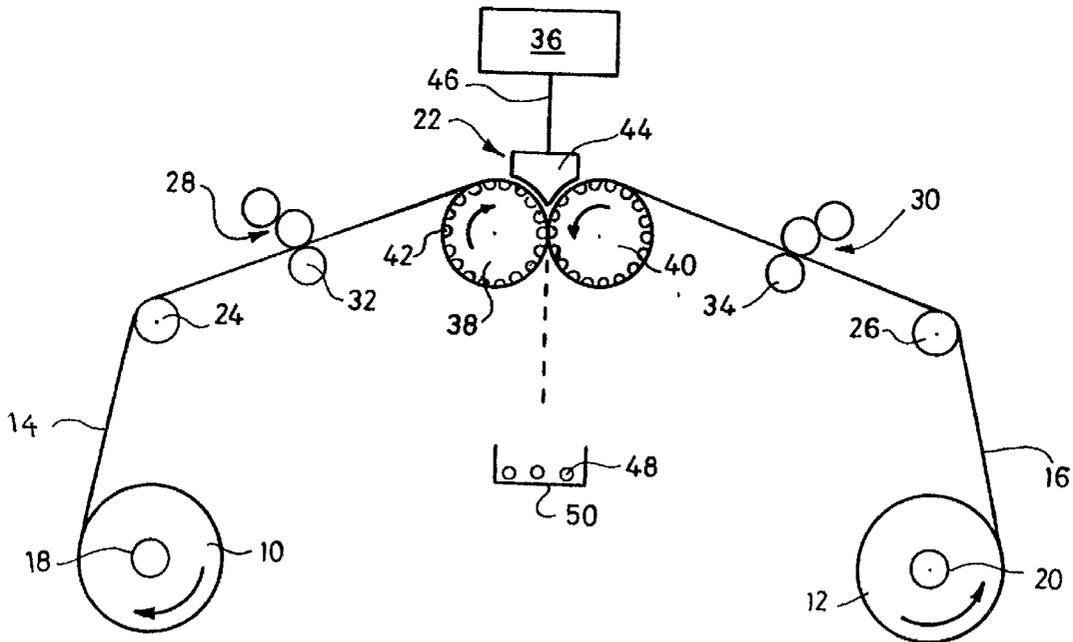

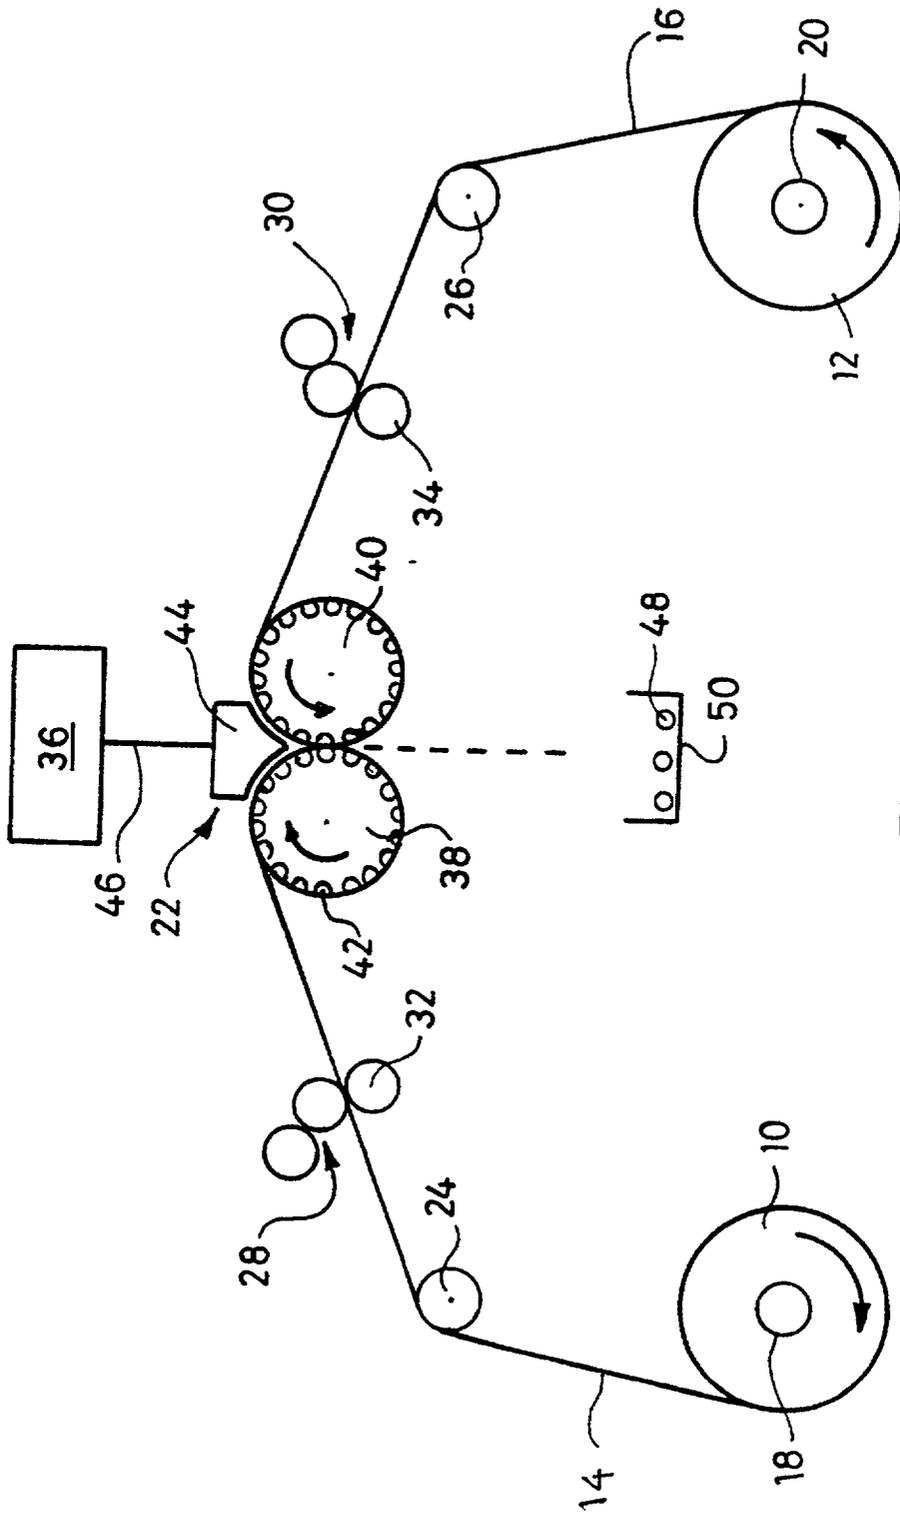


Fig. 1

METHOD OF ENCAPSULATION

FIELD OF INVENTION

[0001] This invention concerns encapsulation and relates to a method of encapsulation, encapsulation apparatus and the resulting capsules.

BACKGROUND TO THE INVENTION

[0002] The provision of water soluble and digestible capsules containing pharmaceutical or cosmetic preparations is well established. Typically oils are encapsulated in gelatin shells designed to release their contents when subjected to immersion in water or exposure to digestive juices. These oils include dietary enhancement substances or, in the case of cosmetic preparations, fragrant oils for release into bath water. A substantial industry has been built up around this principle, based primarily on the use of gelatin for the capsule shells. This gelatin is derived from the bones and skins of animals.

[0003] With concern for the environment and animal welfare and fear of animal related diseases such as Bovine Spongiform Encephalopathy (BSE) increasing, the number of individuals adopting a serious stance on the use of animals and animal-derived products in food substances and cosmetic applications has risen dramatically. As a result, the sales of such gelatin capsules are very limited among such individuals. There exists therefore the need for the provision of a suitable substitute for gelatin in order to provide water soluble or digestible capsules which are not derived from animals. Whilst this is a desirable aim, few materials lend themselves to such use and the machinery currently creating such capsules has been specifically designed to suit the properties of gelatin. As a result, a change in material for the capsule shell requires a redesign of the machinery if it is to have the capability of efficiently producing capsules from the replacement material. It is a change in material and the commensurate machine requirements needed to enable successful processing which this invention addresses.

SUMMARY OF THE INVENTION

[0004] In one aspect, the present invention provides a method of encapsulation, characterised by supplying to an encapsulation unit two films of like material capable of deforming elastically at least when partially solvated, and applying solvent to at least one of the films prior to encapsulation to cause partial solvation of the material surface, such that the partially solvated surface can adhere to and seal with the film material.

[0005] In the encapsulation unit, the substance to be encapsulated is supplied between the films, the films are formed, typically by a moulding process, into suitably shaped capsule portions which can adhere to each other as a result of the adhesive action of the partially solvated surface(s), and which seal together encapsulating the supplied substance, forming a capsule.

[0006] In a further aspect, the invention provides a method of encapsulation, comprising supplying two films of like material capable of deforming elastically at least when partially solvated; applying solvent to at least one of the films to cause partial solvation of the material surface; supplying substance to be encapsulated between the films;

forming the films into suitably shaped capsule portions which can adhere to each other as a result of the adhesive action of the partially solvated surface(s); and sealing the capsule portions together, encapsulating the supplied substance, to form a capsule.

[0007] Conventional gelatin encapsulation relies upon heat as the mechanism for sealing the two portions of the shell together to enclose the contents. The capsules made by this invention do not use heat as the primary means of securing the two portions of the capsule together, but instead make use of the adhesive effects manifested when suitable films are partially solvated at their surface.

[0008] The films may be of a range of different materials. Suitable materials soluble in water (hot or cold) include polyvinyl alcohol (PVA), alginate, hydroxypropyl methyl cellulose and polyethylene oxide. In this case it is simply necessary to apply water at a suitable temperature to the film or films to cause partial solvation. The resulting capsules release their contents when immersed in water or exposed to digestive juices and thus lend themselves to such uses as the release of fragrant oil in a bath or the release of dietary supplements after ingestion. If the material is only soluble in hot water then it is necessary to apply water at appropriately elevated temperatures, but the partial solvation and the subsequent adhesive effects are still effective to seal the capsule.

[0009] Non-water soluble film materials may also be used, such as polycaprolactone and gelatinized starch based materials. In this case it is necessary to apply a suitable solvent such as N-methyl pyrrolidone rather than water to at least one film surface to induce partial solvation. The partial solvation of such films causes them to soften, enabling them to take up the internal dimensions of a mould used to create a capsule. Capsules made from films which are biodegradable but not water soluble release their contents as a result of microbial action instead of immersion in water, and can find use in agricultural and industrial applications.

[0010] The currently preferred film material is PVA, preferably plasticised with glycerin. Suitable films are commercially available in a range of different grades, types and thicknesses. An appropriate film can be readily selected having regard to the intended use, capsule contents and desired capsule properties. For example, PVA film is available in thicknesses ranging between 20 and 1000 microns. For cosmetic applications, good results have been obtained with 80 micron PVA film, eg Hi-Selon (Hi-Selon is a Trade Mark) cold water soluble PVA B9, obtainable from British Traders and Shippers, 429-431 Rainham Road South, Dagenham, Essex.

[0011] It is preferred to use film material that becomes more flexible when in partially solvated conditions as this assists capsule formation. PVA has this property.

[0012] Instead of using pre-formed films, the films may be formed during the encapsulation method, eg by being cast from solution.

[0013] In practising the invention it is appropriate to use two films of like material. The films should be chemically alike but need not be identical in terms of factors such as grade, thickness etc.

[0014] The solvent is selected having regard to the film material, and is conveniently water in the case of water

soluble materials. The solvent should be applied in an appropriate amount, either in isolation or as part of a formulation containing materials such as thickening and/or wetting agents, to cause a suitable degree of partial solvation of the film material surface: this can be readily determined by experiment.

[0015] The solvent is preferably applied just prior to encapsulation at an appropriate location to obtain optimum speed of capsule production.

[0016] The solvent can be applied in a variety of different ways, including by atomisation such as in the form of a spray or jet, by dipping, electrostatic coating, roller, air knife or Meyer bar, or with a sponge. The currently preferred technique is by means of a gravure or flexo printing process as this enables ready control and regulation of the amount and uniformity of solvent application.

[0017] Solvent may be applied to one or both films as appropriate.

[0018] A vacuum is conveniently applied during capsule portion formation to assist deformation of the film material.

[0019] The invention may be used to encapsulate a wide range of substance in the form of solids, liquids or gases. The invention may, for example, be used to encapsulate all of the substances currently encapsulated in gelatin, such as drugs, vitamins, powders, oils, cosmetic preparations, drug delivery systems, paint etc. A typical cosmetic application is encapsulation of bath oils to produce capsules intended to be used in the bath, where the capsule shell dissolves releasing the oil into the bath water.

[0020] The capsules may have a variety of different sizes and shapes, usually determined by the shape of the mould employed. Typically the capsules are spherical or oval, but more elaborate forms eg based on fruit, animal or abstract shapes may be produced, usually for cosmetic applications.

[0021] In a further aspect the invention provides encapsulation apparatus comprising means for supplying two films of material to an encapsulation unit; an encapsulation unit; and means for supplying a solvent for the film material to at least one of the films upstream of the encapsulation unit.

[0022] The encapsulation unit may be based on those used in conventional apparatus currently used for gelatin encapsulation. In typical conventional apparatus, two separate ribbons of gelatin film are first produced by pouring heated liquid gelatin at a controlled rate onto the peripheral faces of two cylinders each rotating about a horizontal axis. The liquid gelatin cools on the cylinders and forms two ribbons which are fed from opposed sides to an encapsulation unit.

[0023] The encapsulation unit typically comprises a pair of similar moulding drums. The outer cylindrical face of each drum is formed with a plurality of indentations of desired form, eg hemispherical, arranged in a series of axially extending rows with, say, 5 or 6 indentations in each row. The drums are supported in side by side relationship, with a small gap there between, and are arranged for coordinated rotation in opposed directions (the left hand drum clockwise, and the right hand drum anticlockwise). A similar arrangement may be used in the present invention. Means for applying a vacuum inside the drums are conve-

niently included, to help pull the partially solvated films into the indentations and so assist capsule portion formation.

[0024] The encapsulation unit typically also comprises a reservoir of the substance to be encapsulated, eg bath oil, and an associated supply arrangement adapted simultaneously to supply a plurality of metered doses (one for each indentation in a row on the moulding drums) of the substance to the moulding drums at predefined time intervals. The arrangement may employ syringe pumps or the like. Again, a similar arrangement may be used in the present invention.

[0025] The metered doses are initially supplied to a heated injection segment located above the nip between the moulding drums, and including a row of a plurality of injectors aligned with the rows of indentations in the drums. A similar arrangement may again be used in the present invention although there is no need for the injection segment to be heated.

[0026] In use in conventional encapsulation, two gelatin ribbons are formed and fed over appropriate guide rollers etc to pass below the injection segment and into the nip between the counter-rotating rollers. Metered doses of the substance to be encapsulated are injected into the nip in synchronism with the drum rotation. The heating segment also acts to heat the gelatin films, which has the effect of making the films capable of sealing to each other and also makes the films more elastic. As the doses of substance are injected between the heated films, the films deform to line the indentations, forming series of pairs of opposed capsule halves containing the substance. The pairs of capsule halves are brought together, sealed and cut from the gelatin ribbons on continued rotation of the drums, thus forming capsules containing the substance. A typical production rate is one row of capsules every 2 seconds. Instead of cutting the capsules from the ribbons, they may be left integral with the ribbons. The resulting capsules are collected below. The capsules are then typically tumbled in a hot air dryer and then kept in a controlled humidity environment for about 2 days to stabilise the capsules. The capsules are then ready for use or sale.

[0027] As noted above, the present invention may use an encapsulation unit generally as described. It is not necessary for the injection segment to be heated, as the present invention does not rely on heating for sealing, as in the prior art, so processing costs may be reduced somewhat and faster processing may be possible. However, the films of the present invention may optionally be heated: in some cases this may enhance film elasticity and sealing.

[0028] Conventional encapsulation apparatus would, of course, also need modification by removal of the gelatin ribbon formation equipment and substitution of equipment for supplying (and possibly also forming) the films of material used in the present invention. In a simple case this could just be a pair of spindles each for receiving a roll of the film, to be fed to the encapsulation unit in known manner.

[0029] A further necessary modification is addition of mean for applying solvent to one or both of the films, preferably located just upstream of the encapsulation unit. As noted above these means could be a spray or jet arrangement, a bath for dipping, an electrostatic coating unit, a roller, an air knife, a Meyer bar, a sponge etc. Preferably, however, a gravure or flexo printing unit is used.

[0030] Means for applying a vacuum within the moulding drums are conveniently also incorporated.

[0031] The invention also covers capsules formed in accordance with a method or by use of apparatus in accordance with the invention.

[0032] The invention also includes within its scope a capsule having a shell comprising material capable of adhering to and sealing with itself when in partially solvated condition.

[0033] In a preferred aspect the invention covers a capsule having a shell comprising polyvinyl alcohol.

[0034] The invention will further be described, by way of illustration, in the following Example and with reference to the accompanying drawing, in which:

[0035] **FIG. 1** is a schematic illustration of one embodiment of apparatus in accordance with the invention.

DETAILED DESCRIPTION OF THE EMBODIMENT

[0036] The apparatus illustrated in **FIG. 1** comprises two rolls **10, 12** of film **14, 16** of like material rotatably supported on spindles **18, 20**, with associated means (not shown) for feeding film from the rolls to an encapsulation unit **22**. The films first pass over respective support rollers **24, 26** and then through respective flexographic printing units **28, 30** with associated backing rollers **32, 34** for supply to a surface of the film, in an adjustable manner, of accurately metered quantities of solvent for the film material. In an experimental apparatus, laboratory scale narrow flexographic heads from RK Print Coat Instruments Limited, Litlington, Royston, U.K. were used for this purpose.

[0037] The encapsulation unit **22** is based on the encapsulation unit of conventional apparatus, as discussed above, and comprises a reservoir containing the substance to be encapsulated and an associated supply arrangement for supplying metered doses of the substance. The reservoir and supply arrangement are represented schematically at **36**.

[0038] The encapsulation unit further comprises a pair of similar moulding drums **38, 40**. The outer cylindrical face of each drum is formed with a plurality of hemispherical indentations **42** arranged in a series of axially extending rows with 6 indentations in each row. Vacuum means (not shown) may optionally be included for applying a vacuum inside the drums to assist deformation of the film material. The drums are supported in side by side relationship with a small gap therebetween, and are arranged for coordinated rotation in opposed directions (the left hand drum **38** clockwise, and the right hand drum **40** anticlockwise). An injection segment **44** is located above the nip between the moulding drums to receive substance from reservoir and supply arrangement **36**, as illustrated schematically by line **46**. Injection segment **44** includes an array of 6 injectors (not shown) aligned with the rows of indentations in the drums.

[0039] In use, film **14, 16** is supplied at an appropriate rate to the encapsulation unit **22**, passing over support rollers **24, 26** and through printing units **28, 30** where solvent is applied to the film surface in appropriate amount. The films then pass below the injection segment **44** and into the nip between drums **38, 40** which are counter-rotating at an appropriate speed. Metered doses of the substance to be

encapsulated are injected into the nip from injection segment **44** in synchronism with the drum rotation. As the doses of substance are injected between the films, the films deform to line the indentations **42** of one row in each of the drums, possibly assisted by application of a vacuum, forming a series of 6 pairs of opposed capsule halves containing the substance. On continued rotation of the drums the pairs of capsule halves are brought together and seal because of the adhesive effect caused by partial solvation of the film surface, producing a row of surface-containing capsules which are cut from the films. One row of 6 capsules is produced approximately every 2 seconds. The resulting capsules **48** are collected in a tray **50**, and the waste film remaining is disposed of. The capsules are dried and stabilised in generally conventional manner.

EXAMPLE

[0040] Using the apparatus of **FIG. 1** encapsulation of a typical bath oil cosmetic product was carried out using Hi-Selon cold water soluble plasticised polyvinyl alcohol (B9) film, 80 micron thick, with partial solvation carried out by application of water. This resulted in production of good quality capsules, suitable for cosmetic use.

1. A method of encapsulation, characterised by supplying to an encapsulation unit two films of like material capable of deforming elastically at least when partially solvated, and applying solvent to at least one of the films prior to encapsulation to cause partial solvation of the material surface, such that the partially solvated surface can adhere to and seal with the film material.

2. A method of encapsulation, comprising supplying two films of like material capable of deforming elastically at least when partially solvated; applying solvent to at least one of the films to cause partial solvation of the material surface; supplying substance to be encapsulated between the films; forming the films into suitably shaped capsule portions which can adhere to each other as a result of the adhesive action of the partially solvated surface(s); and sealing the capsule portions together, encapsulating the supplied substance, to form a capsule.

3. A method according to claim 2, wherein a vacuum is applied during capsule portion formation to assist deformation of the film material.

4. A method according to claim 1, 2 or 3, wherein the film material is selected from polyvinyl alcohol, alginate, hydroxypropyl methyl cellulose, polyethylene oxide, polycaprolactone and gelatinized starch based materials.

5. A method according to claim 4, wherein the film material is polyvinyl alcohol and the solvent is water.

6. A method according to any one of the preceding claims, wherein the film material becomes more flexible on partial solvation.

7. A method according to any one of the preceding claims, wherein the solvent is applied just prior to encapsulation.

8. A method according to any one of the preceding claims, wherein the solvent applied by means of a gravure or flexo printing process.

9. Encapsulation apparatus comprising means for supplying two films of material to an encapsulation unit; an encapsulation unit; and means for supplying a solvent for the film material to at least one of the films upstream of the encapsulation unit.

10. Apparatus according to claim 9, wherein the encapsulation unit comprises a pair of counter-rotating moulding

drums, and an associated arrangement for coordinated supply of substance to be encapsulated.

11. Apparatus according to claim 10, including means for applying a vacuum inside the moulding drums.

* * * * *