



Office de la Propriété

Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2257272 C 2005/11/15

(11)(21) 2 257 272

(12) BREVET CANADIEN  
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 1997/06/05  
(87) Date publication PCT/PCT Publication Date: 1997/12/11  
(45) Date de délivrance/Issue Date: 2005/11/15  
(85) Entrée phase nationale/National Entry: 1998/11/30  
(86) N° demande PCT/PCT Application No.: US 1997/010358  
(87) N° publication PCT/PCT Publication No.: 1997/046750  
(30) Priorités/Priorities: 1996/06/07 (60/019,277) US;  
1997/06/04 (08/868,529) US

(51) Cl.Int.<sup>6</sup>/Int.Cl.<sup>6</sup> D04H 3/16


(72) Inventeurs/Inventors:  
RUDISILL, EDGAR N., US;  
FRANKFORT, HANS RUDOLPH EDWARD, US;  
JANIS, RUDOLPH F., US;  
JOHNSON, STEPHEN B., US;  
MCGINTY, DAVID JACKSON, US;  
SAMUELSON, H. VAUGHN, US;  
SHIN, HYUNKOOK, US;  
VASSILATOS, GEORGE, US

(73) Propriétaire/Owner:  
E.I. DU PONT DE NEMOURS AND COMPANY, US

(74) Agent: BENNETT JONES LLP

(54) Titre : STRUCTURES FIBREUSES NON TISSEES A DENIERS FINS OU FAIBLES

(54) Title: LOW OR SUB-DENIER NONWOVEN FIBROUS STRUCTURES

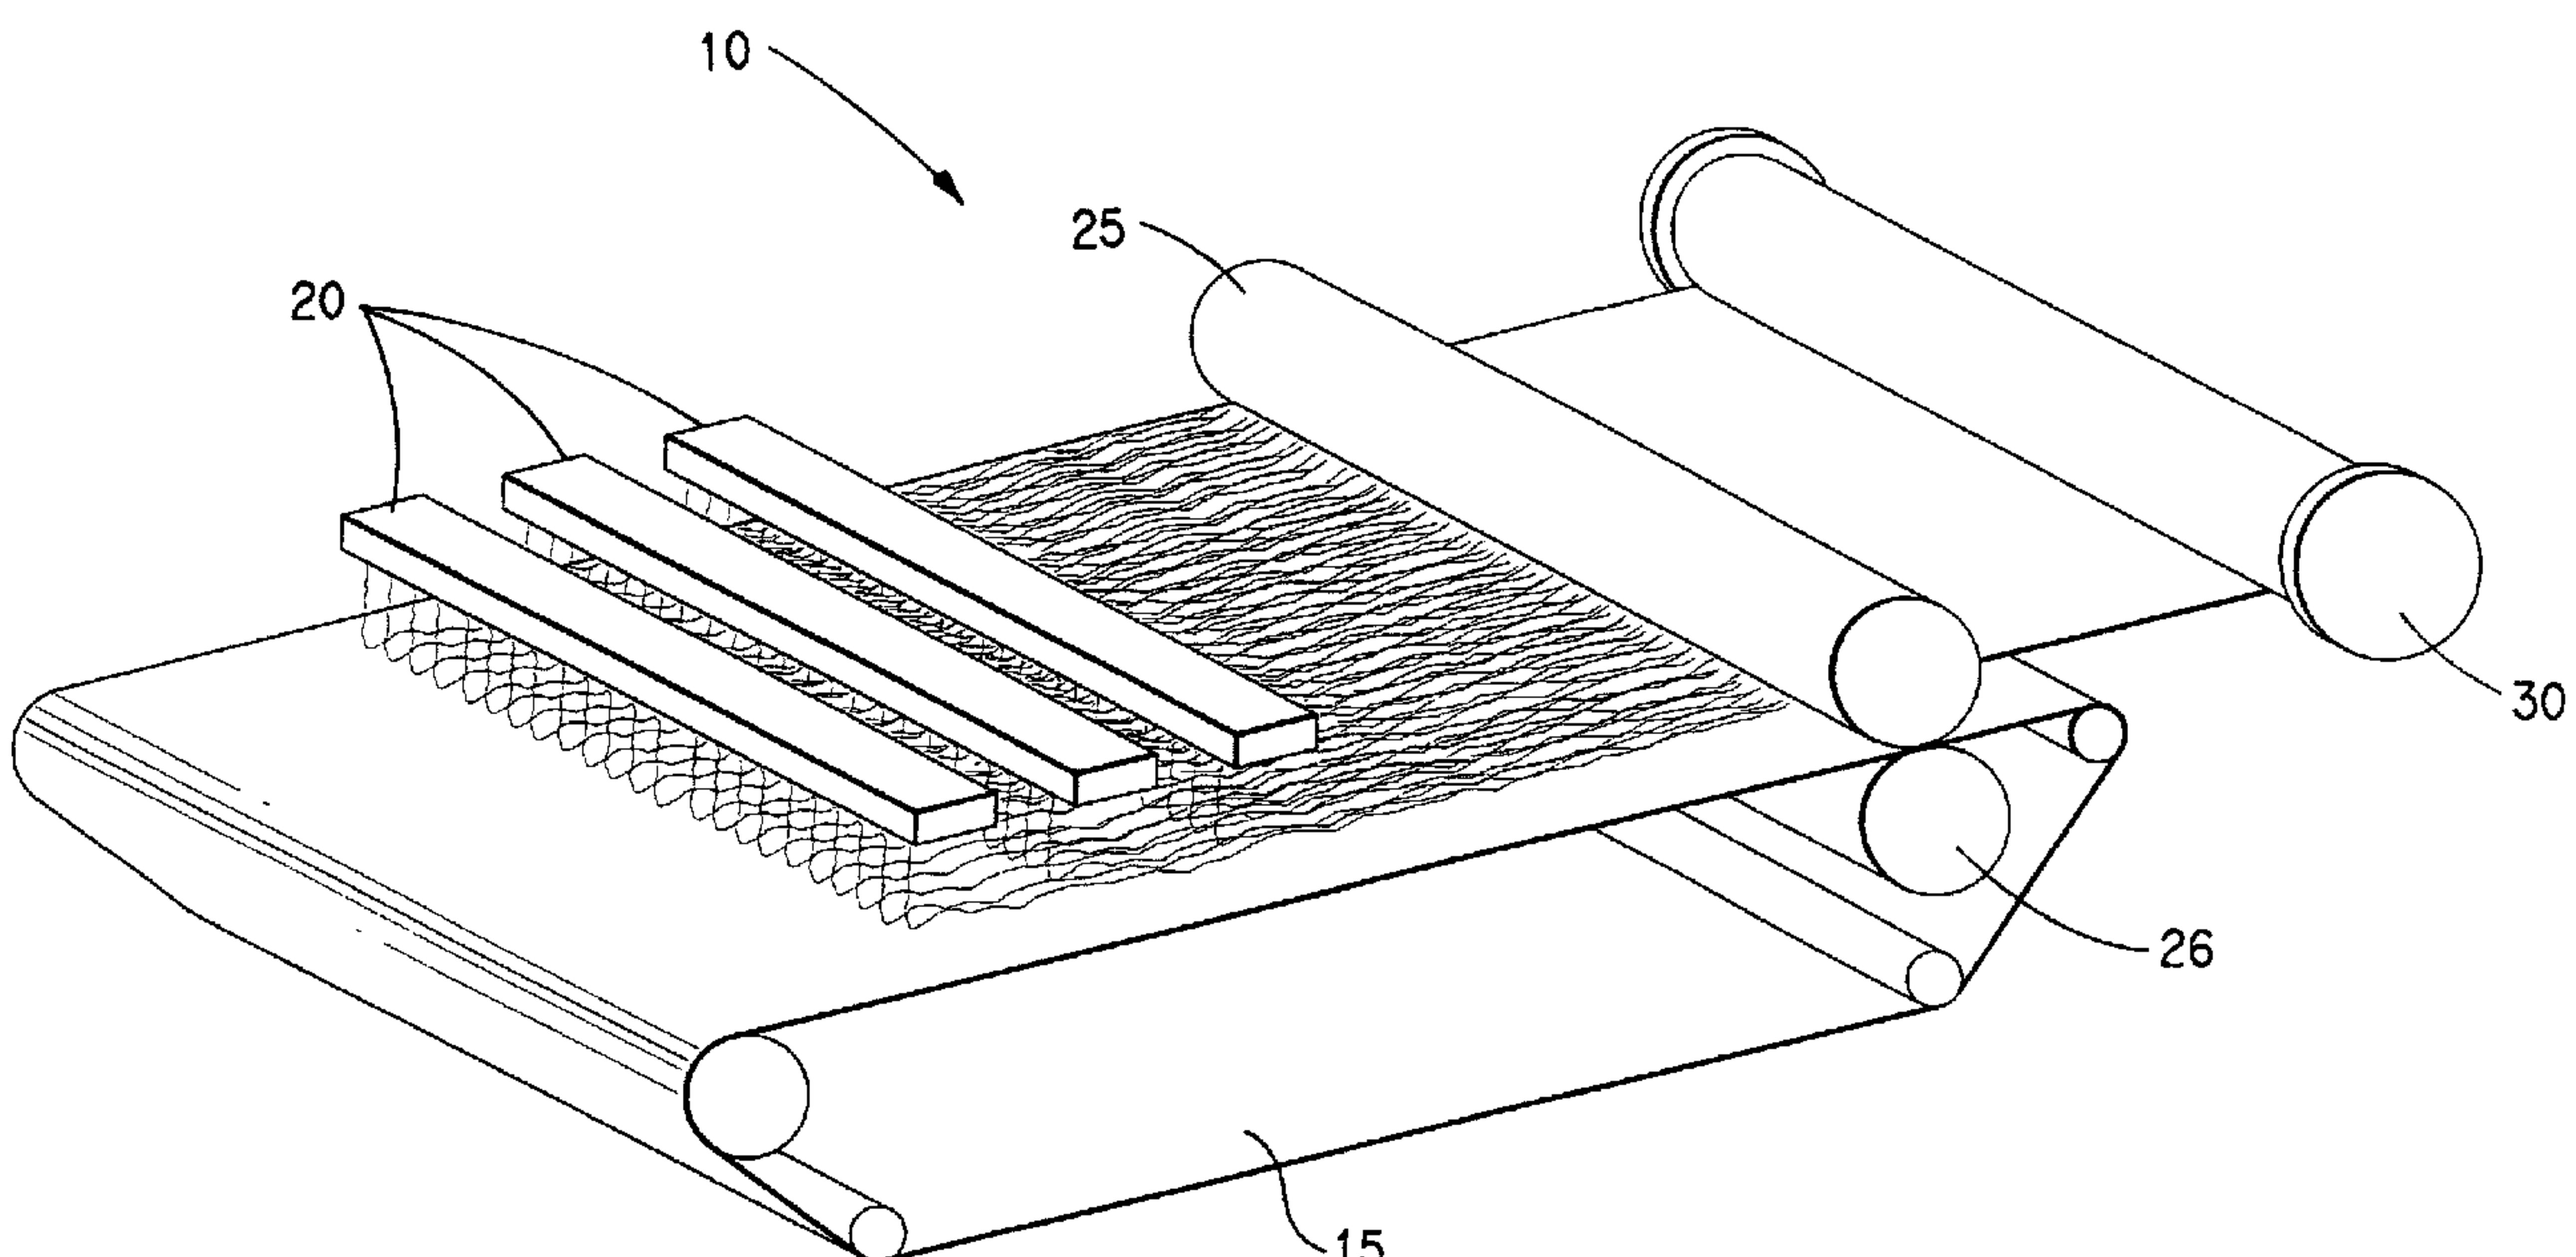

(57) Abrégé/Abstract:

This invention relates to a new nonwoven material which has very high Frazier permeability while having substantial hydrostatic head liquid barrier properties. The material is comprised of fibers which are approximately one denier and finer fibers which have sufficient strength properties so as not to need a support scrim. The fabric is quite comfortable because of its breathability, quite soft because of its construction, and protective from liquids from rain to hazardous chemicals.




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>D04H 3/16, D01F 8/14, D04H 13/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 97/46750</b>	
			(43) International Publication Date: 11 December 1997 (11.12.97)	
(21) International Application Number: <b>PCT/US97/10358</b>			(81) Designated States: AL, AM, AU, AZ, BA, BB, BG, BR, BY, CA, CN, CU, CZ, EE, GE, HU, IL, IS, JP, KG, KP, KR, KZ, LC, LK, LR, LT, LV, MD, MG, MK, MN, MX, NO, NZ, PL, RO, RU, SG, SI, SK, TJ, TM, TR, TT, UA, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 5 June 1997 (05.06.97)				
(30) Priority Data: 60/019,277 7 June 1996 (07.06.96) US 08/868,529 4 June 1997 (04.06.97) US				
(71) Applicant: E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).			(Published) <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(72) Inventors: RUDISILL, Edgar, N.; 5624 Regatta Boulevard, Nashville, TN 37076 (US). FRANKFORT, Hans, Rudolph, Edward; 4408 Treetops Circle, Winterville, NC 28590 (US). JANIS, Rudolph, F.; 2100 Walhala Drive, Richmond, VA 23236 (US). JOHNSON, Stephen, B.; 218 Williams Road, Wilmington, NC 28409 (US). MC GINTY, David, Jackson; 2803 Southwell Place, Midlothian, VA 23113 (US). SAMUELSON, H., Vaughn; 69 Bullock Road, Chadds Ford, PA 19317 (US). SHIN, Hyunkook; 134 Hitching Post Drive, Wilmington, DE 19803 (US). VASSILATOS, George; 2811 Kennedy Road, Wilmington, DE 19810 (US).				
(74) Agent: WESTPHAL, David, W.; E.I. du Pont de Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).				

## (54) Title: LOW OR SUB-DENIER NONWOVEN FIBROUS STRUCTURES

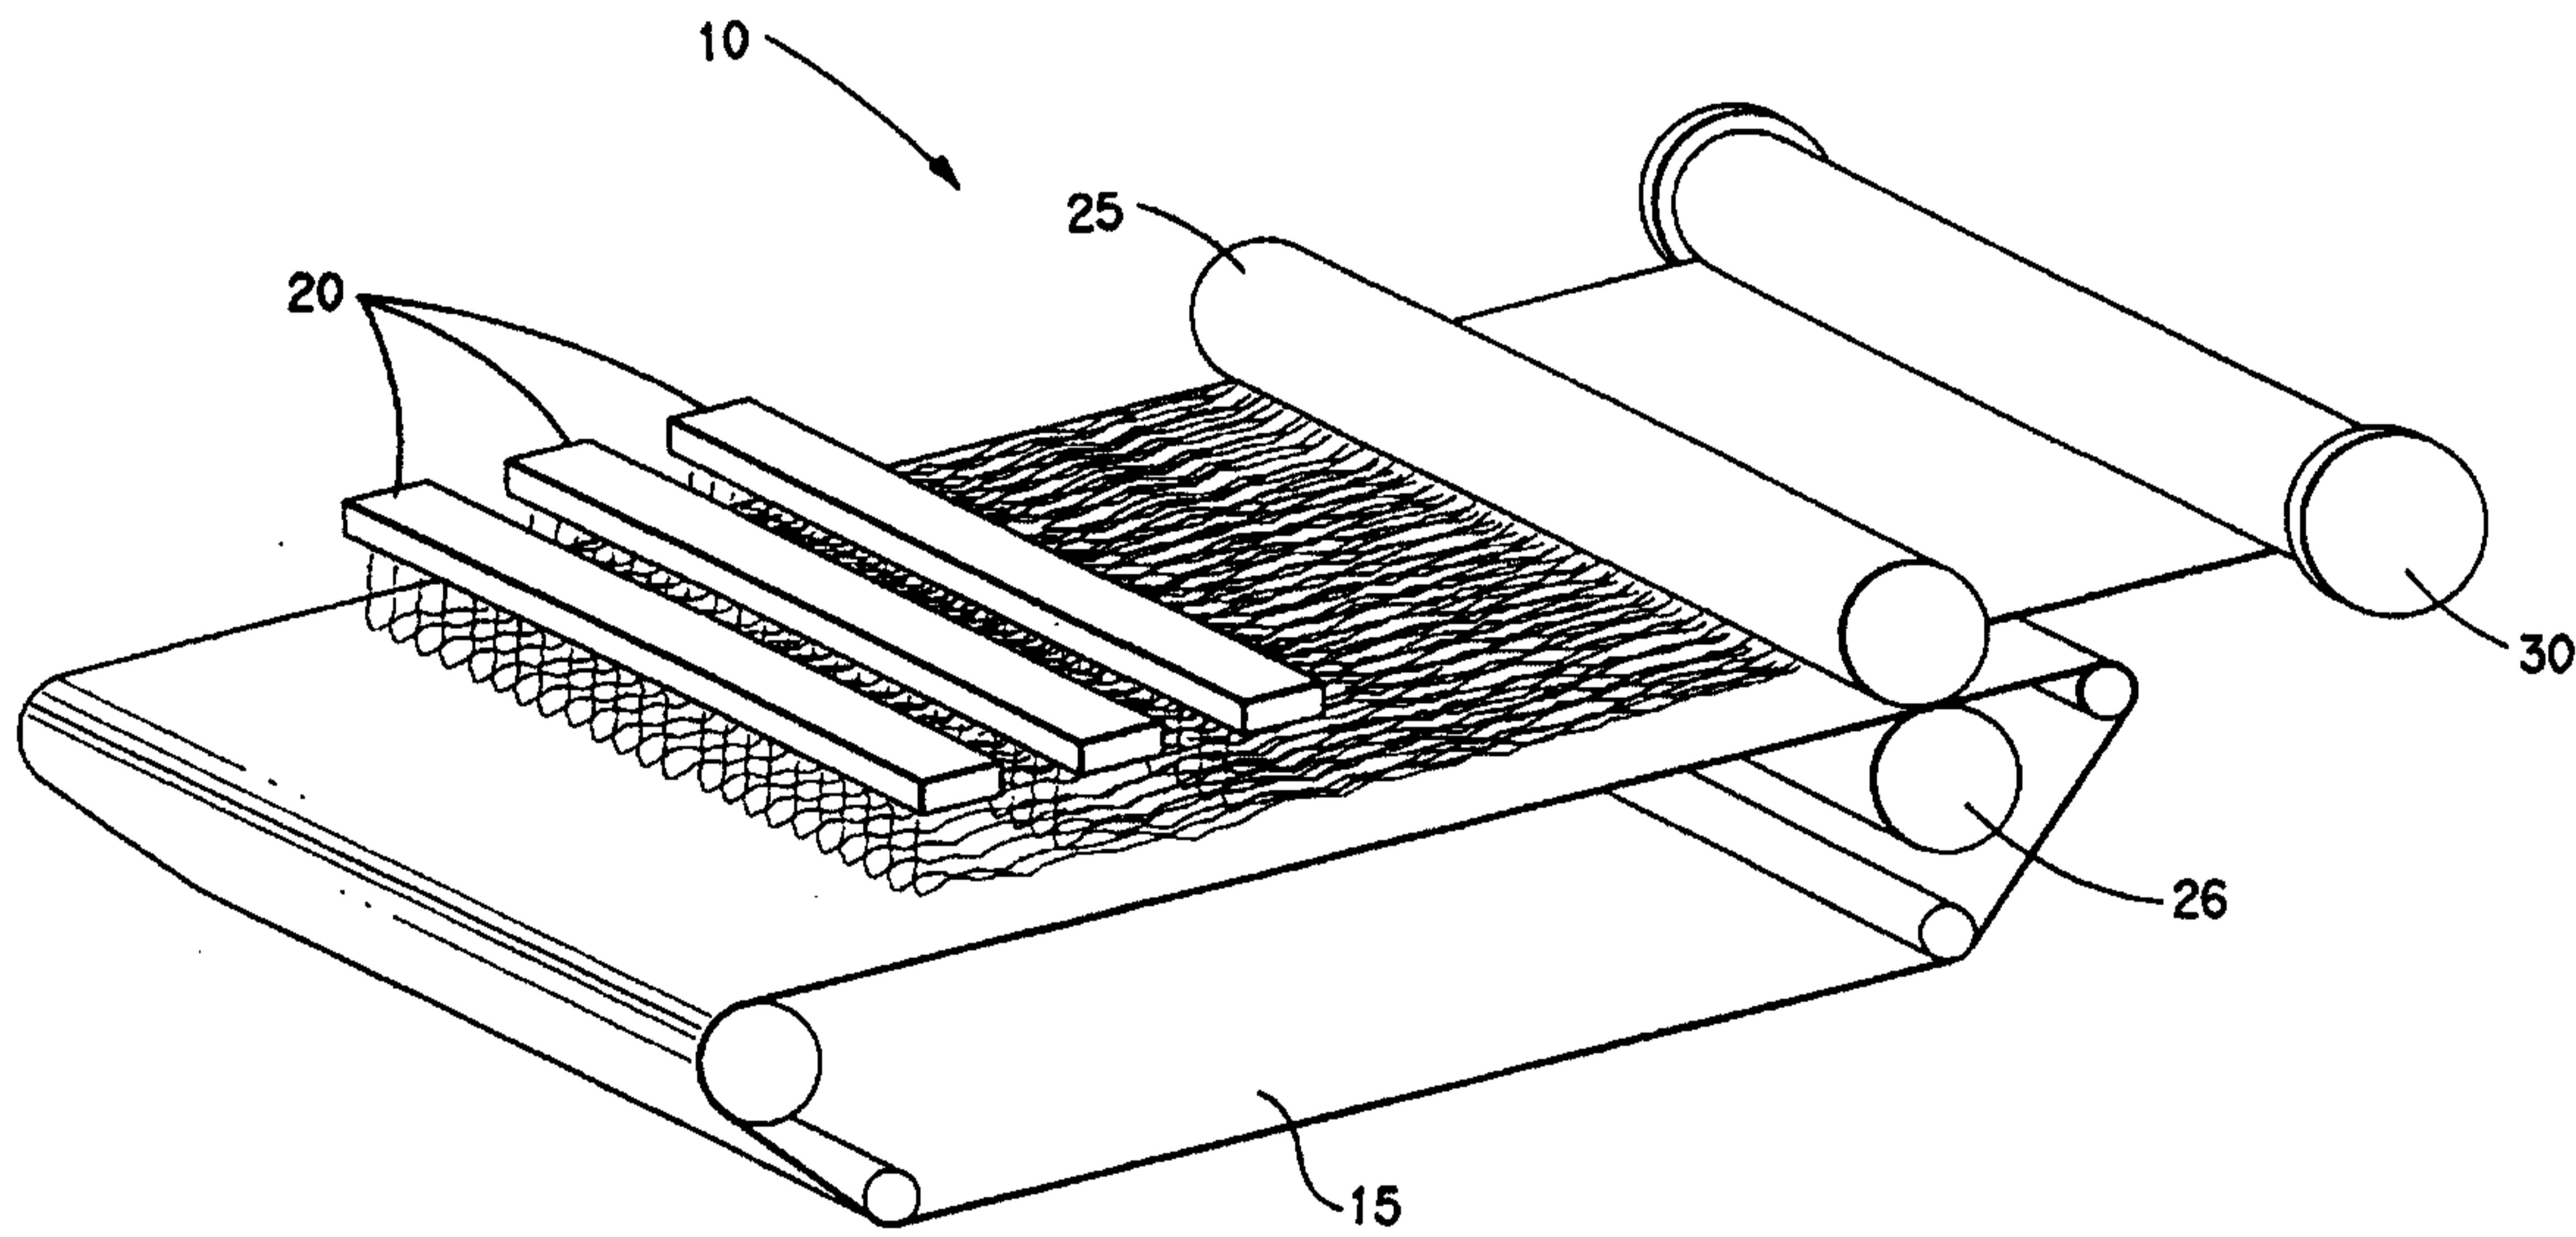

## (57) Abstract.

This invention relates to a new nonwoven material which has very high Frazier permeability while having substantial hydrostatic head liquid barrier properties. The material is comprised of fibers which are approximately one denier and finer fibers which have sufficient strength properties so as not to need a support scrim. The fabric is quite comfortable because of its breathability, quite soft because of its construction, and protective from liquids from rain to hazardous chemicals.

## LOW OR SUB-DENIER NONWOVEN FIBROUS STRUCTURES

### Field of the Invention

This invention relates to nonwoven fibrous structures and more particularly to breathable fabrics and sheet structures formed by fibers which 5 are held together without weaving or knitting.

### Background of the Invention

Nonwoven fibrous structures have been around for many years and today there are a number of different nonwoven technologies in commercial use. To illustrate the breadth of nonwoven technologies, paper 10 is probably one of the earliest developed nonwoven fibrous structures. Nonwoven technologies continue to be developed by those seeking new applications and competitive advantages. One broad market area that has proven to be highly desirable because of its large volume and economics is the protective apparel market. This market comprises protection from 15 hazardous chemicals such as in chemical spill clean up, from liquids such as blood in the medical field and from dry particulates or other hazards such as painting or asbestos removal. This market is served by a number of competing technologies.

Focusing simply on the medical protective apparel market, 20 E. I. du Pont de Nemours and Company (DuPont) makes Sontara® spunlaced fabrics which are used extensively for medical gowns and drapes and, for certain applications within the medical field, Tyvek® spunbonded olefin.

Sontara® spunlaced fabrics have long been used in the medical 25 field because of their exceptional performance and comfort. Sontara® spunlaced fabrics for medical protective apparel uses are typically comprised staple length polyester fiber hydroentangled with woodpulp. The fabric is finished with a moisture repellent coating to render it strike through moisture resistant.

Tyvek® spunbonded olefin is particularly useful in medical 30 packaging where it provides valuable advantages such as permitting

sterilization in the package. It also is extremely low linting thereby minimizing contamination in the operating room.

Other technologies that compete in the medical field include composite or laminated products. The composite provides a balance of properties suitable for the end use. One competitive technology is generally called "SMS" in the industry for Spunbond/Meltblown/Spunbond. The basic SMS nonwoven material is described in US Patent 4,041,203 with further improvements described in US Patents 4,374,888 and 4,041,203. The spunbond outer layers are comprised of spunbond nonwoven which provides strength but is not able to attain the barrier properties of the meltblown inner layer. The technology for making meltblown fibers is well suited to making fine low denier fibers which are able to have barrier and breathability but is not suited to obtaining suitable strength to withstand use as a garment. Meltblown fiber webs are also disclosed in European Patent Publication EP-A-0674035.

US Patents 4,622,259 and 4,908,163 are directed to an improvement over SMS technology by making the meltblown fibers with improved tensile properties. By providing better meltblown fibers, one may avoid applying the scrim reinforcement and obtain a lighter weight fabric.

It is an object of the present invention to provide a further improved nonwoven structure which has a balance of properties which are better suited to barrier end uses.

It is further object of the present invention to provide a nonwoven structure that has more substantial barrier and breathability properties compared to currently known barrier materials.

#### Summary of the Invention

The above and other objects of the invention are achieved by a flexible sheet material having a Frazier permeability of at least about 70 m<sup>3</sup>/min-m<sup>2</sup> and an unsupported hydrostatic head of at least about 15 centimeters.

The invention further relates to a flexible sheet material having a Frazier permeability of at least about 28 m<sup>3</sup>/min-m<sup>2</sup> and an unsupported hydrostatic head of at least about 30 centimeters.

The invention also relates to a flexible sheet material having a Frazier permeability of at least about  $15 \text{ m}^3/\text{min}\cdot\text{m}^2$  and a hydrostatic head of at least about 40 centimeters.

5 The invention includes a flexible sheet material having a Frazier permeability of at least about  $1 \text{ m}^3/\text{min}\cdot\text{m}^2$  and a hydrostatic head of at least about 80 centimeters.

In another aspect the invention comprises a flexible sheet material comprised of meltspun nonwoven fibers having an average length of at least about 4 cm with a cross section of a substantial majority of the 10 fibers is less than  $70 \mu\text{m}^2$  and the average fiber strength is at least 275  $\text{N}/\text{mm}^2$ .

In a still further aspect, the invention comprises a flexible sheet material formed of nonwoven fibers wherein the sheet has a basis weight of at least about  $13 \text{ g}/\text{m}^2$  and up to about  $75 \text{ g}/\text{m}^2$ , and wherein 15 substantially all of the fibers are continuous meltspun fibers, a substantial majority by weight of the fibers have a cross section of less than about 90 microns, and wherein the sheet material has a Frazier permeability of at least about  $1 \text{ m}^3/\text{min}\cdot\text{m}^2$  and a hydrostatic head of at least about 25 centimeters.

20 The invention further relates to a radiation sterilization stable sheath-core multi-component fiber suited for making a thermally bonded nonwoven fabric wherein the core polymer is polyethylene teraphthalate and the sheath fiber is polypropylene teraphthalate.

#### Brief Description of the Drawings

25 The invention will be more easily understood by a detailed explanation of the invention including drawings. Accordingly, drawings which are particularly suited for explaining the invention are attached herewith; however, it should be understood that such drawings are for explanation only and are not necessarily to scale. The drawings are 30 briefly described as follows:

Figure 1 is a perspective view of a first preferred embodiment for making the inventive fabric;

Figure 2 is a perspective view of a second preferred embodiment for making the inventive fabric;

Figure 3 is a chart illustrating one of the properties of the inventive fiber of the present invention;

Figure 4 is second chart illustrating a second property of the inventive fiber of the present invention;

5 Figure 5 is a third chart illustrating a third property of the inventive fiber of the present invention; and

Figure 6 is an enlarged cross sectional view of a sheath-core bi-component fiber.

#### Detailed Description of the Preferred Embodiment

10 Turning now to the drawings there are a number of alternative techniques for making the inventive materials. In Figure 1, there is illustrated a first preferred embodiment of a meltspun low denier spinning system, generally referred to by the number 10 for making a continuous roll of fabric. The system 10 comprises a continuous belt 15 running over a 15 series of rollers. The belt 15 includes a generally horizontal run under a series of one or more spinning beams 20. In each spinning beam 20 is provided molten polymer and a large number of very small holes. The polymer exits through the holes forming a single fiber at each hole. The fibers are preferably hard yarn fibers which are strong and resist shrinkage.

20 Typically, hard yarn fibers are made by quenching and drawing the fibers after they are spun so that the polymer chains are oriented within the fiber. It has been found, as will be described below, that hard yarn fibers may also be made by high speed spinning. Such high speed spinning may be the key to suitable fiber properties as well as suitable productivity to make the fabric 25 price competitive.

Once the strong fibers have been formed, the fast moving and very fine fibers are directed to the moving belt 15. This is no small task due to the number of fibers and their reactivity to the turbulent air forces in the vicinity. Suitable guides, preferably including air baffles, are provided to 30 maintain some control as the fibers are randomly arranged on the belt 15. One additional alternative for controlling the fibers may be to electrostatically charge the fibers and perhaps oppositely charge the belt 15 so that the fibers will be pinned to the belt once they are laid down. The web

of fibers are thereafter bonded together to form the fabric. The bonding may be accomplished by any suitable technique including thermal bonding or adhesive bonding. Hot air bonding and ultrasonic bonding may provide attractive alternatives, but thermal bonding with the illustrated pinch rolls 25 5 and 26 is probably preferred. It is also recognized that the sheet material may be point bonded for many applications to provide a fabric like hand and feel, although there may be other end uses for which it is preferred that the sheet be area bonded with a smoother finish. With the point bonding finish, the bonding pattern and percentage of the sheet material bonded will be 10 dictated so as to control fiber liberation and pilling as well as other considerations. The fabric is then rolled up on a roll 30 for storage and subsequent finishing as desired.

A second arrangement for making the inventive material of the present invention is shown in Figure 2. In Figure 2, there is shown a wetlay 15 nonwoven fabric forming system generally referred to by the number 50. The wet lay system 50 includes a foraminous or screen belt 55 running over a series of rollers. A trough 60 is arranged over the belt 55 to deposit a slurry of liquid and discontinuous fiber thereon. As the slurry moves along with the belt 55, the liquid passes through the openings in the belt 55 and 20 into a pan 61 (also called a pit). The fiber is randomly arranged and is bonded together at the pinch rollers 65 and 66. It should be recognized that there are a number of techniques for bonding the fibers together including through air bonding, resin bonding as well as other suitable bonding techniques. The nonwoven fabric is then rolled up on a roll 70 for storage 25 or subsequent finishing.

The fiber in the inventive fabric is a small denier polymeric fiber which forms numerous, but very small pores. Putting small denier fiber in a fabric to obtain high barrier is generally known in the art and is not new. However, it has been found that when hard yarn meltspun microfibers are 30 used to create a nonwoven fibrous structure, the resulting fabrics have extraordinarily high Frazier permeability. This is new.

It also appears that meltspun microfibers have sufficient strength to form a barrier fabric without the need for any type of supporting scrim

thus saving the additional materials and cost of such supporting materials. While strength will be an important consideration to a buyer of such materials, stability will also be important. It has been found that microfibers may be meltspun at high speed that has low shrinkage. A fabric having high 5 barrier and permeability properties that is strong and stable will have substantial value to makers and wearers of protective garments.

A potential key component for the success of the present invention to a nonwoven fabric may be in the creation of a hardened meltspun microfiber that is created without the steps of annealing and 10 drawing. In particular, it has been found that spinning microfibers at high spinning speeds causes considerable changes in the properties of the fibers. Experiments were tested with 2GT polyester at a range of spinning speeds to show the effect of the spinning speed differences on the properties. As 15 illustrated in the charts in Figures 3, 4, and 5, the tenacity dramatically increases, while the elongation to break and boil off shrinkage dramatically decrease. The data is also tabulated in the following Table A:

**Table A**

Spinning Speed (m/min)	3998	5029	5761	5943	6401
No. of Filaments	200	200	200	200	200
Fiber Size (denier)	0.5	0.5	0.5	0.5	0.5
Boil Off Shrinkage (%)	50.1	15.1	12.1	7.8	8.1
Tenacity (g/denier)	3.3	-	3.9	3.9	3.8
Elongation to Break (%)	49.0	-	33.0	31.8	33.2

20

It should be fairly clear that microfibers made at high spinning speeds will obviate the need for annealing and drawing. The microfibers are strong and stable. Such high production speeds will be desirable for high 25 productive rates of nonwoven fabrics although the handling of such small fibers will be a challenge for any commercial installation.

In Tables B-D below, there is more data to confirm the foregoing data. The next group includes round cross sections polyester as well as bi-lobe cross sections:

5 Table B

Spinning Speed (m/min)	2743	3200	3658	4115	4115
No. of Filaments	100	100	100	100	100
Fiber Size (denier)	0.7	0.7	0.7	0.63	0.55
Cross Section	Round	Round	Round	Round	Round
Boil Off Shrinkage (%)	34	18	5.8	4.0	4.2
Tenacity (g/denier)	2.7	3.0	-	3.2	3.3
Elongation to Break (%)	119	108	91	80	80

Table C

Spinning Speed (m/min)	3658	4435	3200	3658	4115
No. of Filaments	100	100	100	100	100
Fiber Size (denier)	0.63	0.55	0.72	0.78	0.48
Cross Section	Round	Round	Bi-Lobe	Bi-Lobe	Bi-Lobe
Boil Off Shrinkage (%)	5.5	4.2	7.1	7.6	4.1
Tenacity (g/denier)	3.0	3.1	3.0	3.1	3.4
Elongation to Break (%)	86	70	102	96	75

**Table D**

Spinning Speed (m/min)	3200	3200
No. of Filaments	68	100
Fiber Size (denier)	0.78	0.53
Cross Section	Round	Round
Boil Off Shrinkage (%)	4.9	4.5
Dry Heat Shrinkage (%)	4.4	4.3
Tenacity (g/denier)	3.3	3.0
Elongation to Break (%)	132	103

Clearly, it is an improvement in the art to provide fiber at a higher rate with desired properties that are obtained without the ordinary additional 5 processing. It is particularly advantageous in the context of the improved nonwoven fabric.

In one aspect of the invention, the fabric may be subjected to a cold nip to compress the fabric. Under microscopic analysis, the fibers in the compressed fabric appear to be stacked on one another without having 10 lost the basic cross sectional shape of the fiber. It appears that this is a relevant aspect of the invention since each fiber appears to have not been distorted or substantially flattened which would close the pores. As a result, the fabric has an increase in the barrier properties as measured by hydrostatic head seems to maintain a high void ratio and low density and very high 15 Frazier permeability.

From a macroscopic analysis, the inventive fabrics are generally characterized have a balance of tremendously high Frazier permeability while exhibiting substantial hydrostatic head pressures. For example in some test fabrics the initial hydrostatic head may be at a level that is about 20 30 cm while the Frazier is above 65 m<sup>3</sup>/min-m<sup>2</sup>. The Frazier permeability and Hydrostatic head may be readily modified simply by cold calendering the inventive fabric. After calendering, the hydrostatic head may be brought up to as much as 45 to 50 cm while the Frazier remains in excess of 25 m<sup>3</sup>/min-m<sup>2</sup>. A fabric having high barrier properties with high breathability

is believed to be highly desirable as a protective fabric in the medical field and possibly many other fields.

While the description of the invention has thus far been related to meltspun fibers which are only recently being made in the sub-denier sizes; 5 however, there may be other spinning technologies either now developed or yet to be invented that could provide suitable polymeric fibers. The general range of preferred fibers have cross sectional sizes of between about 6 and about 90  $\mu\text{m}^2$  where fibers having a range from about 20 to about 70  $\mu\text{m}^2$  is more preferred and a range of about 33 to about 54  $\mu\text{m}^2$  is most preferred. 10 Fiber sizes are conventionally described as denier or decitex. In the present circumstance, it is believed that the properties are achieved in part by a function of the physical size of the fibers. As denier and decitex relate to the weight of a long length of fiber, the density of the polymer may create some misleading information. For example, if two fibers have the same cross 15 section, but one is made of polyethylene while the other comprises polyester, the polyester would have a greater denier since it tends to be more dense than polyethylene. However, it can generally be regarded that the preferred range of fiber denier is less than or nearly equal to about 1.

As noted above the fiber should be a hardened fiber. The cross 20 sectional shape is not yet believed to be critical to the invention, but most compact cross sections are presumed to be best as the pores will most likely be small but not closed. Clearly, there may be some enhancements to the fabrics of the present invention by various cross sectional shapes of the fibers. At the same time, the fibers are preferred to have sufficient tensile 25 strength that a support layer is not required. This is probably achieved by being composed of fibers having a minimum strength of at least about 275 MPa. Such fiber should easily provide sheet grab strengths in excess of 1 N/g/m<sup>2</sup> normalized for basis weight. The fiber strength of the present invention will accommodate most applications without reinforcement such 30 as the meltblown layer in SMS. Melt blown fibers typically have tensile strengths from about 26 to about 42 MPa due to the lack of polymer orientation in the fiber. In this application, hydrostatic head pressures are measured on the various sheet examples in an unsupported manner so that if

the sheets do not comprise a sufficient number of strong fibers, the measurement is not attainable. Thus, unsupported hydrostatic head pressure is a measure of barrier as well as an indication that the sheet has the intrinsic strength to support the hydrostatic head pressure.

5 It should be recognized that although the inventive fabric has been characterized by hydrostatic head, that the small pores will make a good barrier for dry particulate materials. Thus, with the high Frazier permeability that the fabric may be suitable for some filter applications. It should be recognized that basis weight of the sheet material will have some  
10 effect on the balance of hydrostatic head and permeability. In most cases, it will be desirable from both an economic and productivity standpoint as well as property balance standpoint to have the basis weight be about or below 75 g/m<sup>2</sup>. However, there are potential end uses where heavier and higher barrier sheet materials would be desirable such as certain protective apparel  
15 applications, for example. In such cases, the basis weight may be greater than about 70 g/m<sup>2</sup> and could be quite heavy such 200 g/m<sup>2</sup>, for example.

20 The preferred fiber would be any of a variety of polymers or copolymers including polyethylene, polypropylene, polyester, and any other melt spinnable fiber which would be less than approximately 1.2 decitex per filament. The fiber would be a hard yarn which is conventionally fully drawn and annealed having strength and low shrinkage. As noted above, fibers hardened by high speed melt spinning may be suitable for the present invention. The fabric properties may also be modified by variations of the fiber cross sections.

25 A number of Examples of the present invention have been prepared as follows

#### EXAMPLES 1 - 37

30 Fabric samples were made with a lab batch wet-lay apparatus with meltspun PET fiber cut to 5 mm. The fiber was manufactured by Teijen Fibers and is commercially available. All samples were treated with any acrylic binder (Barriercoat 1708<sup>TM</sup>) to provide the sample with strength and finished with a repellent finish (Frepel 114<sup>TM</sup>, Zonyl 8315<sup>TM</sup>, NaCl, Isopropyl Alcohol) to give hydrophobic properties. Fiber size is below reported as

decitex for round cross sectional fiber. As noted above, the fiber in the present invention need not necessarily be round. Thus, it may be more clear to recognize that decitex is a measure of both polymer density and cross sectional area of the fibers. Thus, for a 0.333 decitex (0.3 denier) PET fiber 5 (2GT polyester) the cross sectional area is about 25 microns ( $\mu\text{m}^2$ ). A 0.867 decitex PET fiber will have a 65 micron cross sectional area.

The data are tabulated below:

TABLE I

	<u>Ex. 1</u>	<u>Ex. 2</u>	<u>Ex. 3</u>	<u>Ex. 4</u>
Basis Weight (g/m <sup>2</sup> )	44.1	44.1	44.1	44.1
Fiber Size (decitex)	0.333	0.333	0.333	0.333
Thickness (mm)	0.33	0.34	0.36	0.38
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	27.7	29.3	32.0	36.6
Hydrostatic Head (cm)	45	47	44	44.5
Density (gm/cc)	0.1336	0.1287	0.1241	0.1158
Void (%)	90.18	90.54	90.88	91.49

10

TABLE II

	<u>Ex. 5</u>	<u>Ex. 6</u>	<u>Ex. 7</u>	<u>Ex. 8</u>
Basis Weight (g/m <sup>2</sup> )	44.1	44.1	44.1	44.1
Fiber Size (decitex)	0.333	0.333	0.333	0.333
Thickness (mm)	0.38	0.41	0.48	0.56
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	44.8	43.6	42.1	51.2
Hydrostatic Head (cm)	40	40.5	39.5	38.5
Density (gm/cc)	0.1158	0.1086	0.0914	0.0789
Void (%)	91.49	92.02	93.28	94.19

TABLE III

	<u>Ex. 9</u>	<u>Ex. 10</u>	<u>Ex. 11</u>	<u>Ex. 12</u>
Basis Weight (g/m <sup>2</sup> )	44.1	44.1	54.2	64.4
Fiber Size (decitex)	0.333	0.333	0.333	0.333
Thickness (mm)	0.58	0.58	0.63	0.53
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	45.1	56.4	46.6	25.3
Hydrostatic Head (cm)	41	34.33	35	46.5
Density (gm/cc)	0.0755	0.0755	0.0855	0.1209
Void (%)	94.45	94.45	93.71	91.11

TABLE IV

	<u>Ex. 13</u>	<u>Ex. 14</u>	<u>Ex. 15</u>	<u>Ex. 16</u>
Basis Weight (g/m <sup>2</sup> )	64.4	43.1	43.4	53.6
Fiber Size (decitex)	0.333	0.867	0.867	0.867
Thickness (mm)	0.79	0.43	0.41	0.41
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	38.1	73.8	65.2	50.0
Hydrostatic Head (cm)	38	28	31	32
Density (gm/cc)	0.0819	0.0998	0.1069	0.1319
Void (%)	93.98	92.66	92.14	90.30

**TABLE V**

	<u>Ex. 17</u>	<u>Ex. 18</u>	<u>Ex. 19</u>	<u>Ex. 20</u>
Basis Weight (g/m <sup>2</sup> )	54.2	62.0	63.4	50.56
Fiber Size (decitex)	0.867	0.867	0.867	0.11
Thickness (mm)	0.46	0.51	0.46	0.18
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	57.9	50.3	43.3	4.74
Hydrostatic Head (cm)	29	30	33	72
Density (gm/cc)	0.1188	0.1223	0.1388	
Void (%)	91.27	91.01	89.79	

**TABLE VI**

	<u>Ex. 21</u>	<u>Ex. 22</u>	<u>Ex. 23</u>	<u>Ex. 24</u>
Basis Weight (g/m <sup>2</sup> )	48.53	49.55	71.27	75.34
Fiber Size (decitex)	0.11	0.11	0.11	0.11
Thickness (mm)	0.20	0.20	0.23	0.30
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	9.12	8.57	3.04	5.17
Hydrostatic Head (cm)	73	60	99	77

5 **TABLE VII**

	<u>Ex. 25</u>	<u>Ex. 26</u>	<u>Ex. 27</u>	<u>Ex. 28</u>
Basis Weight (g/m <sup>2</sup> )	73.64	52.60	55.32	52.60
Fiber Size (decitex)	0.11	0.33	0.33	0.33
Thickness (mm)	0.30	0.20	0.30	0.36
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	4.86	15.14	25.69	31.62
Hydrostatic Head (cm)	63.5	48	43	38.5

TABLE VIII

	<u>Ex. 29</u>	<u>Ex. 30</u>	<u>Ex. 31</u>	<u>Ex. 32</u>
Basis Weight (g/m <sup>2</sup> )	70.93	75.68	75.68	53.96
Fiber Size (decitex)	0.33	0.33	0.33	0.56
Thickness (mm)	0.23	0.38	0.56	0.20
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	8.63	18.6	24.02	16.84
Hydrostatic Head (cm)	55.5	46.5	41.5	40.5

TABLE IX

	<u>Ex. 33</u>	<u>Ex. 34</u>	<u>Ex. 35</u>	<u>Ex. 36</u>
Basis Weight (g/m <sup>2</sup> )	54.64	52.94	76.70	67.87
Fiber Size (decitex)	0.56	0.56	0.56	0.56
Thickness (mm)	0.30	0.38	0.25	0.38
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	40.74	45.60	10.49	31.92
Hydrostatic Head (cm)	33	31	44	34

5 TABLE X

	<u>Ex. 37</u>
Basis Weight (g/m <sup>2</sup> )	76.02
Fiber Size (decitex)	0.56
Thickness (mm)	0.56
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	33.44
Hydrostatic Head (cm)	32.5

EXAMPLES 38 - 40

Fabric samples 38 - 40 were "hand-made" using polypropylene continuous fibers with diameters as indicated in Table XI. The samples were hot pressed as at the Bonding temperatures as indicated in Table XI.

5

TABLE XI

	Ex. 38	Ex. 39	Ex. 40
Basis Weight (g/m <sup>2</sup> )	59.3	48.1	51.9
Fiber Size (μm)	20	20	14-18
Bonding Temp (°C)	152	154	154
Frazier Permeability (m <sup>3</sup> /min-m <sup>2</sup> )	75.0	60.0	288.3
Hydrostatic Head (cm)	20.1	15.0	17.0

EXAMPLES 41 and 42

10 Fabric samples 41 and 42 were "hand-made" similar to Examples 38-40 except that the fabric is made by using two plies of the hand-made samples. The data from samples 41 and 42 are set forth in Table XII.

TABLE XII

	Ex. 41	Ex. 42
Basis Weight (g/m <sup>2</sup> )	128.8	101.7
Fiber Size (μm)	14-18	20
Bonding Temp (°C)	154	154
Frazier Permeability ~ (m <sup>3</sup> /min-m <sup>2</sup> )	35.1	20.7
Hydrostatic Head (cm)	158.0	228.1

15

The data from Tables XI and XII clearly indicate that a unique combination of barrier and air permeability may be formed by the inventive fabric which is not found in other available nonwoven fabrics. The uses of such fabrics and structures may be exceptionally broad as the combination or balance of properties has never really been anticipated in a single fabric. Principally, the fabric may be used in special use apparel such as a medical gown for a surgeon. It would be for a single use to protect the surgeon or other medical personnel from hazardous liquids such as contaminated body fluids. However, during a long and intense operation, the medical personnel would not be overheating but rather would be quite comfortable in a garment that breathes. After use, the garment would preferably be fully recyclable as it would be constituted of a single polymer which would be readily recycled back to constituent monomer as compared to other materials which are combinations of dissimilar polymers or wherein at least one constituent is not a recyclable polymer.

Although there are disclosed a number of examples related to wetlay nonwoven fabrics and then discussion of fibers that may be spun into strong, stable fibers without annealing and drawing, the combination of both aspects of the invention into a nonwoven fabric made directly from strong, stable fiber as the fiber is spun and which avoids the need for annealing and drawing would be at least one preferred arrangement of the invention.

There are several additional aspects to preferred arrangements of the invention. The small denier fiber may be spun as a bicomponent conjugate fiber or multi-component conjugate fiber and split into finer fibers after the fibers are spun. One advantage of spinning conjugate fibers is higher potential production rates depending on the mechanism for splitting the conjugate fibers. Each of the resulting split fibers may have a pie shaped or other shaped cross section.

Another aspect is to provide bicomponent or polymers such as sheath-core arrangements. A sheath-core bi-component fiber is illustrated in Figure 6 where a fiber 80 is shown in cross section. The sheath polymer 82 surrounds the core polymer 84 and the relative amounts of polymer may be adjusted so that the core polymer 84 may comprise more or less than fifty

percent of the cross sectional area. With this arrangement, a number of attractive alternatives can be produced. For example, the sheath polymer 82 can be blended with pigments which are not wasted in the core, thereby reducing the costs for pigments while obtaining a suitably colored material.

5 A hydrophobic material such as a fluorocarbon may also be spun into the sheath polymer to obtain the desired liquid repellency at minimal cost. An antimicrobial additive may be suitable in some healthcare applications. Stabilizers may be provided for a number of applications such as ultraviolet energy exposure, where outdoor exposure to sunlight may be one example.

10 A static electricity discharge additive may be used for applications where a build up of electricity is possible and undesirable. Another additives may be suitable such as a wetting agent to make the sheet material suitable as a wipe or absorbent or to allow liquids to flow through the fabric while very fine solids are collected in the fine pores of the sheet material. As the sheet

15 material is proposed to be comprised of generally continuous filaments, the sheet material may be amenable as a wipe having low linting characteristics.

A polymer having a lower melt point or melting temperature may be used as the sheath to so as to be amenable to melting during bonding while the core polymer does not soften. One very interesting example is a

20 sheath core arrangement using 2GT polyester as the core and 3GT polyester as the sheath. Such an arrangement would be suited for radiation sterilization such as e-beam and gamma ray sterilization without degradation. Other combinations of multi-component fibers and blends of fibers may be envisioned. Various polymers present challenges and

25 opportunities. The sheet material of the present invention may comprise polyester (such as polyethylene teraphthalate, polypropylene teraphthalate, and polybutylene teraphthalate) combinations and blends of polyester, nylon, a polyolefin such as polyethylene and polypropylene, and even elastomeric polymers.

30 The foregoing description and drawings were intended to explain and describe the invention so as to contribute to the public base of knowledge. In exchange for this contribution of knowledge and understanding, exclusive rights are sought and should be respected. The

scope of such exclusive rights should not be limited or narrowed in any way by the particular details and preferred arrangements that may have been shown. Clearly, the scope of any patent rights granted on this application should be measured and determined by the claims that follow.

WHAT IS CLAIMED IS:

1. A flexible sheet material characterized in that the sheet material is comprised of melt extruded generally continuous filament polymer fibers having a minimum fiber strength of about 275 newtons per square millimeter, wherein the sheet material has in combination a Frazier permeability and an unsupported hydrostatic head selected from the group of:

5 a Frazier permeability of at least about  $70 \text{ m}^3/\text{min}\cdot\text{m}^2$  and an unsupported hydrostatic head of at least about 15 cm;

10 a Frazier permeability of at least  $28 \text{ m}^3/\text{min}\cdot\text{m}^2$  and an unsupported hydrostatic head of at least about 30 cm;

a Frazier permeability of at least  $15 \text{ m}^3/\text{min}\cdot\text{m}^2$  and an unsupported hydrostatic head of at least about 40 cm; and

15 a Frazier permeability of at least  $1 \text{ m}^3/\text{min}\cdot\text{m}^2$  and an unsupported hydrostatic head of at least about 80 cm.

2. The sheet material according to Claim 1 wherein the sheet material has a hydrostatic head of at least about 20 cm.

3. The sheet material according to Claim 1 wherein a substantial majority of the fibers have a cross section of less than about 20 square microns.

4. A flexible sheet material characterized in that the sheet material is comprised of melt extruded generally continuous filament polymer fibers having a minimum fiber strength of about 275 newtons per square millimeter, wherein the sheet has a basis weight of from 13 g/m<sup>2</sup> to 75 g/m<sup>2</sup>, substantially all of the fibers are meltspun fibers, a substantial majority by weight of the fibers have a cross section of less than 90 square microns, and wherein the sheet material has a Frazier permeability of at least  $1 \text{ m}^3/\text{min}\cdot\text{m}^2$  and a hydrostatic head of at least 25 cm.

5. The sheet material according to Claim 4 wherein the sheet material has a hydrostatic head of at least 30 cm.

6. The sheet material according to Claim 4 wherein the sheet material has a hydrostatic head of at least 40 cm.

5 7. The sheet material according to any one of Claims 3 and 4 wherein the Frazier permeability is at least about 5 m<sup>3</sup>/min-m<sup>2</sup>.

8. The sheet material according to Claim 4 wherein the Frazier permeability is at least about 10 m<sup>3</sup>/min-m<sup>2</sup>.

10 9. The sheet material according to Claim 4 wherein the Frazier permeability is at least 15 m<sup>3</sup>/min-m<sup>2</sup>.

10. The sheet material according to Claim 4 wherein the Frazier permeability is at least 25 m<sup>3</sup>/min-m<sup>2</sup>.

11. The sheet material according to Claim 4 wherein the Frazier permeability is at least 35 m<sup>3</sup>/min-m<sup>2</sup>.

15 12. The sheet material according to Claim 4 wherein the Frazier permeability is at least about 45 m<sup>3</sup>/min-m<sup>2</sup>.

13. The sheet material according to Claim 4 wherein the hydrostatic head is at least 50 cm.

20 14. The sheet material according to Claim 4 wherein the hydrostatic head is at least 60 cm.

15. The sheet material according to Claim 1 wherein the sheet material is comprised of fibers having an average fiber size less than about 90 µm<sup>2</sup>.

25 16. The sheet material according to any one of Claims 1 and 4 wherein the sheet material is comprised of fibers wherein the average fiber size is less than about 75 µm<sup>2</sup>.

17. The sheet material according to any one of Claims 1, 3, and 4 wherein the sheet material is comprised of fibers wherein the average fiber size is less than about  $60 \mu\text{m}^2$ .

18. The sheet material according to any one of Claims 1, 3, 5 and 4 wherein the sheet has a grab tensile strength of at least about 1 N/g/m<sup>2</sup>.

19. The sheet material according to any one of Claims 1,3 and 4 wherein the sheet material is comprised of fibers and wherein the majority of fibers have a boil off shrinkage of less than ten percent.

10 20. The sheet material according to any one of Claims 1,3 and 4 wherein the sheet material is comprised of fibers which are split fibers from larger conjugate melt spun fibers.

15 21. The sheet material according to any one of Claims 1,3 and 4 wherein the sheet material is comprised of fibers, and at least a portion of the fibers are formed of at least two separate component polymers.

22. The sheet material according to Claim 21 wherein one of said component polymers overlies the other of said component polymers in a sheath-core arrangement.

23. The sheet material according to Claim 22 wherein the 20 sheath component of the fibers includes at least one additive blended into the polymer.

24. The sheet material according to Claim 23 wherein the additive is a hydrophobic additive to repel liquids.

25. The sheet material according to Claim 24 wherein the additive is a fluorocarbon.

26. The sheet material according to Claim 23 wherein the additive is a stabilizer.

27. The sheet material according to Claim 26 wherein the stabilizer is a stabilizing agent for ultraviolet energy exposure.

28. The sheet material according to Claim 24 wherein the additive is a wetting agent to cause mechanical absorption of liquids into the sheet material.

29. The sheet material according to Claim 24 wherein the additive provides a color to the fibers and sheet material.

30. The sheet material according to Claim 24 wherein the additive reduces the buildup of static electricity in the sheet material.

31. The sheet material according to Claim 24 wherein the additive is an antimicrobial agent.

32. The sheet material according to Claim 23 wherein the polymer comprising the sheath has a lower melting temperature than the polymer comprising the core.

33. The sheet material according to Claim 23 wherein the polymer comprising the sheath does not substantially degrade from exposure to radiation sterilization processing.

34. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet are comprised of a first type of the fiber comprised of a first polymer and a second type of the fiber comprised of a second polymer, wherein one of said first and second polymers melts at a lower temperature than the other of said first and second polymers to facilitate thermal bonding.

35. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of polyester polymer.

36. The sheet material according to Claim 35 wherein the fibers are comprised of polyethylene terephthalate polymer.

37. The sheet material according to Claim 35 wherein the fibers are comprised of polypropylene terephthalate polymer.

38. The sheet material according to Claim 35 wherein the fibers are comprised of polybutylene terephthalate polymer.

5 39. The sheet material according to Claim 35 wherein the fibers are comprised of polyester with an additional polymer blended with the polyester polymer.

10 40. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of nylon polymer.

41. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of polyethylene polymer.

15 42. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of polypropylene polymer.

43. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of elastomeric polymer.

20 44. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material comprise a blend of different polymers.

25 45. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of a polymer with at least one additive blended into the polymer.

46. The sheet material according to Claim 45 wherein the additive is a hydrophobic additive to repel liquids.

47. The sheet material according to Claim 45 wherein the additive is a fluorocarbon.

48. The sheet material according to Claim 45 wherein the additive is a stabilizer.

5 49. The sheet material according to Claim 48 wherein the stabilizer is a stabilizing agent for ultraviolet energy exposure.

50. The sheet material according to Claim 45 wherein the additive is a wetting agent to increase mechanical absorption of liquids into the sheet material.

10 51. The sheet material according to Claim 45 wherein the additive provides a color to the fibers and sheet material.

52. The sheet material according to Claim 45 wherein the additive reduces the buildup of static electricity in the sheet material.

15 53. The sheet material according to Claim 45 wherein the additive is an antimicrobial agent.

54. The sheet material according to any one of Claims 1,3 and 4 wherein the sheet material fibers have a repellent finish applied thereon.

20 55. The sheet material according to Claim 54 wherein said repellent finish comprises a fluorocarbon.

56. The sheet material according to Claim 1 wherein the fibers are ultrasonically bonded together.

57. The sheet material according to Claim 1 wherein the fibers are thermally bonded together.

25 58. The sheet material according to Claim 1 wherein the sheet material is comprised of fibers which are adhesively bonded together.

59. The sheet material according to any one of Claims 1,3 and 4 wherein the material has a cross sectional void percentage of at least about 85 percent.

60. The sheet material according to Claim 59 wherein the 5 material has a cross sectional void percentage of at least about 89 percent.

61. The sheet material according to any one of Claims 1,3 and 4 wherein the fibers of the sheet material are comprised of a polymer that does not substantially degrade due to exposure to radiation 10 sterilization processing.

62. The sheet material according to Claim 61 wherein the polymer does not substantially degrade due to exposure to gamma radiation.

63. The sheet material according to Claim 61 wherein the 15 polymer does not substantially degrade due to exposure to e-beam radiation.

64. The sheet material according to any one of Claims 1,3 and 4 wherein the sheet material is comprised of layers of fibers forming a nonwoven sheet and wherein all of the layers are direct laid meltspun 20 generally continuous fibers.

65. The sheet material according to any one of Claims 1 and 3 wherein the basis weight of the sheet material is greater than 13 grams per square meter and less than 100 grams per square meter.

66. The sheet material of claim 22 wherein the core 25 component polymer is polyethylene terephthalate and the sheath component polymer is polypropylene terephthalate.

67. The sheet material according to Claim 66 wherein the sheath polymer includes pigment blended therein and the core polymer is generally free of pigment.

68. The sheet material according to Claim 67 wherein the sheath polymer further includes a fluorocarbon blended therein.

69. The sheet material according to Claim 67 wherein the average cross sectional area of the fibers in the sheet material is less than 5 90 square microns.

70. A flexible sheet material characterized in that the sheet material has a basis weight of from 13 g/m<sup>2</sup> to 75 g/m<sup>2</sup>, a Frazier permeability of at least 1 m<sup>3</sup>/min-m<sup>2</sup>, and a hydrostatic head of at least 25 cm, wherein substantially all of the fibers in the sheet material are 10 meltspun polyester polymer fibers having a cross section of less than about 90 square microns and an average fiber strength of at least 275 N/mm<sup>2</sup>.

71. The sheet material according to Claim 70 wherein the majority of said fibers comprising the sheet material have a boil off 15 shrinkage of less than ten percent.

72. The sheet material according to Claim 71 wherein the sheet material has a Frazier permeability of at least 28 m<sup>3</sup>/min-m<sup>2</sup> and an unsupported hydrostatic head of at least about 30 cm.

FIG. 1



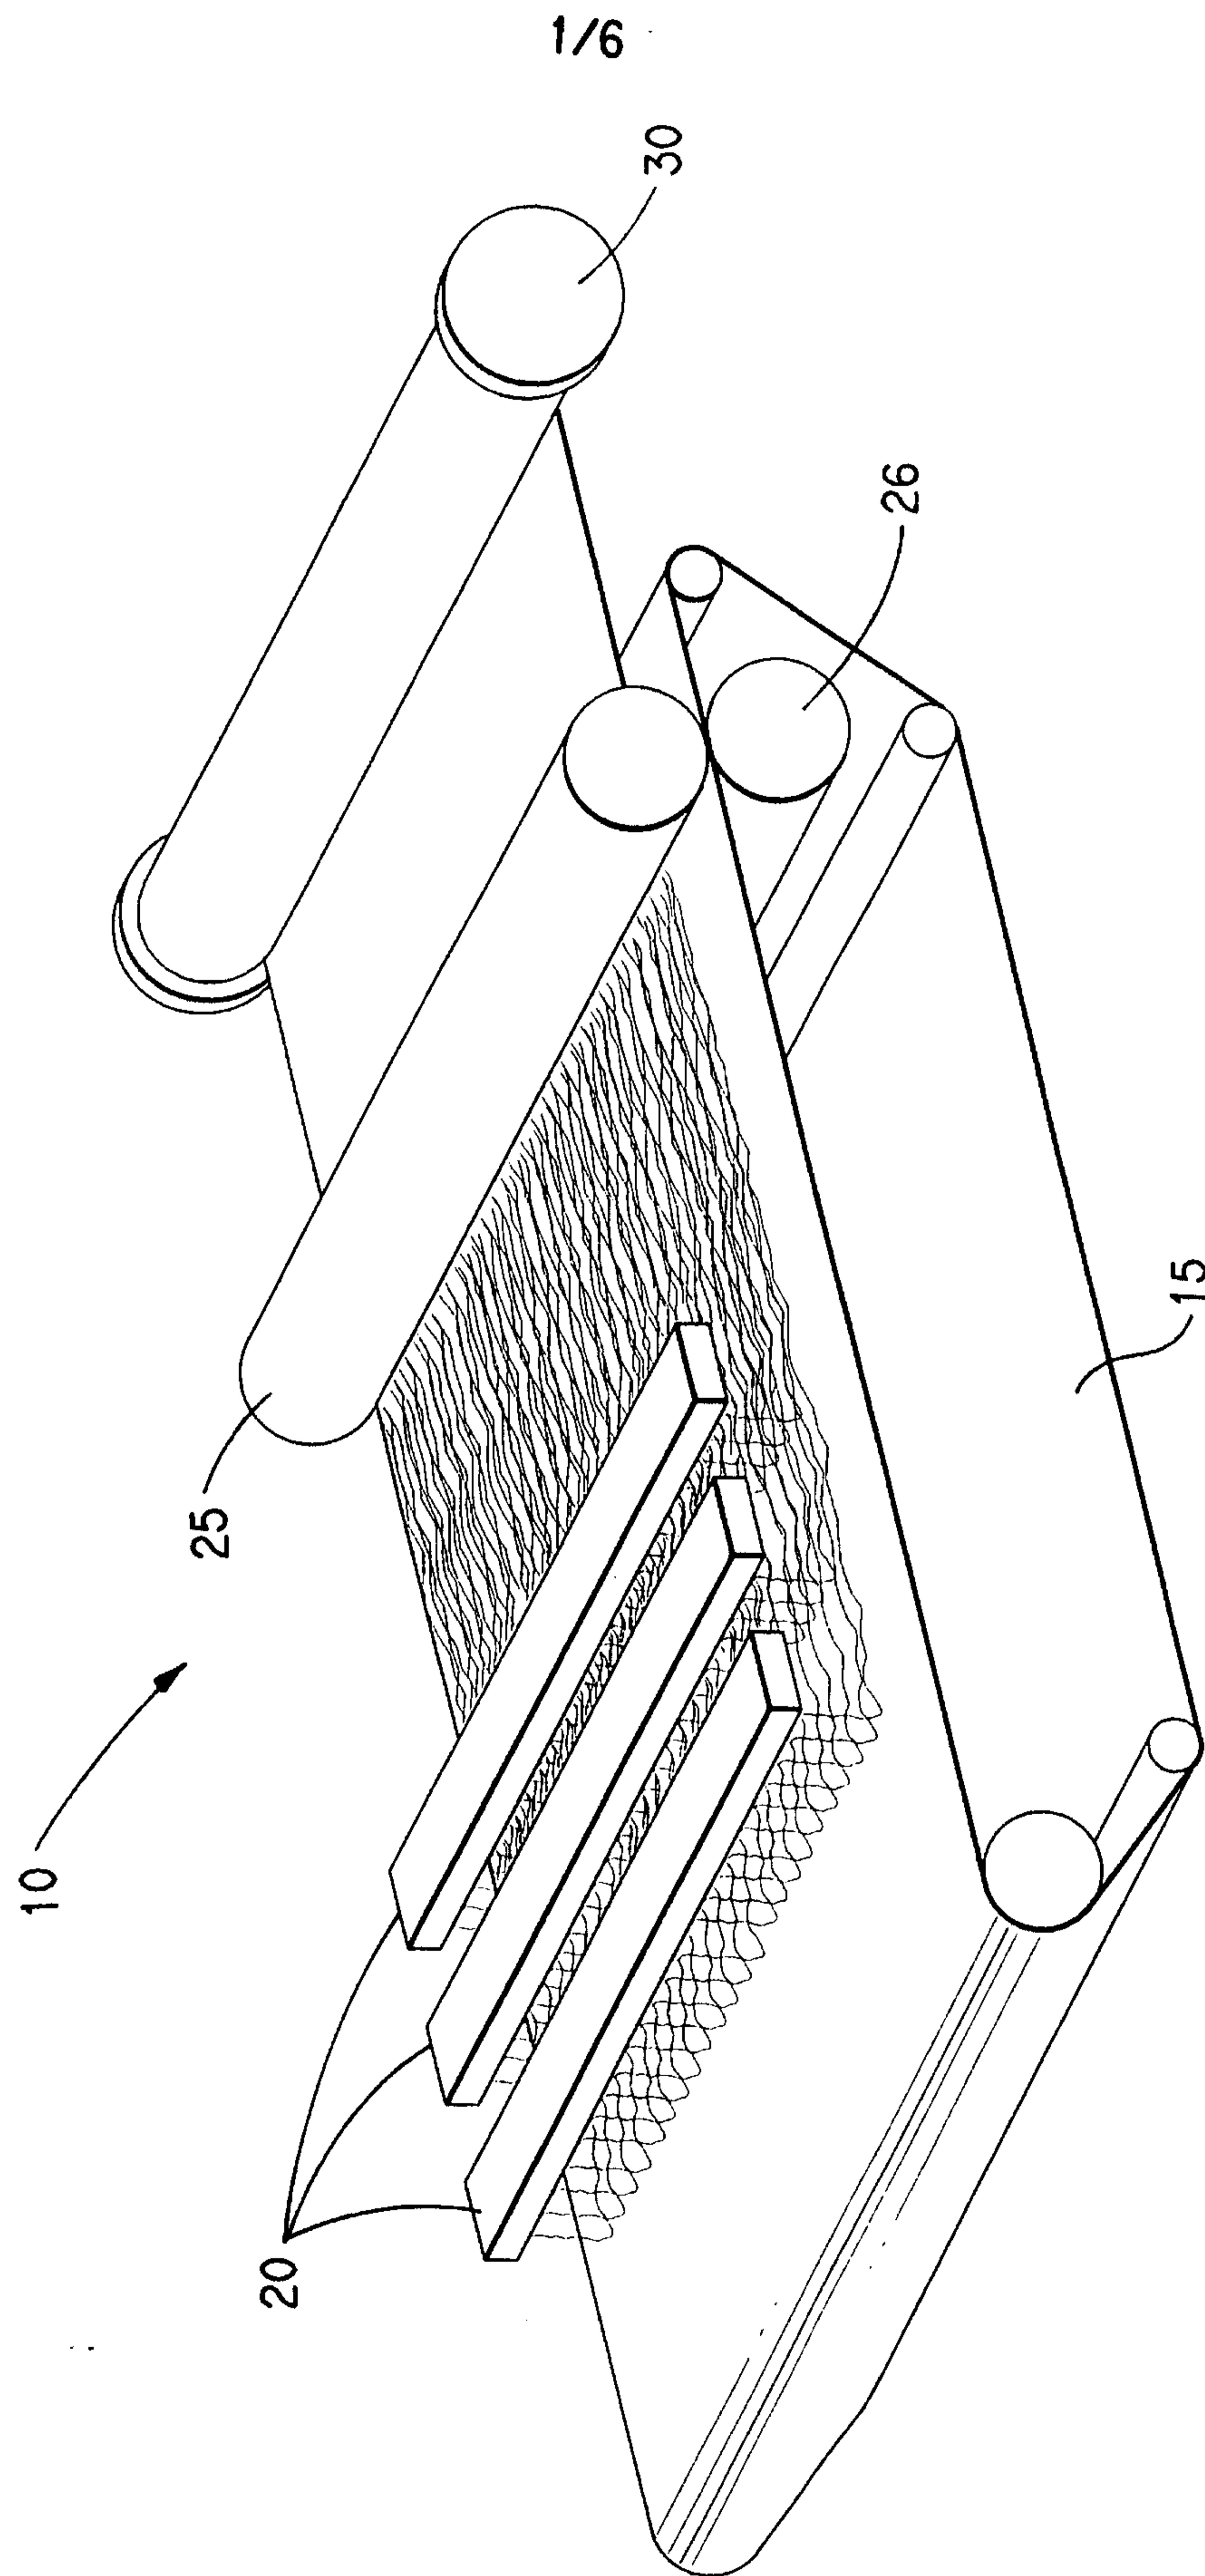


FIG. 2

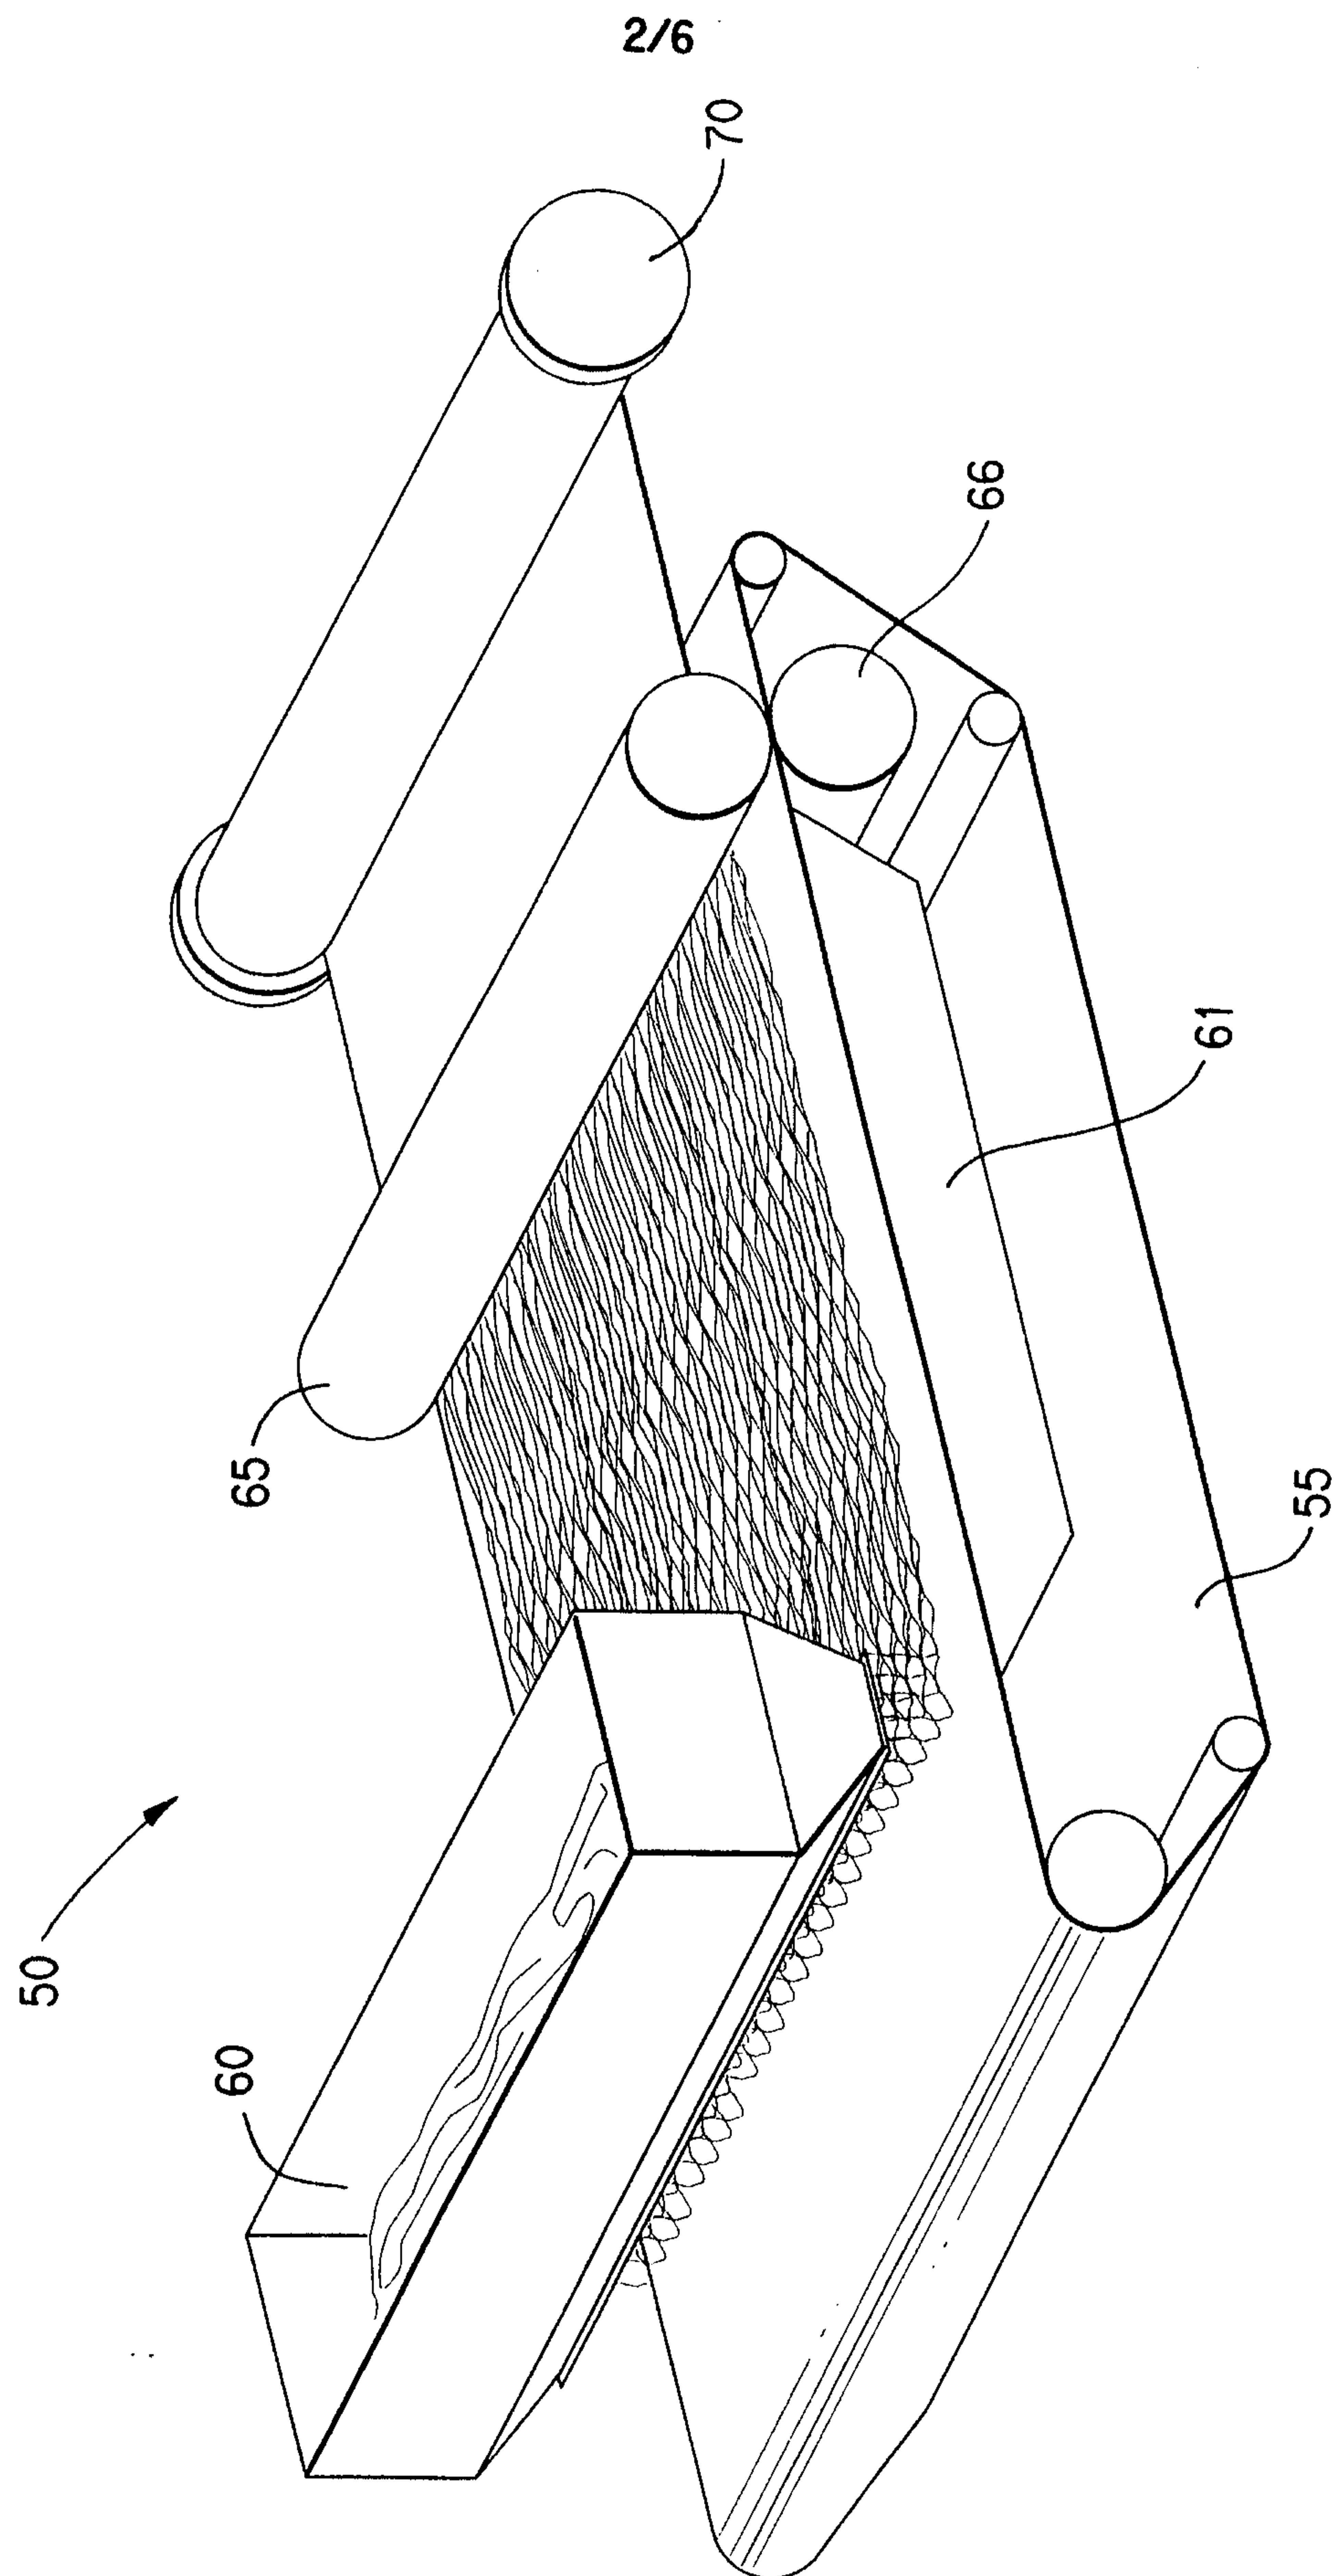

3/6


FIG. 3

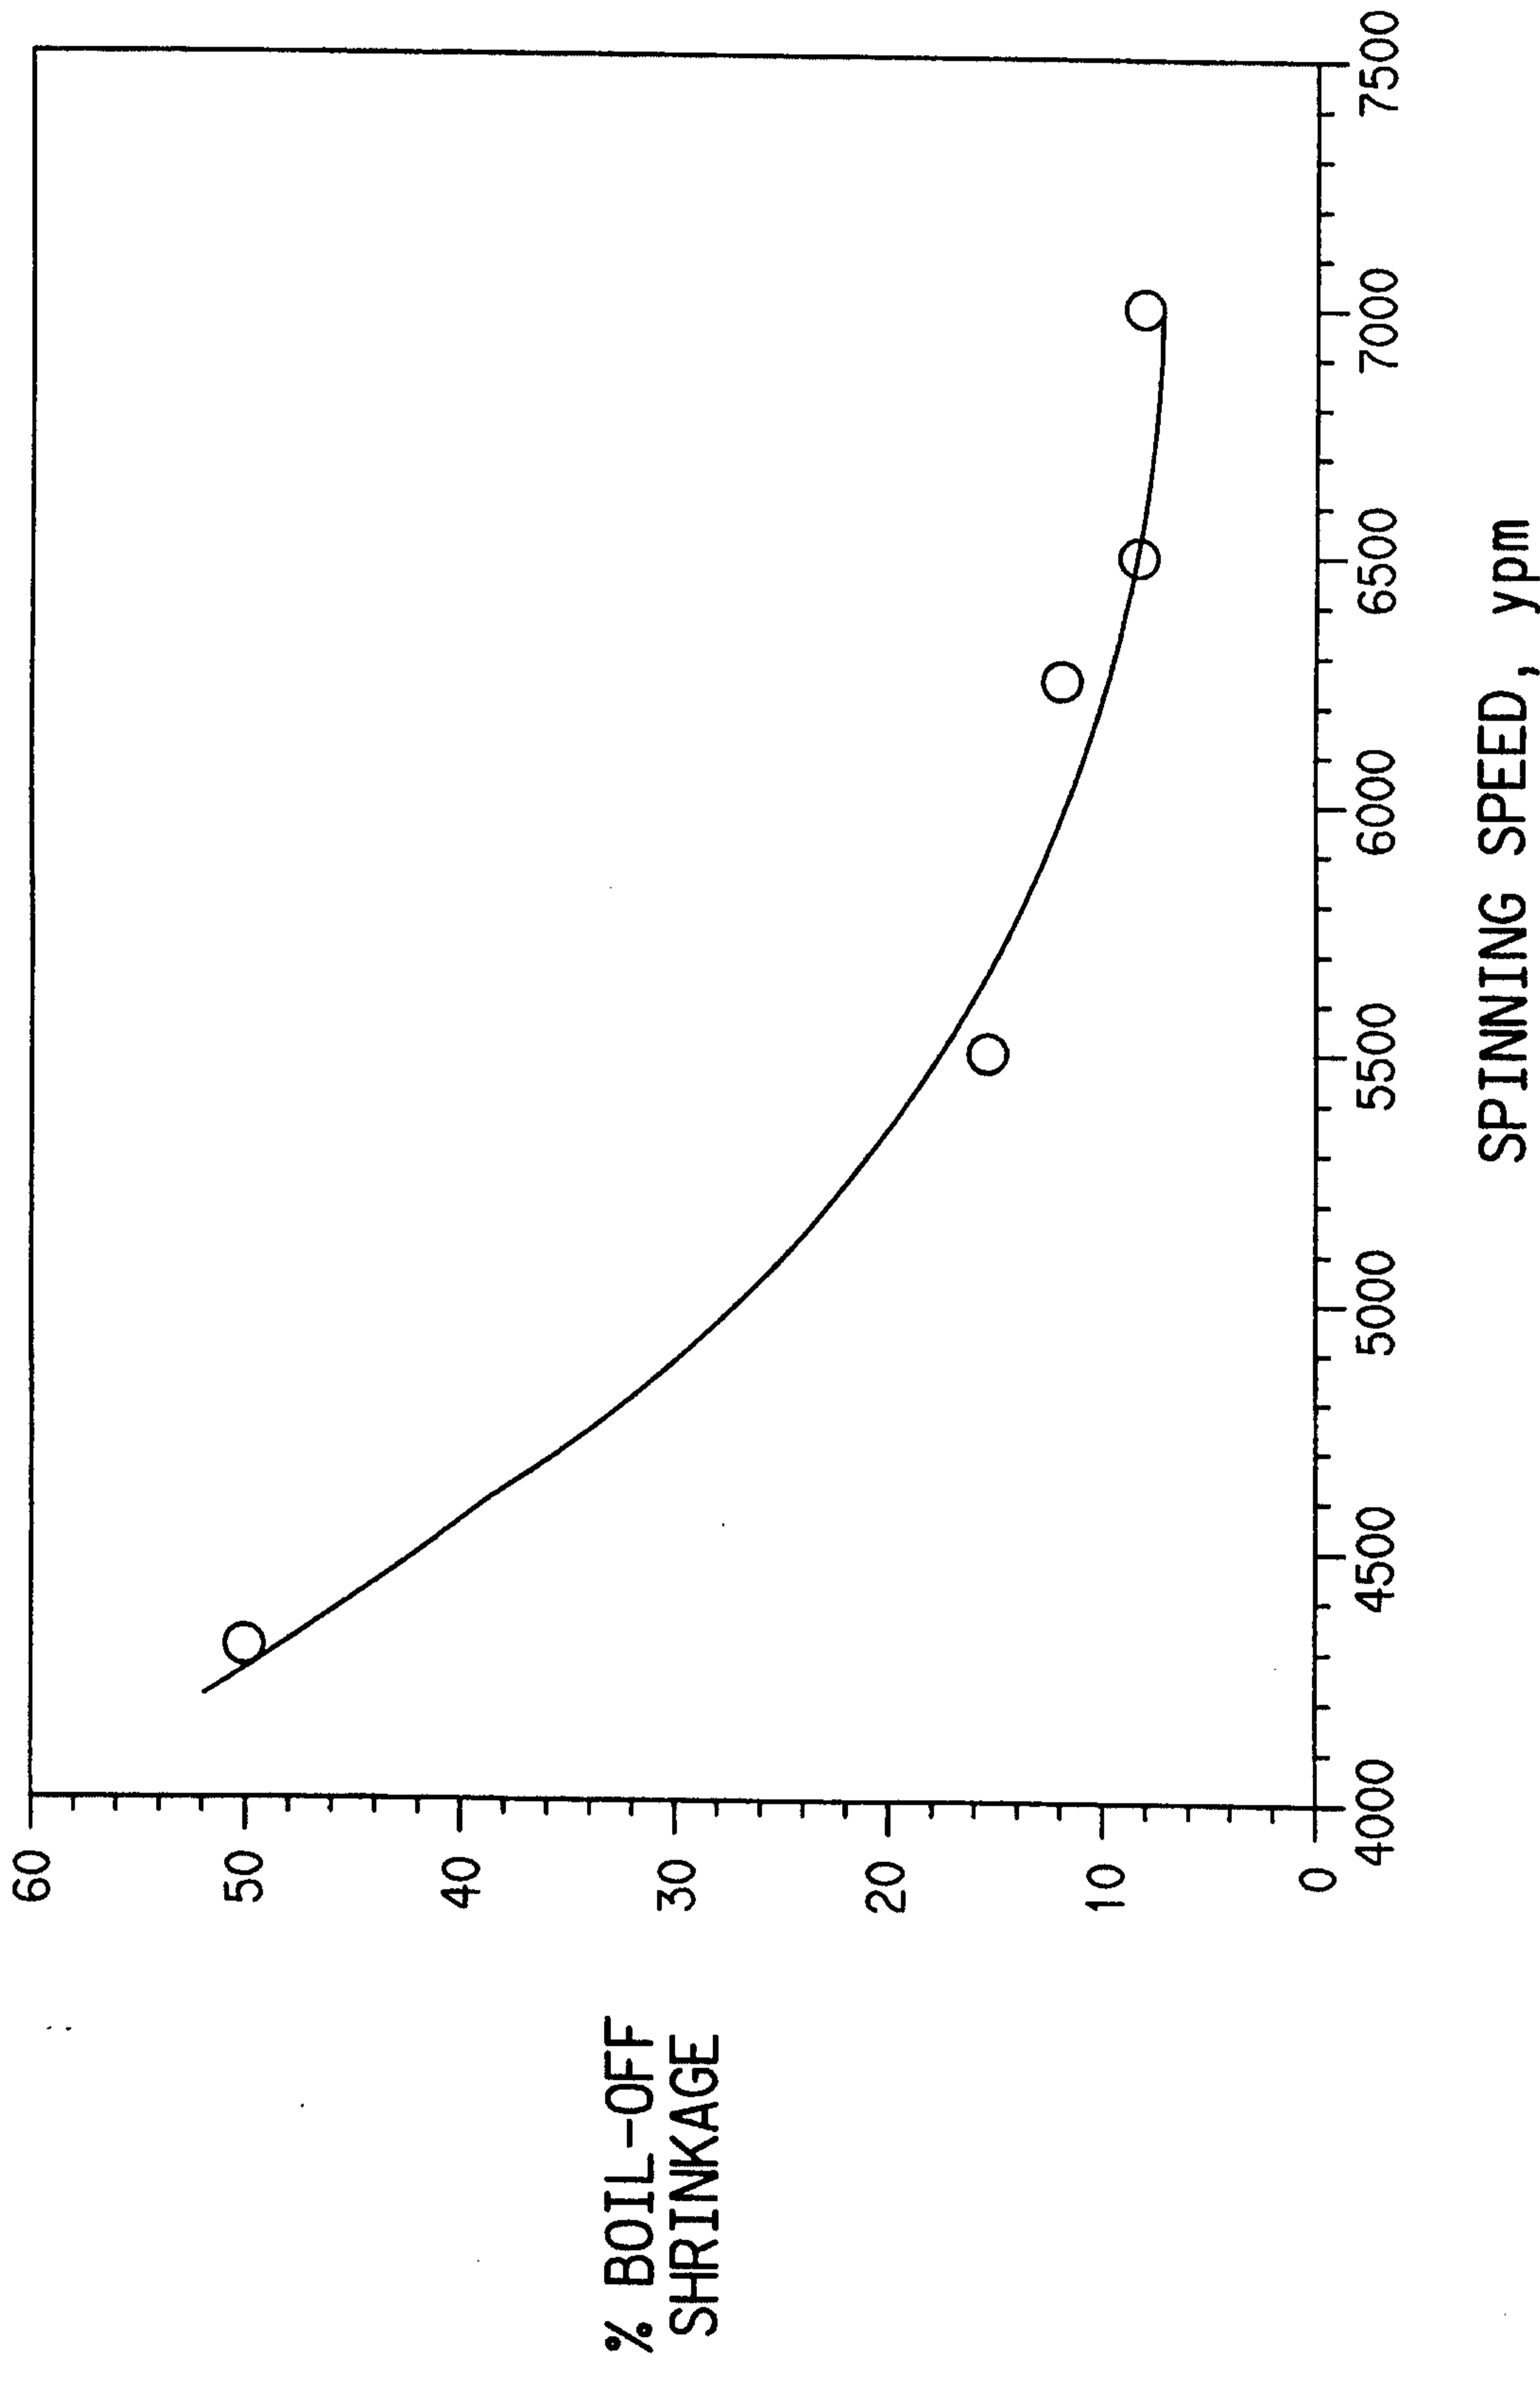

SUBSTITUTE SHEET (RULE 26)


4/6

FIG. 4

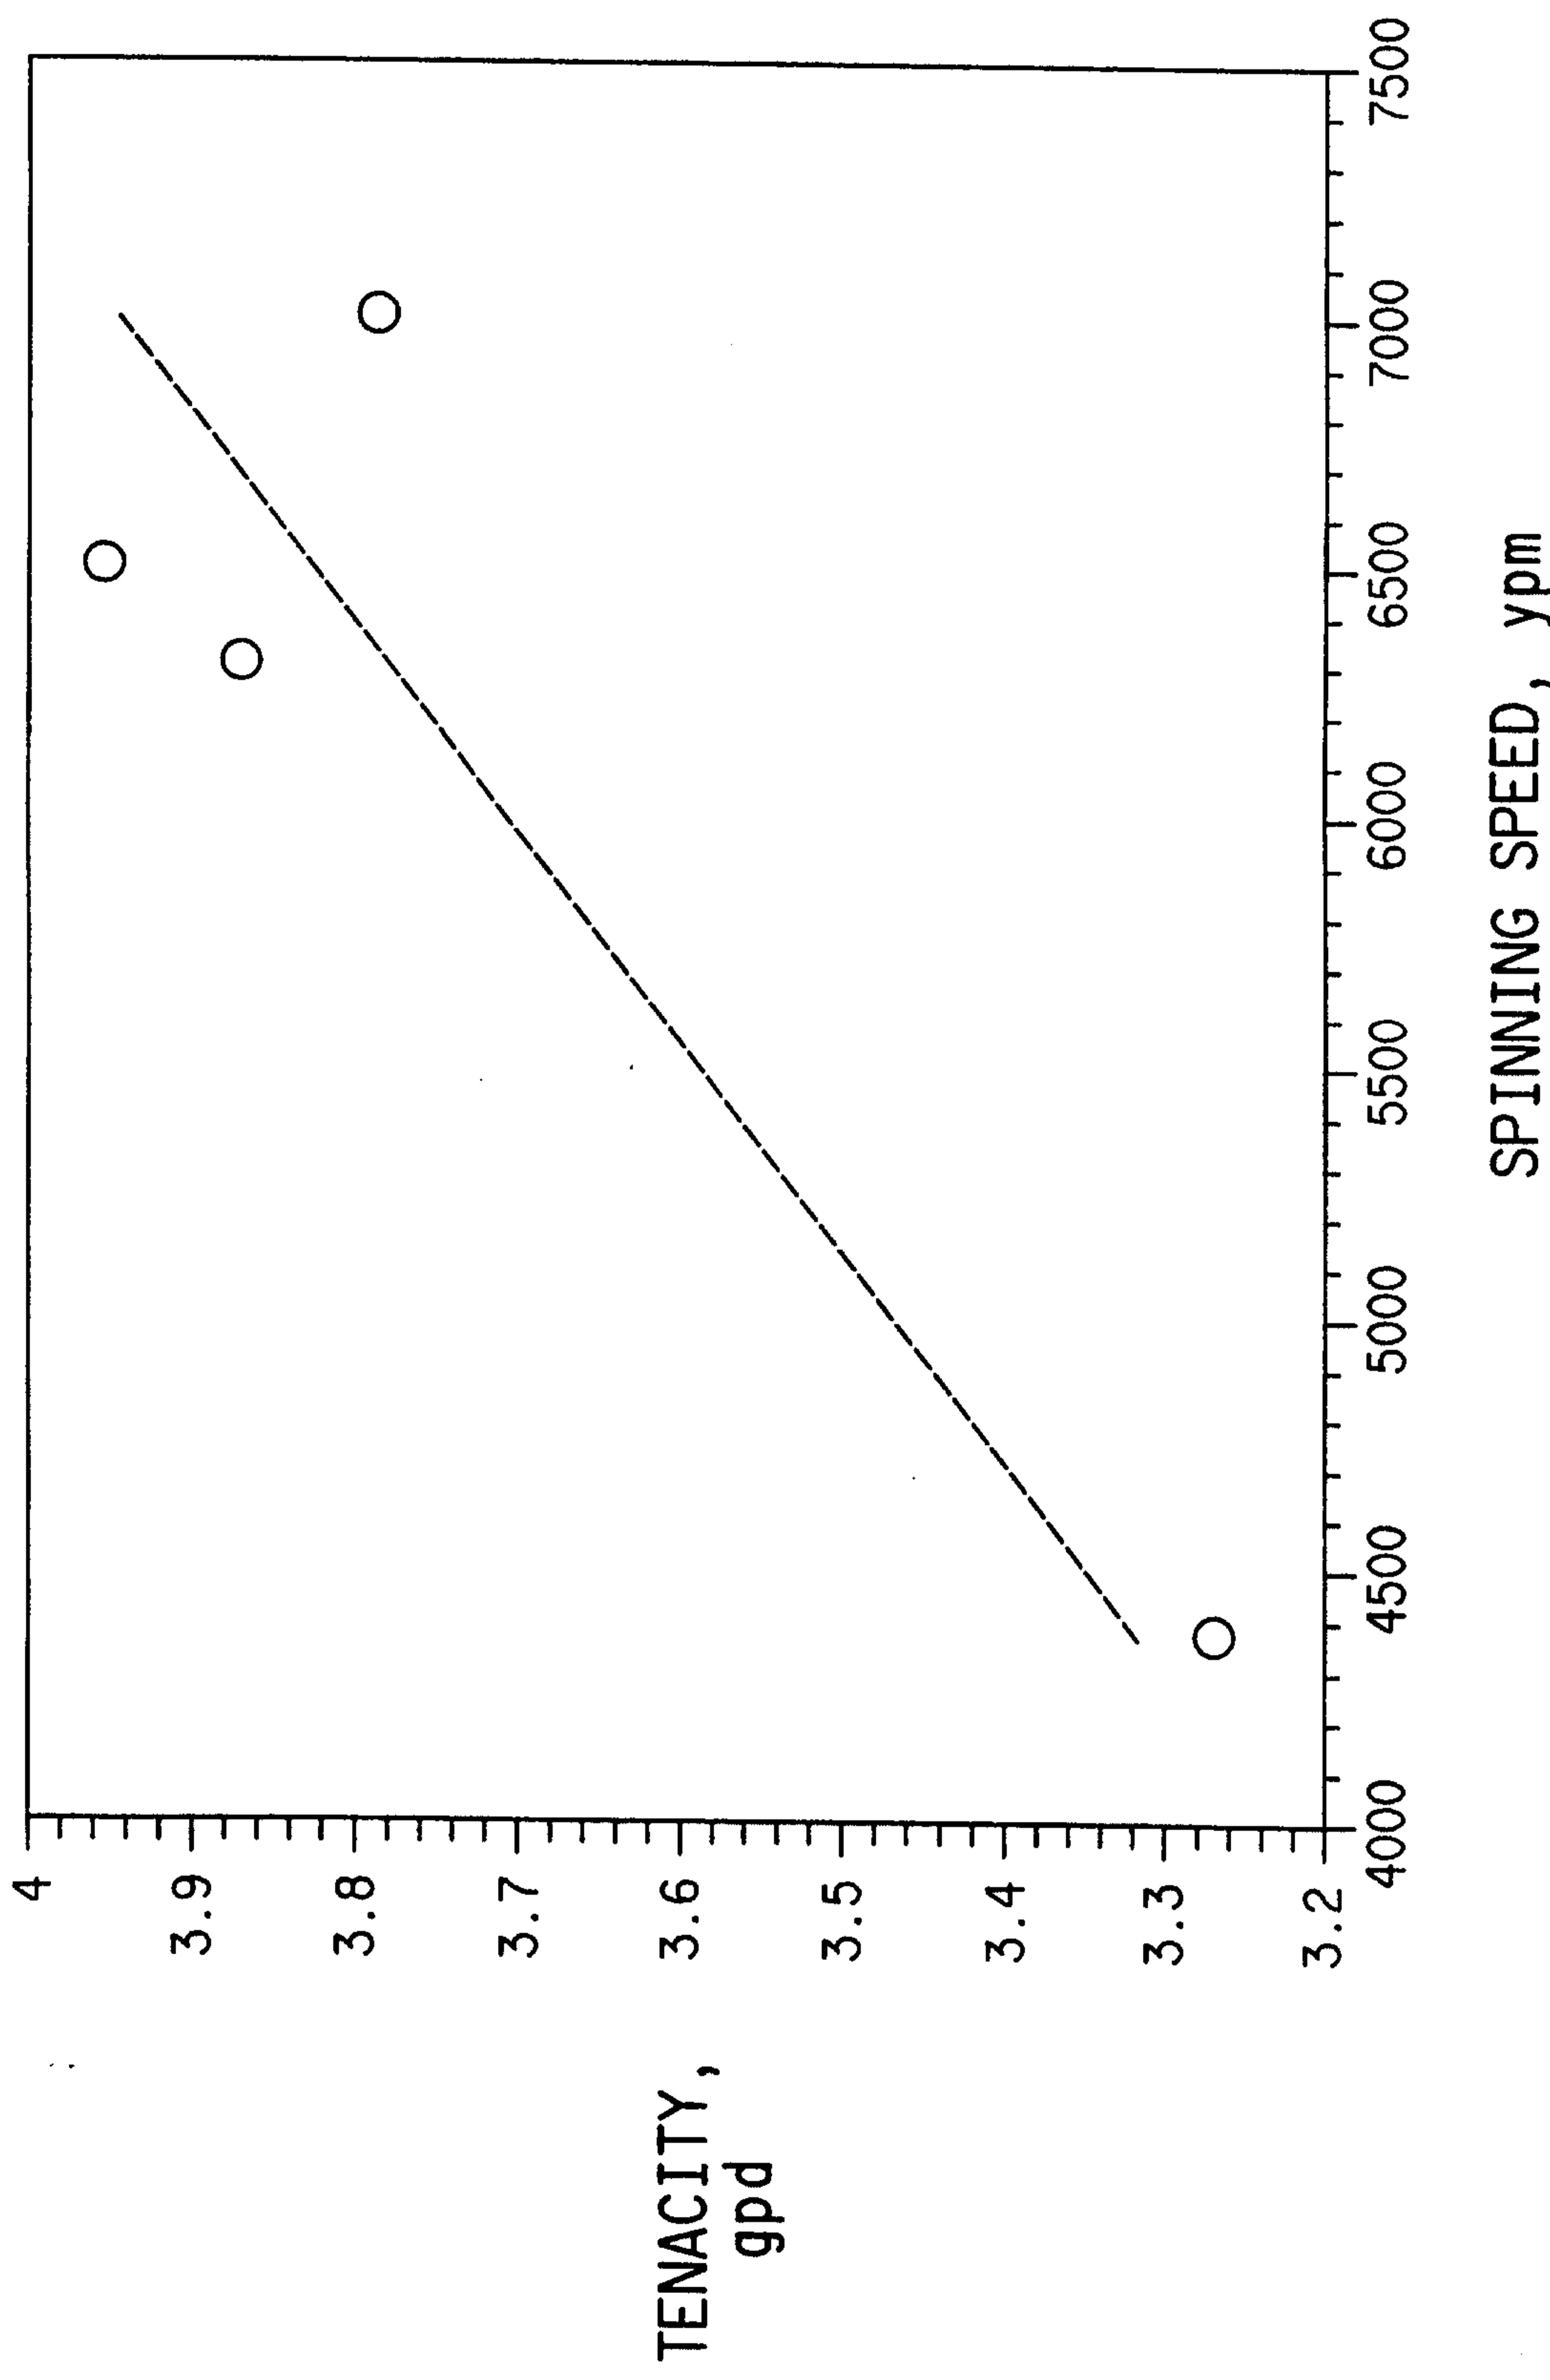

5/6

FIG. 5

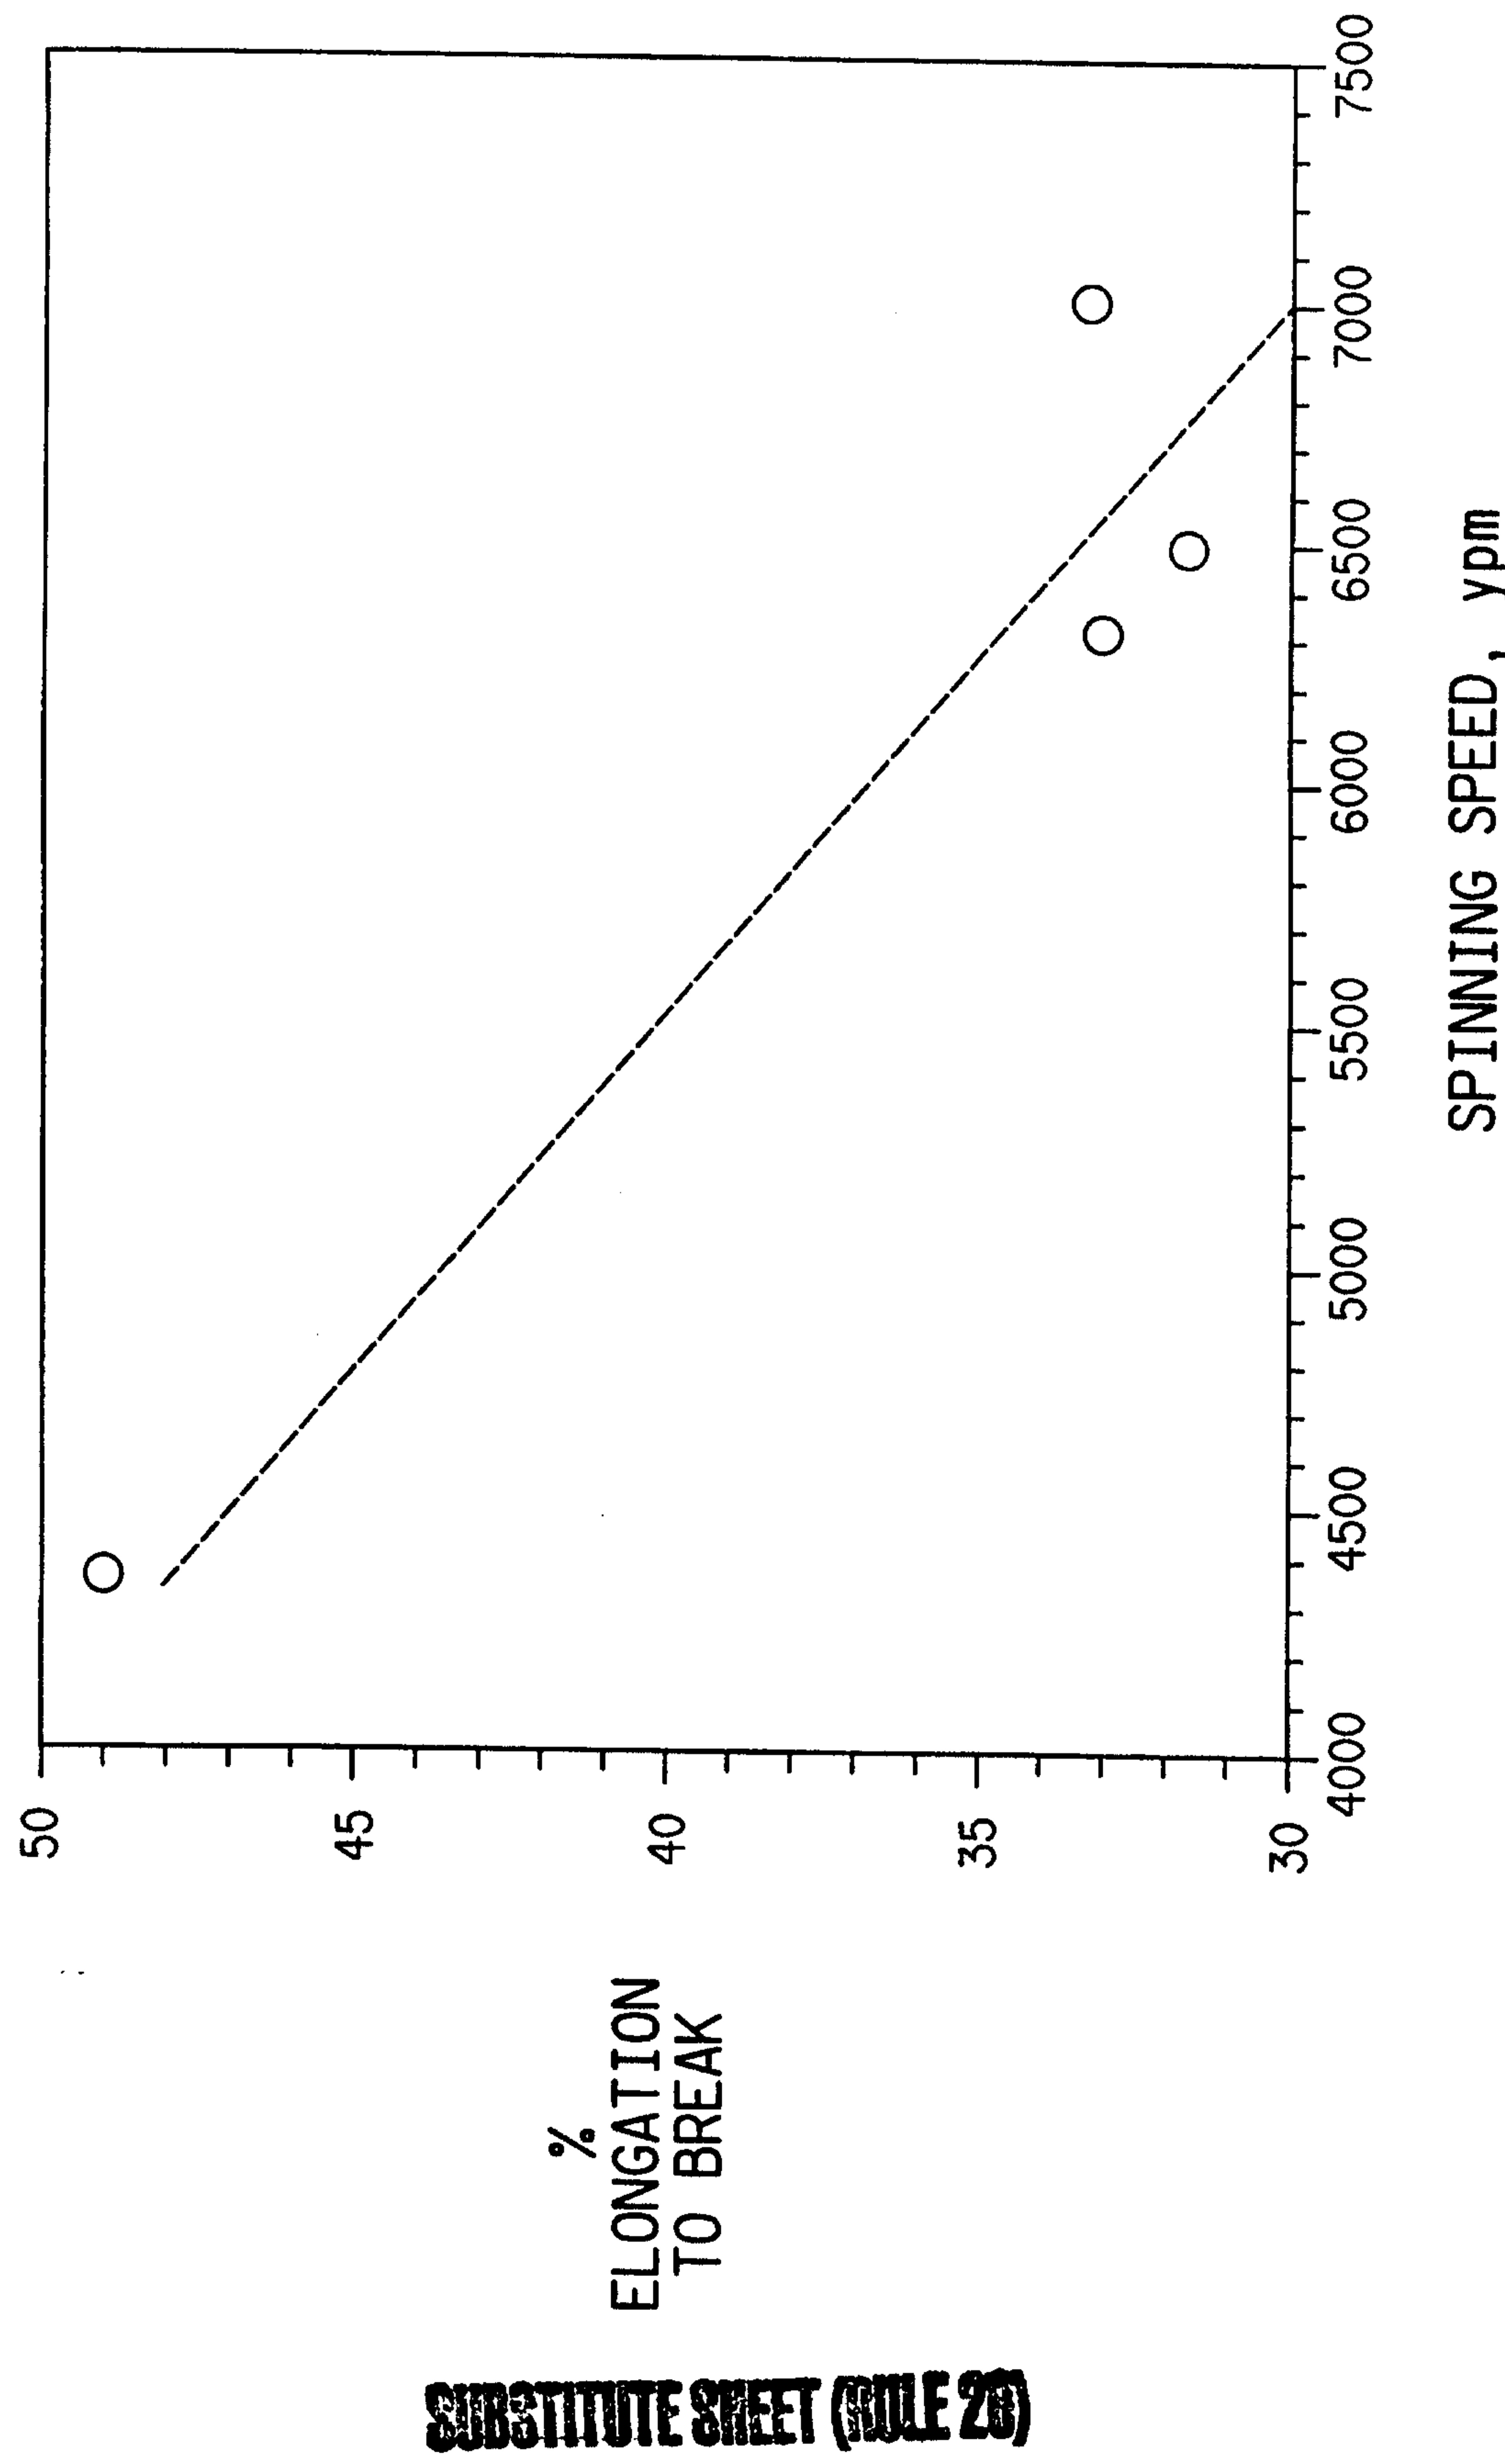


WO 97/46750

PCT/US97/10358

6/6

FIG. 6

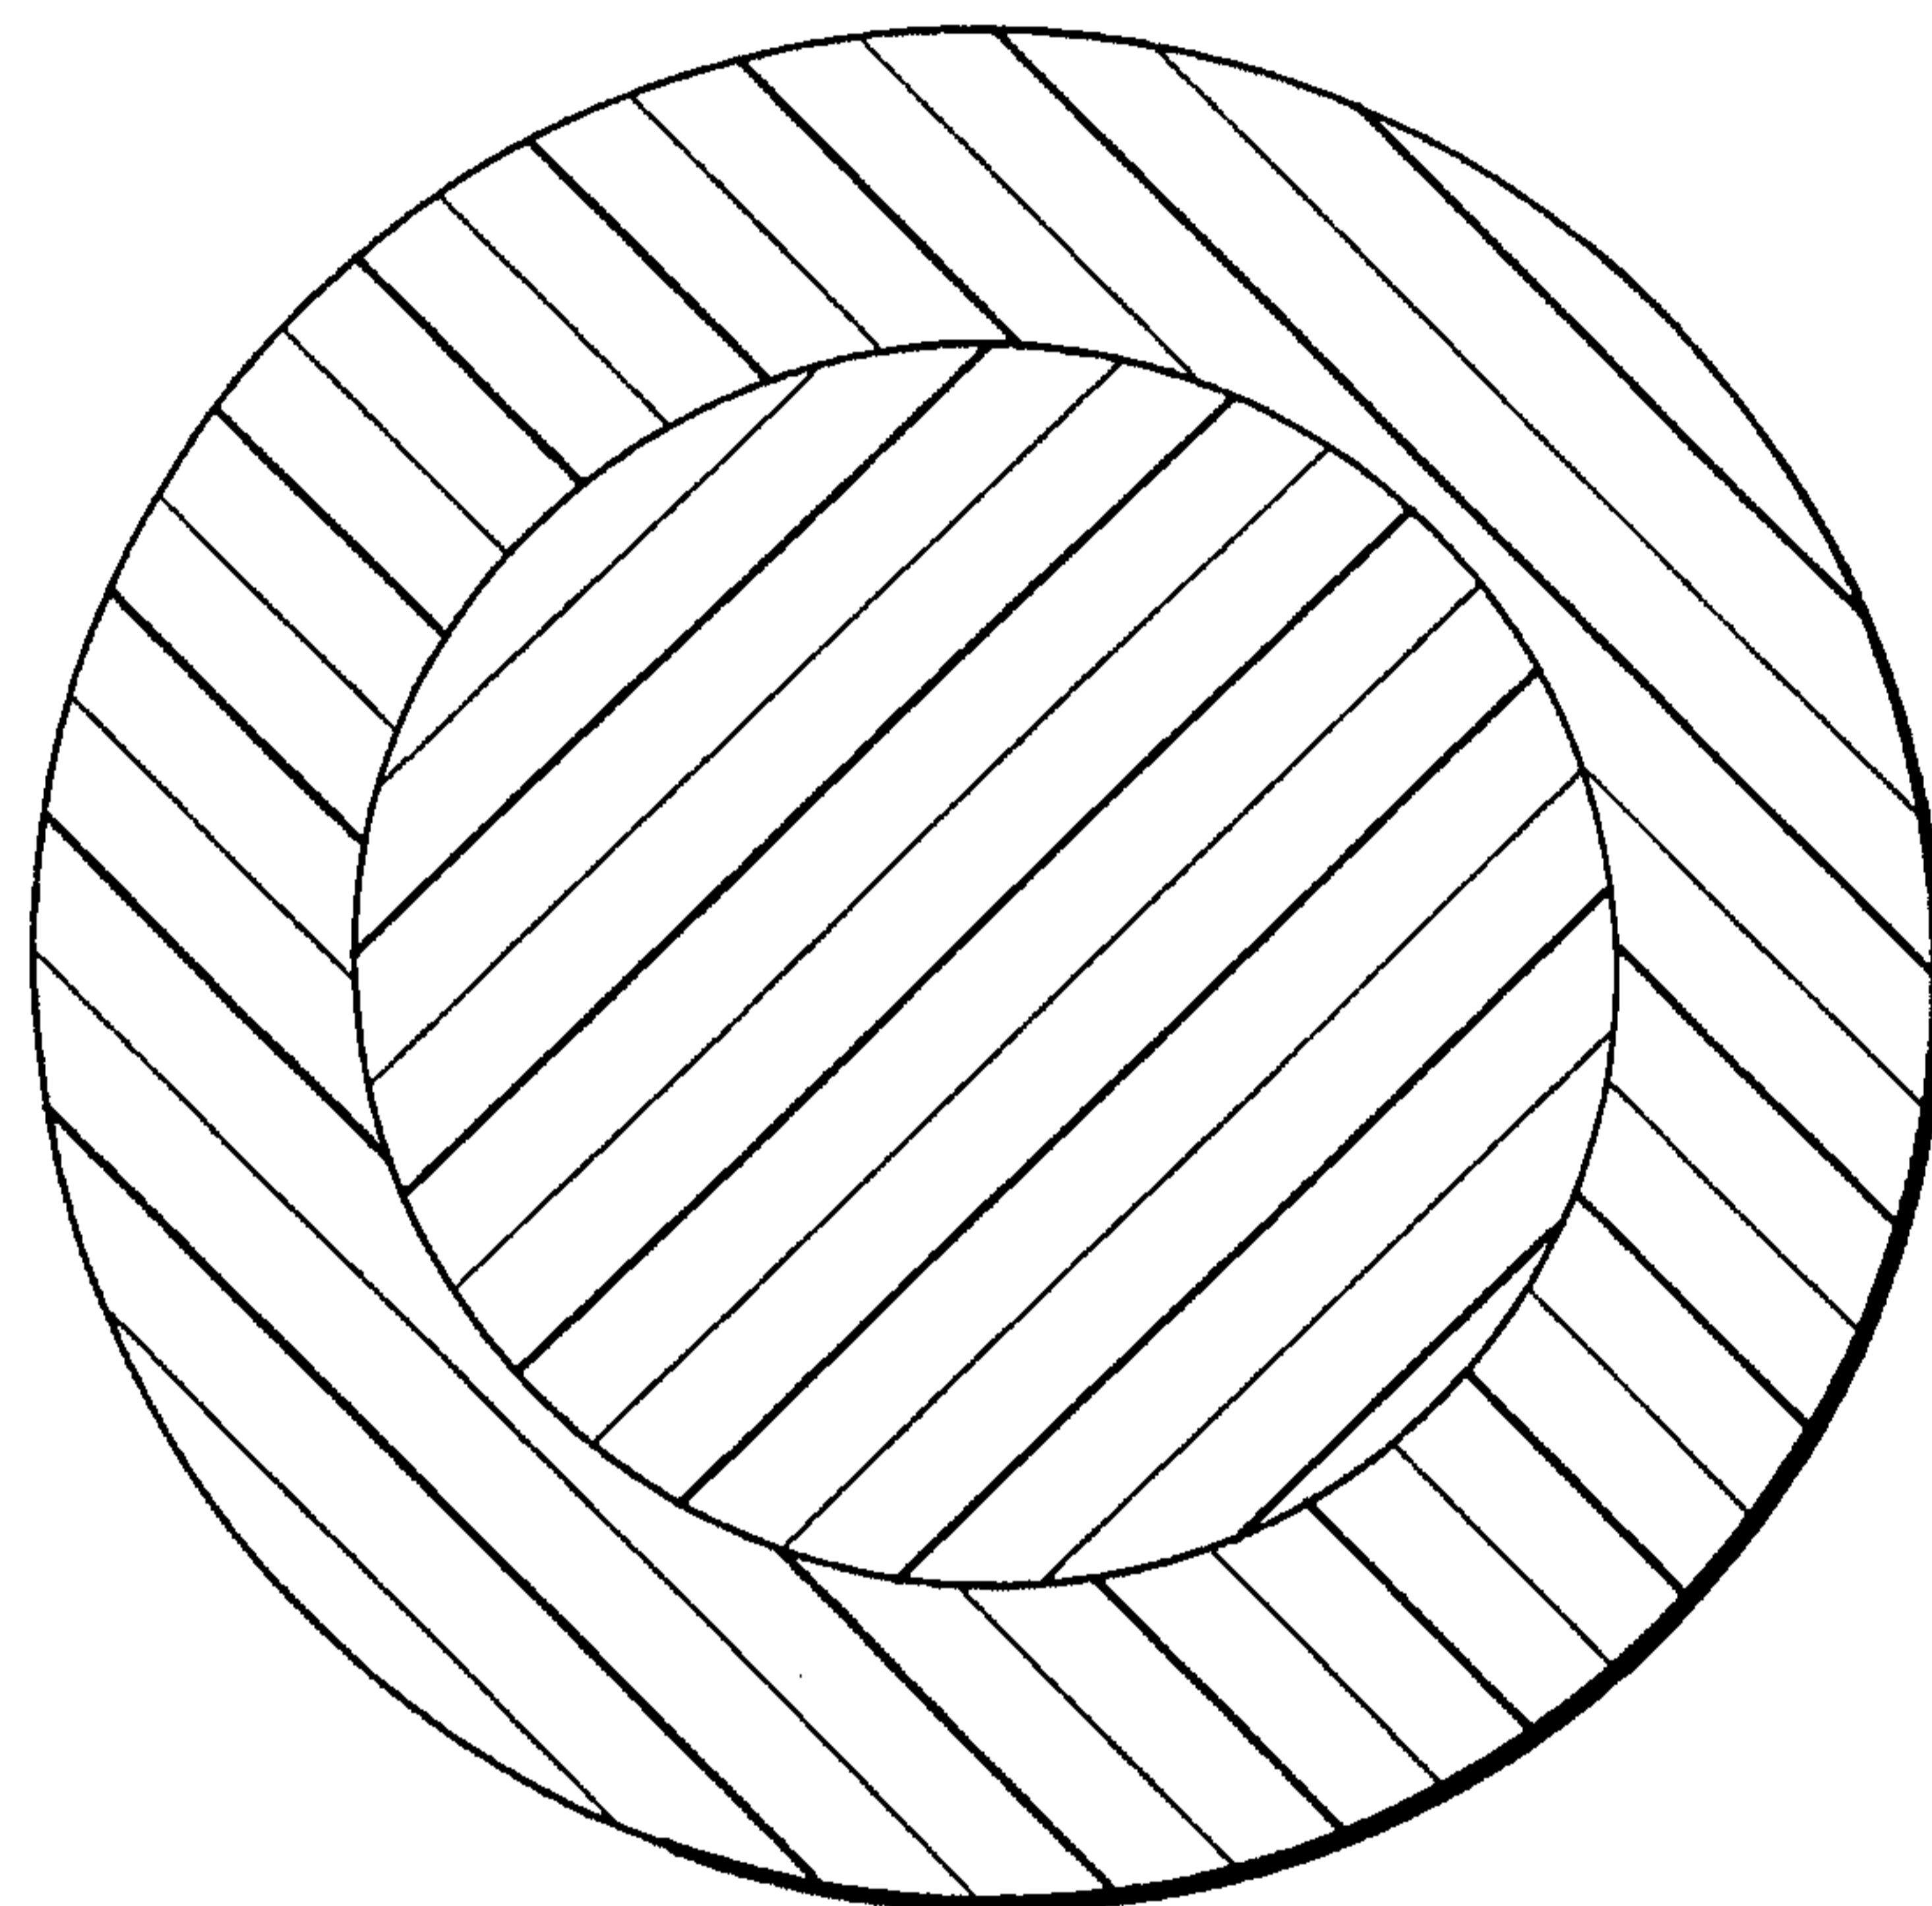

**SUBSTITUTE SHEET (RULE 20)**

