



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G09G 5/00, 3/34, 3/36, H04N 3/14	A1	(11) International Publication Number: WO 00/60572 (43) International Publication Date: 12 October 2000 (12.10.00)
(21) International Application Number: PCT/US00/09079 (22) International Filing Date: 5 April 2000 (05.04.00) (30) Priority Data: 09/286,414 5 April 1999 (05.04.99) US (71) Applicant: TIME WARNER ENTERTAINMENT CO., L.P. [US/US]; 4000 Warner Boulevard, Burbank, CA 91522 (US). (72) Inventors: THAGARD, Gregory, B.; 1120 Granville #302, Los Angeles, CA 90049 (US). DARGAN, John, H.; 1264 Via Landeta, Palos Verdes Estates, CA 90274 (US). BLOTKY, Randolph, M.; 249 Tigertail Road, Los Angeles, CA 90049 (US). (74) Agent: WEISZ, Tiberiu; Gottlieb Rackman & Reisman PC, 270 Madison Avenue, New York, NY 10016-0601 (US).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: A PICTURE FRAME WITH ELECTRONIC AND MOVING IMAGES		
(57) Abstract		
<p>A picture frame (10) that can be used to exhibit regular objects such as photographs or other art works, as well as electronic images, including still and moving images. The frame (10) includes a base, and a border forming a window (18) through which a display area is visible. Electronic displays (28) are attached to the base and/or the border, and a control circuit generates signals for the displays to display various images. The displays can be either color LCD devices or light emitting polymer devices. Imaging data for the displays (28) is stored in an internal or replaceable memory.</p> <div style="text-align: right;"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A PICTURE FRAME WITH ELECTRONIC AND MOVING IMAGES

BACKGROUND OF THE INVENTION

A. Field of Invention

This invention pertains to an improved picture frame that can be used selectively
5 to display one or more still or moving electronic images. More particularly, the
invention pertains to a picture frame having a picture display area surrounded by a
border. Electronic displays are provided in the picture display area and/or the border for
displaying of still or moving images.

B. Description of the Prior Art

10 Picture frames for displaying images are well known in the art. Depending on
their size and structure, picture frames either are free standing or can be hung on a wall.
Some frames can even be used either way. Typically, these frames are used to display
various images, including photographs, paintings and other artistic creations.

A standard picture frame includes a base that forms a picture display area, the
15 base usually being made of a relatively stiff material. To protect the object being
displayed and to enhance its visual and esthetic effect, a border is often provided around
the display area secured to the base. This border may consist of a sheet of paper,
cardboard or other material. Frames are often made or finished with decorative designs
that are very ornate.

20 A disadvantage of a standard picture frame is that it is constructed and arranged

to display only a single object and its border is static in the sense that changing it is either impossible or very difficult.

Various devices are also available for displaying a plurality of pictures. One such device is formed in the shape of a drum with a plurality of individual jackets coupled to a center shaft, each jacket holding one or two pictures. Rotating the shaft allows a viewer to see the pictures in sequence. Another device capable of displaying several pictures includes a closed housing with a viewing window. A mechanical member inside the housing is manipulated to cause pictures within the housing to be moved to the window for viewing. Both of these latter devices are cumbersome to load and to operate. Moreover, these devices again have only a static border, if any, which cannot be changed.

A further problem with existing picture frames is that they cannot be used to display digital images directly. In the past few years, digital photography has become very popular. Some experts believe that in the near future, this technology will completely replace standard photographic techniques based on chemical imaging. Pictures taken with digital cameras are stored as digital data. A major advantage of these pictures is that, since they are stored digitally, they can be manipulated easily to correct various imperfections, to add new esthetic effects or to change portions of the pictures and even their colors. However, until now, digitally generated pictures could be displayed and viewed only in two ways: they could be displayed directly on the monitor of a computer or hard copies could be printed. The first method requires the use of a computer. The second method is not practical, except in commercial applications, because photographic quality printers and papers are expensive. Moreover, once printed, pictures can be displayed only by using a standard frame of the kind discussed above.

OBJECTIVES AND SUMMARY OF THE INVENTION

An objective of the present invention is to provide a picture frame constructed and arranged to display either still or moving digital images.

A further objective is to provide a picture frame that can selectively be used to
5 display either a standard picture or other graphic artwork or an electronic image.

Yet another objective is to provide a picture frame with a dynamic border on which various still or moving images can be generated at will.

Other objectives and advantages of the invention will become apparent from the following description of the invention.

10 Briefly, the subject picture frame consists of a base having a top surface, at least partially covered by an active main display. Attached to the base is a border extending generally along the periphery of the base and defining a window through which the main display is visible. A transparent cover may be mounted on top of the base and attached to the border. A pocket is thus formed between the base and the border. A standard
15 picture or other art work can be slipped or otherwise inserted into this pocket so that it rests on the base and is visible through the window.

The border also has an outer surface having with one or more border displays. Various still and moving images can be selectively displayed on the border displays, the images comprising ornamental designs, and/or alphanumeric characters providing
20 information about the image on the main display or the picture disposed in the pocket. The images displayed on the border displays can still images or moving images related to the image or picture shown by the main display.

An electronic circuit is also provided which includes a controller and a display driver. The controller generates control signals translated by the driver circuit into

corresponding data signals for the main display, if an image is to be generated, and/or for the border displays. The data for the images is stored in a memory that may be a permanently installed memory or it may be a removable memory such as a flash memory card, or both.

5 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a front view of a picture frame constructed in accordance with this invention;

Figure 2 shows a side view of the picture frame of Figure 1;

Figure 3 shows an enlarged partial sectional view of the upper part of the picture
10 frame of Figures 1 and 2 taken along line III-III in Figure 1;

Figure 4 shows a block diagram of an electronic circuit used to control the images displayed by the picture frame of Figures 1-3; and

Figure 5 shows the picture frame of Figures 1-4 with a photograph on the main display and images on the border displays.

15 DETAILED DESCRIPTION OF THE INVENTION

Referring now to Figures 1-3, a picture frame 10 is illustrated having a base 12 made of cardboard or other relatively stiff material, and a border 14 attached circumferentially to the base 12. The base 12 has an inner surface 16. Border 14 is formed with a window 18. The window may have any geometric shape desired although
20 rectangular is preferred. A transparent cover 19 may be positioned in the window 18 and attached to the border 14 in any known manner.

In one aspect of the invention, a display 20 is mounted on the inner surface 16 of

the base 12. Display 20 may be made of LCD material, such as displays available from Micro Display Corporation of Richmond, California or Kopin Corporation of Taunton, Massachusetts, or it may be a display made of a light emitting polymer (LEP), such as displays available from Cambridge Display Technology of Cambridge, United Kingdom.

5 A slot 22 is formed between the border 14 and the inner surface 16 to allow a picture 24 to be inserted. In such a case, display 20 is covered.

Border 14 includes a support 26 generally made of a stiff material. The border 14 is further provided with a plurality of border displays 28 mounted on the support 26. The border displays 28 are constructed in the same way as display 20. Each display 28 may
10 be arranged so that it is coextensive with a portion of the support 26, but together all of displays 28 may substantially cover the whole support 26. Alternatively, the displays 28 may extend only partially over the support 26, as shown in Figure 1. Of course, if desired, only one or two displays 28 may be provided on support 26, disposed, for example, along the top and/or bottom portions of the border 14.

15 A control circuit 30 is also provided to control operation of the displays 20 and 28. As seen in Figure 2, the control circuit may be disposed in a housing 31 attached to the back of the base 12. Alternatively, the control circuit may be imbedded in base 12, support 26, or any other portion of frame 10.

Details of the control circuit are shown in Figure 4. The control circuit includes
20 a microprocessor 32, a memory 34, and display drivers 36, 38, driver 36 being associated with the main display 20 and driver 38 being associated with the border displays 28. The memory 34 is used to store imaging data and is wired permanently as part of the control circuit. Additional digital data may be provided by a removable memory 34A, which may be, for instance, a flash card (see Figure 2). The images are stored in memories 34,

34A using an encoding scheme (e.g., MPEG or JPEG) selected to insure that a large number of images can be stored efficiently. The data from memory 34 and/or memory 34A is selectively retrieved by the microprocessor 32 and is used to generate commands to the drivers 36 and 38.

5 The control circuit of Figure 4 may also be provided with means for setting and changing operational parameters, such as keys 40 and 42 (see Figure 2) and a timer 44.

When the displays 20 and 28 are off, the frame 10 can be used in a normal manner by inserting a picture 24 into slot 22, so that it is disposed in the pocket formed between base 12 and border 14. In this configuration, the picture 24 can be viewed
10 through the window defined by the edges 18, and is protected by the cover 19, just like in a standard frame.

The frame can also be used even without a picture by activating the control circuit 30, thereby causing the microprocessor 32 to show an image on the main display 20. In the simplest mode of operation, only a single image is shown on the main display
15 20.

Alternatively, memory 34 and/or 34A can hold data corresponding to a plurality of images. The circuit 30 may be set, for example, with key 40 to show one image on main display 20. Each time key 40 is activated by a user, another image may be retrieved from memory 34 or 34A and displayed on display 20. Similarly, one or more
20 images may be retrieved and displayed on the border displays 28. Figure 5 shows the frame 10 with images being displayed on the main display 20 and the border displays 28. If desired, frame 10 can also display images stored in memories 34, 34A in a predetermined sequence to generate a slide show. This mode of operation is initiated by activating key 42. Key 42 in turn activates the timer 44. The timer 44 controls the

microprocessor 32 to retrieve successive images from the memory 34 or 34A at regular intervals and to display it on the main display 20. The same or different images may be displayed at regular intervals on the border displays 28 as well.

Flash cards have a large capacity and can store sufficient data for a large number of images to be displayed at a high rate (for example 12-30 images per second). These images can be used to generate a sequence of moving images. Since the total number of images thus stored may be insufficient to generate a lengthy sequence, the microprocessor 32 may be programmed to loop the images so they are played in sequence repeatedly. The sequence of images can be generated on main display 20 or on the border displays 28.

Images may also be loaded into memory 34 from an external source, such as a personal computer. For this purpose, an external interface 50 may be provided which may be, for example, an RS-232 interface, a serial or parallel port, an IR or RF coupler, and so on. A user can generate an image on his computer, or downloaded it, for example from the Internet, and then transmit this image to the microprocessor 32 via interface 50. The interface 50 can then store this image in the memory 34.

Numerous modifications may be made to this invention without departing from its scope as defined in the appended claims.

We claim:

1. A picture frame comprising:
 - a base having a surface defining a display area;
 - an electronic display mounted on said surface in said display area; and
 - a control circuit including a memory that stores imaging data, said control circuit generating signals for said electronic display corresponding to said imaging data to generate an image on said electronic display.
2. The picture frame of claim 1 further comprising a border attached to said base, said border forming a window around said display area.
3. The picture frame of claim 1 further comprising an object securing member that cooperates with said base to secure an object over said display area for exhibiting the object.
4. The picture frame of claim 3 wherein said object securing member includes a border attached to said base and cooperating with said base to form a pocket for the object.
5. The picture frame of claim 1 further comprising a border and a border display attached to said border, said control circuit further generating signals for said border display.

6. The picture frame of claim 5 wherein said control circuit has multiple modes of operation, and further comprises a control key for changing said modes of operation.

7. The picture frame of claim 5 wherein said memory stores imaging data corresponding to a plurality of images, and wherein said control circuit includes a control key for controlling a sequential display of said images on said electronic display.

8. The picture frame of claim 7 wherein said control circuit and said memory cooperate to generate moving images on said electronic display.

9. A picture frame comprising:

a base having a surface defining a display area;

an electronic display mounted on said surface in said display area;

a control circuit including a memory that stores imaging data, said control circuit generating signals for said electronic display corresponding to said imaging data to generate an image on said electronic display; and

a border attached to said base, said border forming a window around said display area;

said border cooperating with said base to selectively secure an object over said base.

10. The picture frame of claim 9 wherein said control circuit and said memory cooperate to generate moving images on said electronic display.

11. The picture frame of claim 9 wherein said border includes a plurality of border displays, said control circuit further generating signals for said border displays to form images thereon.

12. A picture frame comprising:

a base;

a border attached to said base and forming a window to define a display area on said base;

an electronic display mounted on one of said base and border; and

a control circuit that generates electrical signals for said electronic display to control the the display of a preselected image.

13. The picture frame of claim 12 wherein said base and border cooperate to form a pocket arranged to hold an object to be displayed by said picture frame.

14. The picture frame of claim 12 further comprising a memory that stores digital data defining said preselected image.

15. The picture frame of claim 14 wherein said memory is a removable memory.

16. The picture frame of claim 12 wherein said electronic display is a color LCD device.

17. The picture frame of claim 11 wherein said electronic display is a color light

emitting polymer device.

18. The picture frame of claim 17 wherein said memory stores imaging data corresponding to a plurality of images.

19. The picture frame of claim 18 wherein said memory and said control circuit cooperate to generate a sequence of moving images on said electronic display.

20. The picture frame of claim 17 wherein said memory comprises a replaceable memory.

1/2

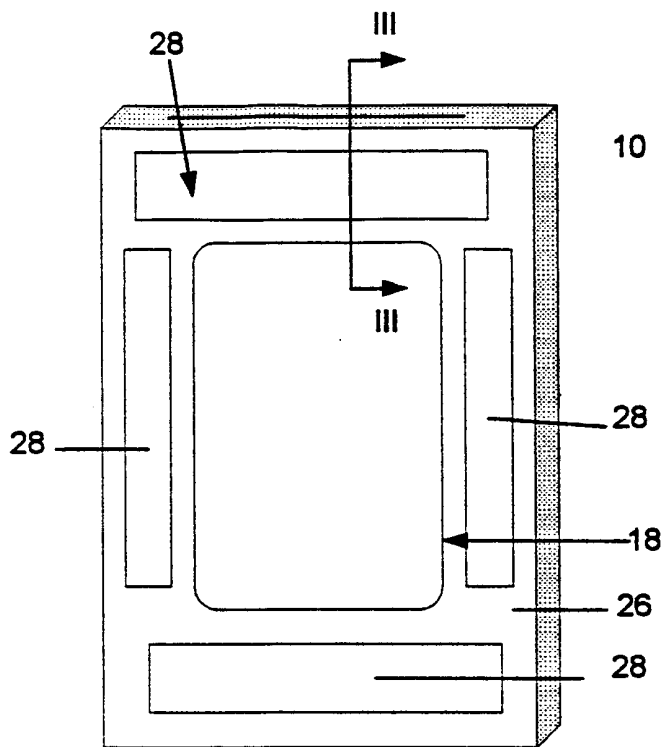


FIGURE 1

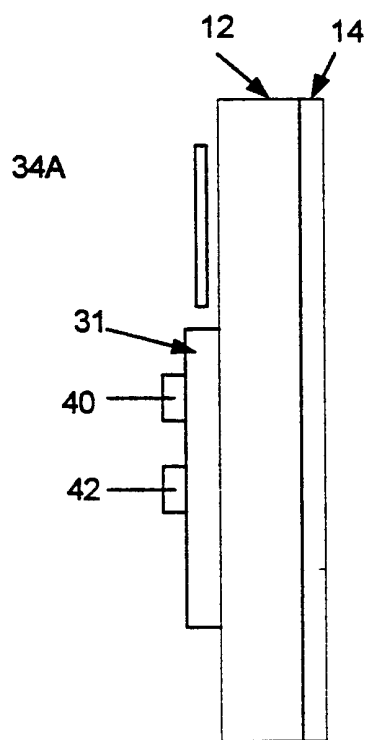


FIGURE 2

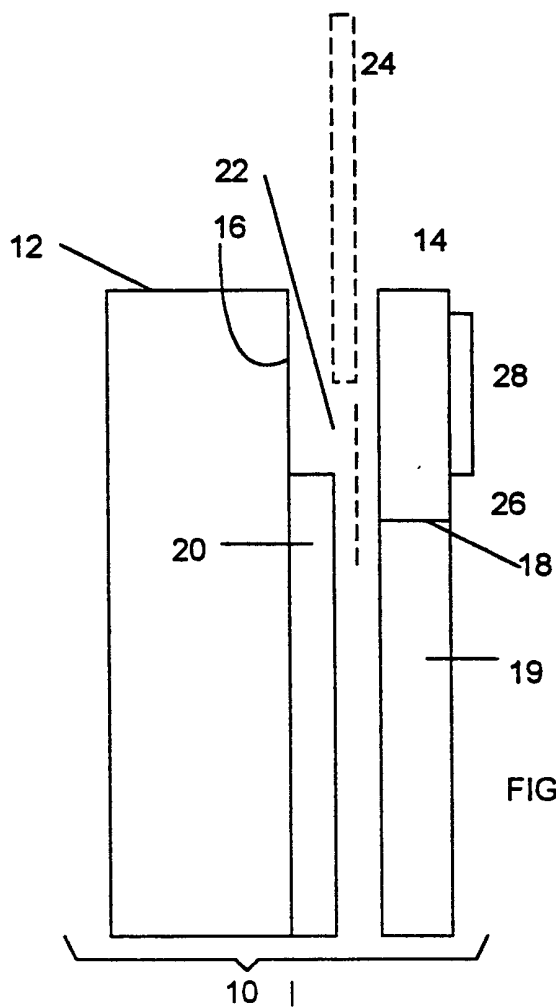


FIGURE 3

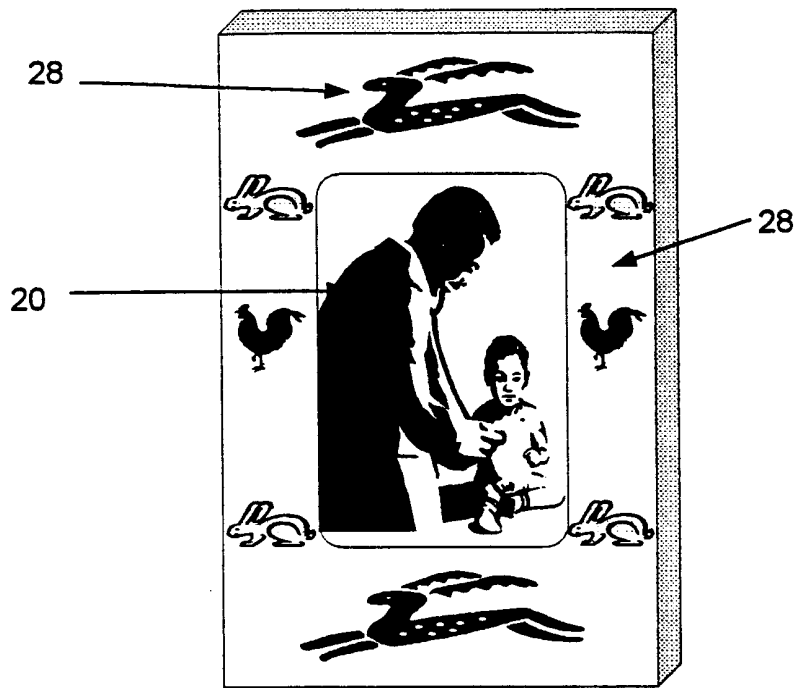


FIGURE 5

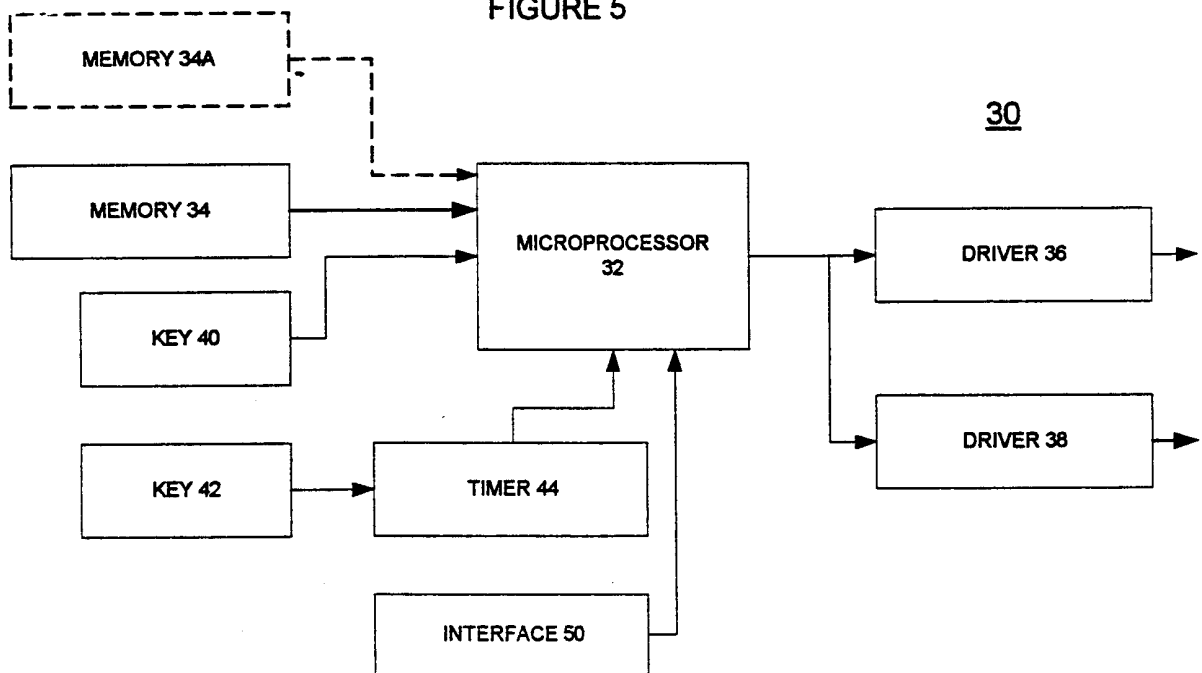


FIGURE 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/09079

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G09G 5/00, 3/34, 3/36; H04N 3/14

US CL : 345/1, 84-98; 348/790

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 345/1, 84-98; 348/790

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST

search terms: picture frame, LCD, polymer, electronic, display

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,459,819 A (WATKINS et al) 17 October 1995, figs. 2-4, col. 7, lines 8-19 & col. 9, line 43 - col. 10, line 16.	1, 2, 5-6, 9, 11-12, 14 ----- 3, 7-8, 10, 15-20
Y	US 4,754,271 A (EDWARDS) 28 June 1988, fig. 3, col. 3, line 5 - col. 4, line 18.	3, 7-8, 10, 15-16, 19-20
Y	US 4,614,668 A (TOPP et al) 30 September 1986, col. 2, lines 29-61.	17-20
A	US 5,442,374 A (KOIZUMI) 15 August 1995, ALL	1-20
A	US 5,629,796 A (SHANKS) 13 May 1997, ALL	1-20

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & * document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

15 JUNE 2000

Date of mailing of the international search report

11 JUL 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JEFF PIZIALI

Telephone No. (703) 305-8382

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/09079

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 5,963,214 A (COK et al) 05 October 1999, ALL	1-20