

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Linear compressor

(51)⁶ International Patent Classification(s)
F04B 17/04 (2006.01) 35/04
F04B 35/04 (2006.01) 20060101ALI2006010
F04B 39/00 (2006.01) 1BHAU **F04B**
F04B 17/04 39/00
20060101AFI2006010 20060101ALI2006010
1BHAU **F04B** 1BHAU
PCT/NZ00/00201

(21) Application No: 2000279741 (22) Application Date: 2000 .10 .17

(87) WIPO No: W002/35093

(43) Publication Date : 2002 .05 .06
(43) Publication Journal Date : 2002 .07 .11

(71) Applicant(s)
Fisher & Paykel Appliances Limited

(72) Inventor(s)
Lee, Geoffrey Alan; Seagar, Neville David; Patel, Upesh; Duncan, Gerald David; McGill, Ian Campbell; Taylor, Andrew Paul

(74) Agent/Attorney
A J PARK, Level 11 60 Marcus Clarke Street, Canberra, ACT, 2601

(56) Related Art
EP 0499367 B1
WO 1998/001675A1
US 3947155 A

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 May 2002 (02.05.2002)

PCT


(10) International Publication Number
WO 02/35093 A1

- (51) International Patent Classification: **F04B 17/04**, 35/04, 39/00
- (21) International Application Number: PCT/NZ00/00201
- (22) International Filing Date: 17 October 2000 (17.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **FISHER & PAYKEL APPLIANCES LIMITED** [NZ/NZ]; 78 Springs Road, East Tamaki, Auckland (NZ).
- (72) Inventors; and
(73) Inventors/Applicants (for US only): **SEAGAR, Neville, David** [NZ/NZ]; 89 Benson Road, Remuera, Auckland (NZ). **McGILL, Ian, Campbell** [NZ/NZ]; 88 Kohimarama Road, Kohimarama, Auckland (NZ). **DUNCAN, Gerald, David** [NZ/NZ]; 12 Cedar Road, Ipsom, Auckland (NZ). **PATEL, Upesh** [NZ/NZ]; 25a Quona Avenue, Hillsborough, Auckland (NZ). **TAYLOR, Andrew, Paul**
- [NZ/NZ]; 139 Point View Drive, Howick, Auckland (NZ). **LEE, Geoffrey, Alan** [NZ/NZ]; 7 Kilsyth Way, Howick, Auckland (NZ).
- (74) Agents: **CALHOUN, Douglas, C.** et al.; A J Park, Intellectual Property Lawyers and Patent Attorneys of Huddart Parker, Building, 1 Post Office Square, Wellington 6015 (NZ).
- (81) Designated States (national): AI, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GL, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LR, LS, LI, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]



(54) Title: LINEAR COMPRESSOR

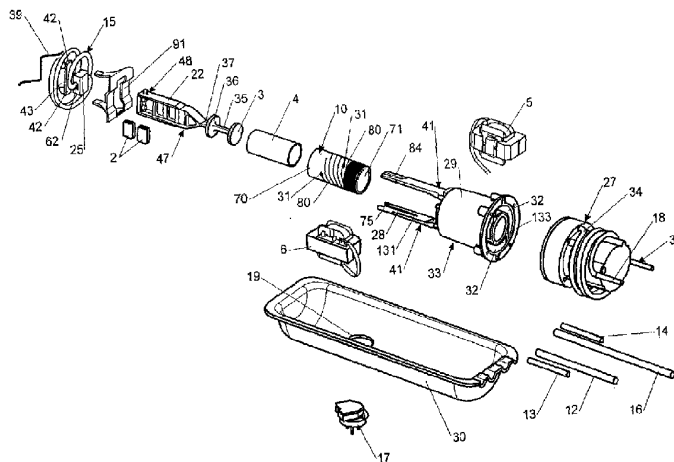

WO 02/35093 A1

(57) Abstract: A linear compressor comprising a cylinder part (10) including a cylinder bore (71) and a piston (4) disposed in, and slidable within the bore (71). A main spring (15) connects the cylinder part (10) directly or indirectly with the piston (4). A connecting rod (47) connects between the main spring (15) and the piston (4). A stator (5) has an air gap through which the connecting rod (47) passes. At least one armature pole (2) is located along the connecting rod (47).



Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

LINEAR COMPRESSOR

BACKGROUND TO THE INVENTION

Field of the Invention

5 The present invention relates to a linear compressor, particularly but not solely for use in refrigerators.

SUMMARY OF THE PRIOR ART

10 Compressors, in particular refrigerator compressors, are conventionally driven by rotary electric motors. However, even in their most efficient form, there are significant losses associated with the crank system that converts rotary motion to linear reciprocating motion. Alternatively a rotary compressor which does not require a crank can be used but again there are high centripetal loads, leading to significant frictional losses. A linear compressor driven by a linear motor would not
15 have these losses, and can be designed with a bearing load low enough to allow the use of aerostatic gas bearings as disclosed in US Patent 5,525,845, where a laterally compliant connecting rod allows for the low bearing load

20 A discussion of aerostatic gas bearings is included in "Design of Acrostatic Bearings", J W Powell, The Machinery Publishing Company Limited, London 1970. However with normal manufacturing tolerances and equipment production of effective gas bearings is difficult.

25 Conventional compressors are mounted within a hermetically sealed housing which in use acts as a reservoir of refrigerant gas. Refrigerant gas is drawn into the compressor from this reservoir and is exhausted through an exhaust conduit leading from the compressor, through the housing.

30 Operation of the compressor involves the reciprocation of moving parts leading to vibration of the compressor unit, in all three axis. To reduce the external noise effect of this vibration the compressor is mounted on isolation springs within the sealed housing.

 With a linear compressor the piston vibrates relative to the cylinder in only one axis, with consequent reaction forces on whichever part, if either, is fixed. One

solution proposed to this problem is to operate a pair of compressors synchronously in a balanced and opposed configuration. However this arrangement would be too complex and costly for use in a commodity item such as a domestic refrigerator. Another proposed solution is the addition of a resonant counterweight to reduce the vibration. However this approach limits the operation of the compressor because the counterweight is a negative feedback device and is limited to the fundamental unbalance force. A further solution is proposed in "Vibration characteristics of small rotary and linear cryogenic coolers for IR systems", Gully and Hanes, Proceedings of the 6th International Cryocooler Conference, Plymouth, Massachusetts, 1990. This solution involves independently supporting the piston part and the cylinder part of the compressor within the housing so that the "stator acts as a counterweight". However in implementing this design in a domestic refrigerator there is a problem when the piston mass is low. In such a compressor, as the discharge pressure increases, the force of the compressed gas acts as a spring (the "gas spring") which increases the running speed as the discharge pressure increases. This is a problem because the "third" vibration mode (where the piston and the cylinder vibrate in phase with each other but out of phase with the compressor shell) is only slightly above the desirable "second" mode (where the shell does not vibrate and the piston and cylinder are out of phase). Thus the shell starts to vibrate intolerably as the "gas spring" starts to operate and effectively raises the "second" mode frequency to, and eventually above, the "third" mode.

It is desirable for many applications for the compressor to be of small size. This reduces the size of all components including the springs and their resonant system. Reducing the size of the compressor requires the compressor to run at higher frequencies. Reduced size in higher frequencies combined to increase the stresses in the spring components. In some linear compressors main springs have been made from pressed spring steel sheet. It has been found that the edges cut in the pressing operation require careful polishing to regain the original strength of the spring steel sheet, and are frequently subject to failure through inadvertent stress concentrations.

A further problem of compressors generally has been the build up of heat, particularly in the vicinity of the compressor cylinder and the cylinder head. The

build up of heat is caused by friction between moving components and by heat transferred from the compressed refrigerant. The build up of heat creates significant problems of increased wear and of running conditions and tolerances between parts which vary according to the time period for which the compressor has been running.
5 These effects may be particularly significant for linear compressors which may run for long periods of time and for which close clearances are particularly important, especially when aerostatic gas bearing systems are being used.

Another heating effect is from the irreversible heat loss prior to re-expansion from the refrigerant remaining within the compression space after compression. In
10 linear compressors up to 15% of the compressed refrigerant may not be expelled, compared to up to 5% in crank driven compressors. This source of heat, which is negligible in conventional compressors, is an important source in linear compressors.

One approach to cooling the cylinder and cylinder head of the compressor involves using liquid refrigerant supplied from the condenser in the subsequent
15 refrigeration system. For example in US patent 2510887 liquid refrigerant from the condenser is supplied to a first cooling jacket surrounding the cylinder thence to a second cooling jacket surrounding the compressor head and subsequently is ejected from a venturi device into the discharge line connecting between the cylinder head and the condenser. This is in the context of a standard crank driven compressor.
20 Also in the context of a standard crank driven compressor US 5694780 shows a circuit in which liquid refrigerant from the condenser is elevated to a higher pressure by a pump. This liquid refrigerant is pumped into a cooling jacket surrounding the compressor cylinder. The liquid refrigerant is forced from the cooling jacket into the exhaust manifold into the cylinder head of the compressor where it mixes with the
25 compressed refrigerant as the compressed refrigerant exits the compressor. This arrangement has the disadvantage of requiring an additional pump for forcing the liquid refrigerant through the cooling jacket surrounding the cylinder and subsequently into the exhaust manifold against the pressure of the compressed gas.

Many linear compressors have been made inside conventional compressor
30 sheets as they have been intended as a drop in replacement for existing rotary-reciprocating compressors which are a commodity item. To achieve this compact

- 4 -

Many linear compressors have been made inside conventional compressor sheets as they have been intended as a drop in replacement for existing rotary-reciprocating compressors which are a commodity item. To achieve this compact size compressors have been made in which the stator, armature, cylinder and piston are all concentrically located. But conventional compressor dimensions constrain the size of the machinery compartment of a refrigerator and lead to wasted space in the compartment surrounding the compressor.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a compact linear compressor which goes some way to overcoming the abovementioned disadvantages.

In a first aspect the present invention consists in a linear compressor comprising:

a cylinder part including a cylinder bore, and a stator having an air gap,
a piston disposed in said bore and slidable therein,
a main spring connecting said cylinder part to said piston,
a connecting rod between said main spring and said piston passing through said air gap of said stator and connecting said main spring to said piston,
and
one or more substantially flat blocks of permanent magnet material supported on said connecting rod with the large faces of said blocks facing the stator, said permanent magnet material magnetised to define at least one armature pole.

In a further aspect the present invention consists in a linear compressor comprising:

a cylinder part including a cylinder bore,
a piston disposed in said bore and slidable therein,
a main spring connecting said cylinder part to said piston, and
a connecting rod between said main spring and said piston and connecting said main spring to said piston, with at least one of:

(a) the connection between said piston and piston rod, and

- 5 -

(b) the connection between said piston rod and said main spring,
being a compliant connection transmitting side and axial loads but allowing
rotation about axes transverse to the axis of reciprocation of said piston in said bore.

In a further aspect the present invention consists in a linear compressor
5 comprising:

a cylinder part including a cylinder housing, cylinder bore in said cylinder
housing, a cylinder head at one end of said housing and a stator having a pair of
winding carrying stator parts, each connected to said cylinder housing at an end
opposite said cylinder head with an air gap between said stator parts,

10 a piston disposed in said bore and slidable therein,

a main spring located at an end of said stator away from said cylinder head,
connecting said cylinder part to said piston,

a connecting rod passing through said stator air gap between said main spring
and said piston and connecting said main spring to said piston, and

15 an armature located along said connecting rod working within said air gap of
said stator and connected with said connecting rod.

In a further aspect the present invention consists in a linear compressor
comprising:

a cylinder part including a cylinder bore, and a stator having an air gap,

20 a piston disposed in said bore and slidable therein,

a main spring connecting said cylinder part to said piston,

a connecting rod between said main spring and said piston passing through
said air gap of said stator and connecting said main spring to said piston, and

at least one armature pole located along said connecting rod,

25 wherein said connecting rod is supported only by said piston at one end and
by said main spring away from said one end.

To those skilled in the art to which the invention relates, many changes in
construction and widely differing embodiments and applications of the invention
will suggest themselves without departing from the scope of the invention as defined

30 in the appended claims. The disclosures and the descriptions herein are purely

2000279741 03 Jul 2006

- 6 -

illustrative and are not intended to be in any sense limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Figure 1 is a partially exploded view from above of a linear compressor according to the preferred embodiment of the present invention;

Figure 2 is an exploded view of the motor end of the compressor assembly from an alternative direction,

10 Figure 3 is an exploded view of the head end of the compressor assembly from one direction; and

Figure 4 is an exploded view of the head end of the compressor assembly from another direction.

DETAILED DESCRIPTION

General Configuration

15 A practical embodiment of the invention, shown in the Figures, involves a permanent magnet linear motor driving a resonantly reciprocating compressor, together operating within a hermetic casing. The compressor includes a piston 3, 4 reciprocating within a cylinder bore 71 and operating on a working fluid which is alternately drawn into and expelled from a compression space at the head end of the
20 cylinder. A cylinder head 27 connected to the cylinder encloses an open end of the cylinder bore 71 to form the compression space and includes inlet and outlet valves 118, 119 and associated manifolds. The compressed working gas exits the compression space through the outlet valve 119 into a discharge manifold. The discharge manifold channels the compressed working fluid into a cooling jacket 29
25 surrounding the cylinder 71. A discharge tube 18 leads from the cooling jacket 29 and out through the hermetic casing.

The cylinder 71 and jacket 29 are integrally formed as a single entity 33 (for example a casting). The jacket 29 comprises one or more open ended chambers 32 substantially aligned with the reciprocation axis of the cylinder 71 and surrounding
30 the cylinder 71. The open ended chambers 32 are substantially enclosed to form the

- 7 -

jacket space (by the cylinder head assembly 27).

The linear motor includes a pair of opposed stator parts 5, 6 which are rigidly connected to the cylinder casting 33.

5 The piston 3, 4 reciprocating within the cylinder 71 is connected to the cylinder assembly 27 via a spring system. It operates at or close to its natural resonant frequency. The primary spring element of the spring system is a main spring 15. The piston 3, 4 is connected to the main spring 15 via a piston rod 47. The main spring 15 is connected to a pair of legs 41 extending from the cylinder casting 33. The pair of legs 41, the stator parts 5, 6, the cylinder moulding 33 and
10 the cylinder head assembly 27 together comprise what will be referred to as a cylinder part 1 during discussion of the spring system.

The piston rod 47 connects the piston 3, 4 to the main spring 15. The piston rod 47 is preferably a rigid piston rod. The piston rod has a plurality of permanent magnets 2 spaced along it and forms the armature of the linear motor.

15 For low frictional loading between the piston 3, 4 and the cylinder 71, and in particular to reduce any lateral loading, the piston rod 47 is resiliently and flexibly connected with both the main spring 15 and with the piston 3,4. In particular a resilient connection is provided between the main spring end 48 of the piston rod 47 in the form of a fused plastic connection between an over moulded button 49 on the
20 main spring 15 and the piston rod 47. At its other end the piston rod 47 includes a pair of spaced apart circular flanges 3, 36 which fit within a piston sleeve 4 to form the piston. The flanges 3, 36 are in series with and interleaved with a pair of hinging regions 35, 37 of the piston rod 47. The pair of hinging regions 35, 37 are formed to have a principle axis of bending at right angles to one another.

25 At the main spring end 48 the piston rod 47 is effectively radially supported by its connection to the main spring 15. The main spring 15 is configured such that it provides for a reciprocating motion but substantially resists any lateral motion or motion transverse to the direction of reciprocation of the piston within the cylinder. In the preferred embodiment of the invention the lateral stiffness is approximately
30 three times the axial stiffness.

- 8 -

2000279741 03 Jul 2006

The assembly which comprises the cylinder part is not rigidly mounted within the hermetic casing. It is free to move in the reciprocating direction of the piston, apart from supporting connections to the casing: the discharge tube 18, a liquid refrigerant injection line 34 and a rear supporting spring 39. Each of the discharge tube 18 and the liquid refrigerant injection line 34 and the rear supporting spring 39 are formed to be a spring of known characteristic in the direction of reciprocation of the piston within the cylinder. For example the tubes 18 and 34 may be formed into a spiral or helical spring adjacent their ends which lead through the hermetic casing 30.

The total reciprocating movement is the sum of the movement of the piston 3, 4 and the cylinder part.

The Gas Bearings

The piston 3, 4 is supported radially within the cylinder by acrostatic gas bearings. The cylinder part of the compressor includes the cylinder casting 33 having a bore 71 therethrough and a cylinder liner 10 within the bore 71. The cylinder liner 10 may be made from a suitable material to reduce piston wear. For example it may be formed from a fibre reinforced plastic composite such as carbon fibre reinforced nylon with 15% PTFE (also preferred for the piston rod and sleeve), or may be cast iron with the self lubricating effect of its graphite flakes. The cylinder liner 10 has openings 31 therethrough, extending from the outside cylindrical surface 70 thereof to the internal bore 71 thereof. The piston 3, 4 travels in the internal bore 71, and these openings 31 form the gas bearings. A supply of compressed gas is supplied to the openings 31 by a series of gas bearing passages. The gas bearing passages open at their other ends to a gas bearing supply manifold, which is formed as an annular chamber around the cylinder liner 10 at the head end thereof between the liner 10 and the cylinder bore 71. The gas bearing supply manifold is in turn supplied by the compressed gas manifold of the compressor head by a small supply passage 73. The small size of the supply passage 73 controls the pressure in bearing supply manifold, thus limiting the gas consumption of the gas bearings.

- 9 -

2000279741 03 Jul 2006

The gas bearing passages are formed as grooves 80 in the outer wall 70 of the cylinder liner 10. These grooves 80 combine with the wall of the other cylinder bore 71 to form enclosed passages leading to the openings 31. It will be appreciated that while the grooves could alternatively be provided in the internal wall of the cylinder bore 71 they are more readily formed in the liner 10 than in the cylinder casting 33, being on an outer surface rather than an inner surface. Being able to machine the grooves into a surface of one or other part rather than having to drill or bore passages is a significant manufacturing improvement.

It has been found that the pressure drop in the gas bearing passages needs to be similar to the pressure drop in the exit flow between the piston 3, 4 and the bore 71 of the cylinder liner 10. Since the gap between the piston 3, 4 and the cylinder liner bore 71 (for an effective compact compressor) is only 10 to 15 microns, the sectional dimensions of the passages also need to be very small (approximately 40 microns deep by 150 microns wide). These small dimensions make manufacture difficult.

However in the preferred embodiment of the present invention this matching is made easier by increasing the length of the passages so that the sectional area can also be increased, for example to 70 microns x 200 microns. This takes advantage of the ability to form grooves 80 of any appropriate shape in the surface of the liner part 10. The grooves 80 can be formed having any path, and if a tortuous path is chosen the length of the grooves 80 can be significantly greater than the direct path from the gas bearing supply manifold and the respective gas bearing forming openings 31. The preferred embodiment has the gas bearing grooves 80 following helical paths. The lengths of the respective paths are chosen in accordance with the preferred sectional area of the passage, which can be chosen for easy manufacture (either machining or possibly by some other form such as precision moulding).

The Cylinder Part

Each part 5, 6 of the stator carries a winding. Each part 5, 6 of the stator is formed with a "E" shaped lamination stack with the winding carried around the central pole. The winding is insulated from the lamination stack by a plastic bobbin.

- 10 -

The particular form of each stator part does not form part of the present invention and many possible constructions will be apparent to persons skilled in the art.

As already referred to the cylinder part 1 incorporates the cylinder 71 with associated cooling jacket 29, the cylinder head 27 and the linear motor stator parts 5, 6 all in rigid connection with one another. Furthermore the cylinder part 1 incorporates mounting points for the main spring 15, the discharge tube 18 and the liquid injection tube 34. It also carries the mountings for cylinder part connection to the main spring 15.

The cylinder and jacket casting 33 has upper and lower mounting legs 41 extending from its end away from the cylinder head. The spring 15, the preferred form of which will be described later, includes a rigid mounting bar 43 at one end for connection with the cylinder casting 33. A pair of laterally extending lugs 42 extend from the mounting bar 43 and are spaced from the mounting bar 42 in a direction toward the cylinder casting 33. The lugs 42 are located to be axially in line with the portions 67, 68 of the spring immediately adjacent the entry of the spring ends into the mounting bar 43. The upper and lower mounting legs 41 of the cylinder casting 33 each include a mounting slot for one of the lugs 42. The mounting slot takes the form of a rebate 75 on the inner face 76 of the mounting leg 41 extending from the free end 77 of the leg 41 towards the cylinder jacket 29. At least one tapered protrusion 78 is formed on the inwardly facing face 82 of each rebate 75. Each such protrusion 78 has a perpendicular face 79 facing the cylinder casting 33 so that the protrusions 78 form barbs for a snap fit connection during assembly. In particular the lateral spacing of the lugs 42, which substantially matches the spacing between opposed faces 82 of the rebates, is such that the lugs 42 will only pass the barbs 78 through deformation of the lugs 42, the mounting legs 41 or both. Once past the protrusions or barbs 78 the lugs 42 are trapped between the perpendicular faces 79 of the barbs 78 and the perpendicular faces 83 forming the end face of the rebates 75. An additional rebate or depression 84 is formed on the outer face 85 of each of the mounting legs 41. This rebate 84 extends axially along the outer face 85 and is spaced from the free end 77 of the respective mounting leg

2000279741 03 Jul 2006

- 11 -

41 at a distance such that each of the further rebates 84 at least meets with the respective rebate 75 on the inside face 76 of its mounting leg 41. The rebates 75 and 84 are of sufficient depth that where they meet or overlap at least an axial opening 86 is provided between them.

5 A clamping spring 87, preferably formed from stamped and folded non-magnetic sheet metal, has a central opening 88 through it such that it may fit over the pair of mounting legs 41. The clamping spring 87 has rearwardly extending legs 89 associated with each mounting leg 41. The free ends 90 of these legs 89 slide within
10 through the axial openings 86 between the outer and inner rebates 84 and 75. With the lugs 42 of the main spring mounting bar 43 in place in the inner rebates 75 of the mounting legs 41 these free ends 90 press against the lugs 42 and hold them against the perpendicular faces 79 of the respective barb 78. Retention of the clamping spring 87 in a loaded condition supplies a predetermined preload against the lugs 42.

15 It is preferred that the clamping spring perform the parallel task of mounting the stator parts 5, 6. The central hole 88 through the clamping spring 87 is closely dimensioned with respect to the mounting legs 41, at least in a lateral direction relative to the mounting legs 41. The clamping spring 87 includes a stator part clamping surface 91 in each of its side regions 92 which span between the mounting
20 legs 41 of the cylinder casting 33.

The cylinder casting 33 includes a pair of protruding stator support blocks 55 extending from the springward face 58 of the jacket 29 at positions in between the positions of the mounting legs 41.

Each of the "E" shaped lamination stacks of the stator part 5, 6 have a
25 vertically oriented perpendicular step 69 on their outer face 56. In each case this is an outward step taken in a direction away from the motor air gap. That portion of each of the faces 56 which is closer to the air gap bears against either the support blocks 55 of the cylinder casting 33 or the stator engaging surfaces 91 of the clamping spring 87 as appropriate. When in position natural attraction between the
30 parts of the motor will draw the stator parts 5, 6 towards one another. The width of

2000279741 03 Jul 2006

2000279741 03 Jul 2006

- 12 -

the air gap is maintained by the location of the perpendicular step 57 against outer edges 40, 72 of the mounting blocks 55 and clamping spring 87 respectively. To additionally locate the stator parts 5, 6 in a vertical direction (the stator engaging surface) of each mounting block 55 includes a notch 57 in its outer edge which in a vertical direction matches the dimension of the "E" shaped lamination stack.

This part of the motor is assembled in a series of operations. The piston assembly is introduced to the cylinder casting 33. Firstly the piston assembly including the piston rod 47 with its integral flanges 3, 36, the piston sleeve 4 and the armature magnets 2 is assembled. The piston, formed by the piston sleeve 4 and the leading flange 3, which forms the piston face, is pushed into the bore 71 of the cylinder, being introduced through the cylinder opening 7 lying between the legs 41 of the cylinder casting 33. The piston connecting rod 47 therefore resides between the legs 41. The inner facing surfaces 76 of the legs 41 include axial slots 28 extending from the rebates 75 along a centre line. Outwardly extending lugs 130 on the piston connecting rod 47 reciprocate within these slots 28 in operation. The accuracy of assembly is such that in general (in the absence of knocks or external motion) the lugs 130 will not contact the surfaces of the slots. However at their ends closest to the cylinder casting 33 the slots 28 include a narrowed and shallowed portion 131 which provides a close fit with the lugs 130 of the connecting rod 47. The piston assembly is pushed into the cylinder bore 71 until the lugs 130 engage within these narrowed portions 131 and until the face of the piston is in a predetermined position relative to the machined cylinder head receiving face 133 of the cylinder casting 33.

The clamping spring 87 is fitted over the mounting legs 41 and the main spring 15 is fitted to the legs 41 by engagement of the lugs 42 into the inwardly facing rebates 75 and past the barbs or protrusions 78. The clamping spring 87 is pushed in a direction away from the cylinder casting 33 and compresses against the mounting lugs 42 until sufficient space is available for introduction of the stator parts 5, 6 between the stator part engaging surfaces 91 of the clamping spring 87 and the mounting blocks 55 of the cylinder casting 33. The stator parts 5, 6 are then

- 13 -

introduced into their position and the clamping spring 87 is released. The width of the stator parts 5, 6 maintains a predetermined compression in the clamping spring 87.

A connection is then made between the main spring 15 and the piston rod 47.

- 5 It is to be noted that the piston is in a predetermined location which is further toward the cylinder head than will be the case during operation of the compressor. The connection is made by fusing the plastic of an over moulded button 25 on the main spring 15 and the plastic of the rearward end 48 of the piston connecting rod 47. The fusion is performed by hot plate welding. At the time of hot plate welding the spring
- 10 15 is preferably extended to a predetermined position or until the spring 15 is exerting a predetermined force. The hot plate weld and fusion between the two plastic components with the piston face in its predetermined position and the spring 15 at its predetermined displacement provides accurate location of the piston relative to the cylinder casting 33 once the spring 15 has been released to its neutral position.
- 15 This is the case irrespective of any eccentricities in the form of the spring 15 or cumulative inaccuracies due to tolerances in the components in the assembly chain.

Cylinder Head

The open end of cylinder casting 33 is enclosed by the compressor head 27.

- The compressor head thereby encloses the open end of cylinder 71, and of the
- 20 cooling jacket chambers 32 surrounding the cylinder 71. In overall form the cylinder head 27 comprises a stack of four plates 100 to 103 together with a suction muffler/intake manifold 104.

The open end of cylinder casting 33 includes a head securing flange 135. The head securing flange 135 has a number of threaded holes 136 spaced around its

25 perimeter into which securing bolts are tightened to draw the stack of plates 100 to 103 together and secure it to the face of the cylinder moulding 33.

An annular rebate 133 is provided in the face of the flange 135. On opposed sides of the flange 135 the rebate 133 includes outwardly extended lobes 137, 138 which act as ports for the discharge tube 18 and the return tube 34 respectively.

- 30 Openings are provided between the three chambers in the cylinder casting 33.

2000279741 03 Jul 2006

- 14 -

2000279741 03 Jul 2006

First head plate 100 fits over the open end of the cylinder moulding 33 within the annular rebate 133. It is relatively flexible and acts as gasket. It encloses the cylinder jacket openings but has a major central opening and does not cover the open end of cylinder 71. A compressed gases return port 110 extends through plate 100 adjacent to the lobe 138 associated with the liquid refrigerant return pipe 34. The edge of this opening 110 closest to the outer wall of the cooling jacket 29 is spaced slightly away from that wall at least in the vicinity of the lobe 138. The effect of this is that, with gases moving through the opening 110 into the cooling jacket chamber, a small area of reduced pressure is created immediately behind the plate 100 and adjacent the lobe 138 of the rebate 135.

A further opening 115 is provided through plate 100 at a position closer to the discharge pipe 18.

Second head plate 101 fits over the first plate 100. Second plate 101 is of larger diameter than plate 100 and is rigid. It may be made from steel, cast iron, or sintered steel. The plate 101 is more extensive than the rebate within which plate 100 sits. The plate 101 resides against the face of the flange and compresses the first plate 100 against the rebate. The plate 101 has openings 139 spaced around its perimeter sized so that the threaded portion of the bolts pass through freely.

The second head plate 101 incorporates a compressed gas discharge opening 111 in registration with opening 110. It also includes a further opening 117 in registration with opening 115 in first plate 100.

A portion of the plate 101 encloses the cylinder opening 116 of plate 100. Through that portion of plate 101 pass an intake port 113 and a discharge port 114. A spring steel inlet valve 118 is secured to the cylinder facing face of plate 101 such that a head portion of it covers the intake port 113. The base of the inlet valve 118 is clamped between the plate 100 and the plate 101 and its position is secured by dowels 140. A spring steel discharge valve 119 is attached to the face of plate 101 away from the cylinder. A head portion of it covers the discharge opening 114. The base of valve 119 is clamped between the second plate 101 and the third plate 102 and located by dowels 141. The discharge valve 119 fits and operates within a

- 15 -

2000279741 03 Jul 2006

discharge manifold opening 112 of the third plate 102 and a discharge manifold 142 formed in the fourth plate 103. The inlet valve 118 sits (apart from its base) within the cylinder compression space and operates in it.

5 The spring steel inlet and discharge valves 118,119 operate entirely under the influence of prevailing pressures. With the piston withdrawing in the cylinder 71 a lower pressure exists on the cylinder side of inlet valve 118 than on the inlet manifold side of it. Accordingly the inlet valve 118 opens to allow refrigerant to enter the compression chamber. With the piston advancing in the cylinder 71 a higher pressure exists in the compression space than in the inlet manifold and the
10 inlet valve 118 is maintained in its closed position by this pressure differential. The inlet valve 118 is biased towards this closed position by its own resilience.

Similarly the discharge valve is normally biased into a closed position, in which it is maintained by the prevailing pressures during withdrawal of the piston within the cylinder 71. It is pushed into an open position by a higher pressure in the
15 compression space than in the discharge manifold during advance of the piston within the cylinder 71.

The third head plate 102 fits within a circular rebate 143 in the cylinder facing face 144 of fourth plate 103. The plate 102 is relatively flexible and serves as a gasket and is compressed between fourth plate 103 and second plate 101. The third
20 plate 102 includes a large opening 112 which is in registration with an extensive rebate 142 in the face 144 of fourth plate 103. Together the opening 112 and the rebate 142 form the discharge manifold into which compressed refrigerant flows from discharge port 114.

A further opening 121 through third plate 102 is in registration with a rebate
25 145 in the face 144 of fourth plate 103. The opening 121 is also in registration with the openings 117 and 115 of second plate 101 and first plate 100. A gas filter 120 receives compressed refrigerant from the rebate 145 and delivers it to the gas bearing supply passage 73 through holes 146, 147 in the first and second plates.

An intake opening 95 through third plate 102 is in registration with intake
30 port 113 in second plate 101. The opening 95 is also in registration with an intake

- 16 -

2000279741 03 Jul 2006

port 96 passing through fourth plate 103. A tapered or frusto-conical intake 97 in the face 98 of fourth plate 103 leads to the intake port 96. The intake port 96 is enclosed by the intake muffler 104. The intake muffler 104 comprises for example a one piece moulding having a substantial open space in its side facing the cylinder casting. This space is enclosed by the fourth plate 103 when it is connected to it. The suction muffler 104 may be connected to the stack of plates 100 to 103 by any number of possible means, for example by fitting a surrounding lip of the muffler within a channel in the face of fourth plate 104 or by bolting the head plates to the cylinder casting through flanges on the muffler, thereby securing the muffler to the fourth plate 103 as part of the stack. The suction muffler 104 includes a passage 93 extending from the enclosed intake manifold space to open out in a direction away from the cylinder moulding 33. This passage is the refrigerant intake passage. With the compressor situated within its hermetic housing an internal projection 109 of an intake tube 12 extending through the hermetic housing extends into the intake passage 93 with generous clearance.

The Cooling Jacket

As already described, interconnected cooling jacket chambers 32 are provided around the compression cylinder 71. In compressing the refrigerant gas the gas reaches a state having a significantly higher temperature than the temperature at which it enters the compression space. This heats the cylinder head 27 and the cylinder wall liner 10.

In the present invention a supply of liquid refrigerant is used to cool the cylinder wall/liner, the cylinder head and the compressed refrigerant.

The liquid refrigerant is supplied from the outlet of a condenser in the refrigeration system. It is supplied directly into the cooling jacket chambers 32 surrounding the cylinder. The discharged newly compressed refrigerant passes into the chambers before leaving the compressor via discharge tube 18. In the chamber 32 the liquid refrigerant vaporises absorbing large quantities of heat from the compressed gas and from the surrounding walls of the cylinder castings 33 and from the cylinder head 27.

- 17 -

2000279741 03 Jul 2006

The liquid refrigerant exiting the condenser is at a slightly lower pressure than the refrigerant immediately after compression which is a barrier to liquid flow to the discharge side of the pump. However it is preferred that a passive arrangement is used for bringing the liquid refrigerant into the cooling jacket. In the present invention this is accomplished by several aspects of the construction of the compressor. Firstly a small region of lowered pressure is provided immediately adjacent the outlet from the liquid return line 34 into the jacket space. The origin of this region of lower pressure has already been described. It comes about through the flow of compressed gas into the jacket through compressed gas opening 110 in head plate 100. The second aspect is a slight inertial pumping effect created by the reciprocating motion of the liquid refrigerant return pipe 34 in the direction of its length. This reciprocation is a result of operation of the compressor, and the associated reciprocating movement of the entire cylinder part the vibration of the cylinder creates a fluctuating acceleration of an axially aligned length 148 of return pipe 34 that produces a fluctuating pressure at the end of the liquid return pipe 34 where it meets inlet 33. Because the liquid evaporates immediately as it enters the cooling jacket during the high pressure fluctuation, any reverse flow during the low pressure fluctuation is a flow of gas. As the gas has a very low density compared to liquid very little mass flow returns through the small notch joining liquid return line 34 to the cooling jacket. Consequently there is a net flow of refrigerant into the cooling jacket.

A third aspect is that in its intended purpose in a domestic refrigerator or fridge/freezer the compressor may be located below the condenser. It has been found that where liquid refrigerant from the condenser is not entering the cooling jacket at a sufficient rate a head of liquid refrigerant builds up in the line extending to the compressor which tends to bring the pressure of the liquid refrigerant closer to the pressure of the compressed refrigerant. This effect has been found to provide a measure of self compensation at times when the relative pressures in the system might otherwise dictate against liquid refrigerant being brought into the cooling jacket space.

- 18 -

The Refrigerant

Another manner for reducing the heat build up by the compressor relates to the refrigerant. It has been found that using Isobutane (R600a) as a refrigerant in a linear compressor leads to synergistic advantages over the use of other refrigerants.

5 One fundamental difference between a linear compressor and a conventional compressor is the amount of volume above the piston at "Top Dead Centre". In a conventional compressor this volume is fixed by the compressor geometry at a small fraction of the displacement. In a free-piston linear compressor this "dead" volume varies with the power input and with the discharge pressure. At moderate powers the
10 dead volume can be a significant fraction of the operating displacement, even as high as 25%.

The dead volume acts as a gas spring, absorbing and releasing energy during compression and re-expansion. However it is an imperfect spring due to the irreversible heat exchange with the cylinder walls. This heat exchange is
15 approximately proportional to the temperature rise of the refrigerant during compression (or the temperature fall during expansion). This temperature rise depends on the specific heat ratio of the gas. For the commonly used refrigerant R134a this ratio is 1.127. It is similar for other commonly used refrigerants, for example CFC 12. However for isobutane (R600a) the specific heat ratio is 1.108.
20 The table below gives the adiabatic temperature of the gas compressed to the saturation pressure matching the condensing temperature for a refrigerator (0 C evaporator temperature) and a freezer or fridge/freezer (-18C evaporator temperature). They both have 32 C superheated gas entering the compressor and a condenser temperature of 42 C (these are typical values).

25

Refrigerant	Evaporator Temperature	
	-18	0
Isobutane	87 C	69 C
HFC134a	99C	77C
30 CFC12	104 C	79 C

30

2000279741 03 Jul 2006

2000279741 03 Jul 2006

5 Thus the characteristics of isobutane and of other refrigerants having a low specific heat ratio are found to be particularly matched with the physical characteristics of the linear compressor. This improvement has been verified by experiment.

10 A series of tests were conducted on a 450 litre refrigerator. It had a mass flow meter on the suction line just prior to the compressor. The refrigerator was tested in an environmental chamber in accordance with the standard AS/NZS 4474.1-1997. The test was first run using refrigerant R134a. The test was subsequently run on two occasions using refrigerant R600a (isobutane). The test results were as follows:

- 20 -

	R134a	R600a (Test 1)	R600a (Test2)
T _{CONDENSOR}	34.3	33.3	33.5
T _{EVAPORATOR}	-3.5	-6.1	-4.5
Input Power	22.3	18.1	17.8
Refrigeration Power	75.25	75.01	75.07
Displacement	7.96	8.7	8.48
Coefficient of Performance	3.38	4.14	4.23

The test results show that the coefficient of performance of the linear compressor running on isobutane was significantly improved compared to when running on R134a.

The Spring System

The cylinder 9 is supported by the discharge tube 18 and by the liquid refrigerant injection tube 34 which have a combined stiffness, $k_{cylinder}$, in the axial direction. The support spring 39 has very low stiffness in an axial direction and has negligible effect. The piston sleeve 4 is supported radially by the gas bearings formed by the cavities and passages in the boundaries of the cylinder bore and the cylinder liner 10. To get resonant oscillation of the piston and cylinder the main spring has a stiffness, k_{main} , such that the resonant frequency, f_n , can be estimated from the relation,

$$f_n = \frac{1}{2\pi} \sqrt{k_{main} \frac{m_{piston} + m_{cylinder}}{m_{piston} m_{cylinder}}}$$

Where m_{piston} , $m_{cylinder}$, are the sprung masses on the piston and cylinder springs, the natural frequency f_n is usually 10 to 20 Hz less than the desired running frequency to allow for the increase in frequency due to the increase in stiffness resulting from the compressed gas.

- 21 -

As already discussed above, the compressor motor comprises a two part stator 5,6 and the magnets on armature 22. The magnetic interaction of the stator 5, 6 and armature 22 generates reciprocating force on the piston.

5 An alternating current in the stator coils, not necessarily sinusoidal, will give rise to substantial movement of the piston relative to the cylinder assembly casting 33 provided the alternating frequency is close to the natural resonant frequency of the mechanical system. This oscillating force creates a reaction force on the stator parts. Thus the stator parts 5,6 are rigidly attached to the cylinder assembly by the clamp spring 87.

10 In the present invention it is proposed that the main spring 15 has a stiffness much greater than the stiffness of the effective cylinder spring. The main spring raises the "second" mode frequency above the "third" so that the "gas spring" then only separates the modal frequencies further.

15 The actual running frequency (the "second" mode frequency) is determined by a complicated relation of the mass of piston and cylinder and by the stiffness of the cylinder spring, and main spring 15. Also when the discharge pressure is high the stiffness of the compressed gas must be added to that of the main spring. However, with the cylinder spring quite soft (for example with a stiffness 1/10 of the main spring) the running frequency is found reasonably accurately by:

$$f_{\text{running}} = \frac{1}{2\pi} \sqrt{\frac{(k_{\text{main}} + k_{\text{gas}}) \cdot \frac{m_{\text{piston}} + m_{\text{cylinder}}}{m_{\text{piston}} \cdot m_{\text{cylinder}}}}$$

20

External vibration due to sources other than from the fundamental due to piston/cylinder movement can be almost eliminated by reducing the oscillating mass and by ensuring that the cylinder springs are relatively soft. The stiffness of the cylinder spring can be reduced to a minimum by having no specific cylinder spring 25 at all, and using the inherent stiffness (usually around 1000 N/m) of the discharge tube 18 (or where a cooling tube is used the stiffness of both discharge and cooling tube are combined, ie: 2000N/m).

For the compressor to resonate at roughly 75Hz, a piston mass of around 100g

- 22 -

and a ten to one cylinder to piston mass ratio, the main spring (k_{main}) needs to be about 40000N/m. Typically the value of the gas spring will be lower than that of the main spring but not substantially lower. In the above case the running frequency might be expected to be 99Hz where the gas spring (k_{gas}) works out at approximately 5 15000N/m.

The Main Spring

Higher running frequencies reduce motor size but require more spring stiffness, and consequently higher stresses in the springs. Thus it is important for compressor longevity that the highest quality spring material be used. In the past, 10 main springs made from pressed spring steel sheet are often used. However, the edges cut in the pressing operation require careful polishing to regain the original fatigue strength of the spring steel sheet.

In the preferred embodiment of the present invention the main spring is formed from circular section music wire which has a very high fatigue strength with 15 no need for subsequent polishing.

The preferred embodiment for the main spring is shown in Figures 1 and 2. The spring takes the form of a continuous loop twisted into a double helix. The length of wire forming the spring 15 has its free ends fixed within a mounting 20 bar 43 with lugs 42 for mounting to one of the compressor parts. As will be seen from Figure 3 and the earlier description these lugs 42 mount to the cylinder part 1, and in particular mount into the slots in the legs 41. The spring 15 has a further mounting point 62 for mounting to the other compressor part as will be apparent in Figure 3 and from the earlier description. In the preferred form this connection is to the piston rod 47 via a moulded plastic button 25. The spring 15 includes a pair of 25 curved sections 63, 64 of substantially constant radius of curvature which each pass around the cylinder mounting bar. Each of these curved sections extends over a length of approximately 360° . Each section curves smoothly at both of its ends. At the mounting bar transitions 65, 66 they curve such that the lengths 67, 68 of them at 30 to maintain a substantially even stress distribution along the transition. The

2000279741 03 Jul 2006

- 23 -

alignment of the cylinder mounting ends 67, 68 aligns then with the cylinder mounting bar. The constant curvature sections 63, 64 of the spring 15 may be rendered of any length. In the example depicted they are each of approximately 360° in length.

5 In the manner depicted in Figures 1 and 2 the mounting bar 43 of spring 15 is on the further side thereof. The central mounting point 62 is on the closer side thereof. The constant curved sections 63, 64 each curve smoothly at their lower ends to be radially aligned and continuous with one another across a diameter of the general circle of the spring at the mounting point 62. The alignment of this diameter
10 is substantially perpendicular to the alignment of the ends 67, 68 at the cylinder part mounting bar 43.

The constant radius curves 63, 64 are placed in torsion by the displacement of the piston mounting point 62 relative to the mounting bar 43. Being constant radius the torsion stress along each of the sections 63, 64 are also substantially constant.

15 The radial or substantially radial direction at the cylinder mounting sections 67, 68 and at the piston mounting point 62 reduces any torsion stresses where the ends of the spring are fitted within the mounting bar 43 and at the piston mounting point 62 and improves mounting of the spring 15 to both the cylinder part and the piston part.

Application of the Linear Compressor

20 The linear compressor according to the preferred embodiment of the present invention is primarily intended for adoption in a domestic type refrigeration system, for example a freezer, a refrigerator or a refrigerator/freezer combination. The compressor may directly replace compressors of other types such as a rotary crank compressors. The linear compressor receives evaporated refrigerant at low pressure
25 through suction tube 12 and expels compressed refrigerant at high pressure through the discharge stub 13. In the refrigeration system the discharge stub 13 would generally be connected to a condenser. The suction tube 12 is connected to receive evaporated refrigerant from one or more evaporators. The liquid refrigerant delivery stub 14 receives condensed refrigerant from the condenser (or from an accumulator
30 or the refrigerant line after the condenser) for use in cooling the compressor as has

2000279741 03 Jul 2006

- 24 -

already been described. A process tube 16 extending through the hermetic casing is also included for use in evacuating the refrigeration system and charging with the chosen refrigerant.

5 The make up of a refrigeration system incorporating the present compressor does not form a part of the present invention. Many useful refrigeration system configurations are known and many more are possible. The compressor according to the present invention may be useful in any such systems.

10 The usefulness of the compressor according to the preferred embodiment of the present invention is not restricted to refrigeration systems for domestic refrigerators and freezers and may also be used in refrigeration systems for air conditioners. It might also be used as a gas compressor for non refrigerant applications in which case the liquid refrigerant delivery for cooling may be removed.

15 Operation and control of the linear compressor is effected by appropriate energisation of the stator parts 5, 6. A power supply connector 17 is provided through the hermetic casing 30, fitted to an opening 19. Appropriate control systems for energisation of the windings do not form part of the present invention and many alternative drive systems for brushless DC motors are well known and applicable. An appropriate drive system is further described in our co-pending International
20 patent application PCT/NZ00/00105.

Advantages

Many advantages of the linear compressor according to the preferred embodiment of the present invention have been outlined during the above detailed description. Some further advantages that have not already been outlined include:

- 25 (a) The resilient flexible connections of the piston connecting rod to the piston, and through the main spring to the mounting legs 41 of the cylinder casting 33, with the light weight of the piston and appropriate choice of materials for the piston sleeve and cylinder liner, together eliminate the need for an added lubricant in the compressor. Accordingly the detrimental presence of oil
30 lubricant in the refrigerant throughout the refrigeration system, or the need for

2000279741 03 Jul 2006

- 25 -

2000279741 03 Jul 2006

- an accumulator or separator for the oil lubricant, is eliminated.
- (b) The light weight piston and connecting rod assembly reduces the magnitude of the oscillating momentum of the two main compressor structures with a consequent reduction in vibration transmitted to the hermetic casing.
- 5 (c) The main spring is formed from a material having a high fatigue life and which does not require additional polishing operations after forming and the main spring shape and configuration minimises material usage, spring weight and spring size for the required spring strength.
- 10 (d) Placing the armature magnets on the piston connecting rod with the piston connecting rod operating directly in the stator air gap provides a laterally compact linear motor with accurate and effective alignment of the operation of the armature between the two parts of the stator.
- (e) The compliant joints between the piston and the piston connecting rod and from the connecting rod to the cylinder part ensure that the piston sleeve does not exert localised pressure within the cylinder bore due to incorrect, non axial, orientation.
- 15 (f) Use of isobutane refrigerant in a linear compressor has been found to provide synergistic advantages compared to the use of refrigerants having higher specific heat ratios.
- 20 (g) Liquid delivery into a cooling jacket surrounding the cylinder provides evaporative cooling to the cylinder and cylinder head assembly and to the combined compressed gases stream leaving the compressor. Discharge into the high pressure gases in the jacket is accomplished without requiring active pumping devices.
- 25 (h) The overall compressor configuration is well suited to use in domestic appliances. The dimensions of the machinery space for a refrigerator or freezer may be reduced due to the low overall height of the hermetic casing. For interior space considerations the machinery compartment generally extends fully across the width of the appliance irrespective of the components
- 30 which it is required to accommodate. However its height and depth are

2000279741 03 Jul 2006

generally determined by the maximum height and depth requirements to fit the compressor. The low profile of the linear compressor according to the present invention is contributed to by the components of the compressor being arranged end to end rather than in a concentric configuration.

5 (I) The main spring and motor parts of the compressor are subject to resilient preloading of a degree determined by the geometry, size and shape of the parts. The potential for parts to become loose and subsequently knock, rattle or fail through operation of the compressor, due to imperfect assembly, due to normal manufacturing tolerances, or due to the effects of motor operation, is reduced or eliminated.

10 (J) Fusion of the piston rod to the main spring in a hot plate welding process in the manner described accurately positions the piston face with respect to the neutral position of the main spring. Accordingly the compressor can be operated to have low cylinder head clearances with confidence that the piston will not strike the cylinder head at the forward end of its travel.

- 27 -

2000279741 03 Jul 2006

CLAIMS:

1. A linear compressor comprising:
a cylinder part including a cylinder bore, and a stator having an air gap,
5 a piston disposed in said bore and slidable therein,
a main spring connecting said cylinder part to said piston,
a connecting rod between said main spring and said piston passing through
said air gap of said stator and connecting said main spring to said piston,
and
10 one or more substantially flat blocks of permanent magnet material supported
on said connecting rod with the large faces of said blocks facing the stator, said
permanent magnet material magnetised to define at least one armature pole.
2. A linear compressor as claimed in claim 1 wherein said cylinder part includes
15 a housing around said cylinder bore, and said stator has two winding carrying stator
parts which are located on opposite sides of said air gap, said parts being separately
located against the said cylinder housing.
3. A linear compressor as claimed in claim 2 wherein a connecting bridge
20 connects between the ends of said stator parts that are away from said cylinder
housing and said main spring connects to said connecting bridge.
4. A linear compressor as claimed claim 2 wherein a connecting bridge connects
25 between the ends of said stator parts that are away from said cylinder housing and a
pair of securing members extend from said cylinder part to connect between said
connecting bridge and said cylinder housing above and below said air gap, and said
connecting bridge presses said stator parts against said cylinder housing.
5. A linear compressor as claimed in claim 4 wherein each of said stator parts
30 bear against a side of each of said securing members, such that above and below said

- 28 -

air gap separation of said stator parts is maintained by the width of said securing members.

6. A linear compressor as claimed in any one of claims 1 to 5 suspended in a hermetic casing with an enclosed discharge gases pathway from a compression space, defined by said cylinder bore and said piston, to an exit through said casing.

7. A linear compressor as claimed in claim 6 wherein said discharge gases pathway includes a discharge tube extending between said cylinder part and said casing.

8. A linear compressor as claimed in claim 7 wherein suction gases enter said hermetic casing from a suction tube, and suction gases are drawn into said linear compressor compression space from the gases in said casing.

15

9. A linear compressor comprising:
a cylinder part including a cylinder bore,
a piston disposed in said bore and slidable therein,
a main spring connecting said cylinder part to said piston, and
a connecting rod between said main spring and said piston and connecting said main spring to said piston, with at least one of:
(a) the connection between said piston and piston rod, and
(b) the connection between said piston rod and said main spring,
being a compliant connection transmitting side and axial loads but allowing rotation about axes transverse to the axis of reciprocation of said piston in said bore.

25

10. A linear compressor as claimed in claim 9 wherein both said connections are compliant connections.

11. A linear compressor as claimed in either claim 9 or claim 10 wherein said

30

2000279741 03 Jul 2006

- 29 -

cylinder part includes a stator having an air gap, said connecting rod passing through said air gap, and armature poles located along said connecting rod.

12. A linear compressor as claimed in claim 11 wherein said cylinder part
5 includes a housing around said cylinder bore and said stator has two winding
carrying stator parts which are located on opposite sides of said air gap, said parts
being separately located against the said cylinder housing.

13. A linear compressor as claimed in claim 12 wherein a connecting bridge
10 connects between the ends of said stator parts that are away from said cylinder
housing and said main spring connects to said connecting bridge.

14. A linear compressor as claimed in any one of claims 9 to 13, including a said
compliant connection between said piston and said piston rod, said compliant
15 connection comprising a flexible and resilient portion of said piston rod at the end
thereof adjacent said piston, said resilient portion being substantially less rigid than a
major portion located between said resilient portion and said main spring.

15. A linear compressor as claimed in claim 14 wherein said piston is hollow and
20 said resilient and flexible portion of said piston rod includes at least one portion of
substantially reduced cross section that is located within the hollow of said piston.

16. A linear compressor as claimed in any one of claims 9 to 15 suspended in a
hermetic casing with an enclosed discharge gases pathway from a compression
25 space, defined by said cylinder bore and said piston, to an exit through said casing.

17. A linear compressor as claimed in claim 16 wherein said discharge gases
pathway includes a discharge tube extending between said cylinder part and said
casing.

30

2000279741 03 Jul 2006

- 30 -

2000279741 03 Jul 2006

18. A linear compressor as claimed in claim 17 wherein suction gases enter said hermetic casing from a suction tube, and suction gases are drawn into said linear compressor compression space from the gases in said casing.
- 5 19. A linear compressor comprising:
a cylinder part including a cylinder housing, cylinder bore in said cylinder housing, a cylinder head at one end of said housing and a stator having a pair of winding carrying stator parts, each connected to said cylinder housing at an end opposite said cylinder head with an air gap between said stator parts,
10 a piston disposed in said bore and slidable therein,
a main spring located at an end of said stator away from said cylinder head, connecting said cylinder part to said piston,
a connecting rod passing through said stator air gap between said main spring and said piston and connecting said main spring to said piston, and
15 an armature located along said connecting rod working within said air gap of said stator and connected with said connecting rod.
20. A linear compressor as claimed in claim 19 wherein a connecting bridge connects between the ends of said stator parts that are away from said cylinder
20 housing and said main spring connects to said connecting bridge.
21. A linear compressor as claimed in claim 19 wherein a connecting bridge connects between the ends of said stator parts that are away from said cylinder housing and a pair of securing members extend from said cylinder housing to
25 connect between said connecting bridge and said cylinder part above and below said air gap, and said connecting bridge presses said stator parts against said cylinder housing.
22. A linear compressor as claimed in claim 21 wherein each of said stator parts
30 bear against a side of each of said securing members, such that above and below said

- 31 -

air gap separation of said stator parts is maintained by the width of said securing members.

23. A linear compressor as claimed in any one of claims 19 to 22 suspended in a hermetic casing with an enclosed discharge gases pathway from a compression space, defined by said cylinder bore and said piston, to an exit through said casing.

24. A linear compressor as claimed in claim 23 wherein said discharge gases pathway includes a discharge tube extending between said cylinder part and said casing.

25. A linear compressor as claimed in claim 24 wherein suction gases enter said hermetic casing from a suction tube, and suction gases are drawn into said linear compressor compression space from the gases in said casing.

15

26. A linear compressor comprising:
a cylinder part including a cylinder bore, and a stator having an air gap,
a piston disposed in said bore and slidable therein,
a main spring connecting said cylinder part to said piston,
a connecting rod between said main spring and said piston passing through said air gap of said stator and connecting said main spring to said piston, and
at least one armature pole located along said connecting rod,
wherein said connecting rod is supported only by said piston at one end and by said main spring away from said one end.

25

27. A linear compressor as claimed in claim 26 wherein said cylinder part includes a housing around said cylinder bore and said stator has two winding carrying stator parts which are located on opposite sides of said air gap, said parts being separately located against the said cylinder housing.

30

2000279741 03 Jul 2006

1 / 4

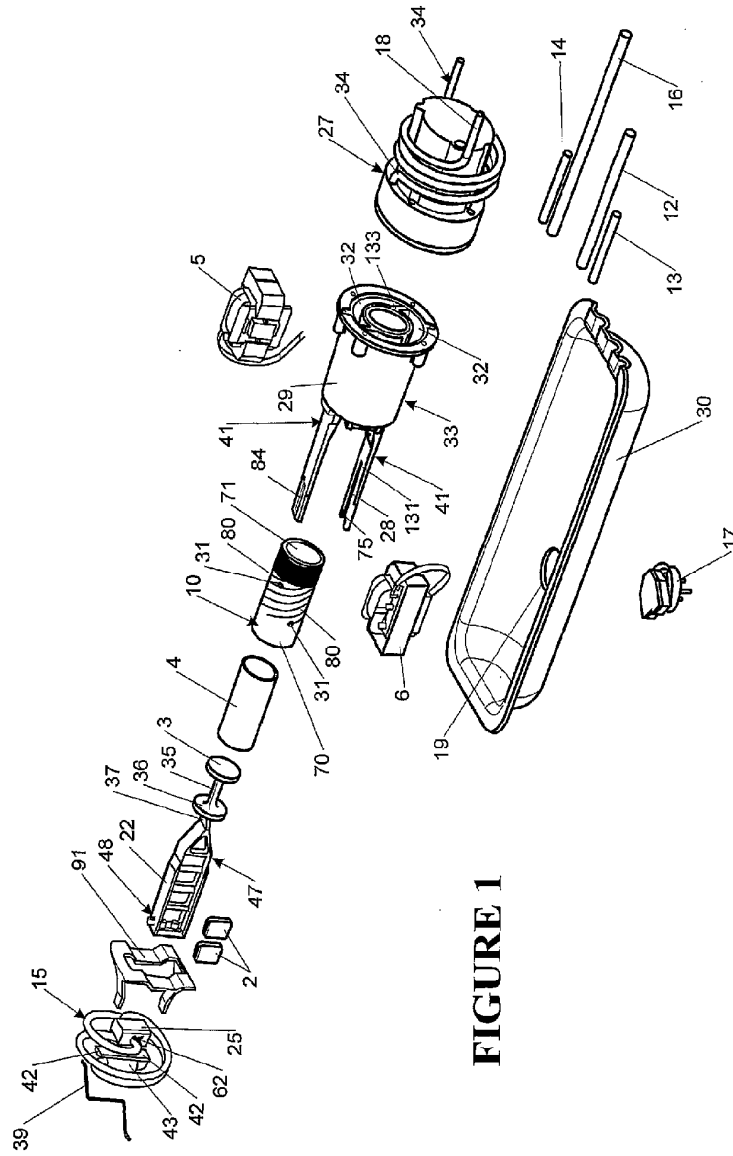


FIGURE 1

SUBSTITUTE SHEET (RULE 26)

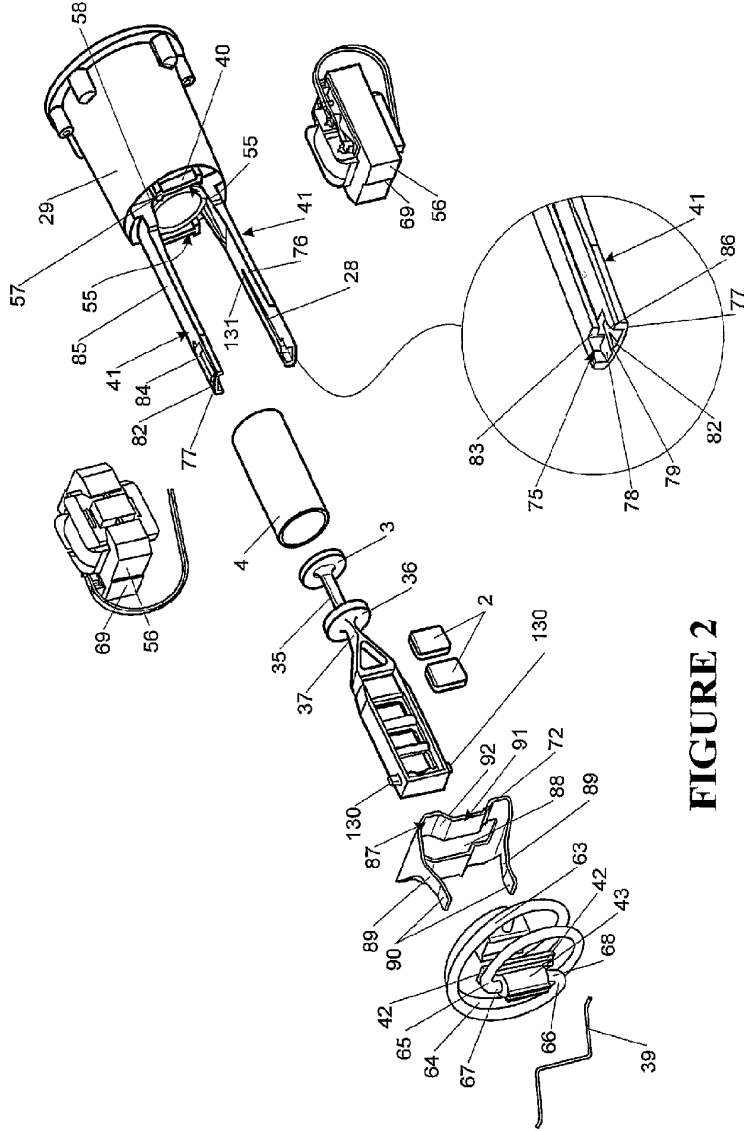


FIGURE 2

SUBSTITUTE SHEET (RULE 26)

3 / 4

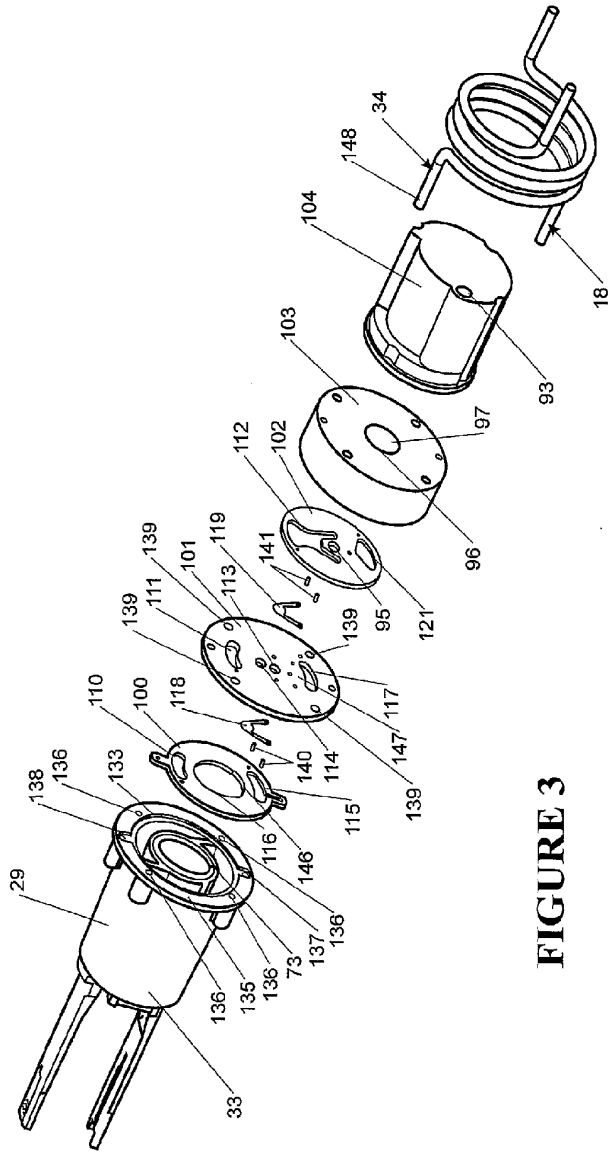


FIGURE 3

SUBSTITUTE SHEET (RULE 26)

4 / 4

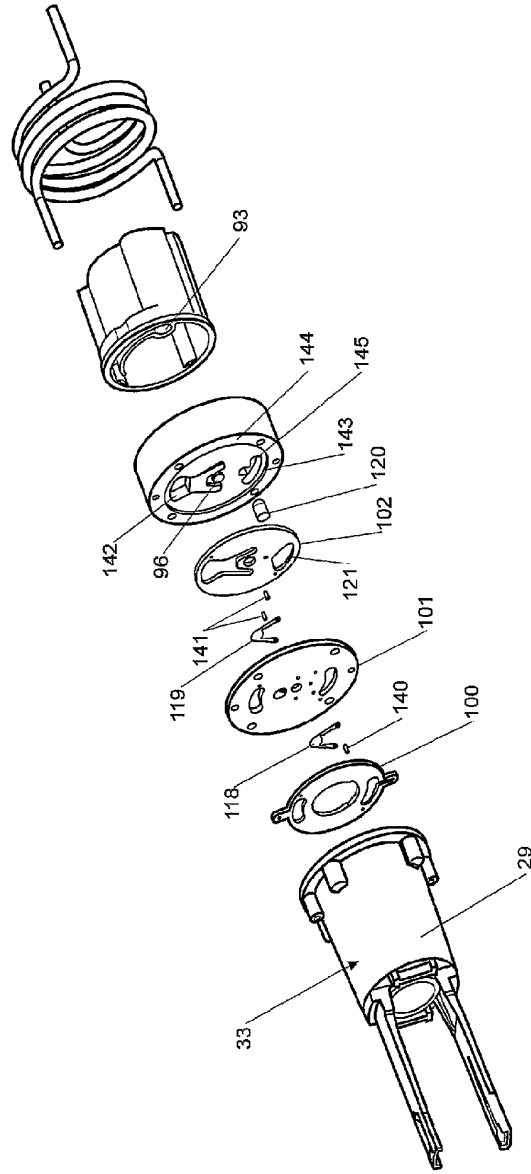


FIGURE 4

SUBSTITUTE SHEET (RULE 26)