

PCTWORLD INTELLECTUAL PROPERTY
ORGANIZATION
International F

INTERNATIONAL APPLICATION PUBLISHED UNDER

(51) International Patent Classification⁶ :**E21C 11/00****A1**

(11) I

WO 9607014A1

(43) International Publication Date:

7 March 1996 (07.03.96)

(21) International Application Number: PCT/FI95/00458

(22) International Filing Date: 28 August 1995 (28.08.95)

(30) Priority Data:

943978

30 August 1994 (30.08.94)


FI

(71) Applicant (for all designated States except US): TAMROCK
OY [FI/FI]; Pihtisulunkatu 9, FIN-33330 Tampere (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LEMMETTY, Pauli [FI/FI];
Lemminkäisenkatu 8, FIN-33540 Tampere (FI).(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box
148, FIN-00121 Helsinki (FI).(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE,
KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK,
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,
SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent
(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW,
SD, SZ, UG).**Published***With international search report.*

(54) Title: ARRANGEMENT FOR MOUNTING SWING CYLINDERS IN BOOM FOR ROCK DRILLING UNIT

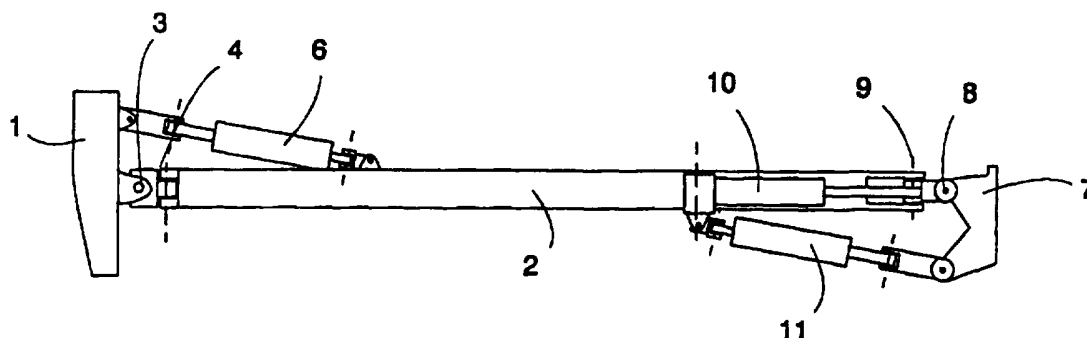**(57) Abstract**

An arrangement for mounting swing cylinders in a boom for a rock drilling unit, comprising a frame (1), a boom (2) pivotally connected about vertical and horizontal shafts (3, 4), relative to the frame (1), a lift cylinder (5) connected between the frame (1) and the boom (2), a swing cylinder (6) connected between the frame (1) and the boom (2), a support (7) for a feed beam, pivotally connected to the other end of the boom (2) about horizontal and vertical shafts (8, 9), a tilt cylinder (10), connected between the support (7) and the boom (2), and a transverse swing cylinder (11) connected between the support (7) and the boom (2). In the invention the swing cylinder (6) is coupled at an angle (α), relative to the longitudinal axis of the boom (2), from the frame (1) to the end of the boom (2) vertically downward so that with the boom (2) in the middle of its upper and lower angles of altitude, the swing cylinder (6) is essentially horizontal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Arrangement for mounting swing cylinders in boom for rock drilling unit

5 The invention relates to an arrangement for mounting swing cylinders in a boom for a rock drilling unit, comprising a frame, a boom pivotally connected about vertical and horizontal shafts, relative to the frame, a lift cylinder connected between the frame and the boom for vertical lifting and lowering of the boom, 10 a swing cylinder connected between the frame and the boom for lateral turning of the boom relative to the frame, a support for a feed beam, connected to the other end of the boom pivotally about horizontal and vertical shafts, a tilt cylinder, connected between the support and the boom for turning the support relative to the boom about a horizontal shaft, and a transverse swing cylinder connected between the boom and the support for turning the support relative to the boom about a vertical shaft. 15

20 A problem with booms for rock drilling units is that when a feed beam is vertically turned when simultaneously being laterally deviated from its upright position to either side, the end of the boom moves so as to describe an arc. The greater the upward or downward movement of the boom, the greater the simultaneous lateral outward swing. This is caused by the articulated structures of a boom and the consequent structural geometry, the elimination of which has in practice proved impossible by mechanical means. A weakness of known 25 solutions is also that the upward and downward swing angles of booms are not symmetrical; the downward angle is narrower than the upward angle for practical reasons. Consequently the lateral deviation in both angular positions of a boom is far too large to be handled and causes much inconvenience when the boom is used. When 35

the boom is allowed to turn to its extreme lateral angles being in its upper angular position, the joints of the cylinders may shift to a position where the boom no longer can turn back, but is locked in place.

5 The object of this invention is to provide an arrangement with optimum elimination of the above problems and with as equal a lateral swing as possible in the upper and lower vertical positions of a boom. The arrangement of the invention is characterized in that
10 a swing cylinder between a frame and a boom is coupled at an angle relative to the longitudinal axis of the boom so that the longitudinal axis of the swing cylinder has a vertical downward inclination from the frame toward the end of the boom, relative to the direction of
15 the longitudinal axis of the boom, and that the centres of the horizontal joints, relative to the base, of the swing cylinder and the boom are essentially united with each other at the base of the boom when the boom faces straight ahead relative to the frame.

20 An essential idea of the invention is that the swing cylinder is coupled vertically inclined relative to the longitudinal axis of the boom so that with the swing cylinder in the horizontal plane, the boom is in the middle of its vertical swing range, whereat the
25 upward or downward swinging of the boom from this position causes an equal deviation in both the extreme upper and lower positions to the lateral swing of the boom because of the position of the swing cylinder. Correspondingly, the transverse swing cylinder needed for turning
30 the feed beam is coupled at an angle to the longitudinal axis of the boom, whereat the turning of both the feed beam and the boom results in equal angular changes by the action of the vertical swing angle.

35 It is an advantage of the invention that the changes in the direction and lateral deviations of both

the boom and the feed beam, when vertically turned, are essentially the same relative to the horizontal plane both above and below, as the angles between the longitudinal axis of the boom and the swing cylinder, and correspondingly the transverse swing cylinder, compensate for the vertical deviations of the boom.

The invention will be described in greater detail in the accompanying drawings, wherein

Figure 1a is a schematic top view of an arrangement of the invention,

Figure 1b is a schematic side view of an arrangement of the invention,

Figure 2 schematically shows the boom geometry of the arrangement of the invention by way of an example.

Figure 1a schematically shows a part of a frame 1, comprising a boom 2 for a rock drilling unit, pivotally connected about a vertical shaft 3 and a horizontal shaft 4. A lift cylinder 5, not shown in the Figure, is pivotally connected at both ends between the frame 1 and the boom 2, and is shown in Figure 1b, inclined from the boom 2 downward toward the frame 1. Between the boom 2 and the frame 1, a swing cylinder 6 is pivotally connected at the ends to the frame 1 and the boom 2. Cylinders 5 and 6 are both coupled so as to be able to turn relative to the frame 1 and the boom 2, in both the vertical and horizontal planes. Such an articulated coupling is generally known per se, and will not be described in any greater detail. A support 7 is at the end of the boom 2 for fixing a feed beam to the end of the boom 2. The support 7 is pivotally connected at the end of the boom 2 about a vertical shaft 8 and a horizontal shaft 9. Figure 1 further shows a tilt cylinder 10, pivotally connected between the boom 2 and the support 7 at both its ends for vertical lifting of

the support 7 and, therewith the feed beam, relative to the boom 2. The Figure also shows a transverse swing cylinder 11, pivotally connected at its ends between the boom 2 and the support 7 for swinging the support 7 about the vertical shaft 8 irrespective of its vertical angle.

Figure 1b correspondingly shows a side view of the arrangement of Figure 1a. The Figure shows that the swing cylinder 6 and the transverse swing cylinder 11 are inclined toward the direction of the longitudinal axis of the boom 2 and further at a downward angle relative to the end of the boom 2. With the boom 2 in the horizontal plane, the vertical angular difference of the swing cylinder 6 is α , preferably, in a manner shown in greater detail in Figure 2, half the difference between the vertical uppermost and lowermost swing angles of the boom 2. Correspondingly, the vertical angle between the longitudinal axes of the transverse swing cylinder 11 and the boom 2, β , is half the difference between the vertically turnable extreme angles of the support 7. Typically the angles α and β are equal, but may also be unequal.

Figure 2 schematically shows the ratio between the vertical angles of the boom 2 and the angles of the swing cylinder 6. Line L2a refers to the direction of the longitudinal axis of the boom with the boom 2 in the horizontal plane, line L2b refers to the direction of the longitudinal axis of the boom with the boom 2 lifted vertically to the farthest possible upward position, and line L2c refers to the longitudinal axis of the boom with the boom 2 vertically turned to the farthest possible downward position. Typically the angle of elevation of the boom 2 upward is greater than downward, and this has been illustrated by allocating the value 50° to the upper angle of altitude γ_1 and the value 30° to

the lower angle of altitude γ_2 . In order to obtain equal lateral deviations of the end of the boom 2, irrespective of the lateral swing angle, in the extreme positions of both the upper and lower angles of altitude, the effect of the swing cylinder 6 must be made symmetrical. This is accomplished by an angle α , between the longitudinal axis L6 of the swing cylinder 6 and the longitudinal axis of the boom 2, being wide enough for the swing cylinder 6 to become essentially horizontal while the boom 2 is swung to the middle of the extreme limits L2b and L2c, to line L2d. Consequently, when completely equal deviations both in the upper and lower directions are required, the value of the angle α is half the difference between the upper swing angle γ_1 and the lower swing angle γ_2 , i.e. in the case shown in the Figure, $(50^\circ - 30^\circ) : 2 = 10^\circ$. Thus, with the boom 2 in the horizontal plane in accordance with the line L2a, the downward position of the swing cylinder 6 below it, from the joint between the boom 2 and the frame, equals the value of the angle α , i.e. in the case shown in the Figure, 10° . Correspondingly, with the swing cylinder 6 horizontal, i.e. parallel with the line L2a, a resulting upward movement of the boom equals the value of the angle α , i.e. the boom is parallel with the line L2d. The inclination β of the transverse swing cylinder 11 of the support 7 supporting the feed beam is defined similarly, and is at its simplest implementation equal to α . As is evident from the Figures, the joints of the swing cylinder and the boom are essentially aligned relative to the frame 1 when the boom 2 faces straight ahead relative to the frame 1. Thus the centres of the horizontal joints at the base of the boom are essentially united with each other in this situation, although small structural differences may exist. Similarly, when the feed beam is required to turn correspondingly as precisely

as possible, the measurements of the feed beam or its horizontal joints are arranged so that the centres of these horizontal joints are essentially united. It is naturally clear that when the boom turns laterally, the turning of the centres of the joints causes therein a certain deviation, relative to each other, from their original position, which results in a small error owing to the structure of the mechanism. This, however, has no essential significance as to the invention, as the movements of the boom are, however, essentially symmetric above and below the middle of the vertical swing angle of the boom.

In the above description and in the drawings the invention has been described only by way of example, and it is by no means to be so restricted.

Claims

1. An arrangement for mounting swing cylinders in a boom for a rock drilling unit, comprising a frame (1), a boom (2) pivotally connected about vertical and horizontal shafts (3, 4), relative to the frame (1), a lift cylinder (5) connected between the frame (1) and the boom (2) for vertical lifting and lowering of the boom (2), a swing cylinder (6) connected between the frame (1) and the boom (2) for lateral turning of the boom (2) relative to the frame (1), a support (7) for a feed beam, connected to the other end of the boom (2) pivotally about horizontal and vertical shafts (8, 9), a tilt cylinder (10), connected between the support (7) and the boom (2) for turning the support (7) relative to the boom (2) about a horizontal shaft, and a transverse swing cylinder (11) connected between the boom (2) and the support (7) for turning the support (7) relative to the boom (2) about a vertical shaft (8), c h a r - a c t e r i z e d in that the swing cylinder (6) between the frame (1) and the boom (2) is coupled at an angle (α) relative to the longitudinal axis of the boom (2) so that the longitudinal axis of the swing cylinder (6) has a vertical downward inclination from the frame (1) toward the end of the boom (2), relative to the direction of the longitudinal axis of the boom (2), and that the centres of the horizontal joints, relative to the base, of the swing cylinder (6) and the boom (2) are essentially united with each other at the base of the boom when the boom faces straight ahead relative to the frame (1).



2. An arrangement as claimed in claim 1, c h a r a c t e r i z e d in that the angle (α) between the longitudinal axes of the swing cylinder (6) and the boom (2) is in the vertical plane essentially half the

difference between the upper swing angle (γ_1) and the lower swing angle of the boom (2), relative the horizontal plane.

3. An arrangement as claimed in claim 1 or 2,
5 c h a r a c t e r i z e d in that the transverse swing cylinder (11) between the boom (2) and the support (7) is similarly coupled relative to the longitudinal axis of the boom (2) at a angle (β), vertically inclined from the frame (1) downward toward the end of the boom (2).

10 4. An arrangement as claimed in claim 3, c h a r a c t e r i z e d in that the angle (β) between the longitudinal axes of the transverse swing cylinder (11) and the boom (2) is in the vertical plane half the difference between the angles turnable upward and downward relative to the support (7) and the boom (2).
15

5. An arrangement as claimed in claim 3 or 4, c h a r a c t e r i z e d in that the angles of the swing cylinder (6) and the transverse swing cylinder (11) (α , β), relative to the longitudinal axis of the
20 boom (2), are equal.

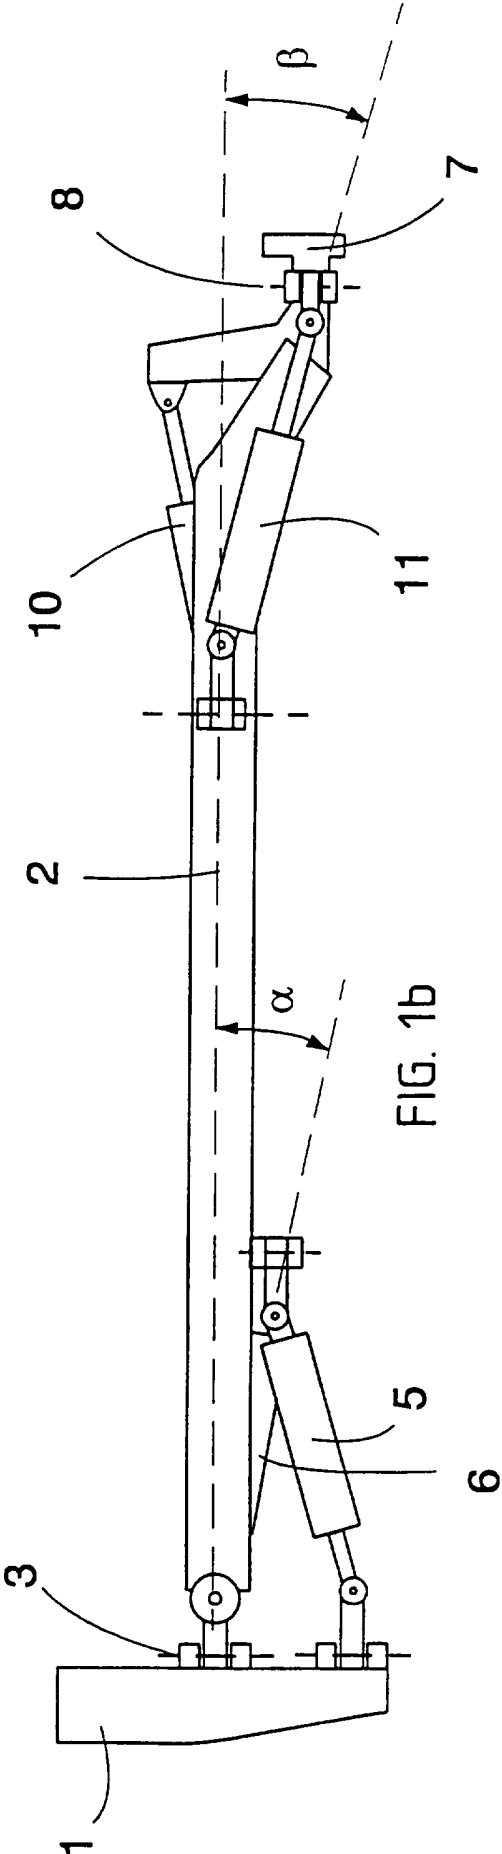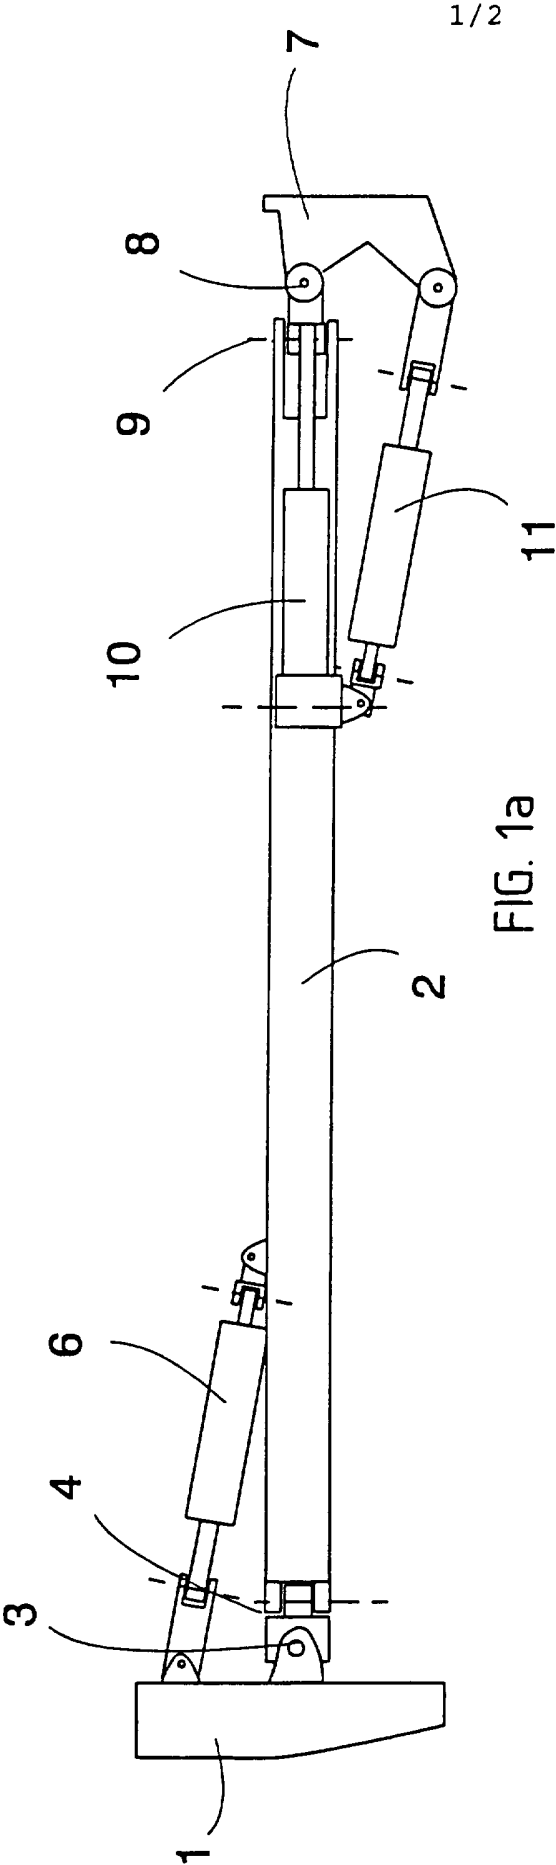

2/2

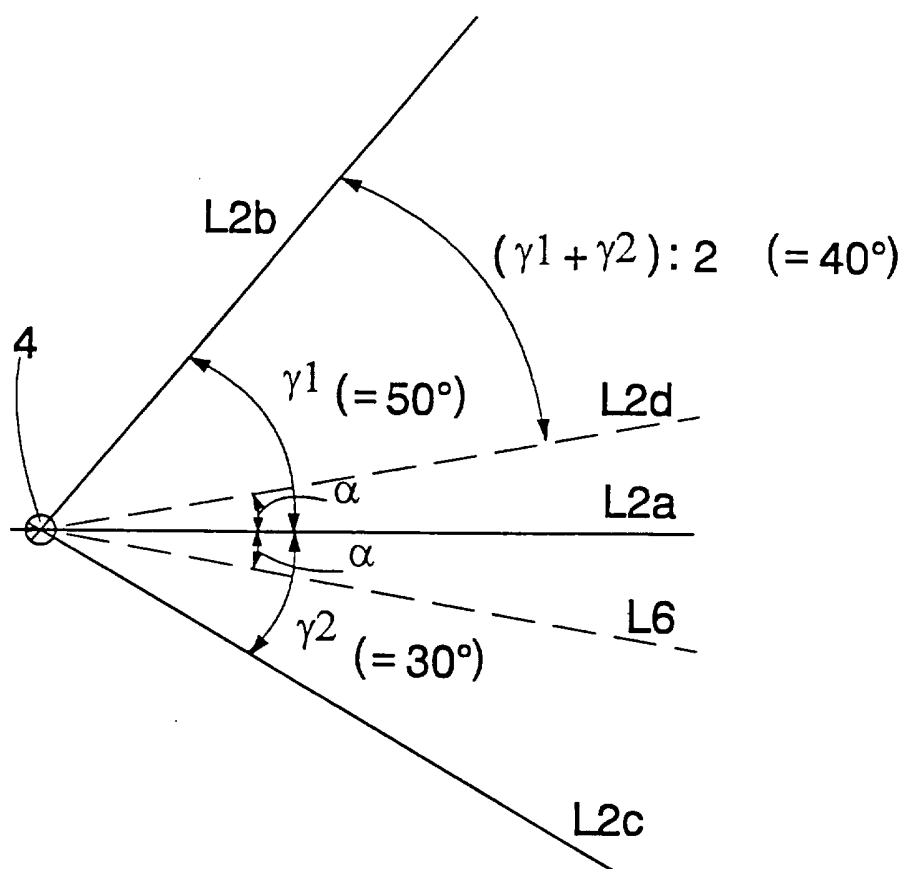


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 95/00458

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: E21C 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: E21C, E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0140873 A1 (VEREINIGTE EDELSTAHLWERKE AKTIENGESELLSCHAFT (VEW)), 8 May 1985 (08.05.85), figure 1, detail 6 -- -----	1

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

7 December 1995

15.12.1995

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Henrik Bodin
Telephone No. +46 8 782 25 00

30/10/95

PCT/FI 95/00458

Form PCT/ISA/210 (patent family annex) (July 1992)