



(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2018/07/19  
(87) Date publication PCT/PCT Publication Date: 2019/01/24  
(85) Entrée phase nationale/National Entry: 2020/01/20  
(86) N° demande PCT/PCT Application No.: US 2018/042871  
(87) N° publication PCT/PCT Publication No.: 2019/018630  
(30) Priorités/Priorities: 2017/07/21 (US62/535,321);  
2018/03/07 (US15/914,497)

(51) Cl.Int./Int.Cl. *H04L 12/28* (2006.01),  
*H04W 4/00* (2018.01), *H04W 80/00* (2009.01)  
(71) Demandeur/Applicant:  
ITRON NETWORKED SOLUTIONS, INC., US  
(72) Inventeur/Inventor:  
STUREK, DONALD EUGENE, US  
(74) Agent: SMART & BIGGAR LLP

(54) Titre : PROCÉDE ET SYSTÈME DESTINÉS À UNE COMMUNICATION ENTRE UN RESEAU MAILLE PRIVE ET UN RESEAU PUBLIC  
(54) Title: METHOD AND SYSTEM FOR COMMUNICATING BETWEEN PRIVATE MESH NETWORK AND PUBLIC NETWORK

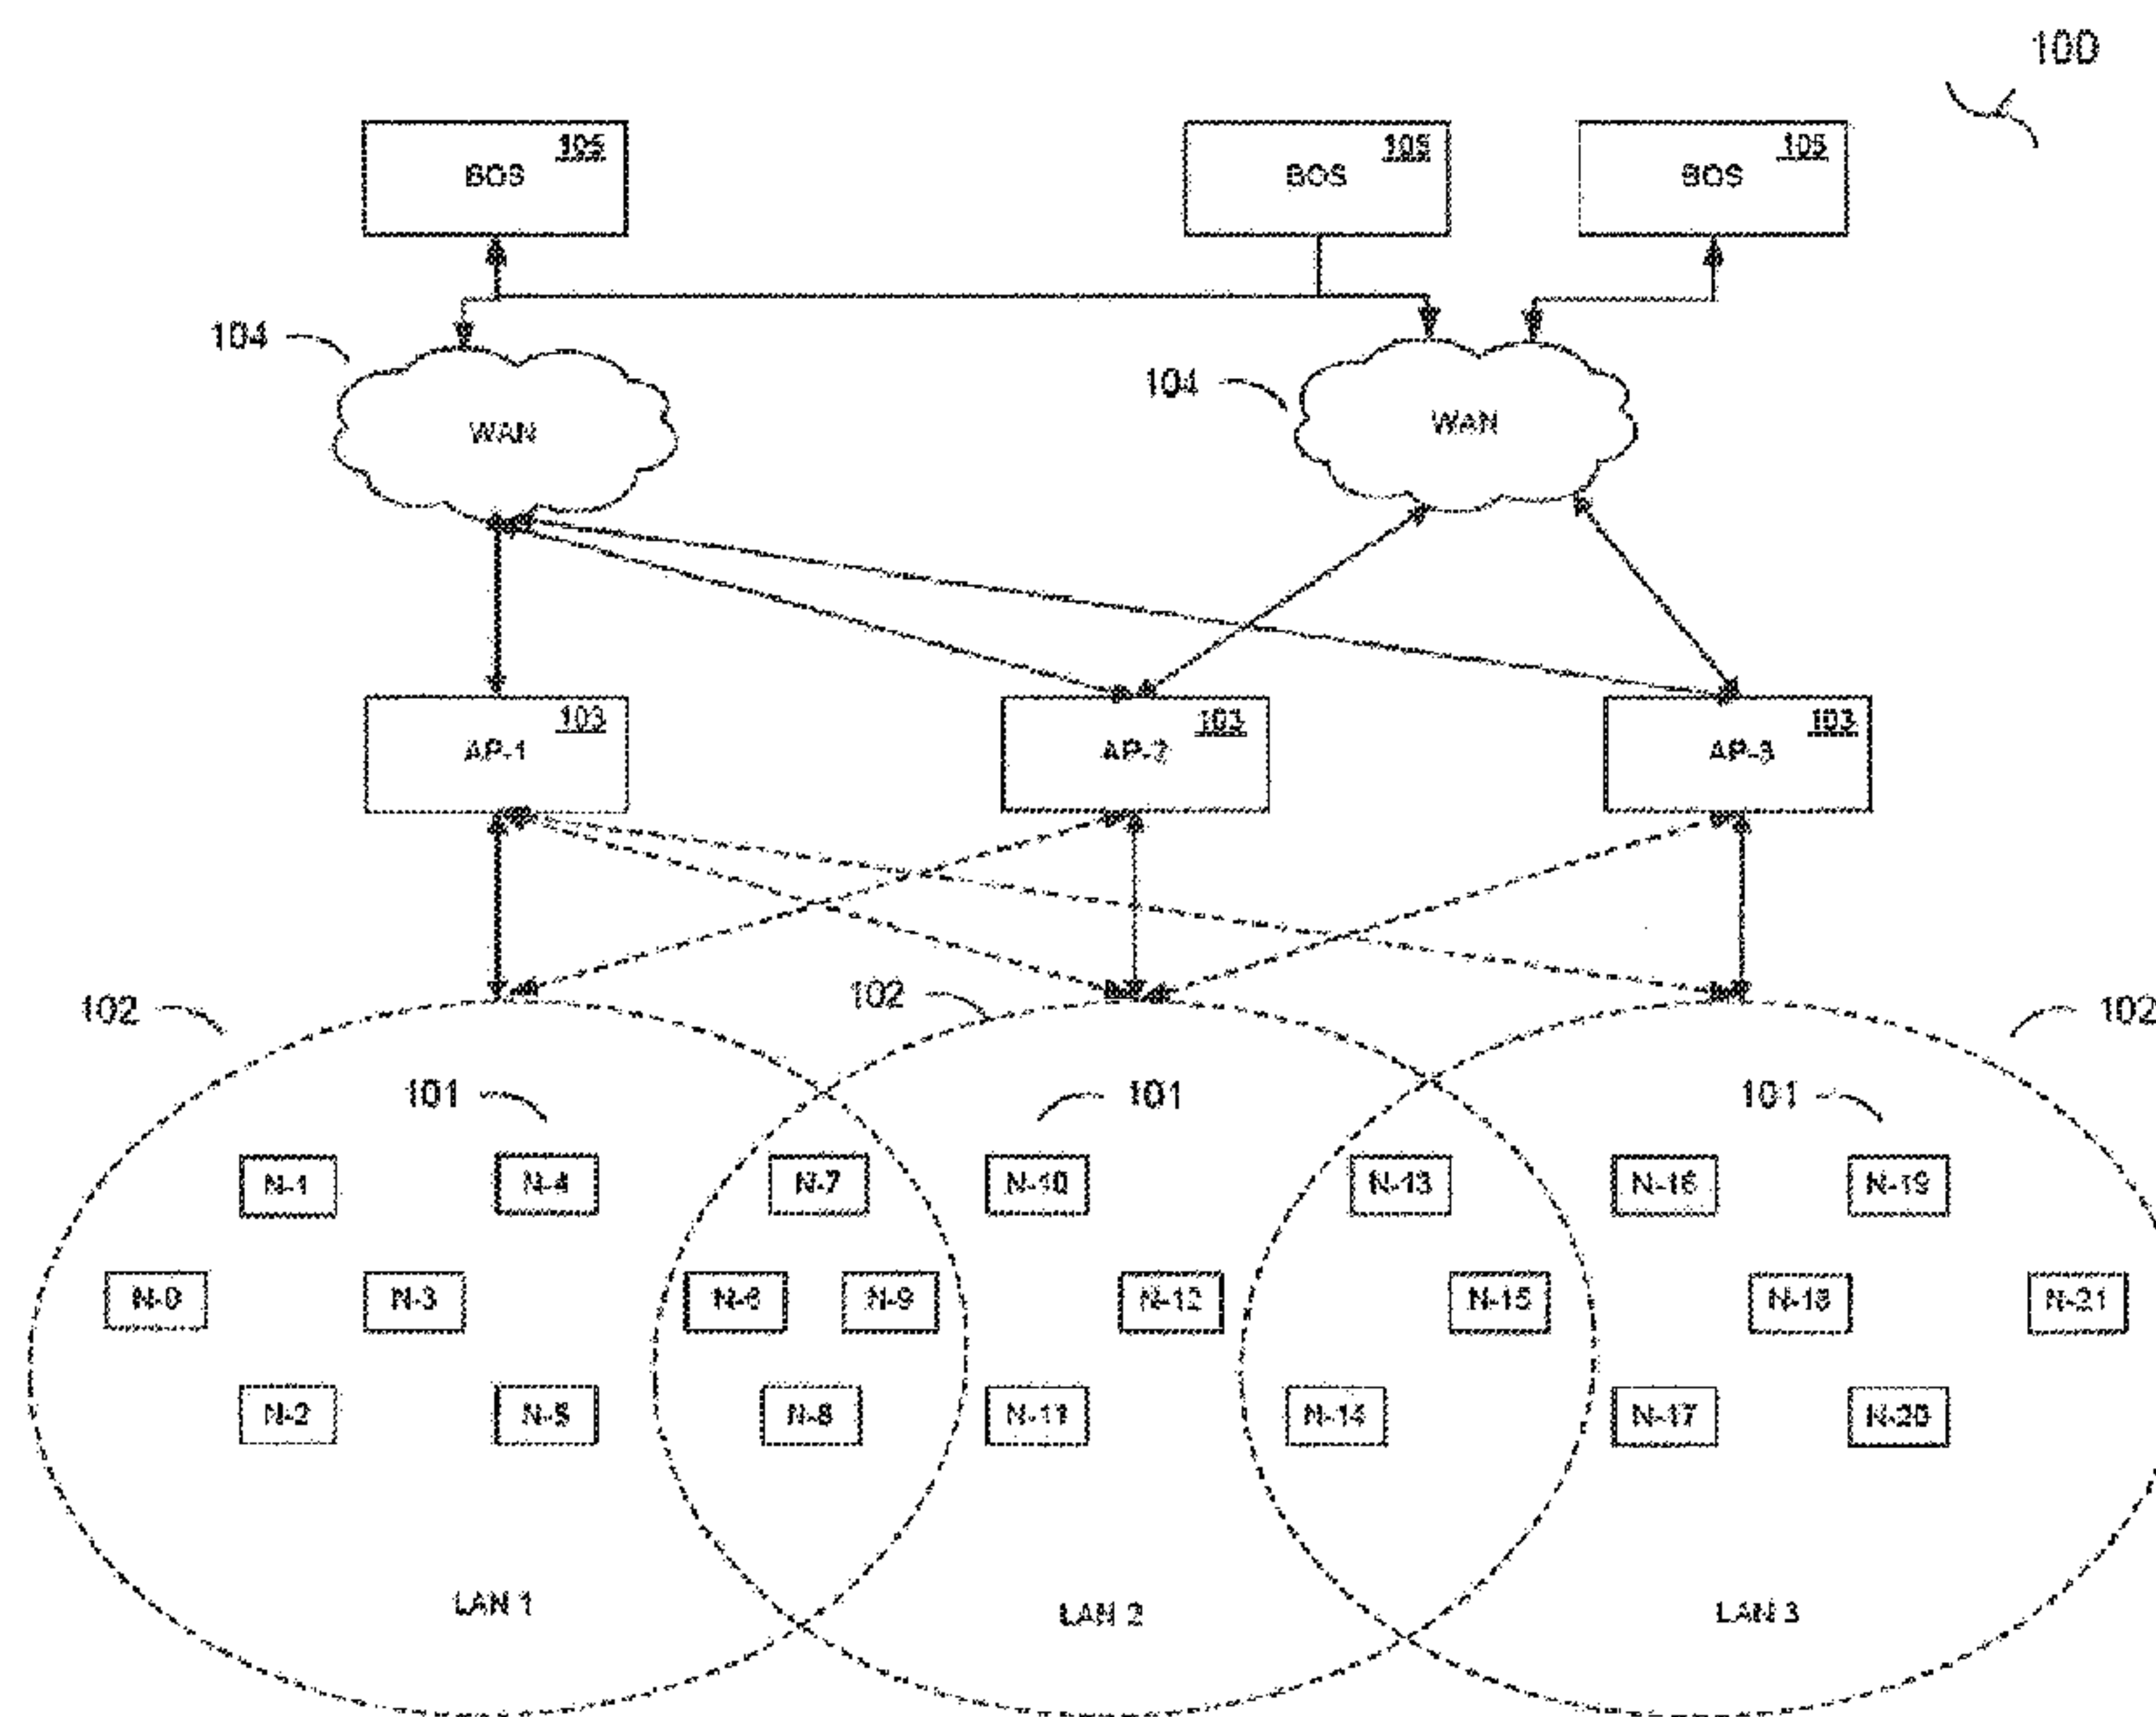


Figure 1

(57) **Abrégé/Abstract:**

A wireless communication system includes a first wireless network having first nodes each assigned a unique first address, a second wireless network having second nodes each assigned a unique second address, a border router node constituting an interface between the second network and a third wireless network, and at least one access point constituting an interface between the first and third networks. At least one of the first nodes is a mesh router node in the first network and a border router node in the second network (MR/BR node). The MR/BR node has unique addresses respectively assigned in the first and second networks. The MR/BR node receives a communication in the first network and transmits it to at least one second node in the second network. The MR/BR node receives a communication in the second network and transmits it to at least one first node in the first network.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

(43) International Publication Date  
24 January 2019 (24.01.2019)



(10) International Publication Number  
**WO 2019/018630 A1**

## (51) International Patent Classification:

*H04L 12/28* (2006.01) *H04W 80/00* (2009.01)  
*H04W 4/00* (2018.01)

## (71) Applicant: ITRON NETWORKED SOLUTIONS, INC.

[US/US]; 230 W. Tasman Drive, San Jose, California 95134 (US).

## (21) International Application Number:

PCT/US2018/042871

## (72) Inventor: STUREK, Donald Eugene;

1142 San Lori Lane, El Cajon, California 92019 (US).

## (22) International Filing Date:

19 July 2018 (19.07.2018)

## (74) Agent: LABARRE, James A.;

Buchanan Ingersoll & Rooney PC, P.O. Box 1404, Alexandria, Virginia 22313-1404 (US).

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

62/535,321	21 July 2017 (21.07.2017)	US
15/914,497	07 March 2018 (07.03.2018)	US

## (81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

## (54) Title: METHOD AND SYSTEM FOR COMMUNICATING BETWEEN PRIVATE MESH NETWORK AND PUBLIC NETWORK

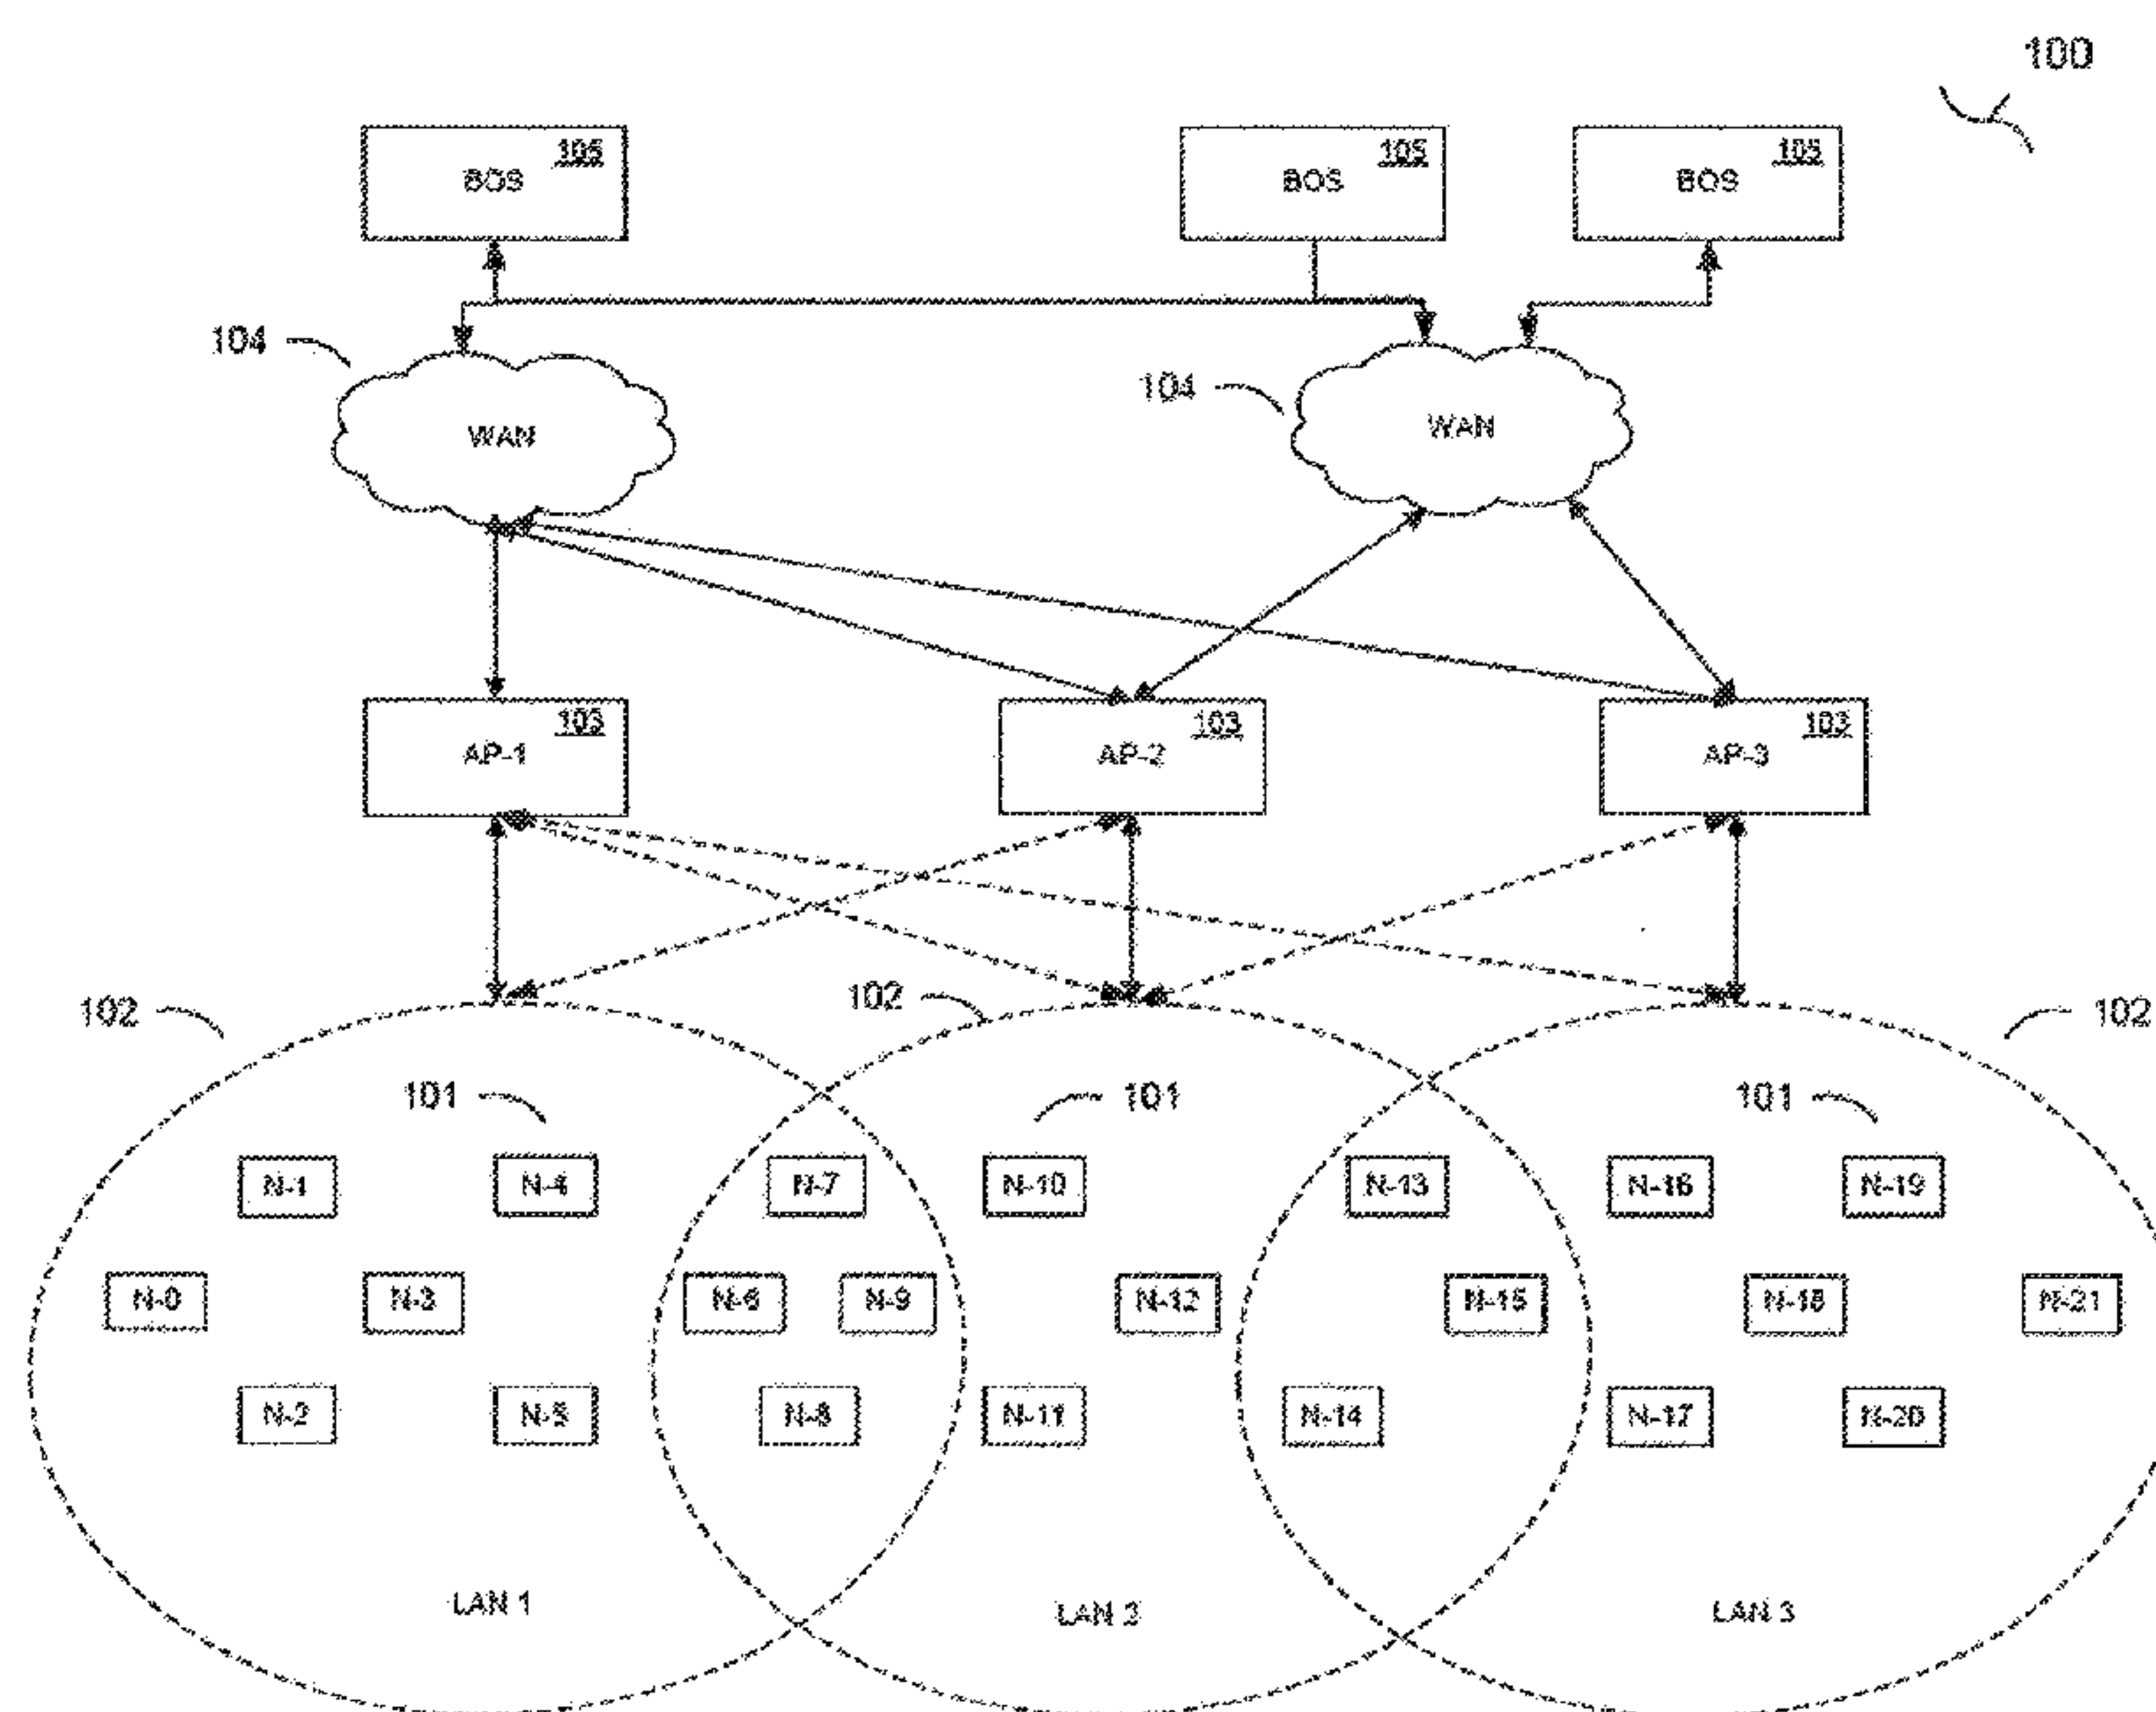


Figure 1

(57) **Abstract:** A wireless communication system includes a first wireless network having first nodes each assigned a unique first address, a second wireless network having second nodes each assigned a unique second address, a border router node constituting an interface between the second network and a third wireless network, and at least one access point constituting an interface between the first and third networks. At least one of the first nodes is a mesh router node in the first network and a border router node in the second network (MR/BR node). The MR/BR node has unique addresses respectively assigned in the first and second networks. The MR/BR node receives a communication in the first network and transmits it to at least one second node in the second network. The MR/BR node receives a communication in the second network and transmits it to at least one first node in the first network.

[Continued on next page]

# WO 2019/018630 A1

---

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

- *with international search report (Art. 21(3))*



## Method and System for Communicating Between Private Mesh Network and Public Network

### Field

[0001] The present disclosure relates to a method and system for enabling communication between a private mesh network and a public network.

### Background

[0002] A mesh network is a network topology in which nodes of the network can relay data for other nodes of the network. An example of a wireless mesh network is an advanced meter infrastructure (AMI) system for collecting data from utility meters (e.g., electricity, gas, water, etc.) or other community service devices (e.g., street lights, traffic signs, etc.), reporting the collected data to a back office system, and communicating data between the meters or devices and the back office system. The back office system can be located in one location or can be distributed across multiple locations. In such an AMI system, the meters or public utility devices each have a computer processor and transceiver (e.g., network interface card (NIC)) for communicating data between the meters or community service devices and other nodes of the network. Hereinafter, the meters or community service devices equipped with a processor and transceiver are collectively referred to as mesh network nodes. The mesh network nodes may transmit data to access points (also referred to as gateways) which serve as an interface between a local area network (LAN) composed of mesh network nodes, and a separate network through which the access point(s) is/are connected to the back office system. The access points may communicate with the back office system using a public network, such as a wide area network (WAN) (e.g., a cellular network). The access points are mesh network nodes because they are part of the LAN. The access points are also members of the WAN because the access points serve as interfaces between the LAN and WAN.

[0003] The LAN in which the mesh network nodes and access points are members may be a private network, to which access is restricted to approved network nodes and/or mesh network nodes that have the necessary credentials to be considered as approved network nodes when communicating in the private network. There may be a desire, however, to provide greater flexibility so that nodes in the public network may communicate with nodes in the private network. For example, Wi-SUN is a



global industry alliance promoting interoperable wireless networking standards. There may be a desire for a node in one public network such as a WAN to communicate with mesh network nodes in a private LAN.

### Summary

[0004] An exemplary embodiment of the present disclosure provides a wireless communication system for communicating between wireless networks. The exemplary wireless communication system includes a first wireless network having a plurality of first nodes configured to communicate with each other over the first wireless network, where each of the plurality of first nodes in the first wireless network has a respectively unique first address in the first wireless network. The exemplary wireless communication system also includes a second wireless network having a plurality of second nodes configured to communicate with each other over the second wireless network, the second wireless network being distinct from the first wireless network, where each of the plurality of second nodes in the second wireless network has a respectively unique second address in the second wireless network. In addition, the exemplary wireless communication system includes a border router node constituting an interface between the plurality of second nodes in the second wireless network and a third wireless network distinct from the first and second wireless networks. According to an exemplary embodiment, each of the plurality of second nodes in the second wireless network being one hop away from the border router node, respectively. The exemplary wireless communication system also includes at least one access point constituting an interface between the plurality of first nodes of the first wireless network and the third wireless network. In accordance with an exemplary embodiment, at least one of the first nodes in the first wireless network is a mesh router node in the first wireless network and a border router node in the second wireless network (MR/BR node), the MR/BR node constituting an interface between the first and second wireless networks, the MR/BR node being configured to communicate with upstream and downstream nodes in the first wireless network, and to communicate with downstream nodes in the second wireless network. The MR/BR node has both a unique first address in the first wireless network and a unique second address in the second wireless network. In accordance with an exemplary embodiment, the MR/BR node is configured to receive a first communication in the first wireless network via the first address of the



MR/BR node and transmit the received first communication to at least one of the second nodes in the second wireless network, and to receive a second communication in the second wireless network via the second address of the MR/BR node and transmit the received second communication to at least one of the first nodes in the first wireless network.

**[0005]** An exemplary embodiment of the present disclosure provides a method of communicating in a wireless communication system. In accordance with an exemplary embodiment, the wireless communication system includes a first wireless network having a plurality of first nodes configured to communicate with each other over the first wireless network, where each of the plurality of first nodes in the first wireless network has a respectively unique first address in the first wireless network. The exemplary wireless communication system also includes a second wireless network having a plurality of second nodes configured to communicate with each other over the second wireless network, the second wireless network being distinct from the first wireless network, where each of the plurality of second nodes in the second wireless network has a respectively unique second address in the second wireless network. In addition, the exemplary wireless communication system includes a border router node constituting an interface between the plurality of second nodes in the second wireless network and a third wireless network distinct from the first and second wireless networks. According to an exemplary embodiment, each of the plurality of second nodes in the second wireless network being one hop away from the border router node, respectively. The exemplary wireless communication system also includes at least one access point constituting an interface between the plurality of first nodes of the first wireless network and the third wireless network. In accordance with an exemplary embodiment, the method includes assigning at least one of the first nodes in the first wireless network as a mesh router node in the first wireless network and a border router node in the second wireless network (MR/BR node), where the MR/BR node constitutes an interface between the first and second wireless networks. The MR/BR node is configured to communicate with upstream and downstream nodes in the first wireless network, and to communicate with downstream nodes in the second wireless network. The exemplary method also includes assigning the MR/BR node with both a unique first address in the first wireless network and a unique second address in the second wireless network. In accordance with an exemplary



embodiment, the MR/BR node receives a first communication in the first wireless network via the first address of the MR/BR node, and transmits the received first communication to at least one of the second nodes in the second wireless network. Further, in accordance with an exemplary embodiment, the MR/BR node receives a second communication in the second wireless network via the second address of the MR/BR node, and transmits the received second communication to at least one of the first nodes in the first wireless network.

### **Brief Description of the Drawings**

[0006] Additional refinements, advantages and features of the present disclosure are described in more detail below with reference to exemplary embodiments illustrated in the drawings, in which:

[0007] Fig. 1 is a diagram of a system including a mesh network configured for communicating with a cellular network, according to an exemplary embodiment of the present disclosure;

[0008] Fig. 2 is a block diagram showing how layer 2 (L2) and layer 3 (L3) networks may be combined in operation in a Wi-SUN field area network, according to an exemplary embodiment of the present disclosure;

[0009] Fig. 3 is a block diagram illustrating how individual personal area networks (PANs) A, B and C of the L3 network can each be configured to operate like a mesh network in a Wi-SUN field area network, according to an exemplary embodiment of the present disclosure;

[0010] Fig. 4 illustrates a combination of an L2 mesh network as shown in Fig. 2 with an L3 mesh network as shown in Fig. 3, according to an exemplary embodiment of the present disclosure;

[0011] Figs. 5-12 illustrate exemplary embodiments of registration procedures and routing procedures which are implemented in the combined system of Fig. 4; and

[0012] Fig. 13 is a block diagram illustrating structural features of a node in the wireless communication system, according to an exemplary embodiment of the present disclosure.

### **Detailed Description of Exemplary Embodiments**

[0013] Fig. 1 is a diagram of a system 100 including a mesh network configured for communicating with a cellular network, in accordance with an exemplary embodiment of the present disclosure. In Fig. 1, a plurality of nodes 101 are



arranged in one or more LANs 102. In the example of Fig. 1, nodes N-1 to N-9 are arranged in LAN 1, nodes N-7 to N-15 are arranged in LAN 2, and nodes N-13 to N-21 are arranged in LAN 3. As illustrated, some of the nodes can be members of more than one LAN. For instance, nodes N-7 to N-9 are members of LAN 1 and LAN 2, and nodes N-13 to N-15 are members of LAN 2 and LAN 3. The LANs 102 illustrated in Fig. 1 are each respectively an example of a first wireless network as used herein.

[0014] The nodes 101 are each connected to one more access points (AP) 103 which are interfaces between the LANs 102 and a WAN 104 (e.g., a cellular network managed by at least one cellular network provider). The APs 103 may be connected to one or more back office stations (BOS) or servers 105 via the WAN 104. The BOS 105 can function to distribute commands to the APs 103 and/or nodes 101, and to receive data from the nodes 101 and/or APs 103 via the WAN 104.

[0015] Each of the nodes 101 is configured to discover other nodes 101 and APs 103 in the mesh network by listening to all neighbors with which it can set up links. The nodes 101 may then construct a routing table with an ordered list of next hops and corresponding path costs (advertised cost of egress by the next hop). The nodes 101 may register with their upstream nodes as well as the APs 103. By registering with the APs 103, the nodes 101 can obtain a respectively unique network address for each AP with which the nodes 101 register. For example, node N-5 can register with AP-1 and AP-2 to obtain (e.g., be assigned) two respectively unique network addresses, one based on the registration with AP-1 and another based on the registration with AP-2. Node N-5 can receive its assigned addresses when receiving registration acknowledgement or confirmation messages from AP-1 and AP-2, respectively. Node N-5's addresses can, for example, be based on a prefix respectively associated with the individual APs and a unique identifier (e.g., MAC address) of the node. For example, node N-5 can have a first address based on a prefix associated with AP-1 and the unique identifier of node N-5, and a second address based on a prefix associated with AP-2 and the unique identifier of node N-5. The nodes 101 can register their address(es) with upstream nodes 101 as well as the APs 103 and BOS 105. A node have multiple addresses provides multiple routes to reach that node. In the above example of node N-5 having two unique addresses, the BOS 105 can transmit commands or data to node N-5 through the WAN 104 via AP-1 or via AP-2.



[0016] The LANs 102 may be referred to as layer 2 (L2) networks, and the WAN(s) 104 may be referred to as layer (L3) networks. Fig. 2 is a diagram showing how L2 and L3 networks may be combined in operation in a Wi-SUN field area network. In Fig. 2, there are three separate personal area networks (PANs) each supporting nodes in the field. The L3 network includes a plurality of leaf nodes (LNs) connected to a border router node (BRN). The BRN is connected to the WAN backhaul (e.g., IPv4 (or IPv6) network interfacing the BOS via the Internet (the BOS may be a back end, head end or control center service, for example), and serves as an interface between the leaf nodes of the L3 network 210 and the WAN. The BRN treats the leaf nodes in the L3 networks as each being one hop away. In Fig. 2, the L3 networks (PAN A, PAN B, and PAN C) are depicted as a routing view at the L3 level. In the L3 network, all nodes appear as one hop away.

[0017] In network L2 in Fig. 2, each node is a multi-hop connection to the nodes in the L3 network. In Fig. 2, the L2 network 220 has a mesh network structure similar to that illustrated in Fig. 1. Thus, an access point node (APN) serves as an interface between the mesh network nodes of the L2 network 220, and the nodes of the L3 network 210.

[0018] In Fig. 2, the L2 network nodes includes two types of nodes: forwarding nodes (FNs), and leaf nodes (LNs). The forwarding nodes forward data from other nodes to the access point node. The leaf nodes are downstream of the forwarding nodes. In Fig. 2, service advertisements are initiated at the access point nodes and are propagated by the L2 mesh nodes to advertise the access point nodes' services. With regard to service registration, messages are sent from L2 nodes to join the L2 mesh network. In doing so, the L2 mesh nodes provide a unique identifier (e.g., the MAC address of the node) to join the network and obtain network addresses (e.g., by assignment), as discussed above with respect to Fig. 1. Acknowledgement messages are then from one or more access point nodes (with which the joining node is registering) to join the mesh network. The acknowledgement message can identify the addresses assigned to the mesh nodes when they register with the access point node and join the L2 network. The address(es) assigned to each node can be based on the nodes unique identifier, such as its MAC address. In Fig. 2, upward forwarding from nodes in the L2 network to the access point node occurs along the path of service registration. Downward forwarding from the access point



node to the downstream nodes in the L2 network is accomplished by source route using the address(es) assigned to each downstream node (L2 addresses).

[0019] In Fig. 2, the combinations of L3 B and L2 B, and L3 C and L2 C operate similar to the combination of L3A and L2A, as shown in Fig. 2. In operation, the leaf nodes in L3 A operate as if each node in L2 A are one hop away. However, as is evident from the network architecture illustrated in Fig. 2, that is not the case. The nodes in L2 A and L3 A must be able to communicate with each other's network. To accomplish this, the nodes in the respective networks L2 and L3 must have nodes that can communicate between the different networks. Further, the L3 network can be made to operate like a mesh network, as shown in Fig. 3.

[0020] As shown in Fig. 3, the individual personal area networks (PANs) A, B and C of the L3 network can each be configured to operate like a mesh network in a Wi-SUN field area network. Like the mesh network L2 in Fig. 2, the mesh L3 networks in Fig. 2 include leaf nodes and router nodes (distinguished by shading in Fig. 3). However, unlike the mesh network L2 in Fig. 2, the individual PANs of the L3 network in Fig. 3 have a border router node as the interface to the WAN backhaul, rather than an access point node. In Fig. 3, the WAN backhaul is an IPv4 or IPv6 network interfacing the BOS (backend/head end/control center) via the Internet to the L3 nodes via a border router node. Similar to Fig. 2, PAN A, PAN B, and PAN C represent distinct personal area networks. In Fig. 3, the layer 3 networks under the border router nodes depict the routing view in the L3 network. Each router node or leaf node in the L3 network appears in a multi-hop network within PAN A, PAN B or PAN C to the respective border routers.

[0021] In Fig. 3, network forwarding for Wi-SUN L3 mesh routing is accomplished in the upward (e.g., from a leaf node to the border router node) and downward (e.g., from a border router node to a leaf node) directions. In the L3 mesh network illustrated in Fig. 3, upward forwarding from the L3 nodes to the border router node is by rank (hops away from the border router node). All upward forwarding must go to a neighbor that is one less in rank than the forwarding device. Downward forwarding from the border router node to the router nodes or leaf nodes is by source route using IP addresses (L3 addresses).

[0022] The nodes in private L2 networks and the nodes in public L3 networks must be able to communicate with each other's network if there is to be cooperation between the networks. To accomplish this, the nodes in the respective networks L2



and L3 must have nodes that can communicate between the different networks. The present disclosure provides a technique of combining L2 and L3 networks to permit intercommunication between the nodes in private L2 networks and the nodes in public L3 networks.

**[0023]** Fig. 4 illustrates a combination of an L2 mesh network as shown in Fig. 2 with an L3 mesh network as shown in Fig. 3. The exemplary embodiment of Fig. 4 introduces a new type of node that is not illustrated in Figs. 2 and 3: a layer 2 mesh router, layer 3 border router (L2 MR/L3 BR). In Fig. 4, the layer 3 leaf node (L3 LN) is a leaf node in the L3 mesh network, the layer 2 mesh router is the same as the forwarding node in Fig. 2, and the layer 3 mesh router (L3 MR) is the same as the router node in Fig. 3. In the combined system, layer 2 mesh router, layer 3 border router (L2 MR/L3 BR) node is a special construction node, and is programmed to know that it is a special construction node. The L2 mesh router, L3 border router (L2 MR/L3 BR) nodes are interfaces between the L2 and L3 networks. According to an exemplary embodiment, the L2 mesh router, L3 border router (L2 MR/L3 BR) nodes may perform channel hopping. Such channel hopping is not limited to frequency hopping. According to an exemplary embodiment, the layer 2 mesh router, layer 3 border router (L2 MR/L3 BR) node is the only node in the combined system that has to know how to perform such channel hopping, because it is operating according to two different network communication protocols, e.g., L2 mesh network addressing, and L3 addressing (IP addressing). The channel hopping utilized by the layer 2 mesh router, layer 3 border router (L2 MR/L3 BR) node is independent of the L2 or L3 device addressing or the communication or addressing protocol in use for either the L2 or L3 network. In essence, the channel hopping utilized by the layer 3 border router (L2 MR/L3 BR) is a variation on the physical media (e.g., frequency spectrums) in use for the respective networks. The L2 mesh devices (e.g., L2 mesh router) and the L3 border router nodes may or may not be operating using channel hopping.

**[0024]** Figs. 5-12 illustrate exemplary embodiments of registration procedures and routing procedures which are implemented in the combined system of Fig. 4. In Fig. 5, arrow 1 pointing to the L2 mesh router/L3 border router node identifies the L2 mesh router/L3 border router node that can communicate in both networks L2 and L3. The L2 mesh router/L3 border router node registers with the L2 access point (with address 0x00136...01) when the L2 mesh router/L3 border router node joins the L2 network. The L2 mesh router/L3 border router node will register its L2



address with the L2 access point (and other neighbor nodes in the L2 network) like all other L2 nodes, but the L2 mesh router/L3 border router node will also register its L3 network address, as well as the prefix it will support, to the IP forwarding table supporting the L2 access point. Thus, the L2 mesh router/L3 border router node can serve as an interface between the L2 and L3 networks when the access point in the L2 network receives a packet from the WAN targeted to a node with address 2001::35, for example. In other words, as indicated in Fig. 5, the L2 mesh router, L3 border router node with MAC address 0x00136...07 joins the L2 mesh network by registering with the access point node of the L2 node as a forwarding node for the L3 network. Thus, node 2001::7 has registered with the access point in the L2 network as the gateway to the Layer 3 sub-network. The nodes with addresses 2001::16, 2001::25 and 2001::35 have registered their addresses with the AP with a gateway as 0x00136...07 (2001::7). The aforementioned example is based on using the same 2001:: prefix for both the L2 mesh devices and the L3 mesh devices. The present disclosure is not limited to this example. A different prefix can be allocated to the L2 mesh devices than the prefix allocated to the L3 mesh devices, and the registration process with the L2 access point can thereby be simplified so that only one entry in the IP forwarding table of the L2 access point that gives the prefix in use in the L3 mesh network. In this case, the L2 mesh router/L3 border router node will have two IP addresses, one using the prefix in use for the L2 mesh network, and another one using the prefix in use for the L3 mesh network. When a different prefix is used for the L2 and L3 mesh devices, there is only one registration process that needs to occur when the L2 mesh router/L3 border router node begins to operate in its specialized function as the L2 mesh router/L3 border router node. A tradeoff with using different prefixes is that packets would have to be downward routed to the L3 border router before it can be known that a destination address is unreachable, as opposed to having the packet returned by the L2 access point who would know if a particular L3 mesh device was registered if the same prefix was used for both L2 and L3 devices. The present disclosure allows for information to be shared outside of the L2 mesh network to a device that is capable of forwarding the IP packets with a mechanism to reached devices in the L3 mesh network.

[0025] Figs. 6-9 illustrate routing procedures in the combined system. As designated by arrow 2 in Fig. 6, the access point of AP finds 2001::35 is reachable through the AP with a Layer 2 gateway of 0x00136..07. This operation illustrates a



new protocol addition, because the node with MAC address 0x00136...07 registers with Access Point as a gateway to a Layer 3 mesh subnetwork via MAC address 0x00136...07.

**[0026]** Fig. 7 illustrates the establishment of a standard L3 mesh network. In particular, as shown by arrow 3 in Fig. 7, the L2 mesh router/L3 border router node with device address 2001::7 is a border router and creates an L3 Mesh subnetwork. The node with address 2001::16 joins the L3 Mesh. Nodes 2001::25 and 2001::35 similarly join the L3 mesh. Likewise, the un-numbered devices in the L3 mesh subnetwork join the L3 mesh. In accordance with the depiction in Fig. 7, the access point source routes from 0x0136...01 (itself), 0x0136...05, 0x0136...07 (gateway).

**[0027]** Fig. 8 illustrates a new protocol addition, where the node with IP address 2001::7 (i.e., the L2 mesh router, L3 border router) sends a message to the L2 access point registering node 2001::16 as accessible via the gateway of 2001::7 (L2 mesh node with MAC address 0x00136...07). Node 2001::25 and 2001::35 join the Layer 3 mesh subnetwork and are reported to the access point, accessible via gateway 2001::7. In accordance with an exemplary embodiment, the present disclosure provides for the ability to register a whole range of addresses (e.g., 2001::1 to 2001::64), where different prefixes can be used outside the L3 mesh. The use of different prefixes between the devices of the L2 mesh network and the devices of the L3 mesh network achieve the advantages as described above. Using different prefixes with the L2 and L3 mesh devices avoids having to register every address in the L3 mesh network.

**[0028]** Fig. 9 illustrates a downward routing example where the access point receives a packet from the WAN targeted to 2001::35. In Fig. 10, the access point finds that address 2001::35 is reachable through the access point with a Layer 2 gateway of 0x00136...07. Next, in Fig. 11, the access point with address 0x0136...01 routes to the node with address 0x0136...05, which in turn routes to the node with address 0x0136...07, i.e., the L2 mesh router, L3 border router node.

**[0029]** In Fig. 12, arrow 4 illustrates L3 mesh routing where the L2 mesh router, L3 border router node extracts the IP packet and finds that the destination is 2001::35, thereby resulting in new packet forwarding added to the L2 mesh. In Fig. 12, arrows 5 represent L3 mesh routing in which the L2 mesh router, L3 border router node with address 20017::7 routes via the layer 3 mesh to the node with address 2001::25, which in turn routes to the node with address 2001::35.



[0030] In the above examples illustrated in Figs. 9-12, the access point receives a packet from the WAN targeted to a node with address 2001::35. The L2 mesh router, L3 border router node with address 2001::7 has registered with the access point as the gateway to the Layer 3 sub-network. The nodes with 2001::16, 2001::25 and 2001::35 have registered their addresses with the access point with a gateway as address 0x00136...07 (2001::7). As noted above, the present disclosure provides for the use of use of different prefixes between the devices of the L2 mesh network and the devices of the L3 mesh network, which avoids having to register every address in the L3 mesh network. The forwarding/routing process then proceeds as discussed above with respect to Figs. 10-12. The examples of Figs. 9-12 illustrate downward routing. Forward/upward routing would operate in a similar manner in the combined system. In particular, forward/upward routing would involve IP forwarding to the L2 mesh router, L3 border router node, then L2 mesh forwarding to the access point in the L2 network, and then forwarding to the destination.

[0031] The foregoing exemplary embodiments of the wireless communication system were described with respect to the features that the nodes in the wireless communication system perform. Fig. 13 is a block diagram of the structural features of a node in the wireless communication system according to an exemplary embodiment of the present disclosure. As an example, the structural features of a node 101 in the mesh network of Fig. 1 (L2 network in Fig. 2) is illustrated in Fig. 13. The nodes in the L3 network as well as the border router node, access point node, MR/BR node, and back office server (BOS) can have a similar structure to the node 101 illustrated in Fig. 13.

[0032] As shown in Fig. 13, the node 101 includes a processing unit 110, a communication unit 120, an input unit 130, and a memory slot 140. The processing unit 110 includes a processor 111, a read-only memory (ROM) 112, a random access memory (RAM) 113, a memory unit 114, a reception unit 115, and a transmission unit 116. The processor 111 controls the aggregate functions of each component of the node 101. The processor 111 may include a general-purpose processor such as an ARM, Intel or AMD processor, and/or an Application-Specific Integrated Circuit (ASIC).

[0033] The ROM 112 stores programs, such as an operating system and computer-readable application programs, and logic instructions which are executed by the processor 111. The memory unit 114 is a non-volatile memory which can also



record computer-readable application programs to be executed by the processor 111. The memory slot 140 is configured to receive a removable non-volatile memory card and/or disc inserted therein, such as a CD-ROM, DVD-ROM, BD-ROM, flash memory, optical memory, etc. The memory slot 140 communicatively couples terminals of the removable memory card/disc to the processing unit 110 to provide the components of the processing unit 110 access to data and application programs recorded on the memory card/disc, and to store data thereon. The RAM 113 is used as a working memory by the processor 111 when executing the programs and logic instructions recorded in the ROM 112, memory unit 114 and/or memory card/disc inserted into the memory slot 140. The ROM 112, memory unit 114 and memory card/disc inserted into the memory slot 140 are examples of a non-transitory computer-readable recording medium on which an operating system and/or application programs of the node 101 can be recorded and executed by the processor 111. The processor 111 is configured to communicate with any of these computer-readable recording media and thus is communicatively connected to these computer-readable media.

**[0034]** The reception unit 115 receives data from the communication unit 120 and forwards the received data to the processor 111 for appropriate processing. The transmission unit 116 receives data that is instructed to be sent to the communication unit 120 by the processor 111, and transmits the instructed data to the communication unit 120.

**[0035]** The communication unit 120 is an interface (e.g., transceiver) between the node 101 and other nodes in the wireless network(s) in which the node is assigned an address, such as forwarding nodes, leafs nodes, border router nodes, and access point nodes. The communication unit 120 can transmit data to one or more nodes as individual messages, a multicast message or a broadcast message. The communication unit 120 also receives data and/or instructions from other nodes in the wireless network. Received data and/or instructions are forwarded to the processor 111 by the reception unit 115.

**[0036]** The input unit 130 can include keys and pointing devices that can be manipulated by an operator of the node 101. For example, the input unit 130 can include a QWERTY keyboard, a trackball or similar selecting and pointing device, a number pad, etc. The input unit 130 can include a display device configured to visually display an input received by such keys and/or pointing devices. The input



unit 130 can also include a multi-input touch screen with a virtual keyboard and buttons represented in a graphical user interface (GUI). Operating instructions received by the input unit 130 are forwarded to the processor unit 111.

[0037] As noted above, the nodes in the L3 network as well as the border router node, access point node, MR/BR node, and back office server (BOS) can have a similar structure to the node 101 illustrated in Fig. 13. For nodes that are configured to communicate with other nodes in more than one network, the communication unit of such multi-network nodes can be embodied as a single transceiver configured to communicate with multiple networks. Alternatively, the communication unit of multi-network nodes can be embodied as separate transceivers each respectively configured to communicate with one or more of the networks with which the multi-network node can communicate. The back office server (BOS) may be distributed across multiple devices in multiple locations.

[0038] In addition to providing a wireless communication system in accordance with the above-described exemplary embodiments, the present disclosure also provides a method of operating such a wireless communication system. In the exemplary method of the present disclosure, the wireless communication system includes features of the above-described exemplary embodiments (e.g., Fig. 4). In accordance with an exemplary embodiment, the method includes assigning at least one of the first nodes in the first wireless network as a mesh router node in the first wireless network and a border router node in the second wireless network (MR/BR node), where the MR/BR node constitutes an interface between the first and second wireless networks. The MR/BR node is configured to communicate with upstream and downstream nodes in the first wireless network, and to communicate with downstream nodes in the second wireless network. The exemplary method also includes assigning the MR/BR node with both a unique first address in the first wireless network and a unique second address in the second wireless network. In accordance with an exemplary embodiment, the MR/BR node receives a first communication in the first wireless network via the first address of the MR/BR node, and transmits the received first communication to at least one of the second nodes in the second wireless network. Further, in accordance with an exemplary embodiment, the MR/BR node receives a second communication in the second wireless network via the second address of the MR/BR node, and transmits the received second communication to at least one of the first nodes in the first wireless



network. The exemplary method of the present disclosure can also include features of the exemplary embodiments of the wireless communication system as described above.

[0039] It will be appreciated by those skilled in the art that the disclosed embodiments can be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The presently disclosed embodiments are therefore considered in all respects to be illustrative and not restricted. The scope of the invention is indicated by the appended claims rather than the foregoing description and all changes that come within the meaning and range and equivalence thereof are intended to be embraced therein. In the claims, the word “comprising” or “including” does not exclude other elements or steps, and the indefinite article “a” or “an” does not exclude a plurality. A single processor or controller or other unit may fulfil the functions of several items recited in the claims. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.



## CLAIMS

What is claimed is:

1. A wireless communication system for communicating between wireless networks, the wireless communication system comprising:

a first wireless network having a plurality of first nodes configured to communicate with each other over the first wireless network, each of the plurality of first nodes in the first wireless network having a respectively unique first address in the first wireless network;

a second wireless network having a plurality of second nodes configured to communicate with each other over the second wireless network, the second wireless network being distinct from the first wireless network, each of the plurality of second nodes in the second wireless network having a respectively unique second address in the second wireless network;

a border router node constituting an interface between the plurality of second nodes in the second wireless network and a third wireless network distinct from the first and second wireless networks, each of the plurality of second nodes in the second wireless network being one hop away from the border router node, respectively; and

at least one access point constituting an interface between the plurality of first nodes of the first wireless network and the third wireless network,

wherein at least one of the first nodes in the first wireless network is a mesh router node in the first wireless network and a border router node in the second wireless network (MR/BR node), the MR/BR node constituting an interface between the first and second wireless networks, the MR/BR node being configured to communicate with upstream and downstream nodes in the first wireless network, and to communicate with downstream nodes in the second wireless network,

wherein the MR/BR node has both a unique first address in the first wireless network and a unique second address in the second wireless network, and

wherein the MR/BR node is configured to receive a first communication in the first wireless network via the first address of the MR/BR node and transmit the received first communication to at least one of the second nodes in the second wireless network, and to receive a second communication in the second wireless network via the second address of the MR/BR node and transmit the received second communication to at least one of the first nodes in the first wireless network.



2. The wireless communication system according to claim 1, wherein the first wireless network is a private network, and the second wireless network is a public network.

3. The wireless communication system according to claim 2, wherein the second wireless network is a cellular network.

4. The wireless communication system according to claim 2, wherein the second wireless network is the Internet.

5. The wireless communication system according to claim 1, comprising:  
a back office configured to transmit first commands to the first nodes in the first wireless network via the at least one access point, to transmit second commands to the second nodes in the first wireless network via the border router node, to receive first responses from the first nodes in the first wireless network via the at least one access point, and to receive second responses from the second nodes in the second wireless network via the border router node.

6. The wireless communication system according to claim 1, wherein the plurality of first nodes in the first wireless network are each respectively one of a leaf node and a forwarding node in the first wireless network,

wherein the forwarding node is an intermediary node between the at least one access point and at least one leaf node in the first wireless network, and

wherein the leaf node is a downstream node that is not an intermediary node for another node in the first wireless network.

7. The wireless communication system according to claim 1, wherein each of the plurality of first nodes of the first wireless network is configured to register with the at least one access point when each of the first nodes respectively joins the first wireless network, and

wherein each first node in the first wireless network is assigned a respectively unique first address based on a unique identifier of that first node and the at least one access point with which the first node registered.



8. The wireless communication system according to claim 7, wherein each second node in the second wireless network is assigned a respectively unique second address based on a unique identifier of that second node and the border router node, and

wherein each second node in the second wireless network downstream of the MR/BR node is configured to register the respectively unique second address of that second node with the MR/BR node upon registering with the MR/BR node, and

wherein the MR/BR node is configured to register the respectively unique second address of each second node that registered with the MR/BR node, with the at least one access point such that the at least one access point can route, via the MR/BR node, communications addressed to at least one second node in the second wireless whose unique second address is registered with the MR/BR node.

9. The wireless communication system according to claim 1, wherein each second node in the second wireless network is assigned a respectively unique second address based on a unique identifier of that second node and the border router node, and

wherein each first node in the first wireless network is assigned a respectively unique address based on a unique identifier of that first node and the at least one access point.

10. The wireless communication system according to claim 9, wherein each first node in the first wireless network downstream of the MR/BR node is configured to register the respectively unique first address of that first node with the MR/BR node upon registering with the MR/BR node, and

wherein the MR/BR node is configured to register the respectively unique first address of each first node that registered with the MR/BR node, with the border router node such that the border router node can route, via the MR/BR node, communications addressed to at least one first node in the first wireless whose unique first address is registered with the MR/BR node.

11. The wireless communication system according to claim 1, wherein the MR/BR node is configured to receive, via the first address of the MR/BR node, the



first communication in the first wireless network from the at least one access point, and to transmit the received first communication to at least one of the second nodes in the second wireless network.

12. The wireless communication system according to claim 1, wherein the MR/BR node is configured to receive, via the first address of the MR/BR node, the first communication in the first wireless network from at least one other first node in the first wireless network downstream of the MBR/BR node, and to transmit the received first communication to at least one of the second nodes in the second wireless network.

13. The wireless communication system according to claim 1, wherein the MR/BR node is configured to receive, via the second address of the MR/BR node, the second communication in the second wireless network from the border router node, and to transmit the received second communication to at least one of the first nodes in the first wireless network.

14. The wireless communication system according to claim 1, wherein the MR/BR node is configured to receive, via the second address of the MR/BR node, the second communication in the second wireless network from at least one second node in the second wireless network downstream of the MR/BR node, and to transmit the received second communication to at least one of the first nodes in the first wireless network.

15. A method of communicating in a wireless communication system, the wireless communication system including:

a first wireless network having a plurality of first nodes configured to communicate with each other over the first wireless network, each of the plurality of first nodes in the first wireless network having a respectively unique first address in the first wireless network;

a second wireless network having a plurality of second nodes configured to communicate with each other over the second wireless network, the second wireless network being distinct from the first wireless network, each of the plurality of second



nodes in the second wireless network having a respectively unique second address in the second wireless network;

a border router node constituting an interface between the plurality of second nodes in the second wireless network and a third wireless network distinct from the first and second wireless networks, each of the plurality of second nodes in the second wireless network being one hop away from the border router node, respectively; and

at least one access point constituting an interface between the plurality of first nodes of the first wireless network and the third wireless network,

wherein the method comprises:

assigning at least one of the first nodes in the first wireless network as a mesh router node in the first wireless network and a border router node in the second wireless network (MR/BR node), the MR/BR node constituting an interface between the first and second wireless networks, the MR/BR node being configured to communicate with upstream and downstream nodes in the first wireless network, and to communicate with downstream nodes in the second wireless network;

assigning the MR/BR node with both a unique first address in the first wireless network and a unique second address in the second wireless network;

by the MR/BR node, receiving a first communication in the first wireless network via the first address of the MR/BR node, and transmitting the received first communication to at least one of the second nodes in the second wireless network; and

by the MR/BR node, receiving a second communication in the second wireless network via the second address of the MR/BR node, and transmitting the received second communication to at least one of the first nodes in the first wireless network.

16. The method according to claim 15, wherein the first wireless network is a private network, and the second wireless network is a public network.

17. The method according to claim 16, wherein the second wireless network is a cellular network.



18. The method according to claim 16, wherein the second wireless network is the Internet.

19. The method according to claim 15, comprising:

- transmitting, by a back office of the wireless communication system, first commands to the first nodes in the first wireless network via the at least one access point;
- transmitting, by the back office, second commands to the second nodes in the first wireless network via the border router node;
- receiving, by the back office, first responses from the first nodes in the first wireless network via the at least one access point; and
- receiving, by the back office, second responses from the second nodes in the second wireless network via the border router node.

20. The method according to claim 15, wherein the plurality of first nodes in the first wireless network are each respectively one of a leaf node and a forwarding node in the first wireless network,

- wherein the forwarding node is an intermediary node between the at least one access point and at least one leaf node in the first wireless network, and
- wherein the leaf node is a downstream node that is not an intermediary node for another node in the first wireless network.

21. The method according to claim 15, wherein each of the plurality of first nodes of the first wireless network registers with the at least one access point when each of the first nodes respectively joins the first wireless network, and

- wherein each first node in the first wireless network is assigned a respectively unique first address based on a unique identifier of that first node and the at least one access point with which the first node registered.

22. The method according to claim 21, wherein each second node in the second wireless network is assigned a respectively unique second address based on a unique identifier of that second node and the border router node,



wherein each second node in the second wireless network downstream of the MR/BR node registers the respectively unique second address of that second node with the MR/BR node upon registering with the MR/BR node, and

wherein the MR/BR node registers the respectively unique second address of each second node that registered with the MR/BR node, with the at least one access point such that the at least one access point can route, via the MR/BR node, communications addressed to at least one second node in the second wireless whose unique second address is registered with the MR/BR node.

23. The method according to claim 15, wherein each second node in the second wireless network is assigned a respectively unique second address based on a unique identifier of that second node and the border router node, and

wherein each first node in the first wireless network is assigned a respectively unique address based on a unique identifier of that first node and the at least one access point.

24. The method according to claim 23, wherein each first node in the first wireless network downstream of the MR/BR node registers the respectively unique first address of that first node with the MR/BR node upon registering with the MR/BR node, and

wherein the MR/BR node registers the respectively unique first address of each first node that registered with the MR/BR node, with the border router node such that the border router node can route, via the MR/BR node, communications addressed to at least one first node in the first wireless whose unique first address is registered with the MR/BR node.

25. The method according to claim 15, wherein the MR/BR node receives, via the first address of the MR/BR node, the first communication in the first wireless network from the at least one access point, and transmits the received first communication to at least one of the second nodes in the second wireless network.

26. The method according to claim 15, wherein the MR/BR node receives, via the first address of the MR/BR node, the first communication in the first wireless network from at least one other first node in the first wireless network downstream of



the MBR/BR node, and transmits the received first communication to at least one of the second nodes in the second wireless network.

27. The method according to claim 15, wherein the MR/BR node receives, via the second address of the MR/BR node, the second communication in the second wireless network from the border router node, and transmits the received second communication to at least one of the first nodes in the first wireless network.

28. The method according to claim 15, wherein the MR/BR node receives, via the second address of the MR/BR node, the second communication in the second wireless network from at least one second node in the second wireless network downstream of the MR/BR node, and transmits the received second communication to at least one of the first nodes in the first wireless network.





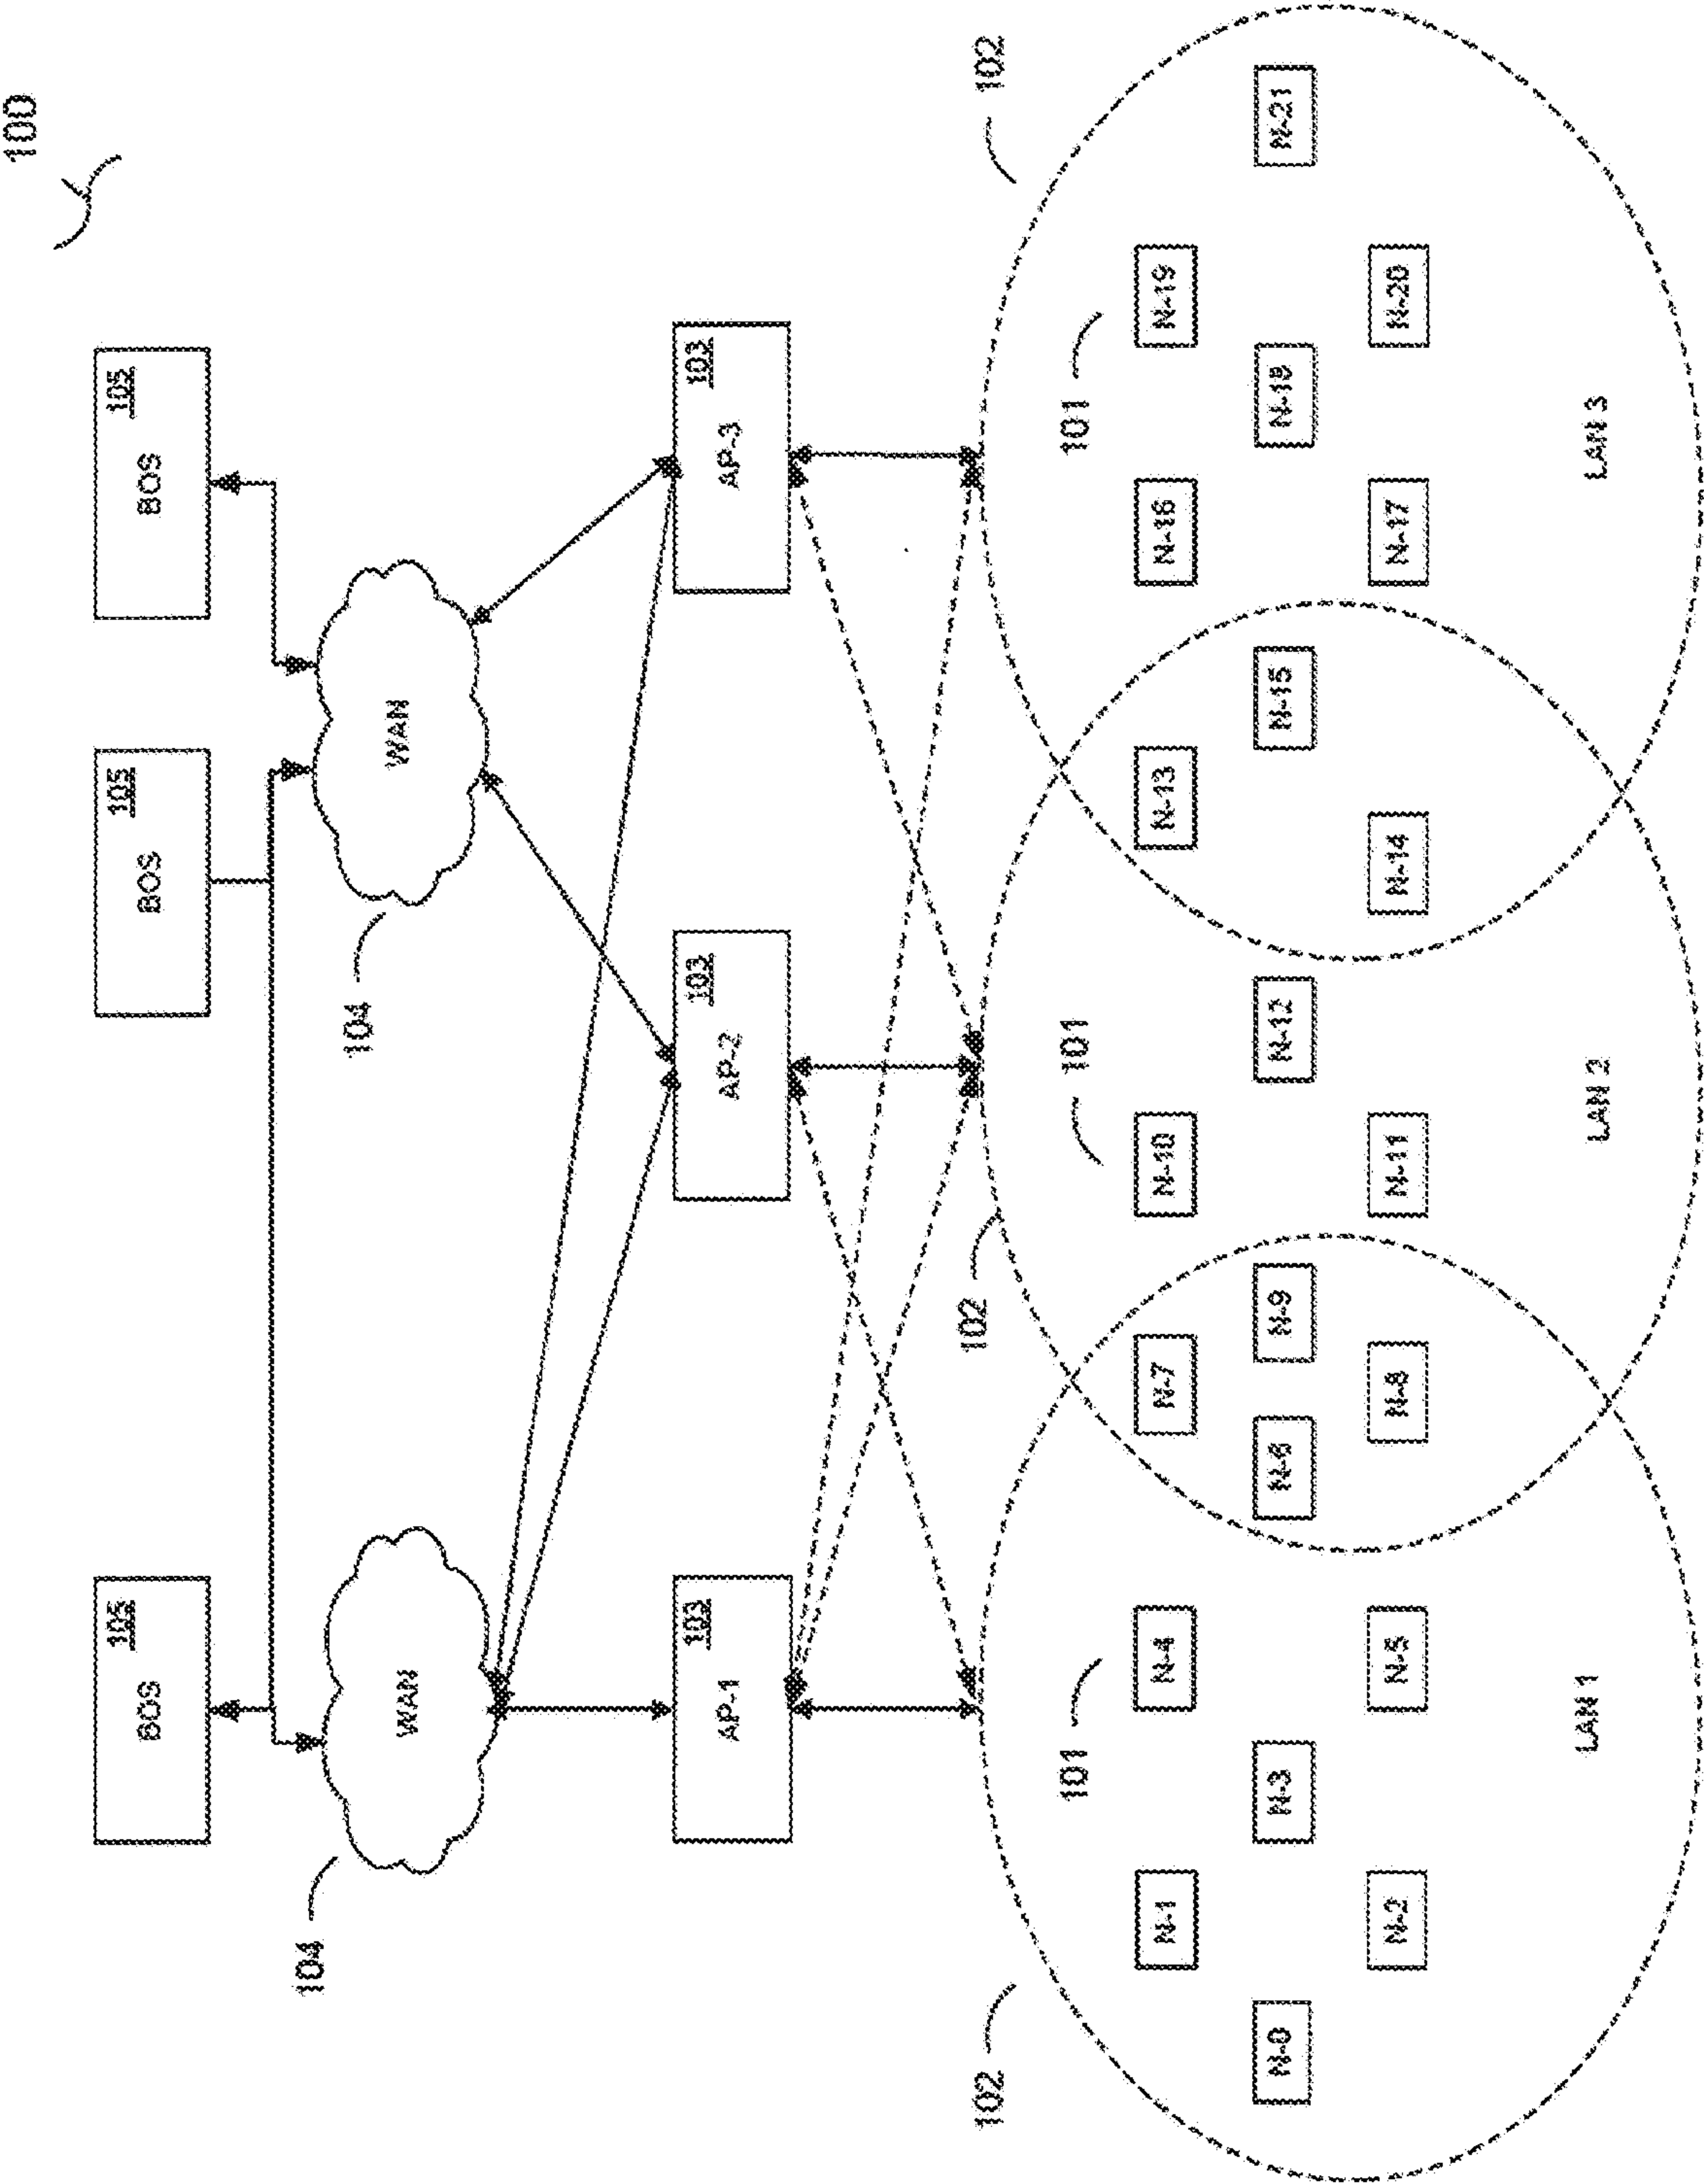


Figure 1






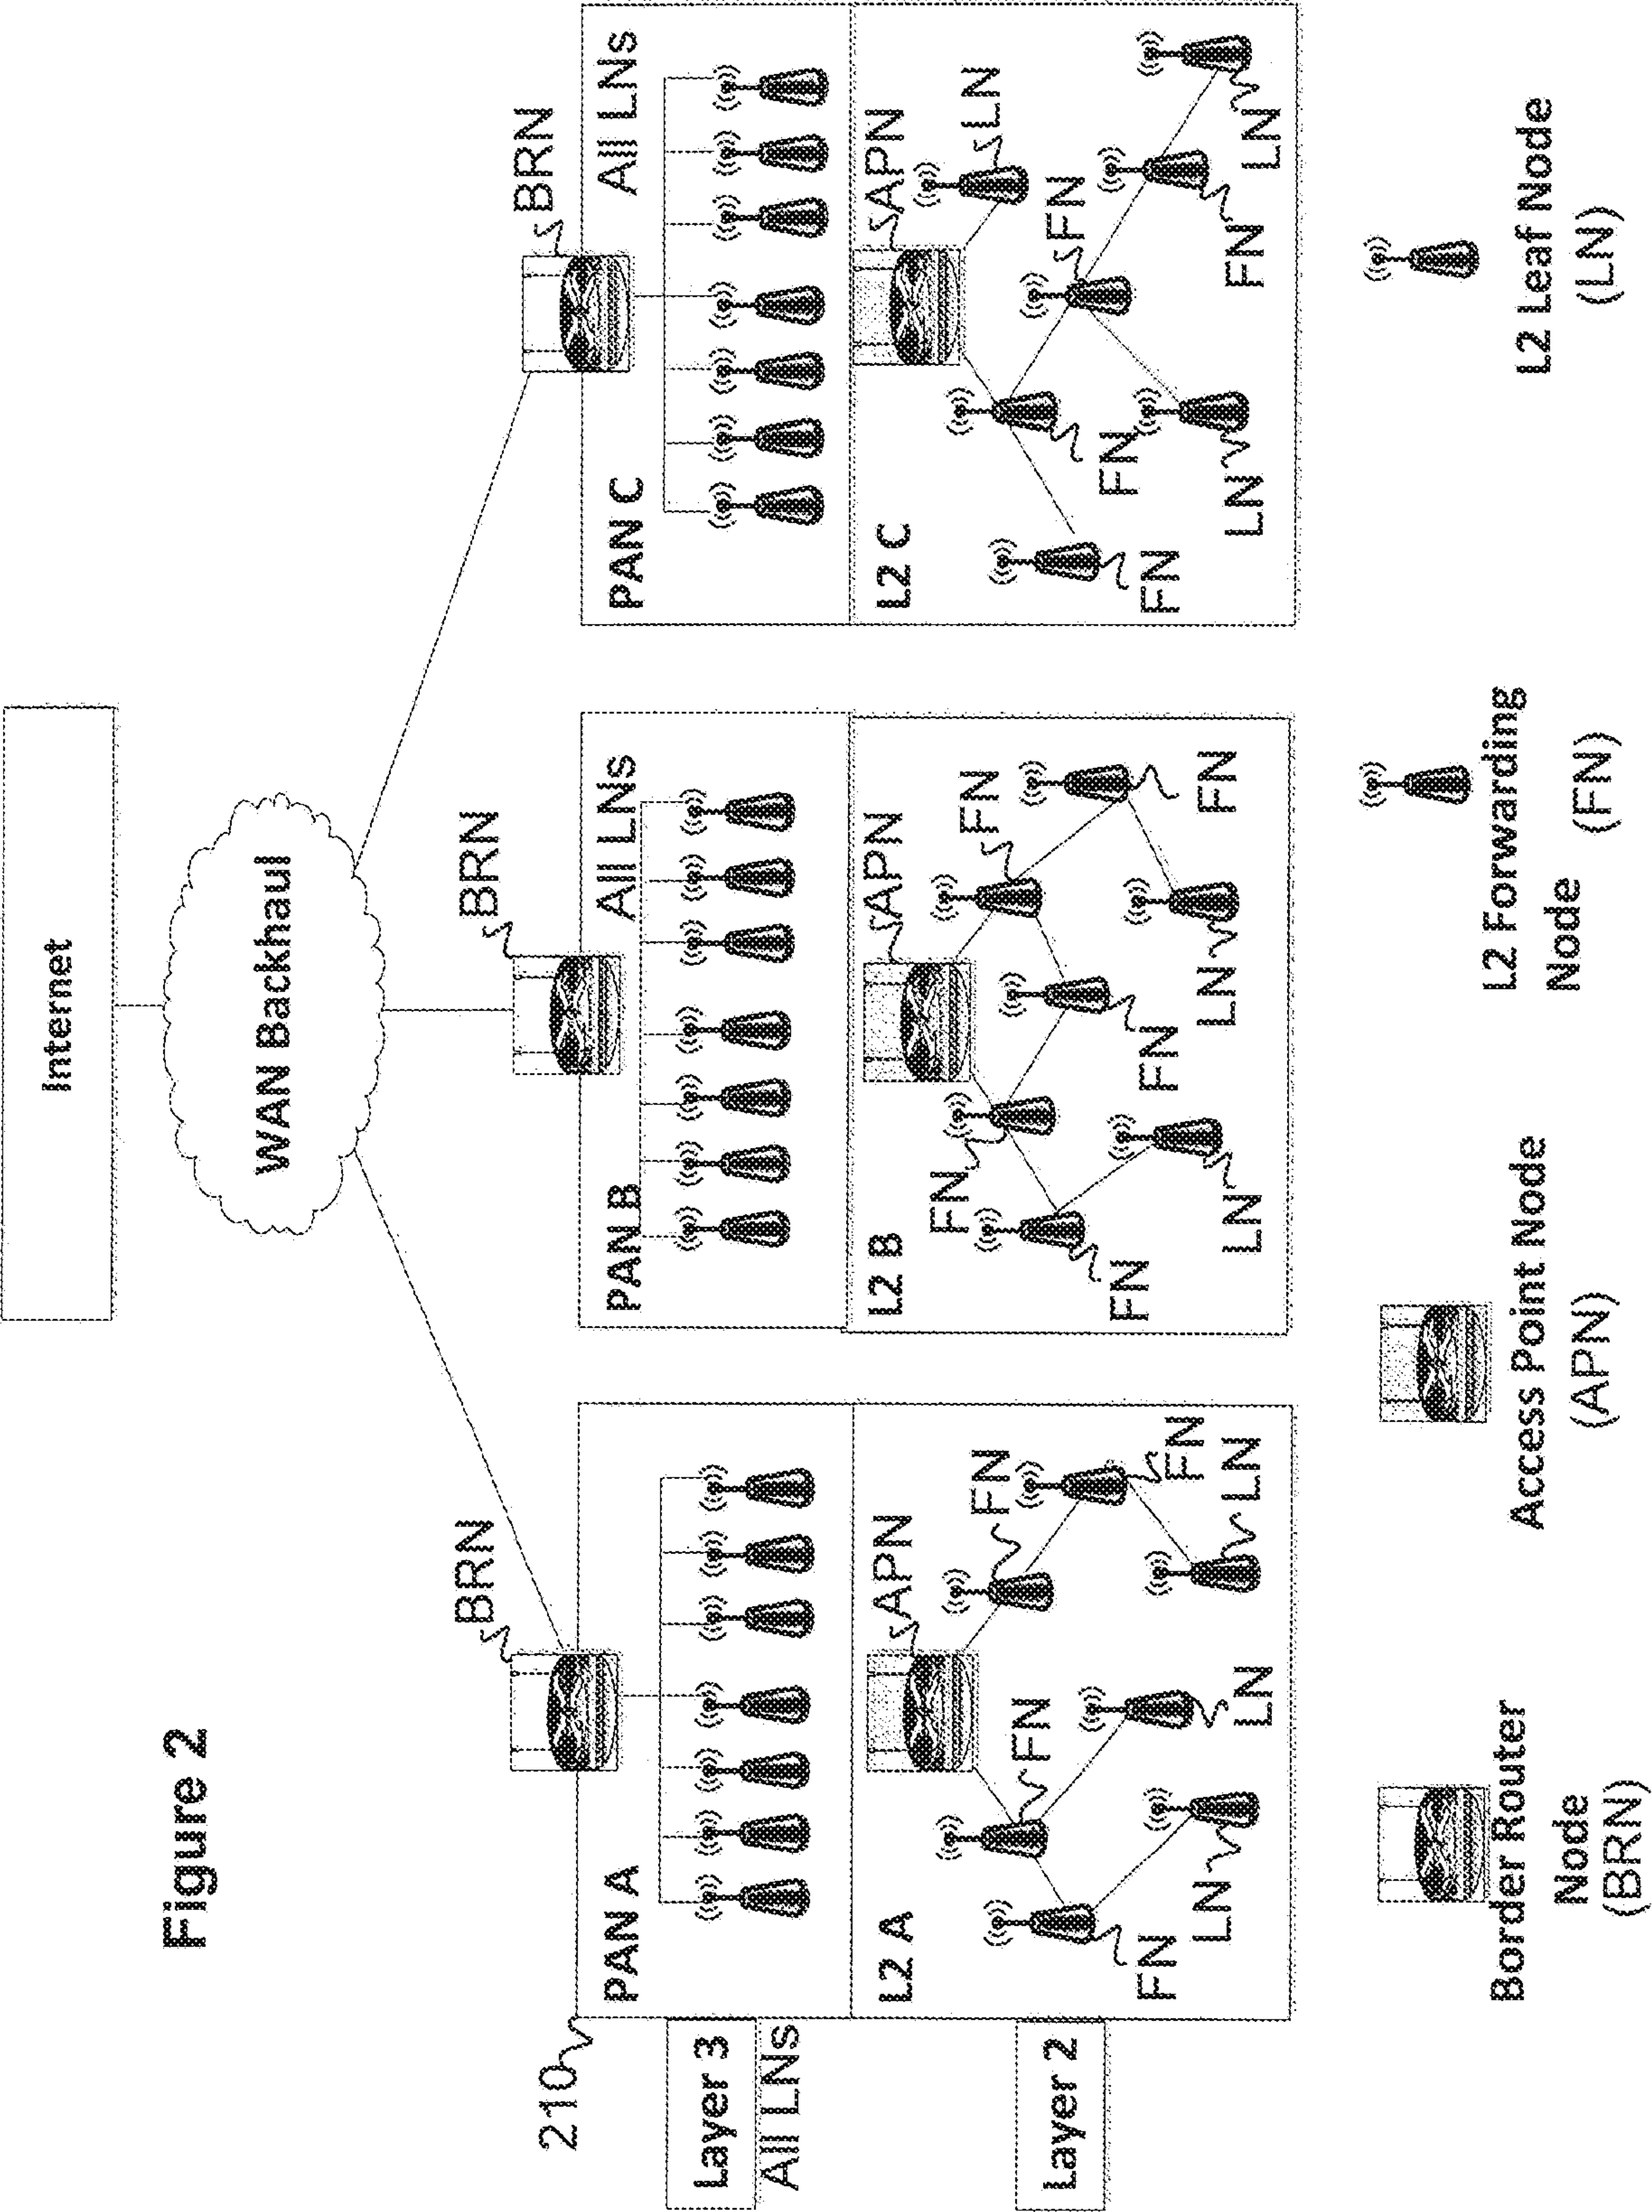

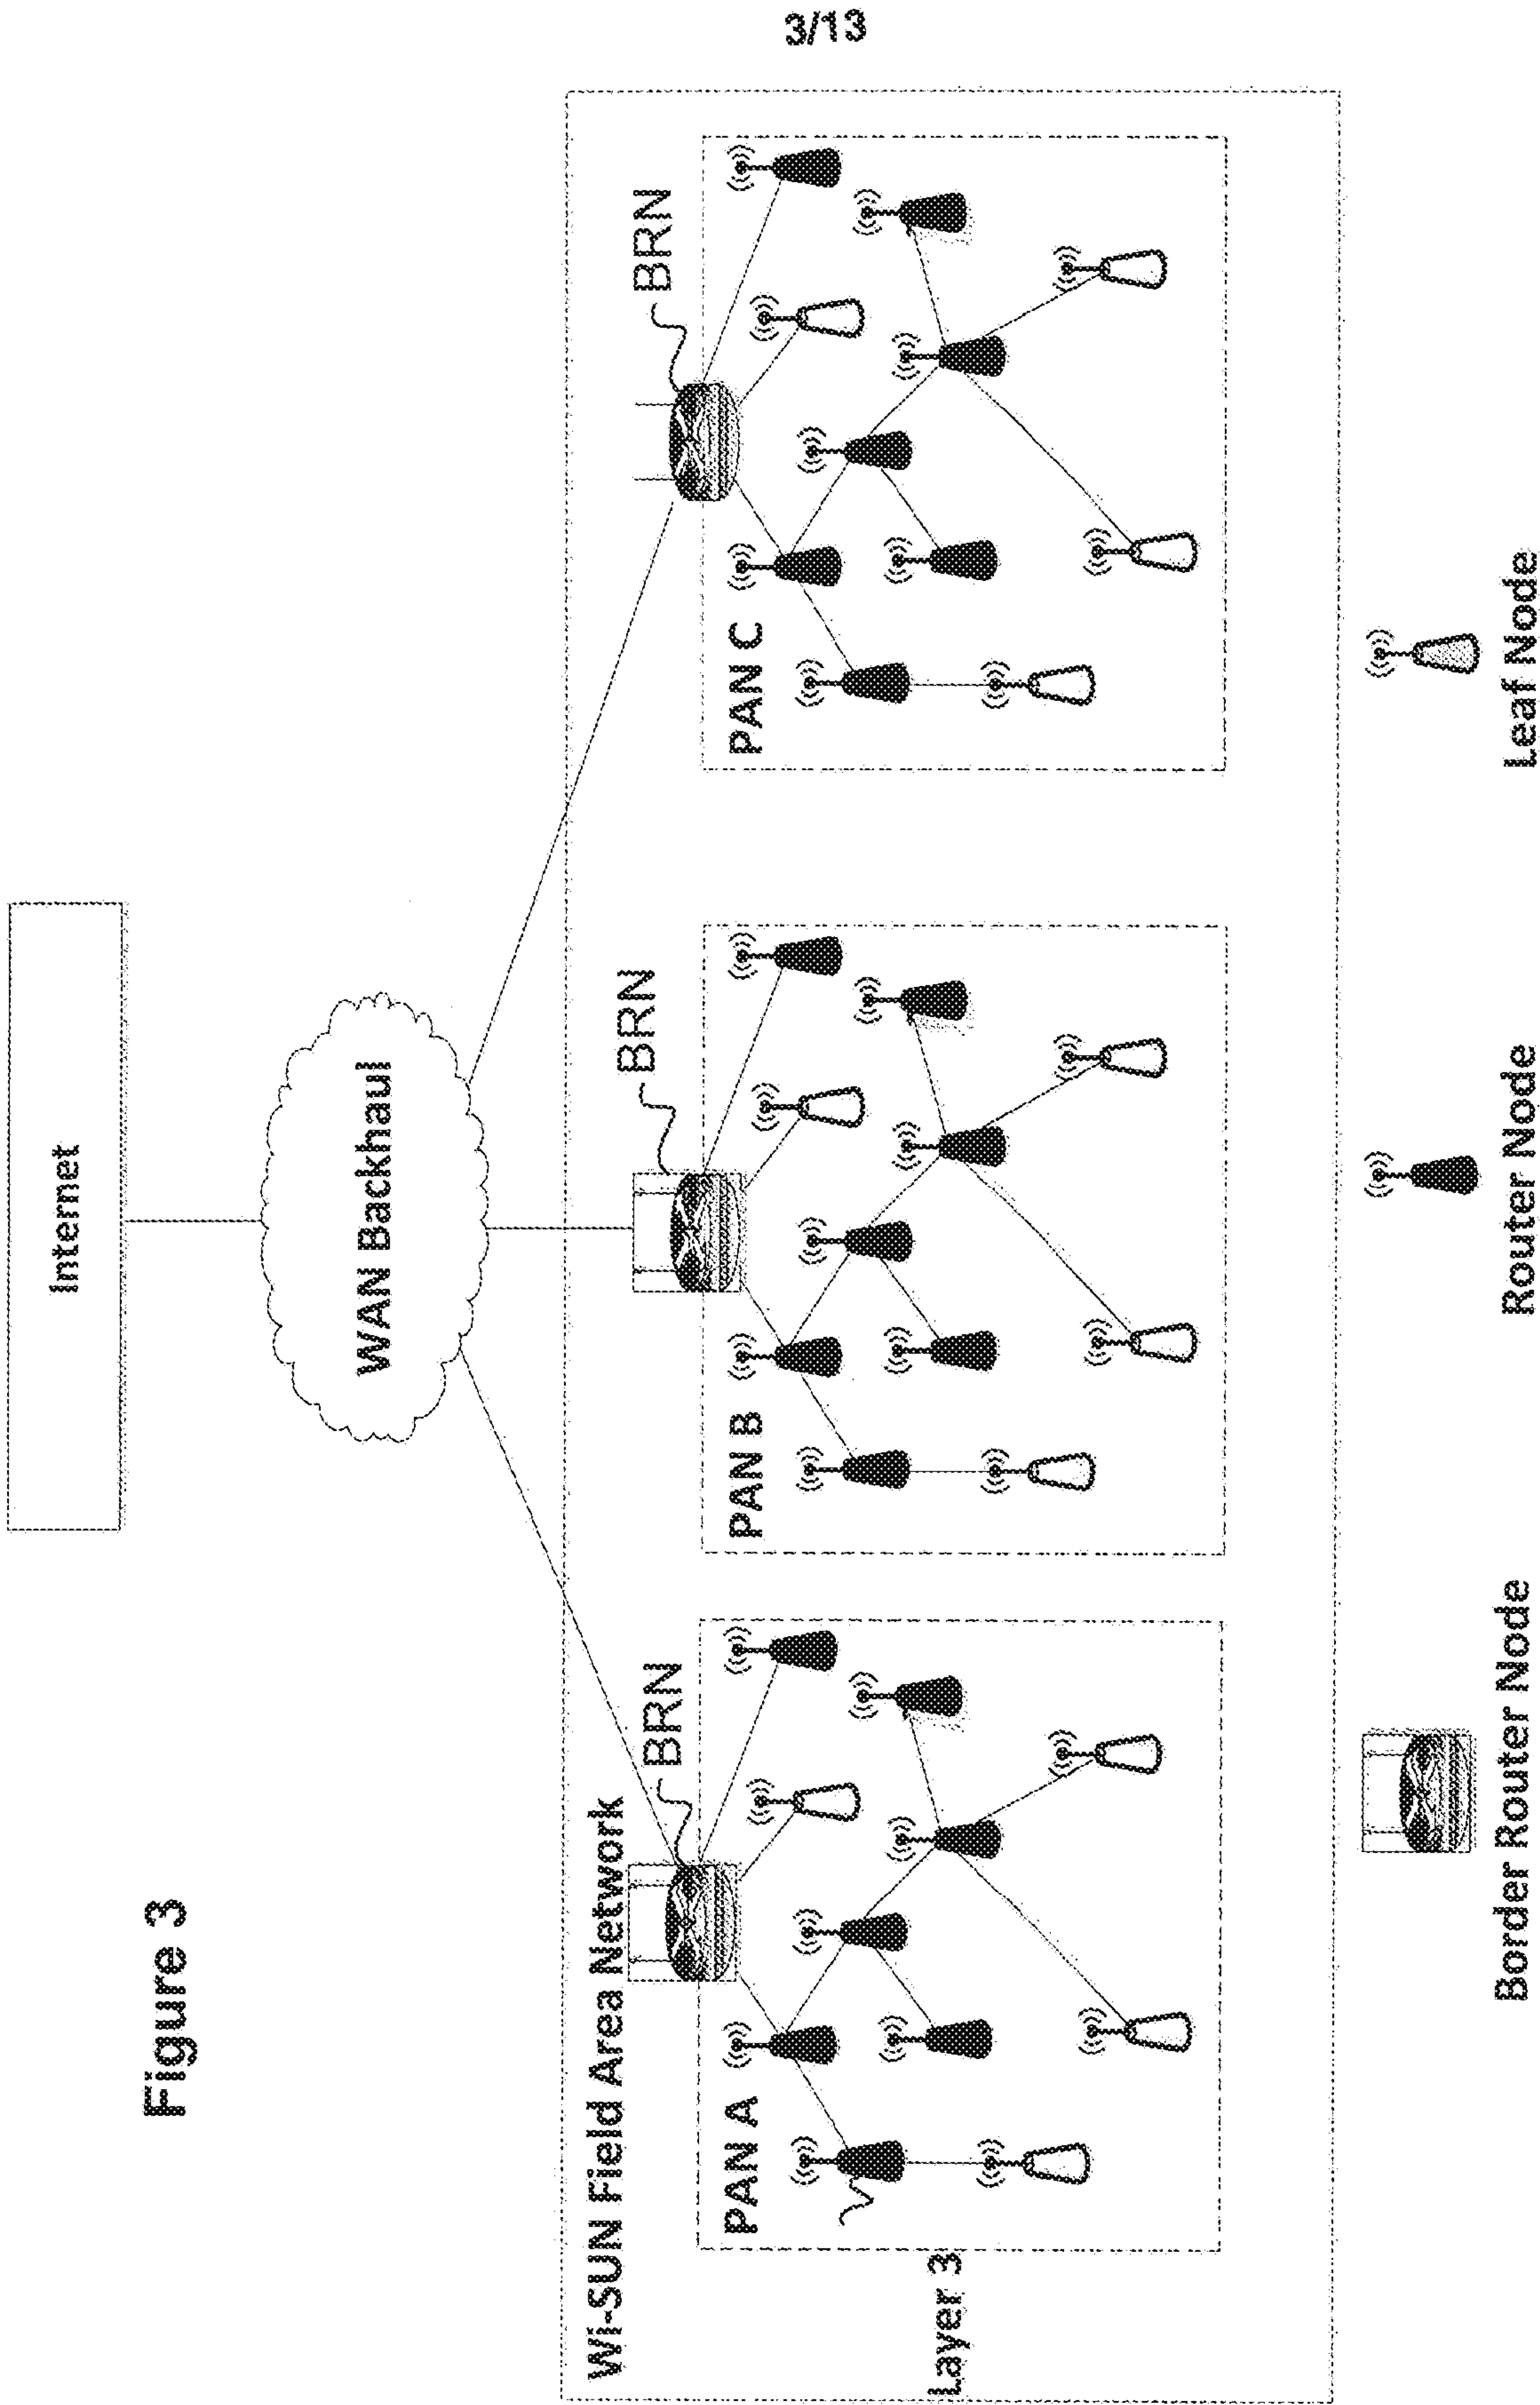




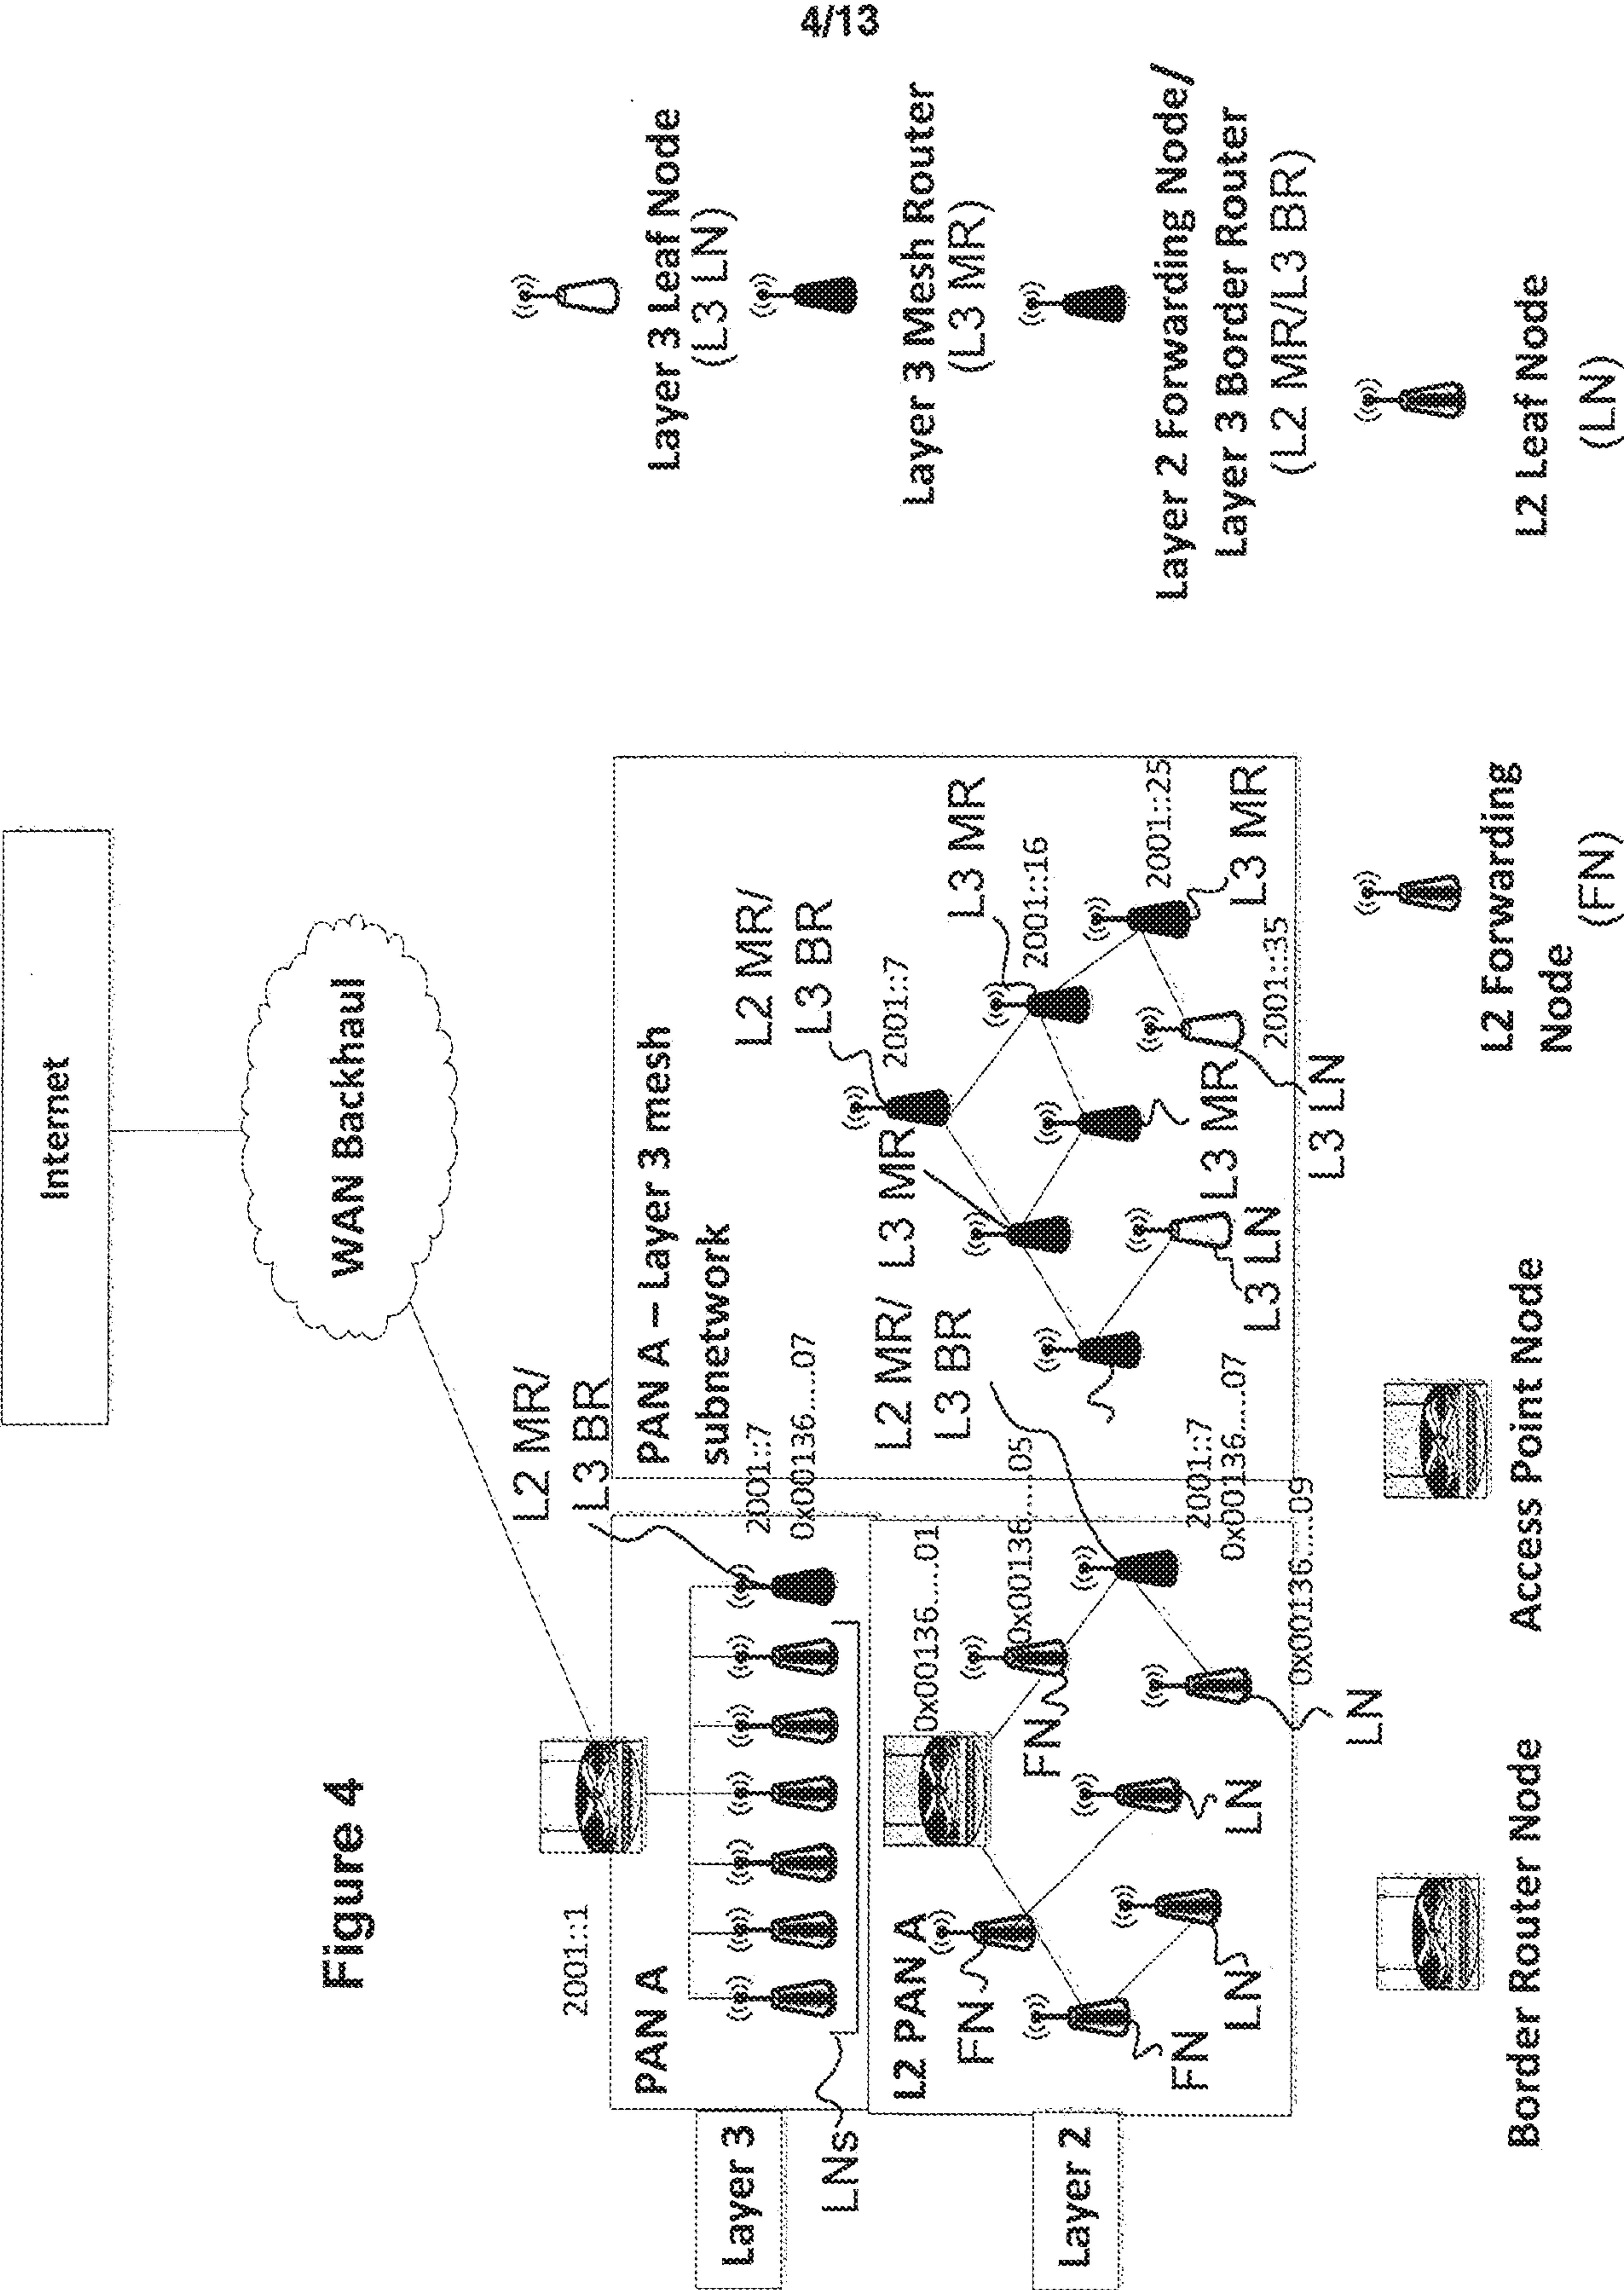





5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843

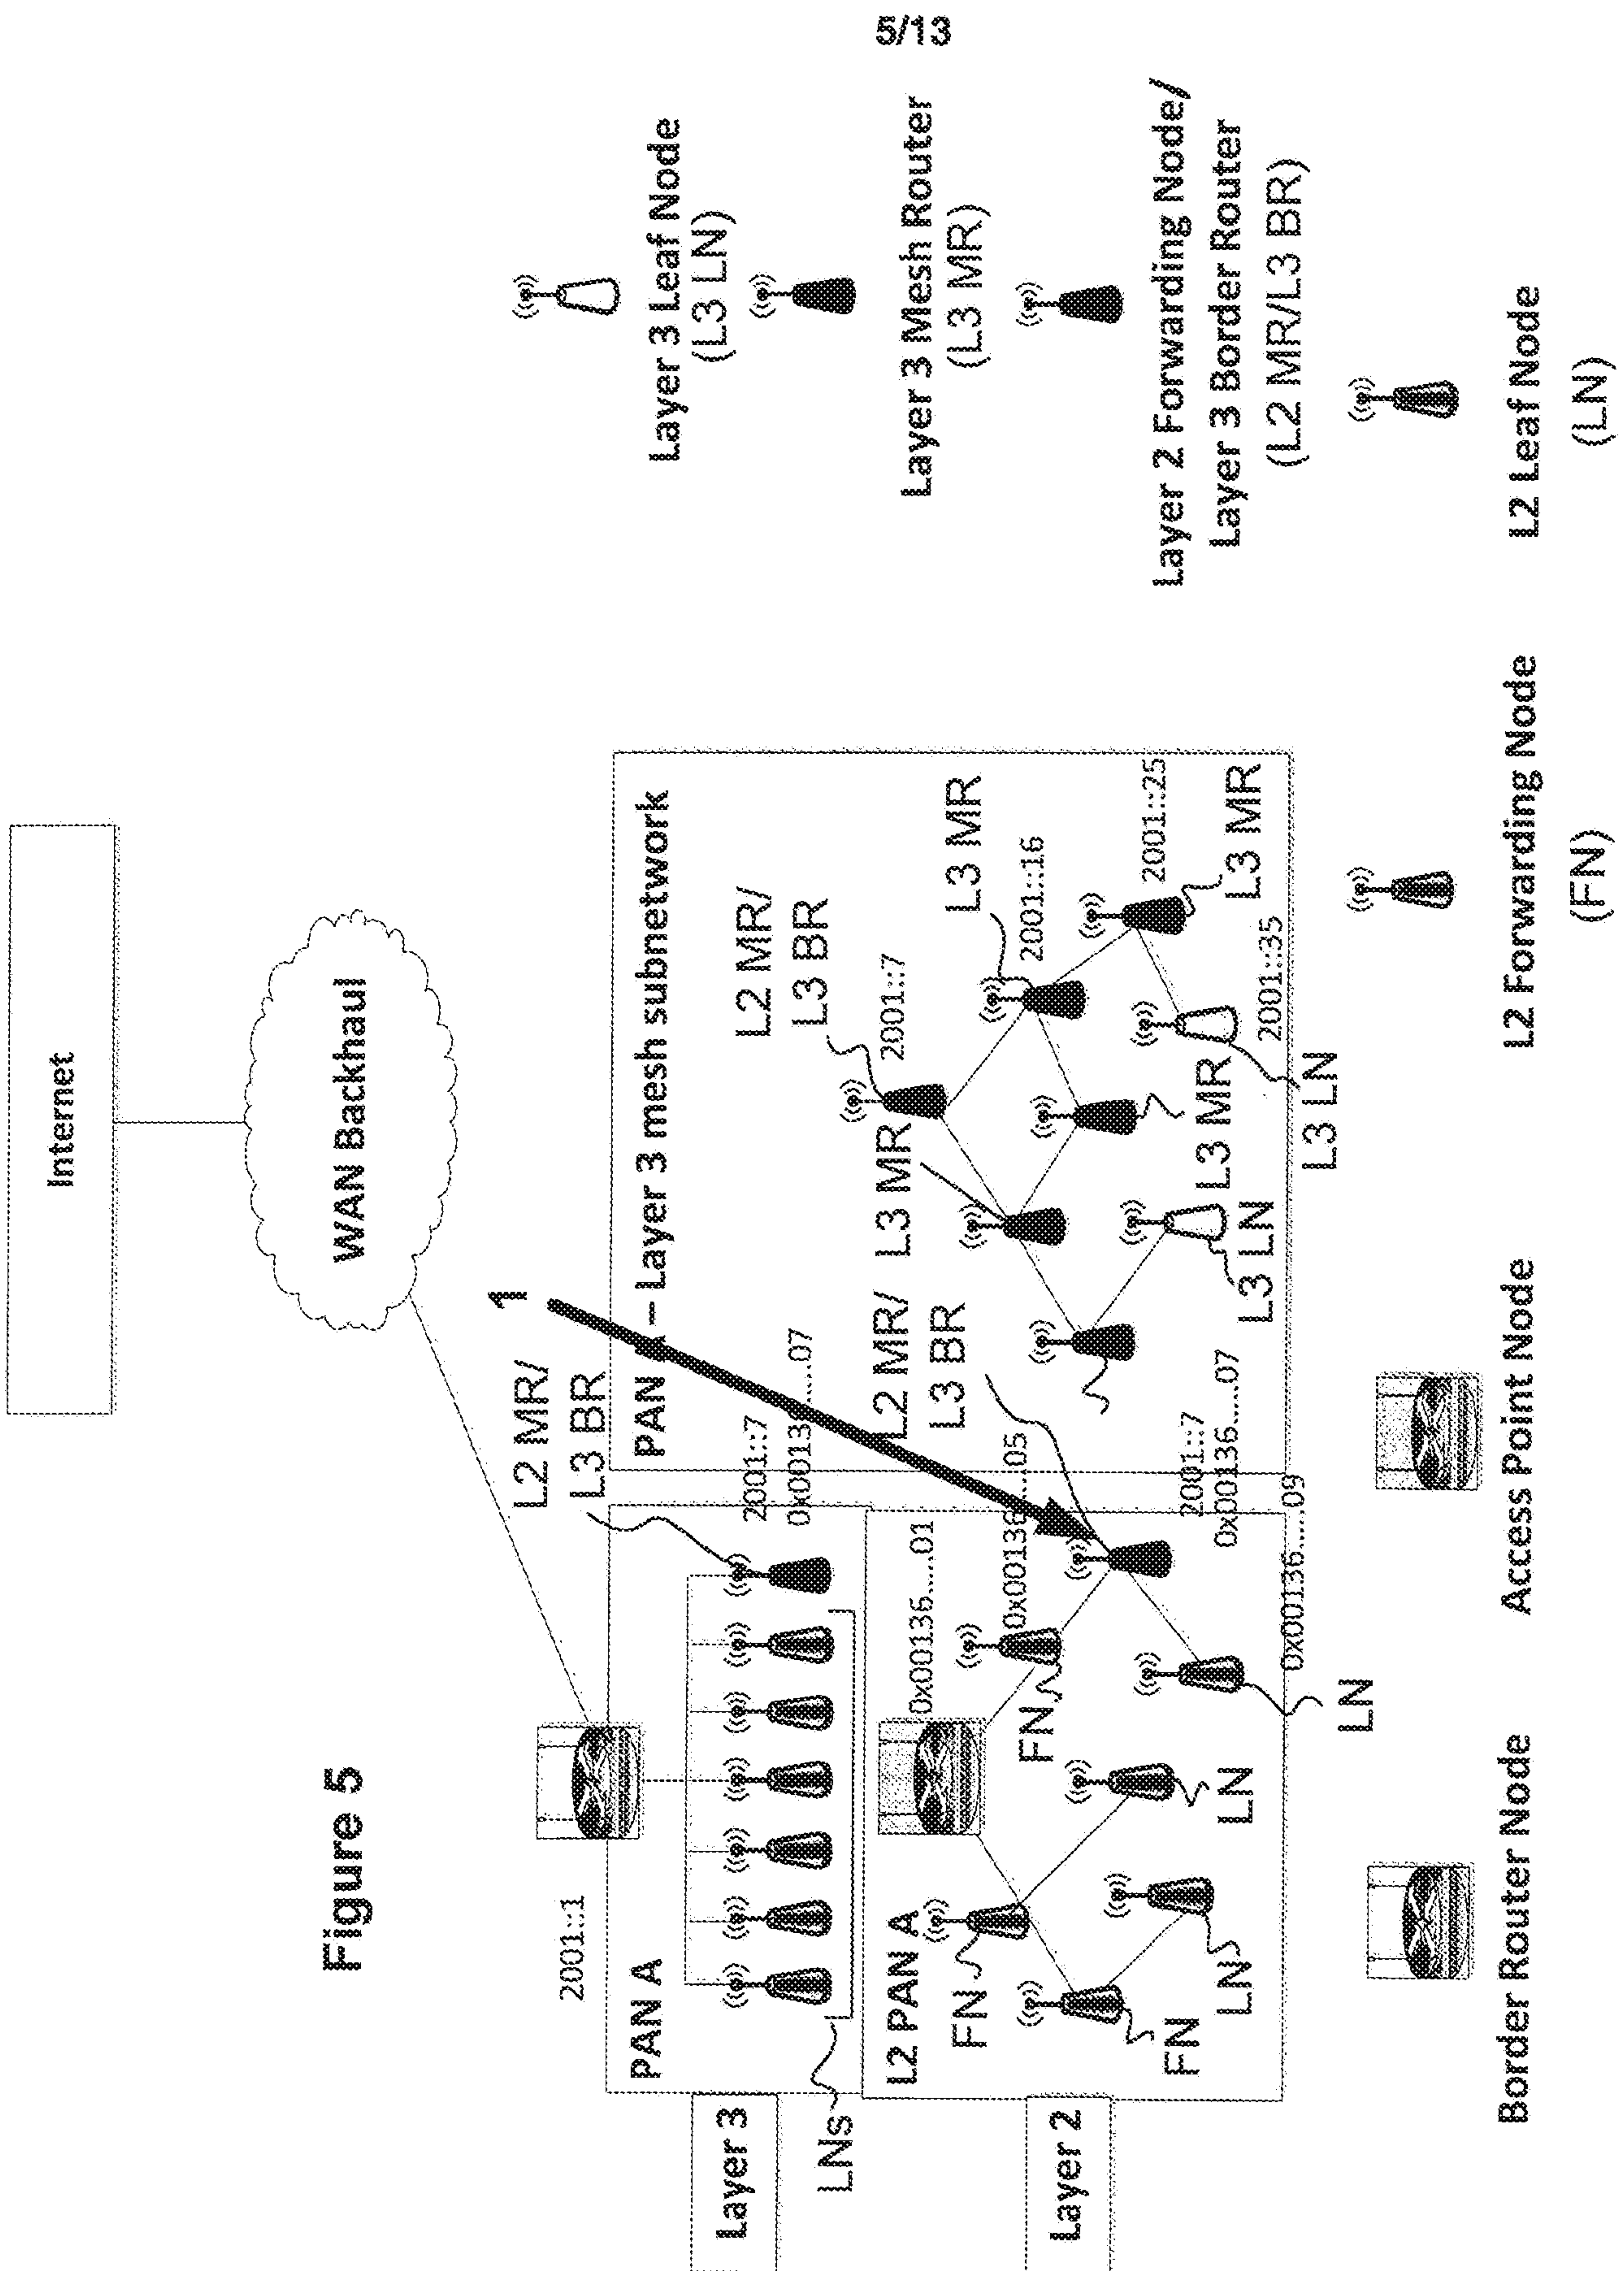



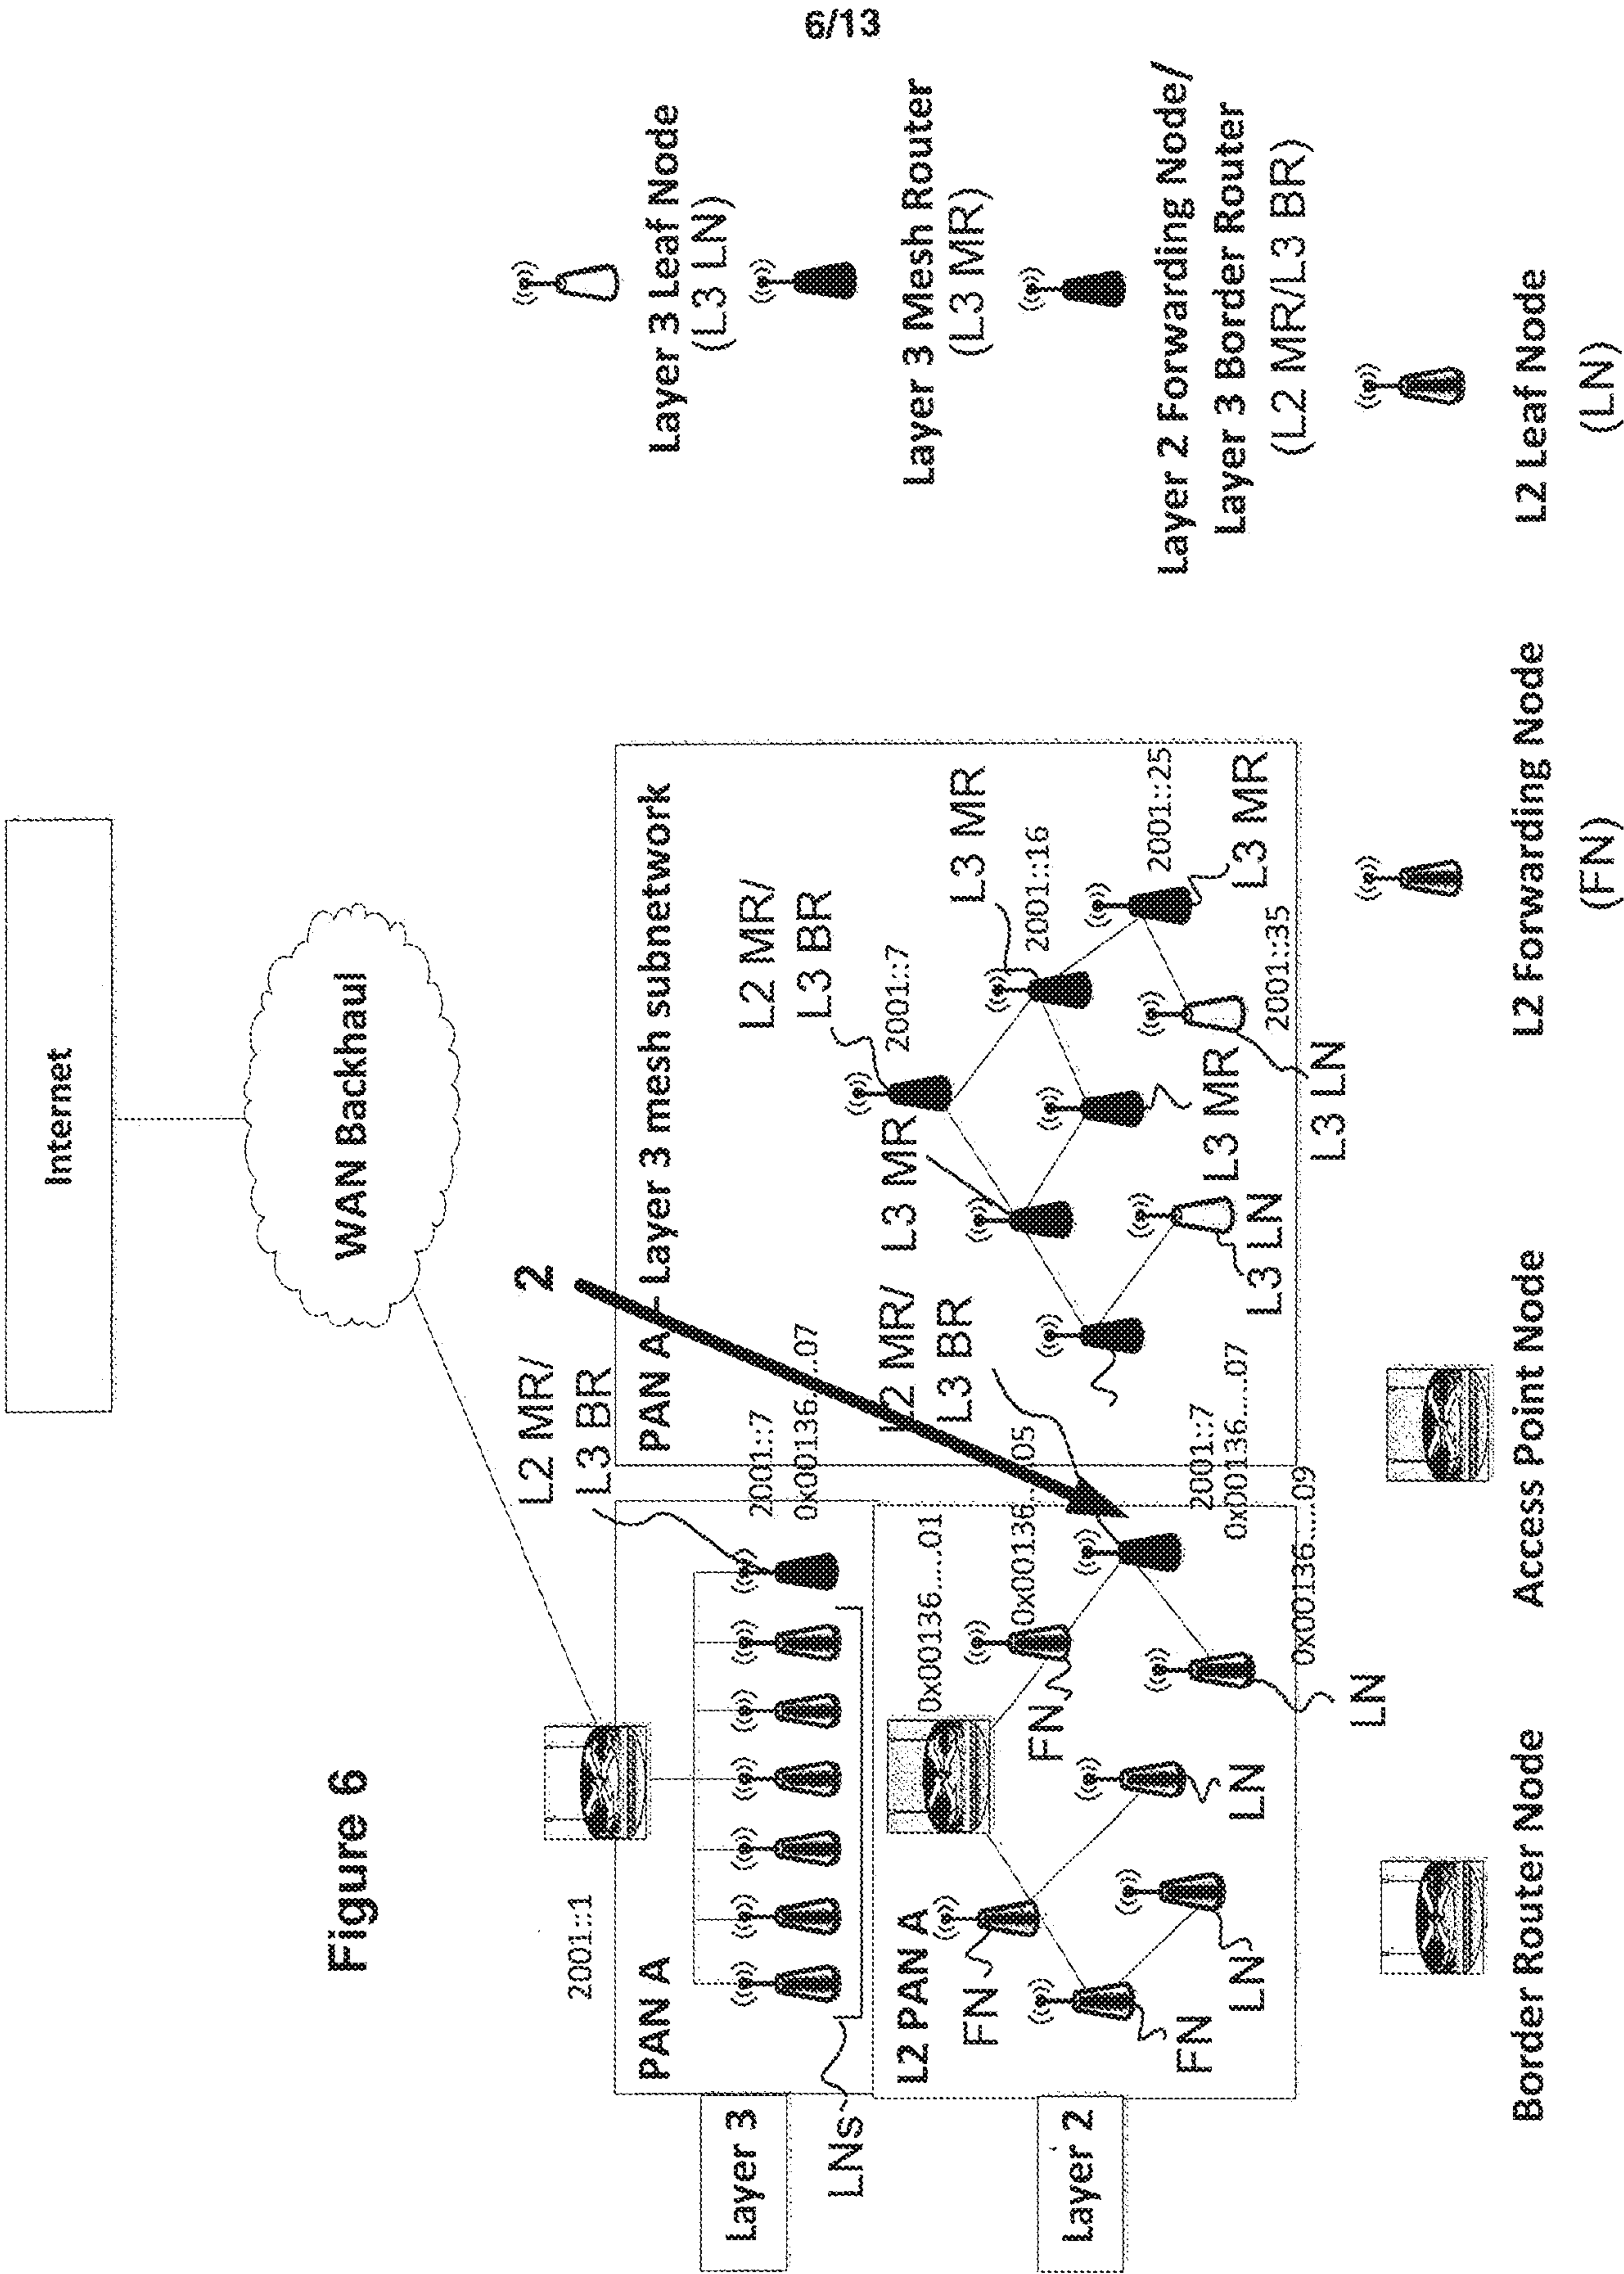




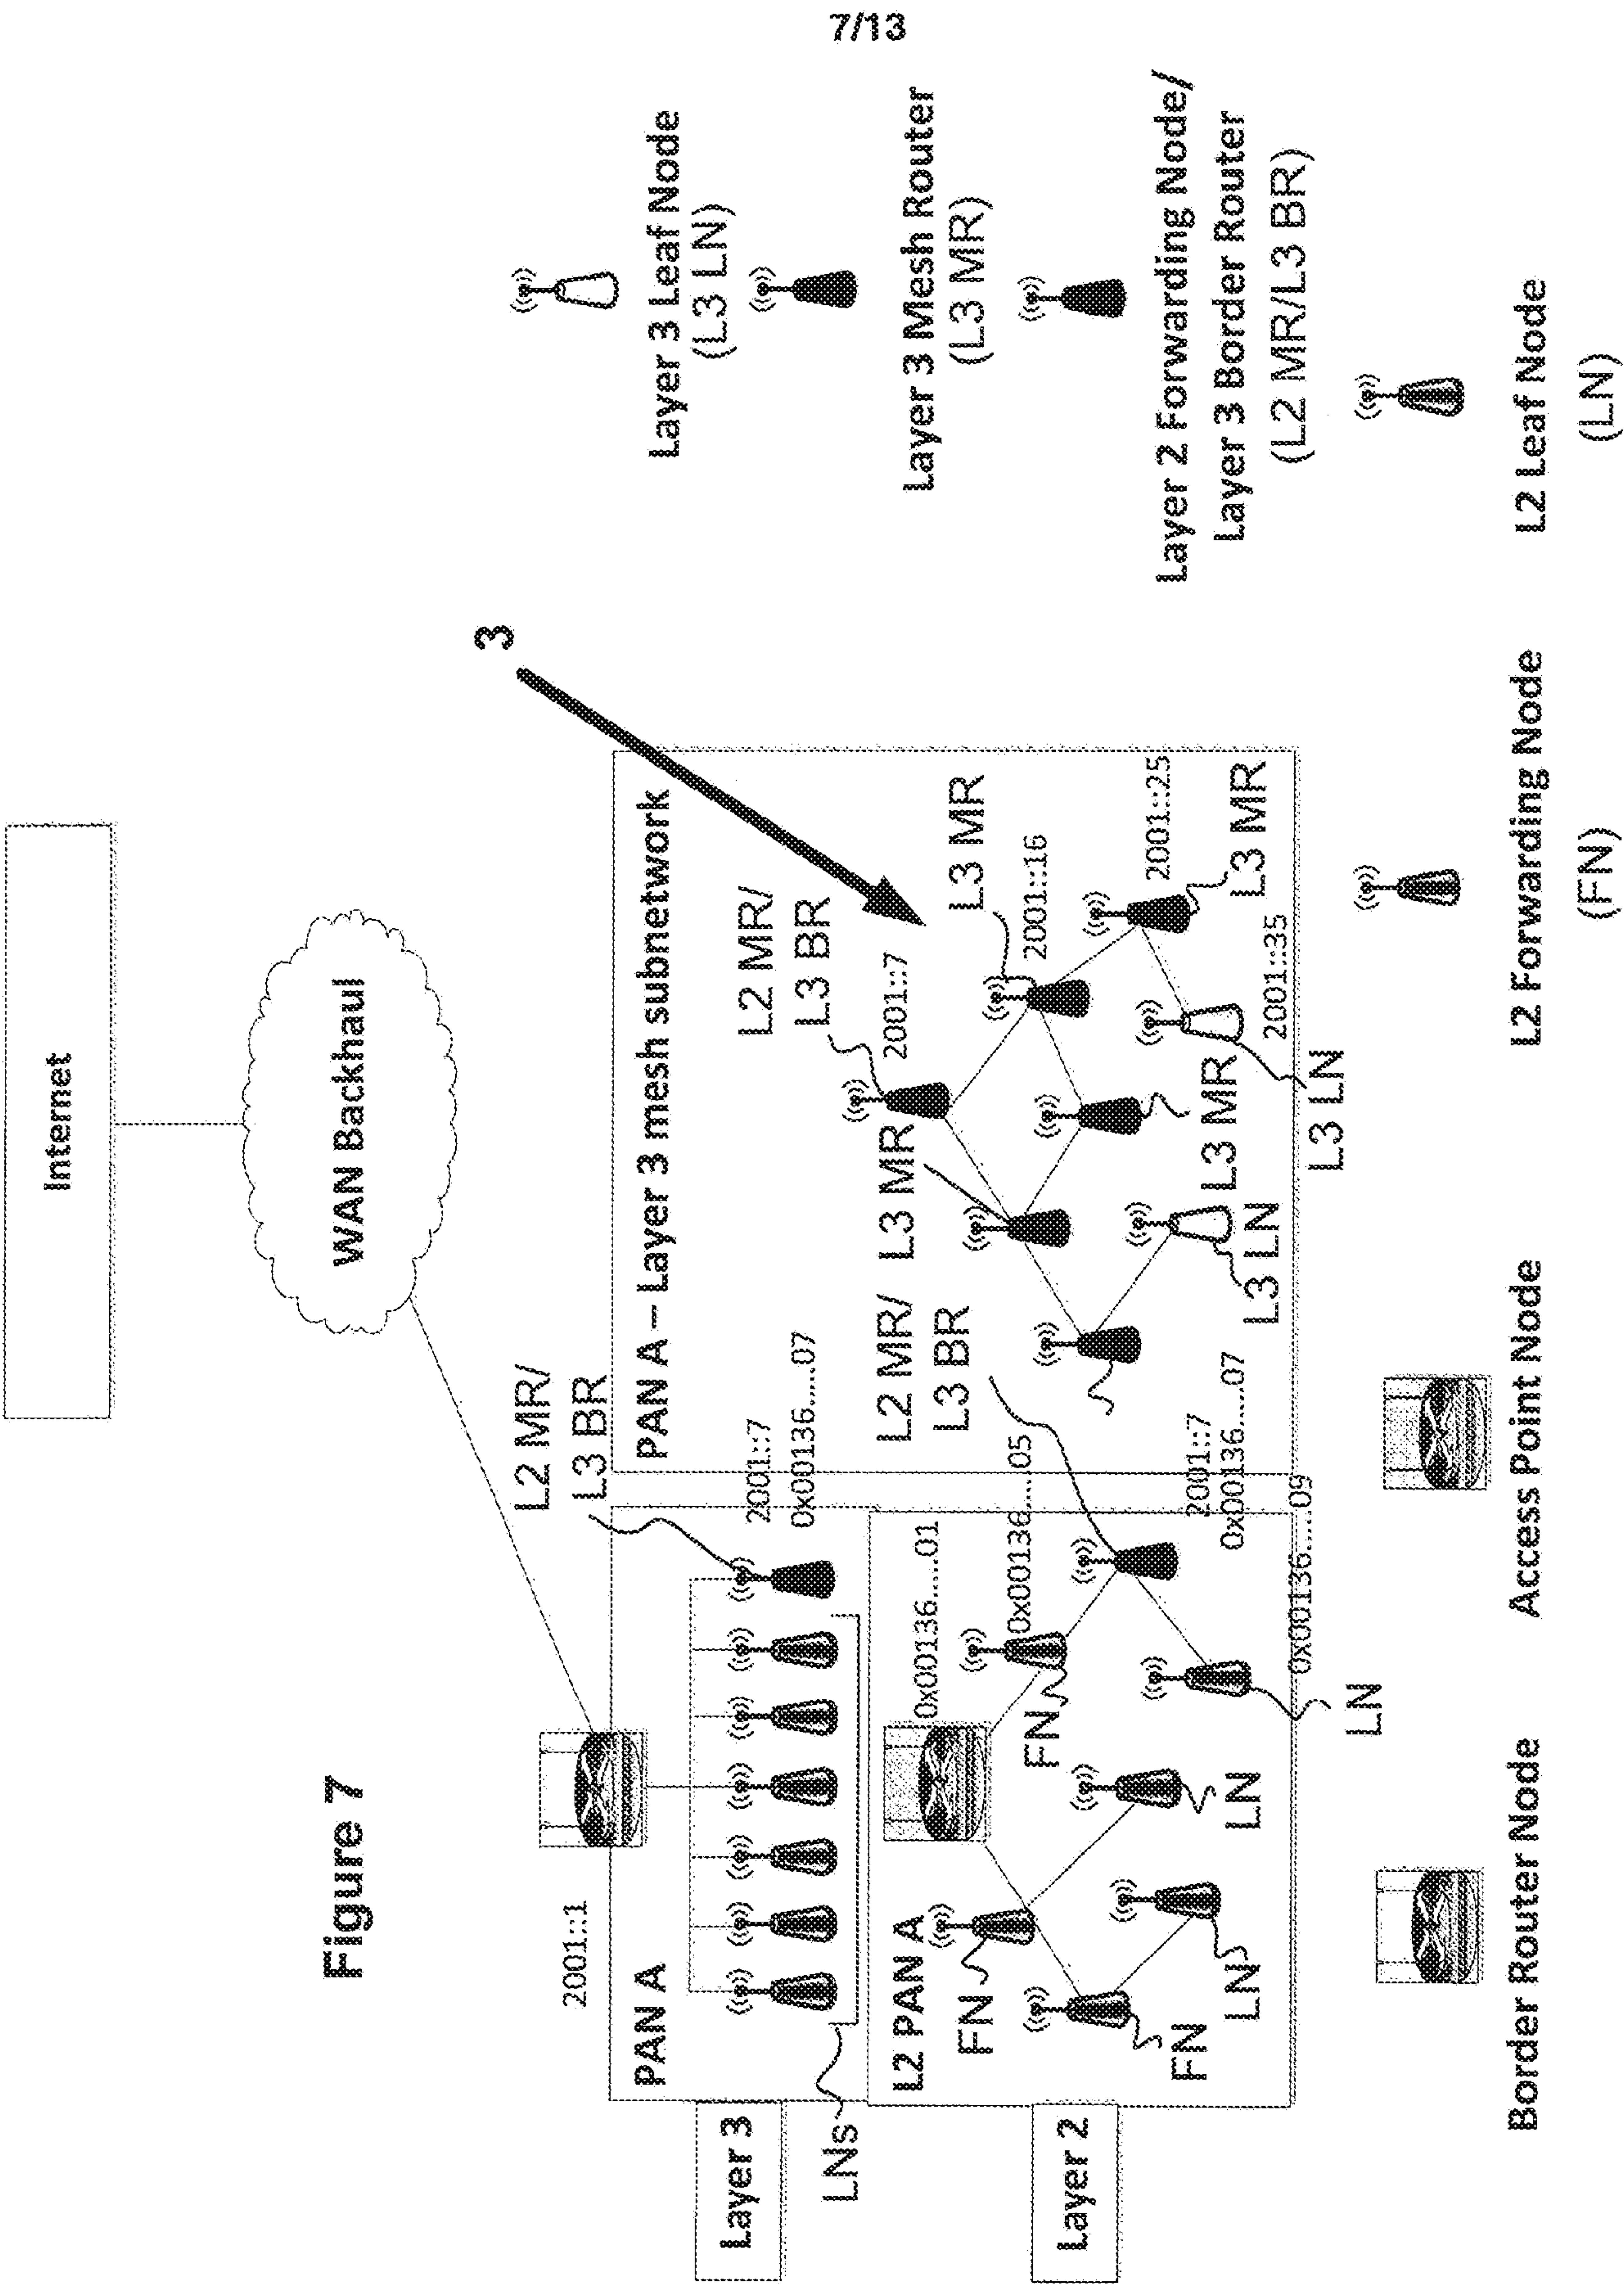




8  
 9  
 1  
 3  
 5  
 7  
 4  
 6

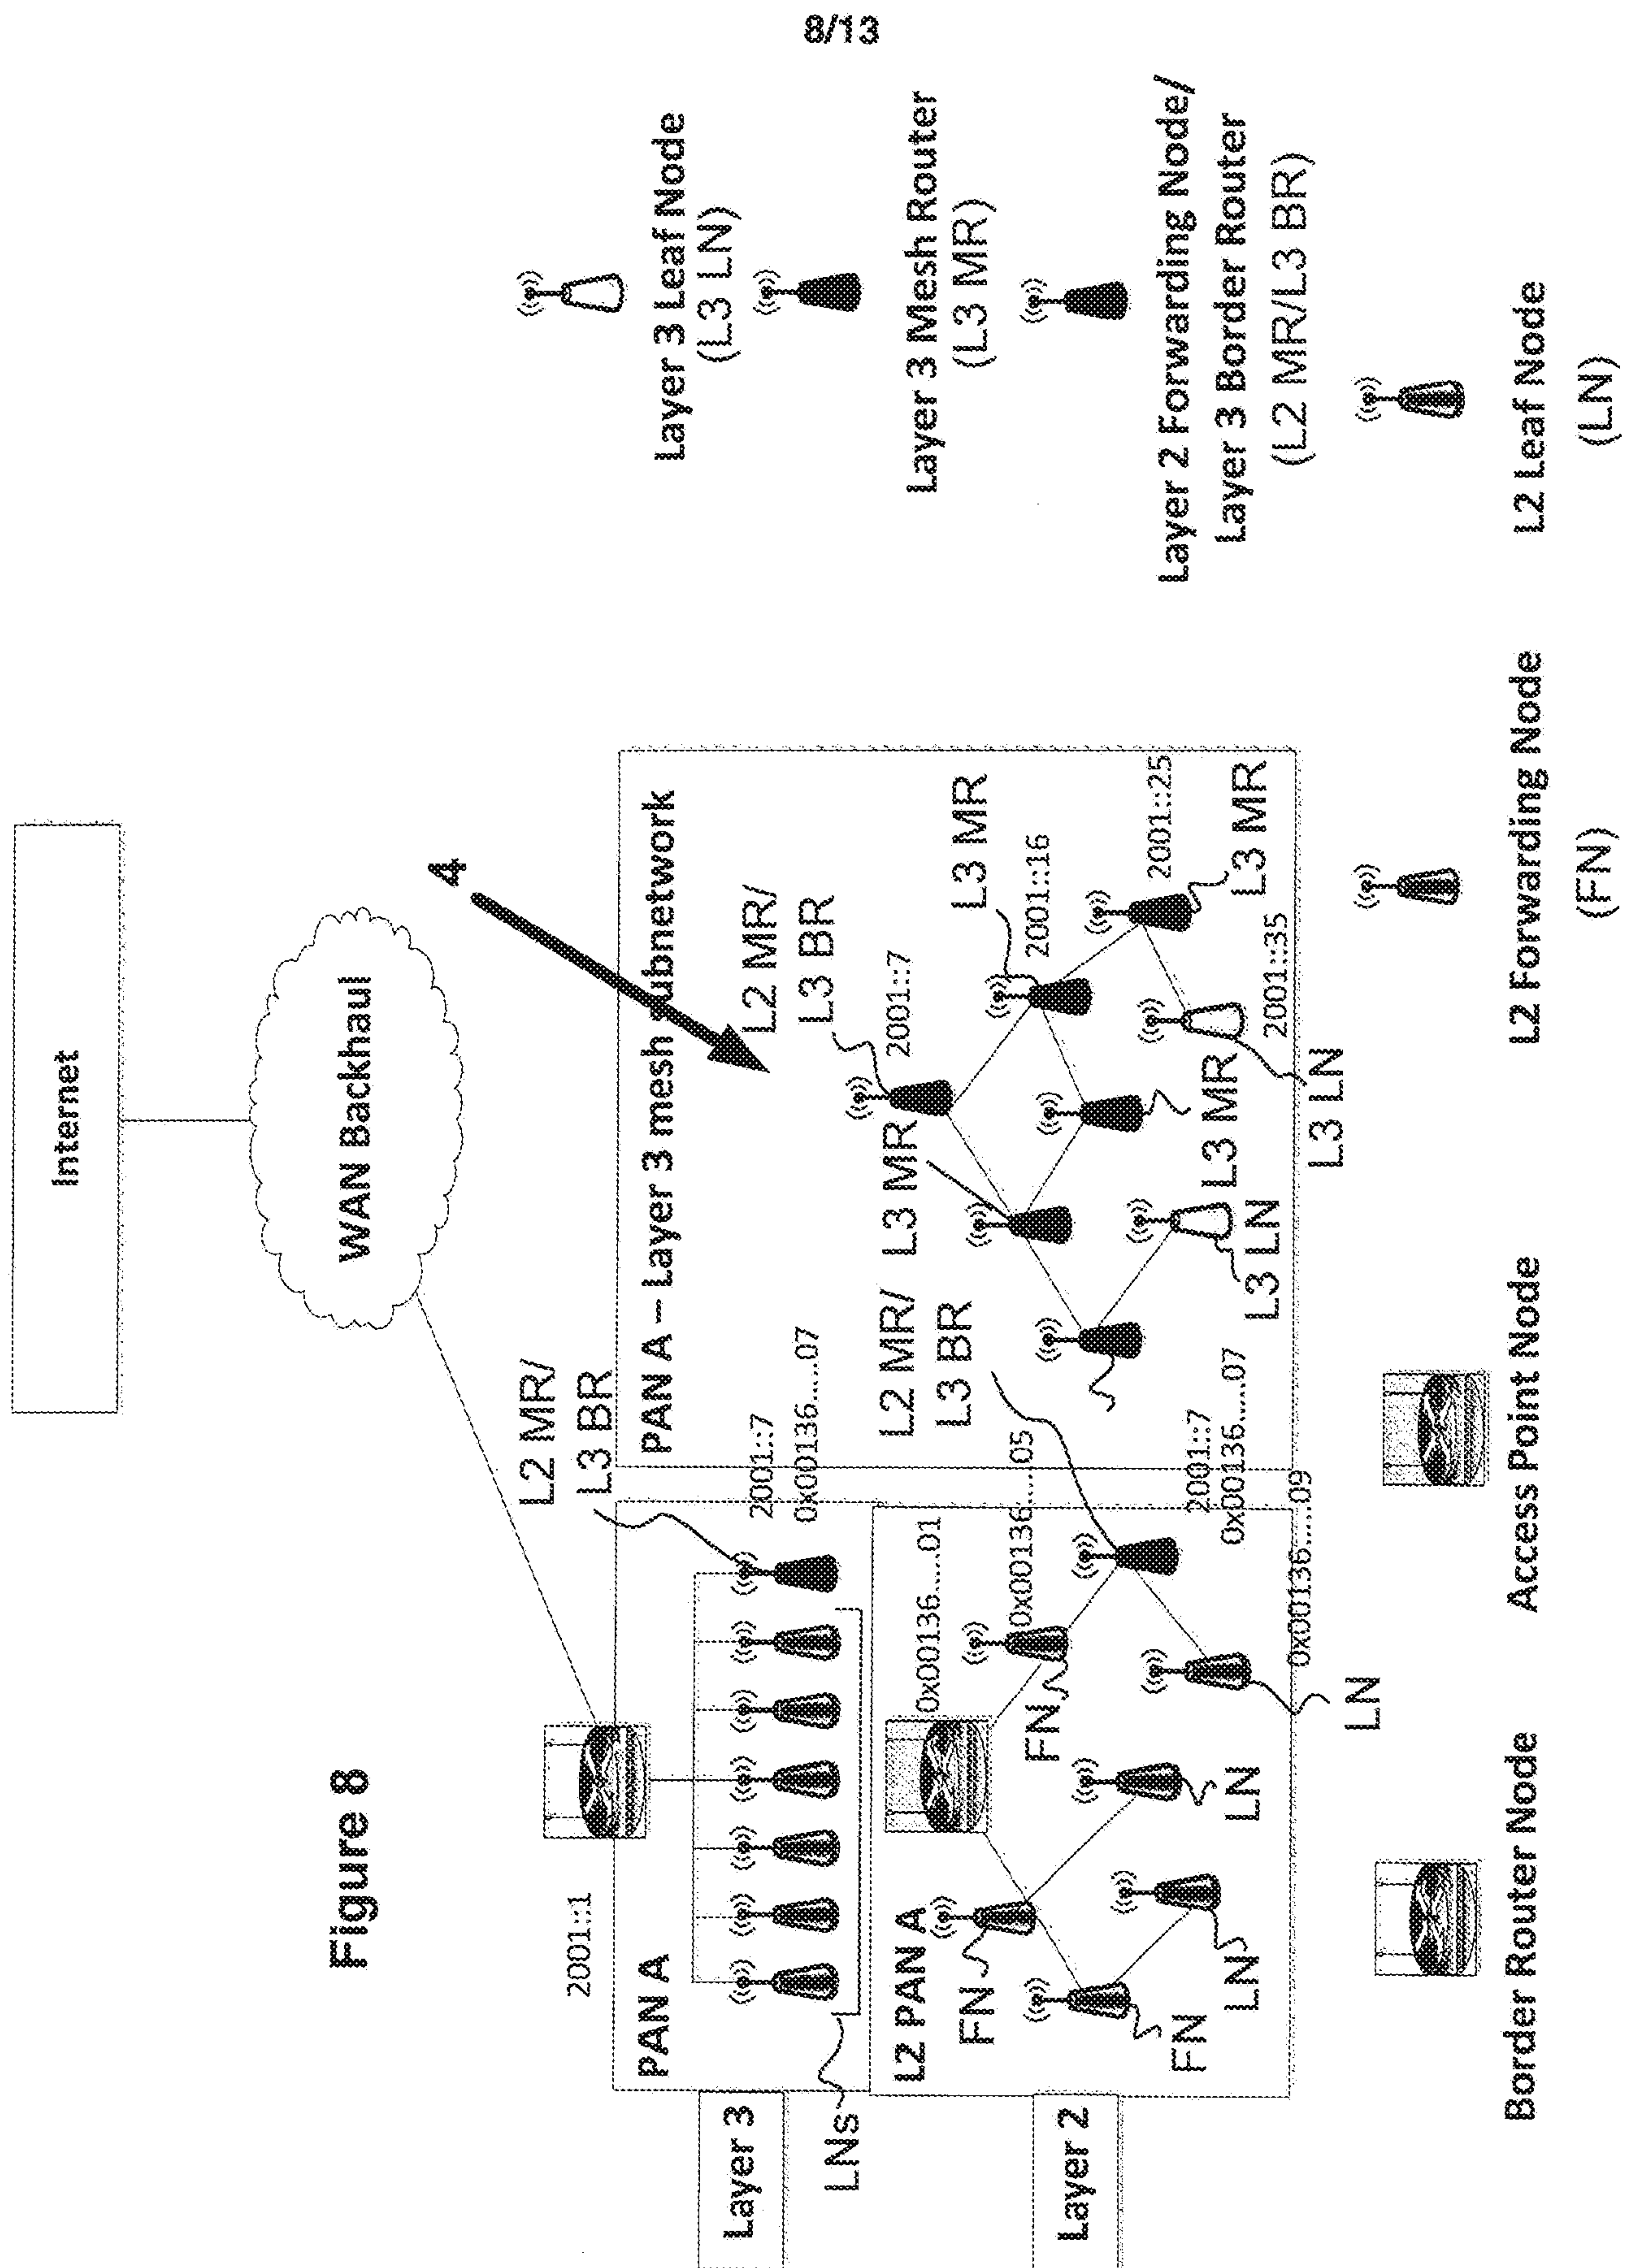




9  
8  
7  
6  
5  
4  
3  
2  
1

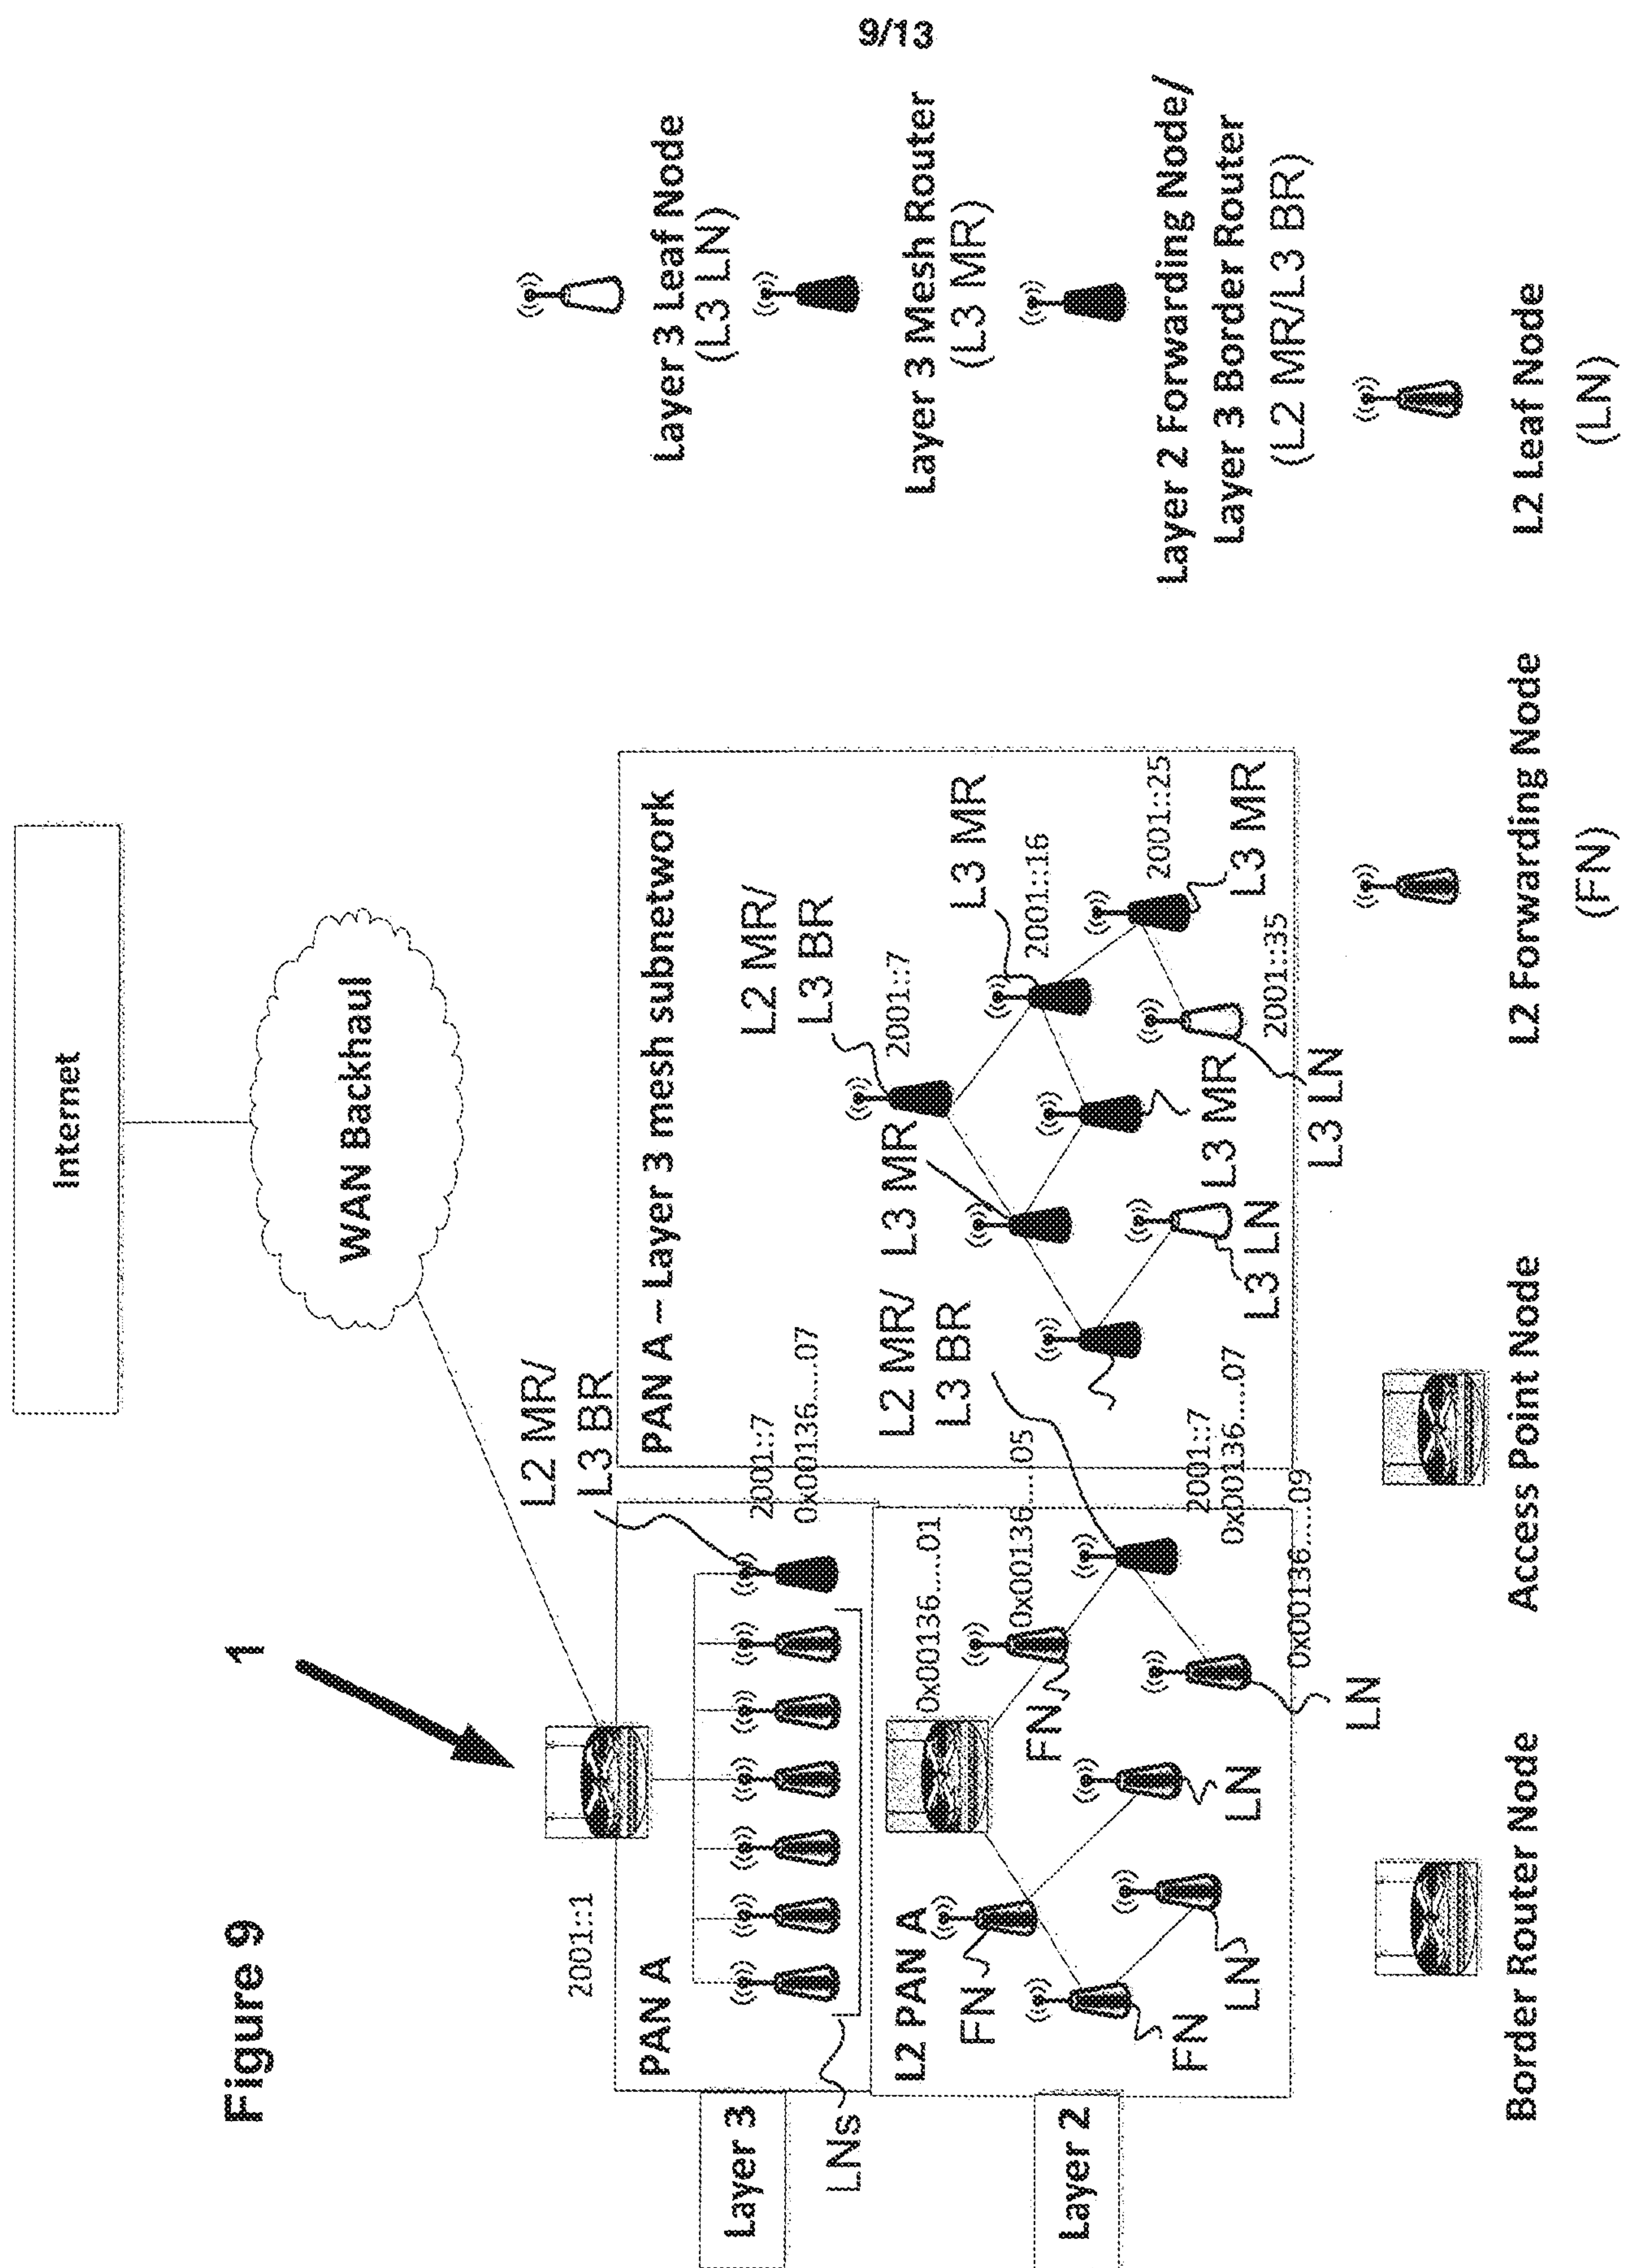




0135  
x  
L

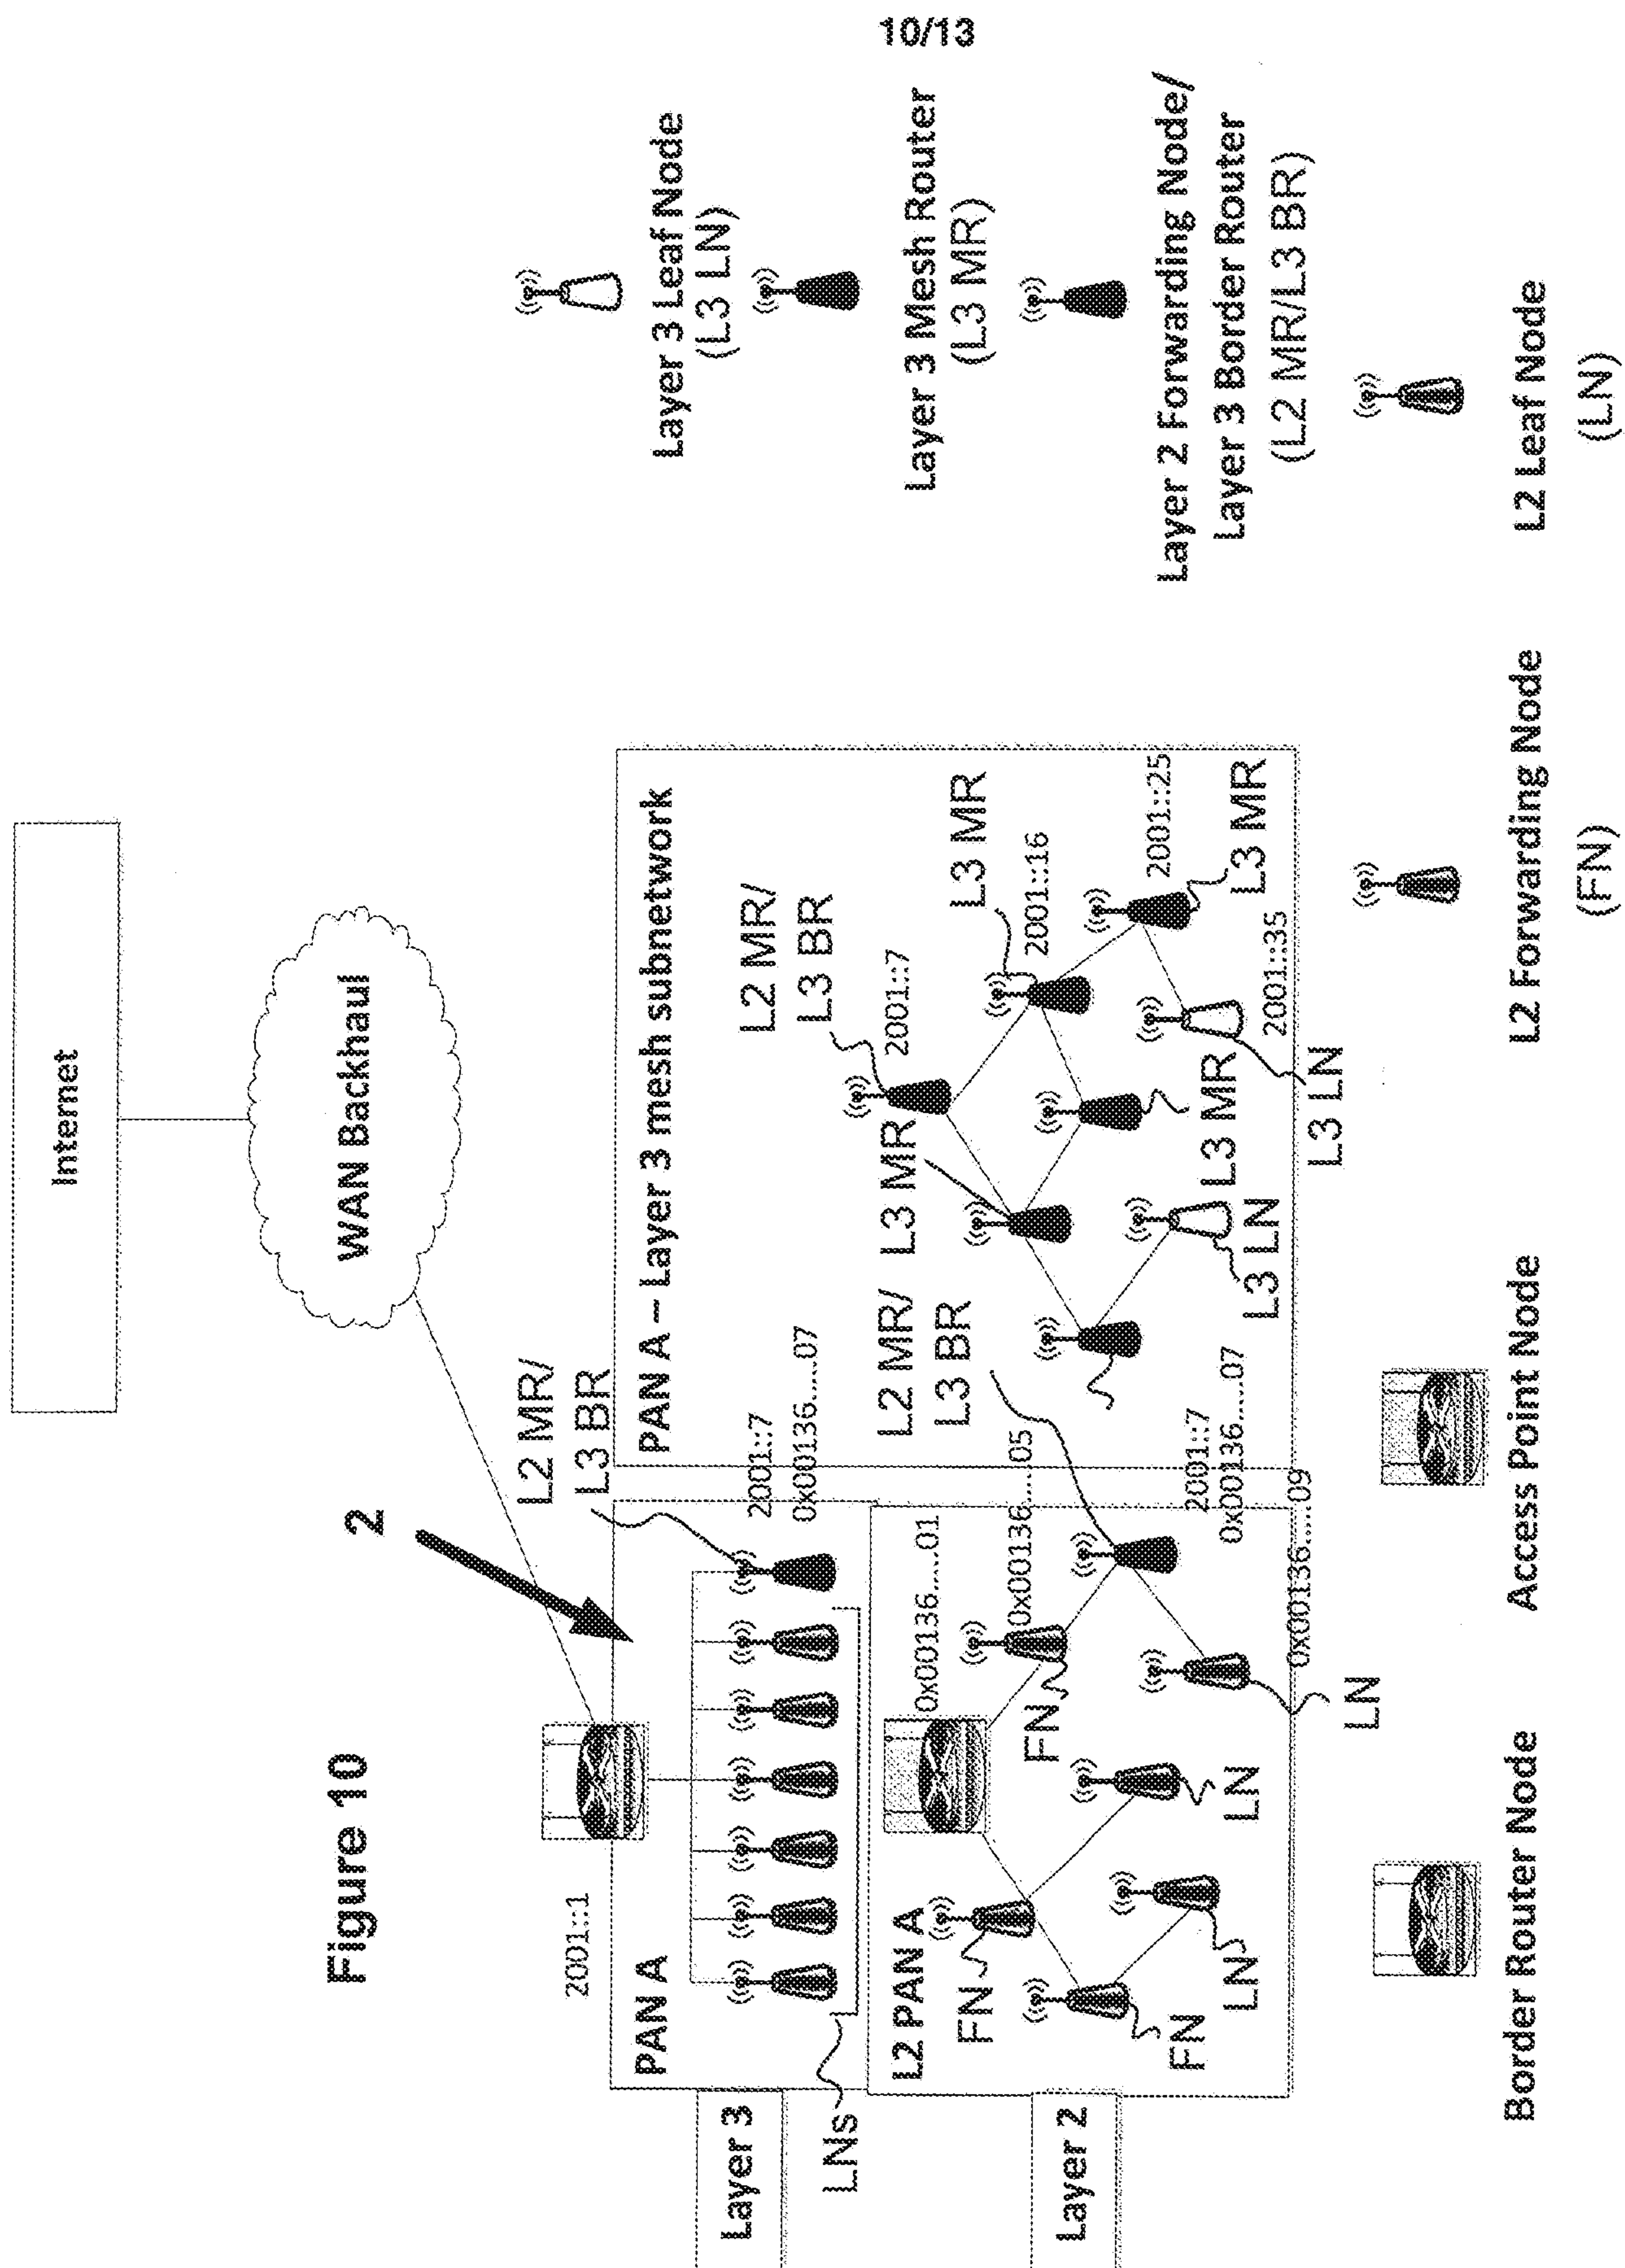




1990

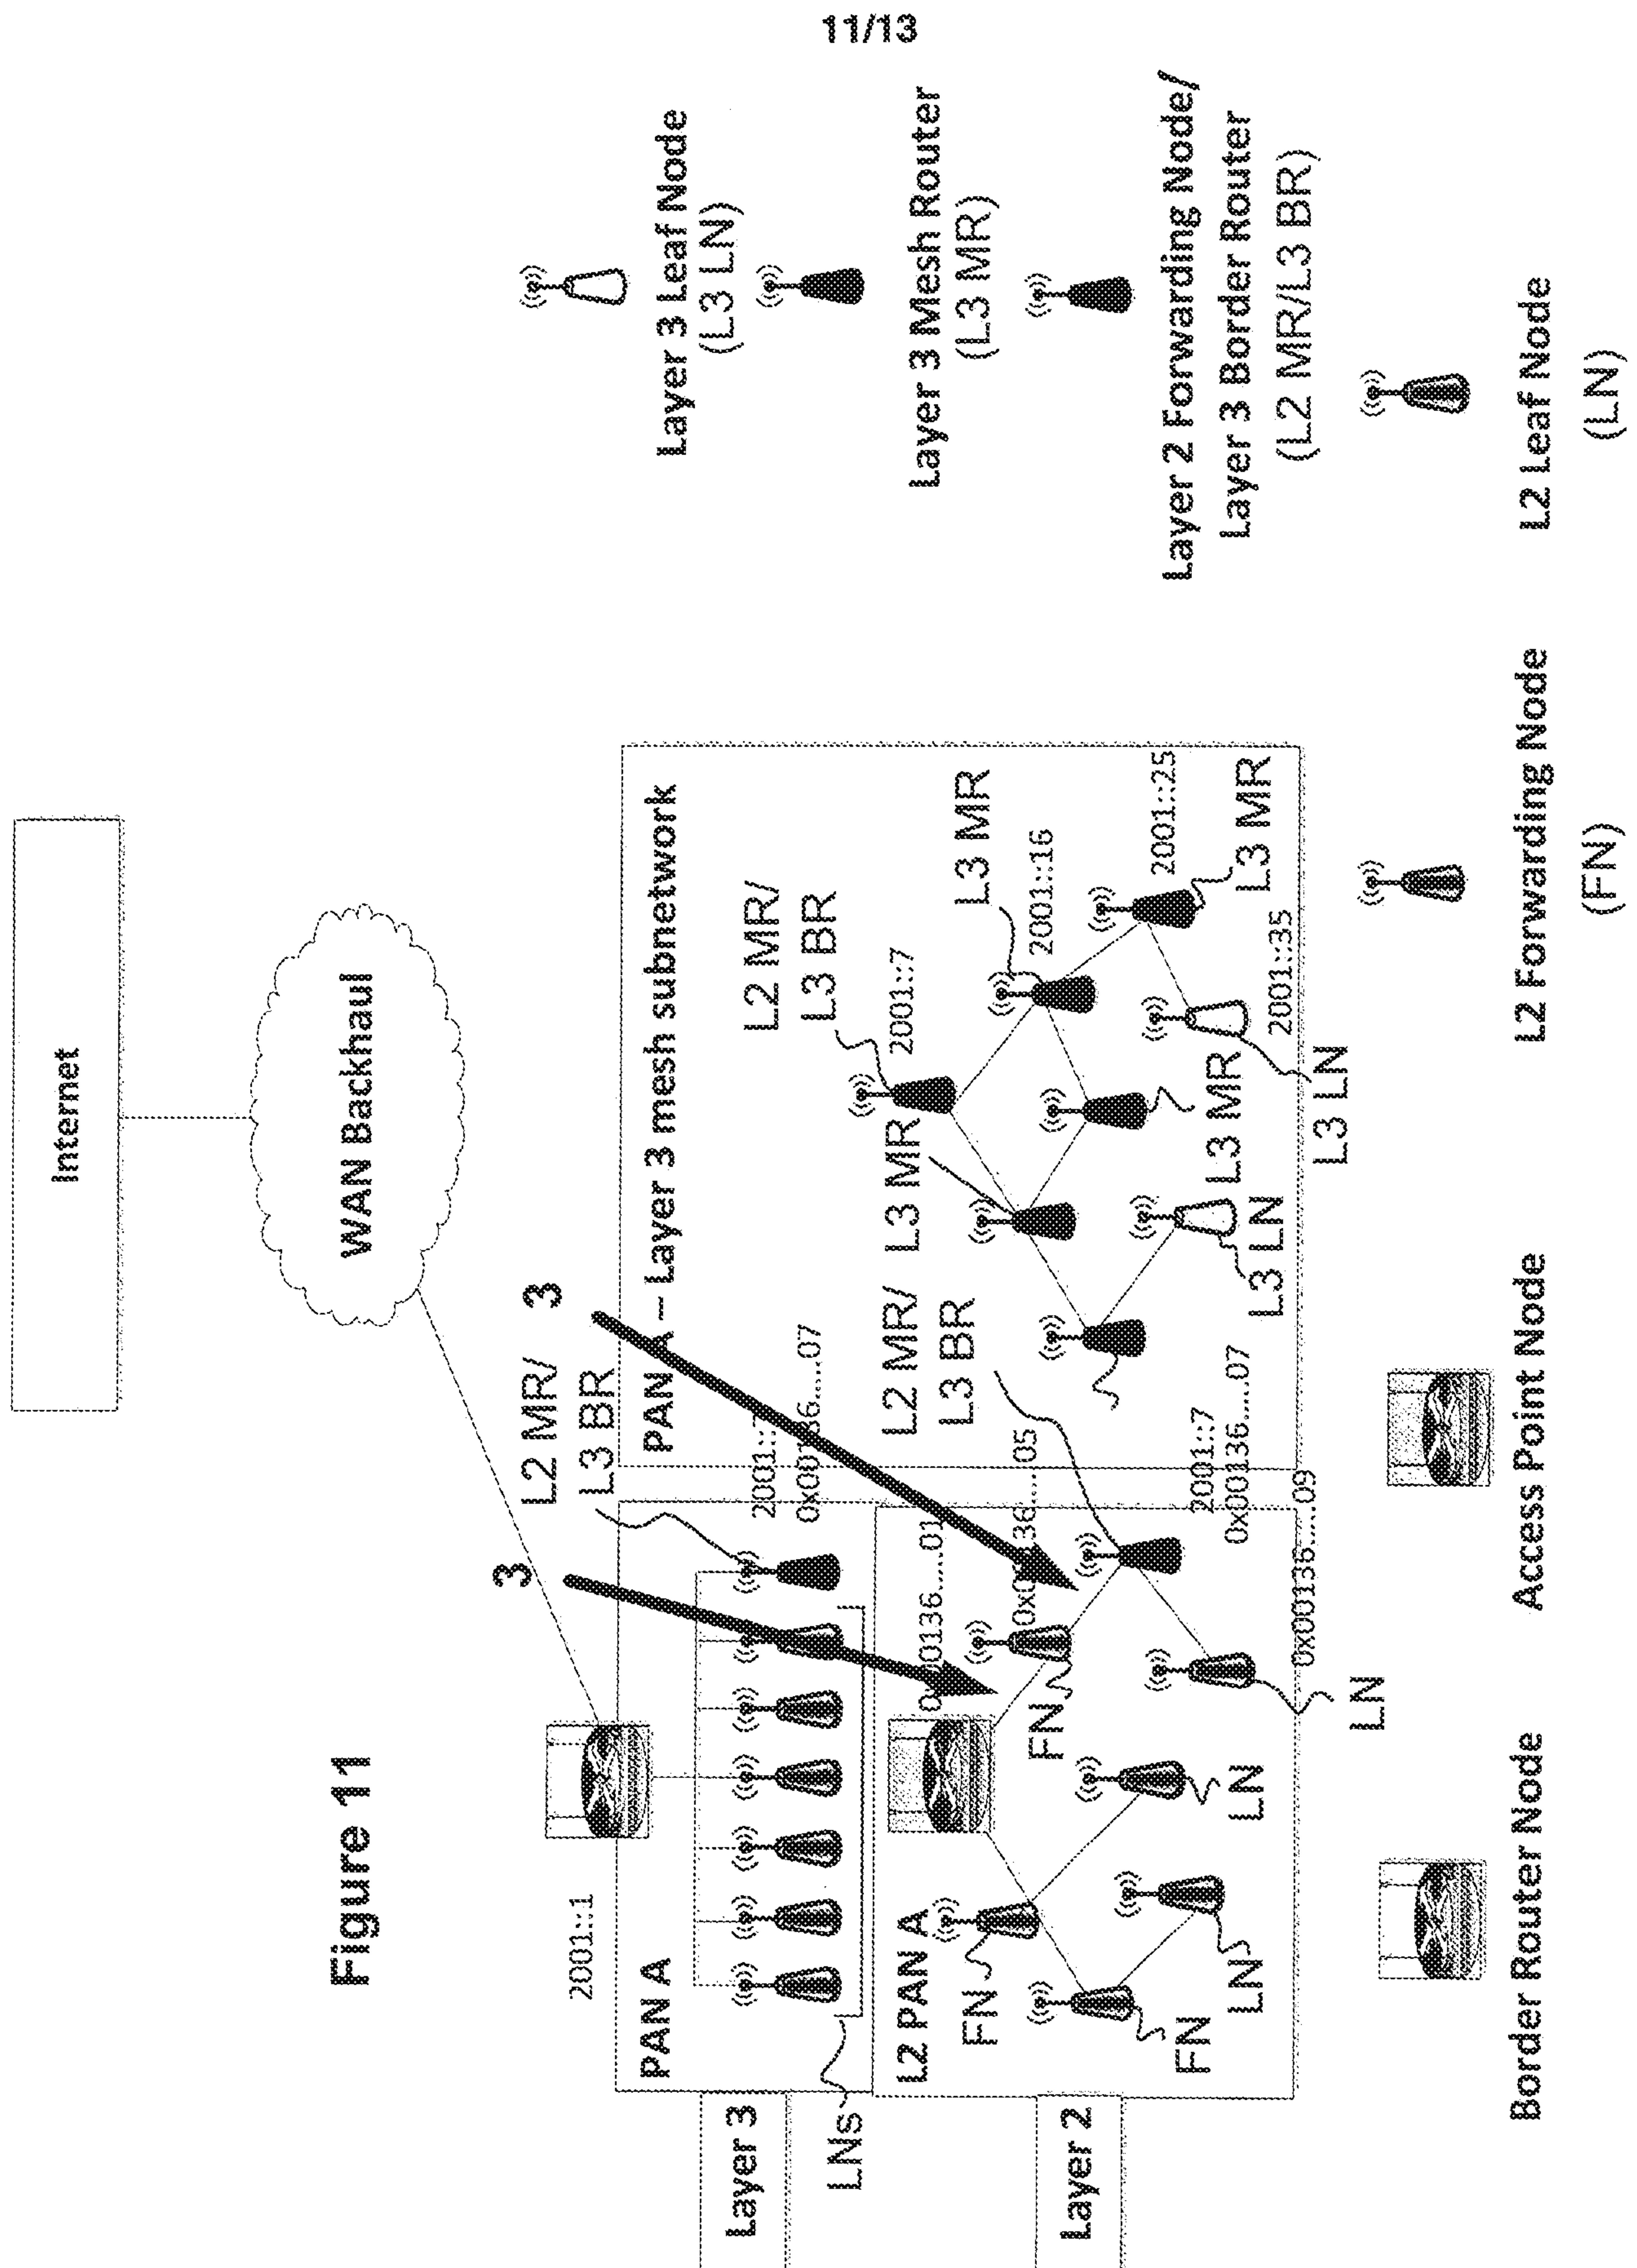




2 June 1997

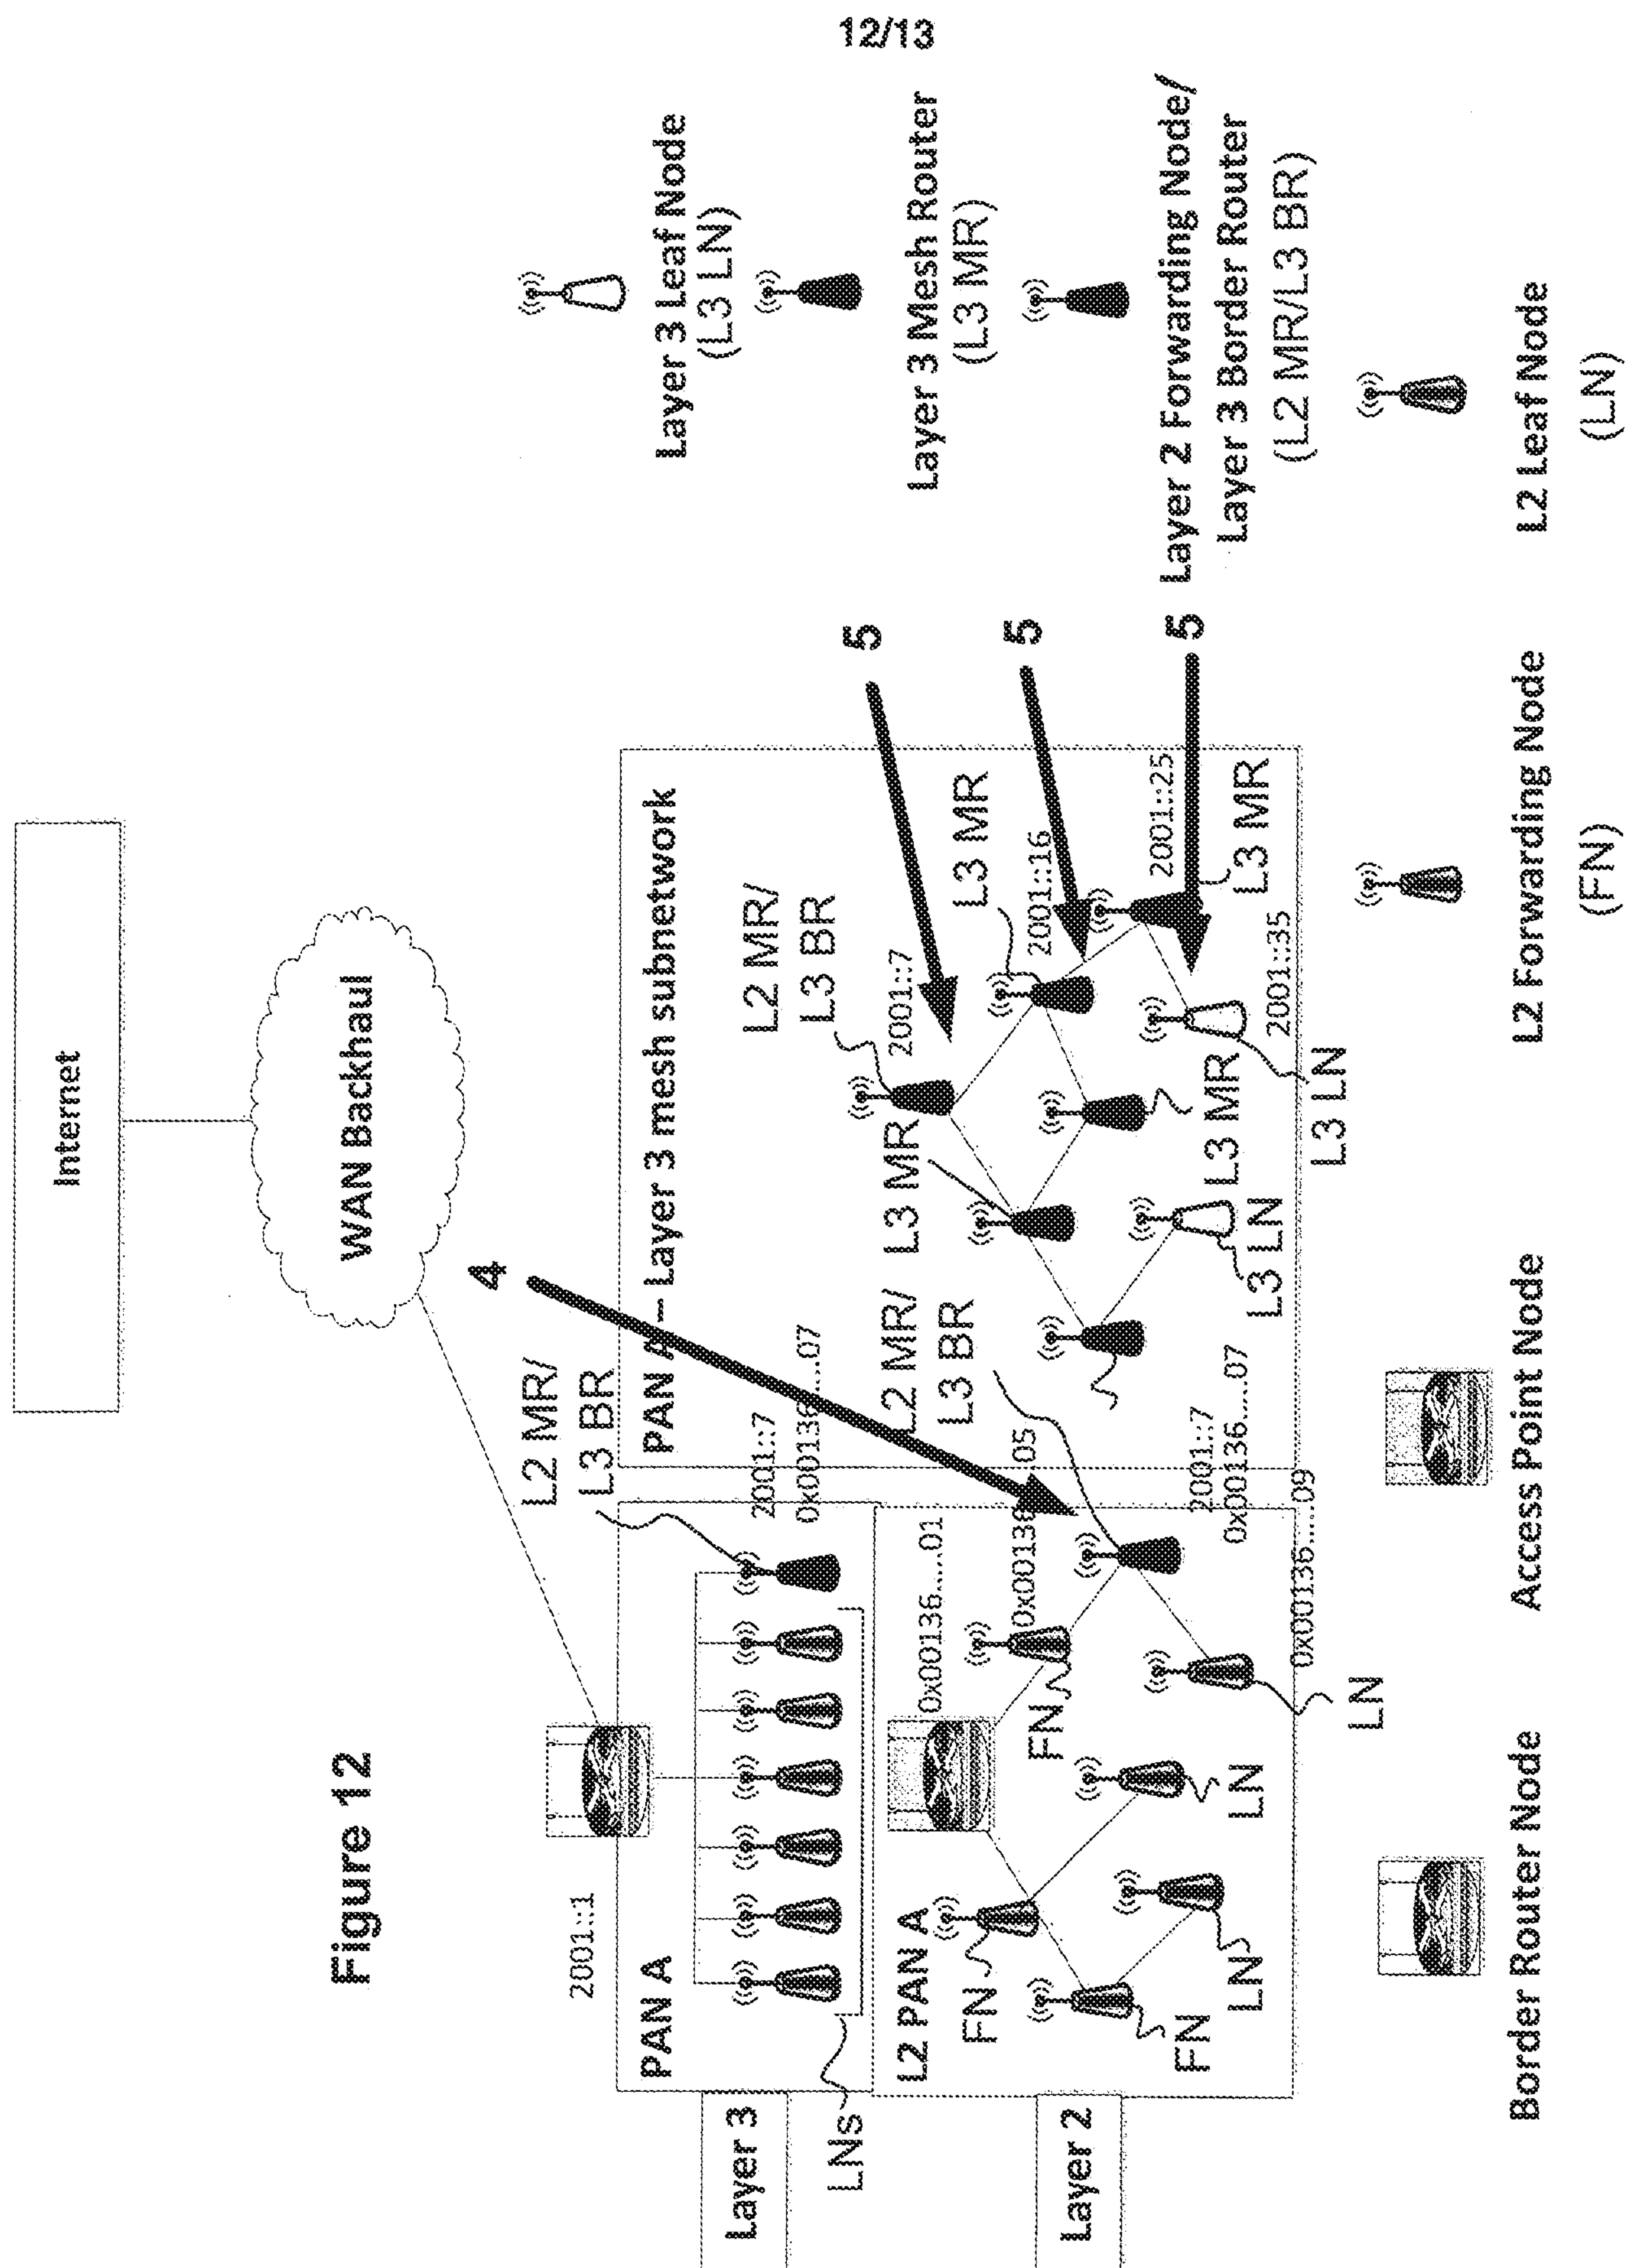



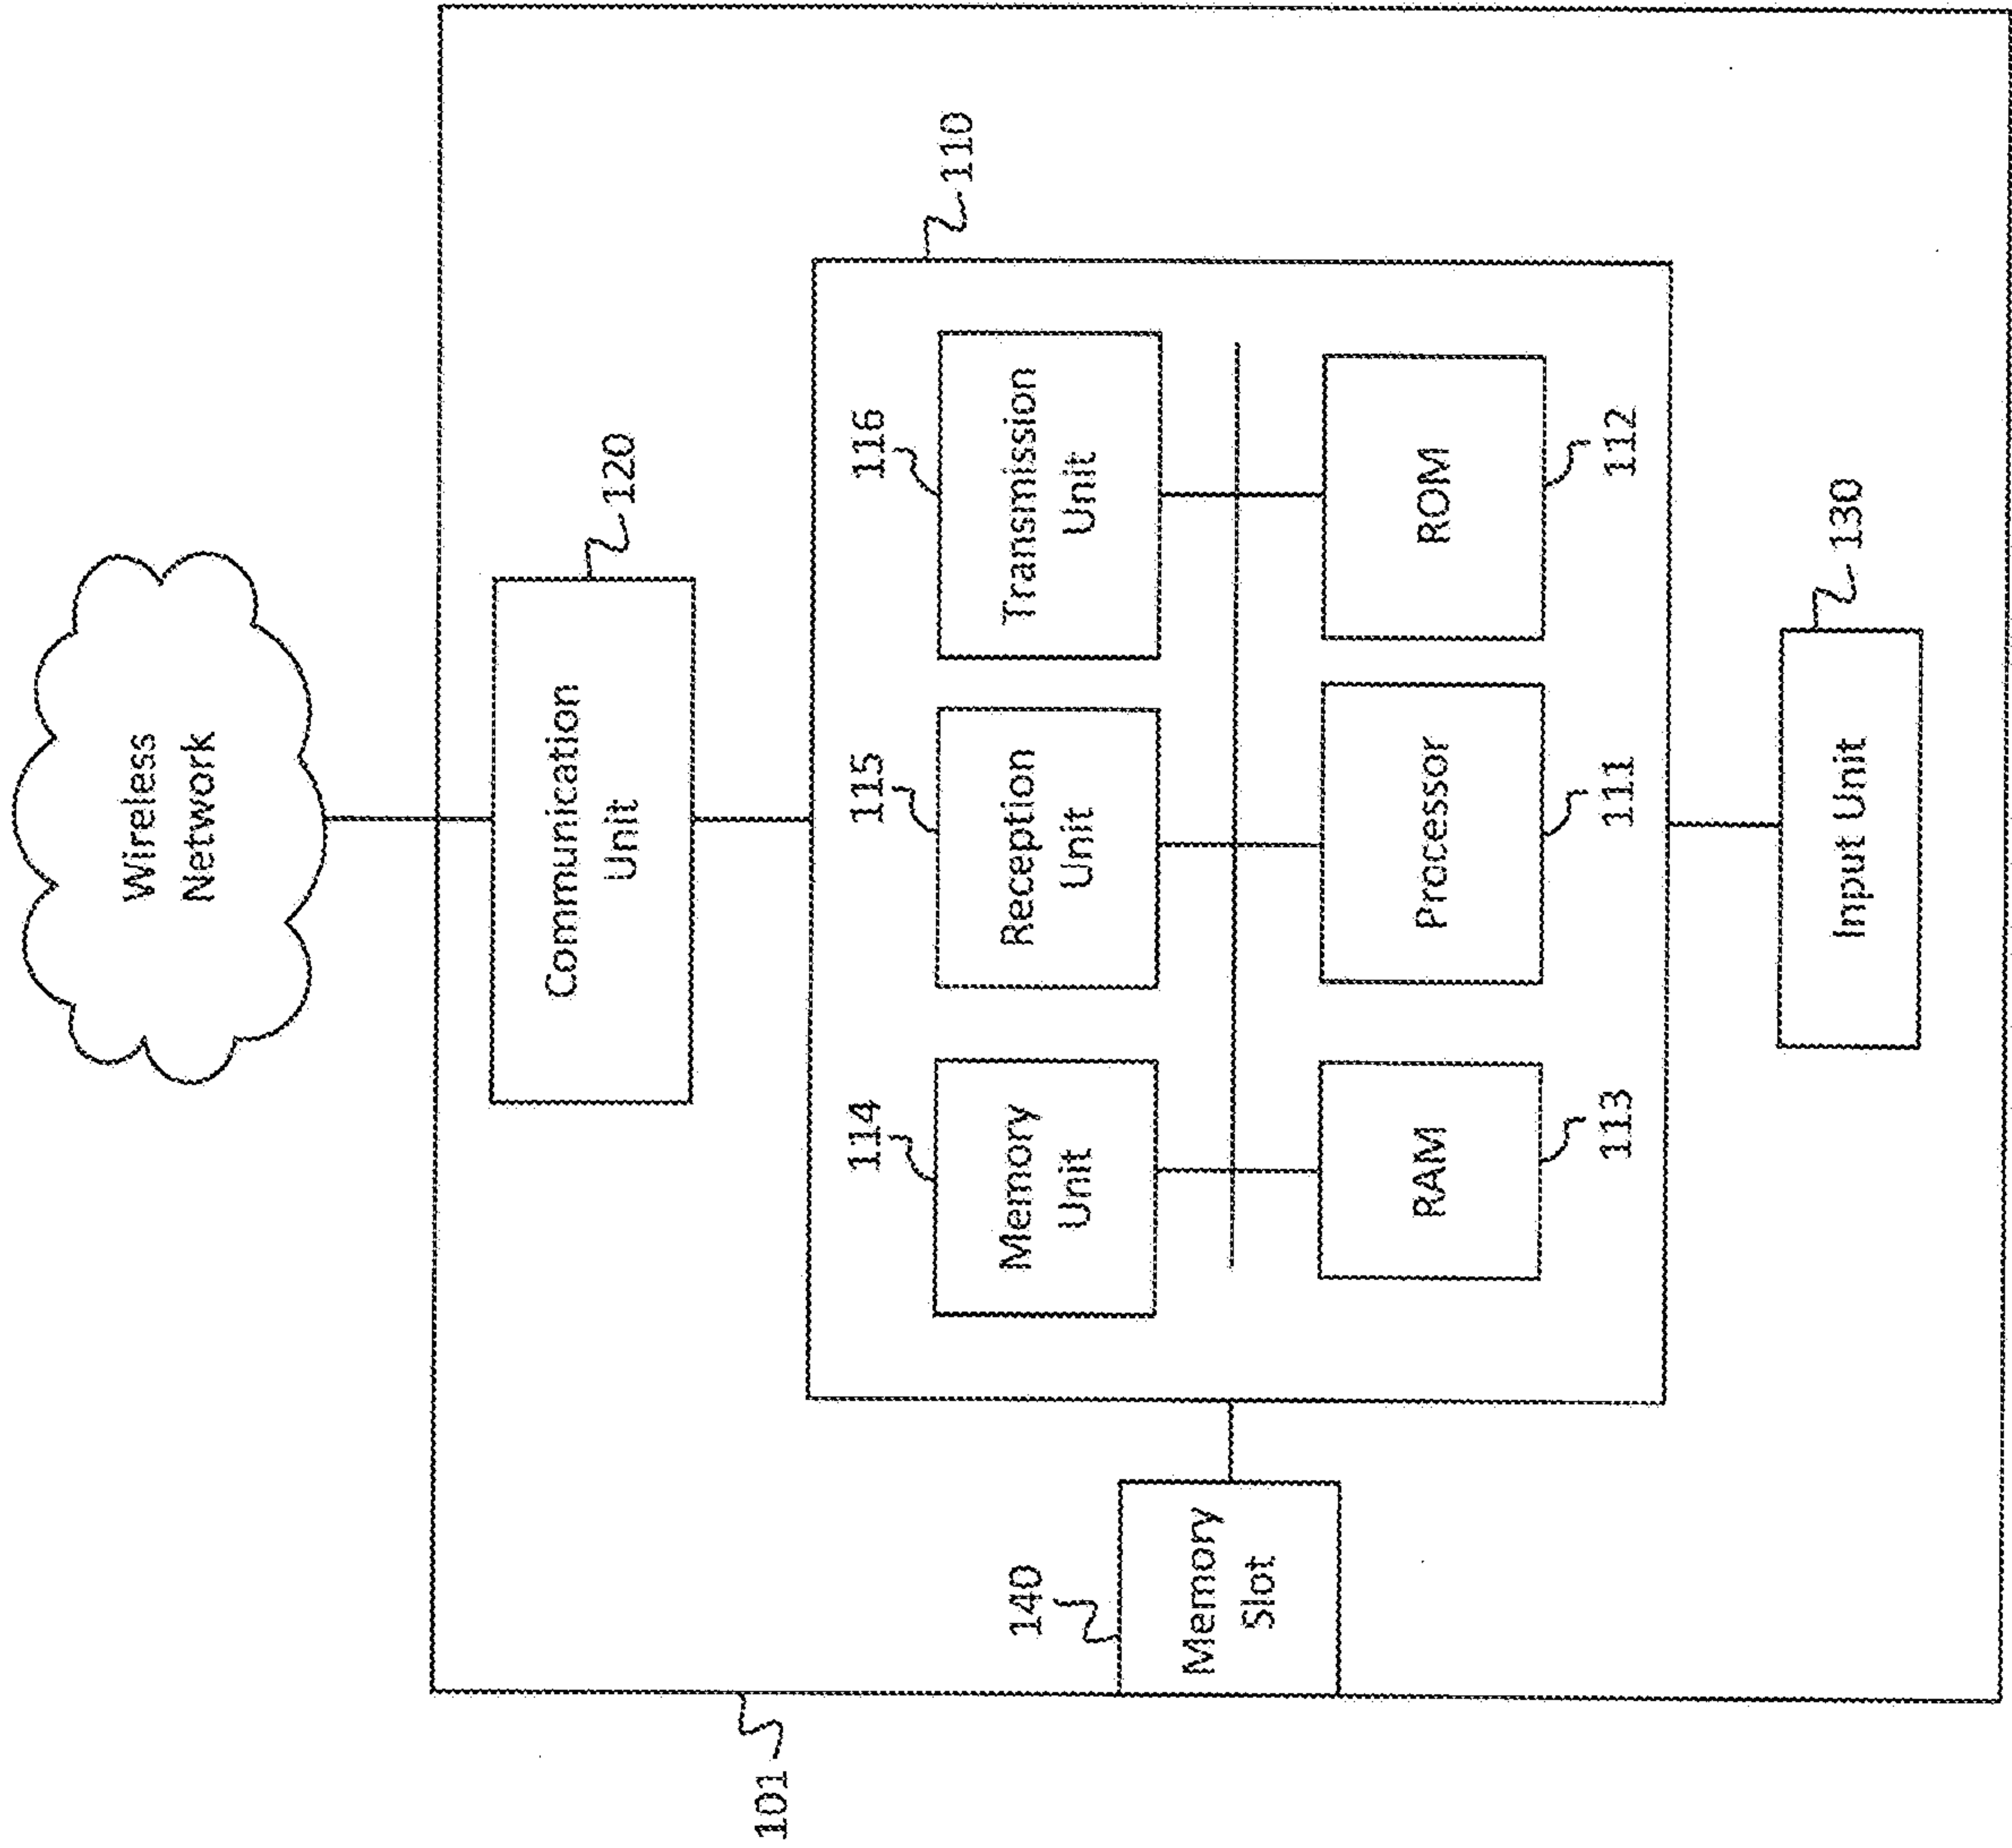



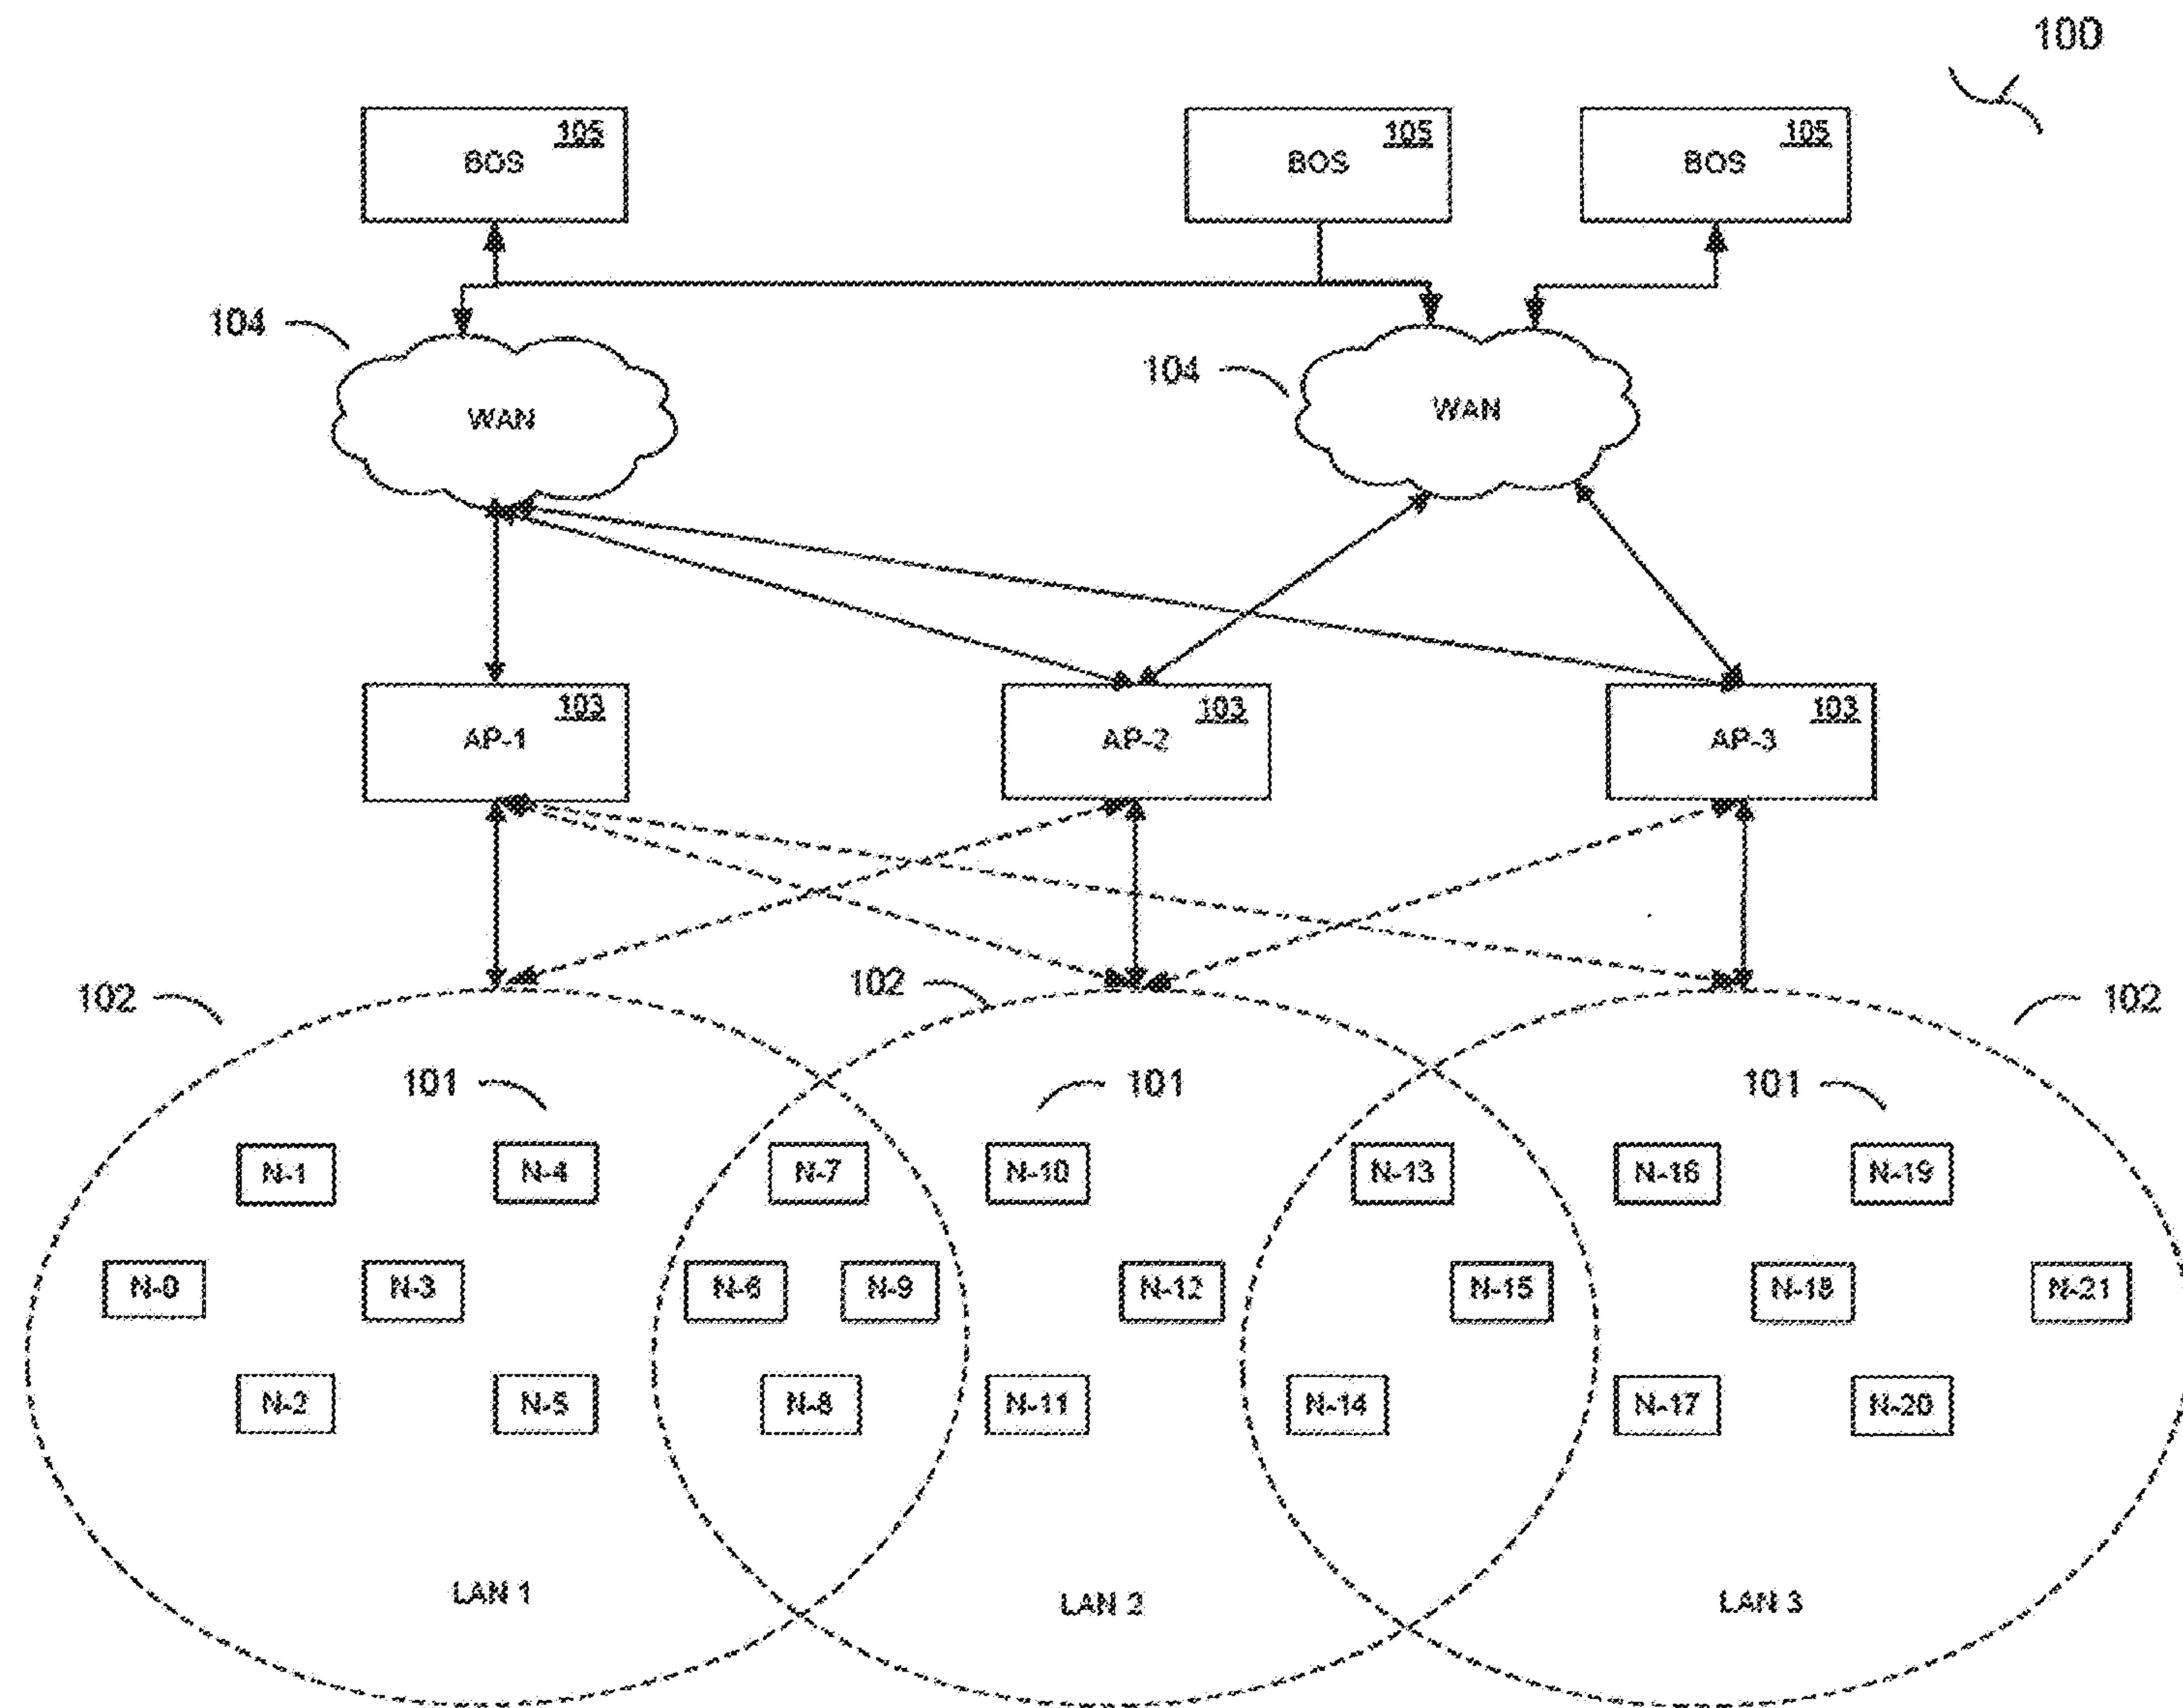


Figure 1