

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2011265254 B2

- (54) Title
Patient-matched instruments
- (51) International Patent Classification(s)
A61B 17/74 (2006.01) **A61F 2/36** (2006.01)
A61B 17/56 (2006.01)
- (21) Application No: **2011265254** (22) Date of Filing: **2011.06.10**
- (87) WIPO No: **WO11/156755**
- (30) Priority Data
- | | | |
|-------------------|-------------------|--------------|
| (31) Number | (32) Date | (33) Country |
| 61/393,643 | 2010.10.15 | US |
| 61/353,838 | 2010.06.11 | US |
| 61/402,095 | 2010.08.23 | US |
- (43) Publication Date: **2011.12.15**
(44) Accepted Journal Date: **2016.05.19**
- (71) Applicant(s)
Smith & Nephew, Inc.
- (72) Inventor(s)
Agnihotri, Aashiish;Conway, Patrick Brian;Evans, David L.;Gibson, Luke Andrew;Griffin, Jennifer Allyn;Hughes, Michael Dean;Mehl, David Timothy;Salehi, Abraham Biglari;Sharp, Jeffrey Andrew;Tarsha, Maroun Hanna;Wald, Andrew Justin;Wolfe, Thomas S.
- (74) Agent / Attorney
Davies Collison Cave, Level 15 1 Nicholson Street, MELBOURNE, VIC, 3000
- (56) Related Art
US 2008/0188855
US 2009/0093816
US 2009/0222016

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 December 2011 (15.12.2011)

(10) International Publication Number
WO 2011/156755 A3

(51) International Patent Classification:
A61B 17/74 (2006.01) *A61B 17/56* (2006.01)
A61F 2/36 (2006.01)

South Front Street, Apt. 310, Memphis, TN 38103 (US).
EVANS, David, L. [US/US]; 4110 Sunny Meadows, Bartlett, TN 38135 (US). **GIBSON, Luke, Andrew** [US/US]; 4992 Glenalden Cove, Southaven, MS 38672 (US).
GRiffin, Jennifer, Allyn [US/US]; 1325 Wilbec Road, Memphis, TN 38116 (US). **HUGHES, Michael, Dean** [US/US]; 9589 Shadow Glen Cove, Cordova, TN 38016 (US). **MEHL, David, Timothy** [US/US]; 623 Charleston Court, Apt. 301, Memphis, TN 38103 (US). **SALEHI, Abraham, Biglari** [US/US]; 3127 Sycamore View Road, Bartlett, TN 38134 (US). **SHARP, Jeffrey, Andrew** [US/US]; 1155 E. 2100 S. Apt. 845, Salt Lake City, UT 84106 (US). **TARSHA, Maroun, Hanna** [JO/US]; 25 Nottoway Boulevard, Apt. 301, Memphis, TN 38103 (US). **WALD, Andrew, Justin** [US/US]; 505 Tennessee Street #325, Memphis, TN 38103 (US). **WOLFE, Thomas, S.** [US/US]; 1810 Elk River Cove, Collierville, TN 38017 (US).

(21) International Application Number:
PCT/US2011/040042

(22) International Filing Date:
10 June 2011 (10.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/353,838 11 June 2010 (11.06.2010) US
61/402,095 23 August 2010 (23.08.2010) US
61/393,643 15 October 2010 (15.10.2010) US

(71) Applicant (for all designated States except US): **SMITH & NEPHEW, INC.** [US/US]; 7135 Goodlett Farms Parkway, Cordova, TN 38016 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **AGNIHOTRI, Aashiish** [IN/US]; 1189 East Island Place, Memphis, TN 38103 (US). **CONWAY, Patrick, Brian** [US/US]; 408

(74) Agents: **KRISTAL, Phyllis, K.** et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, MN 55440-1022 (US).

[Continued on next page]

(54) Title: PATIENT-MATCHED INSTRUMENTS

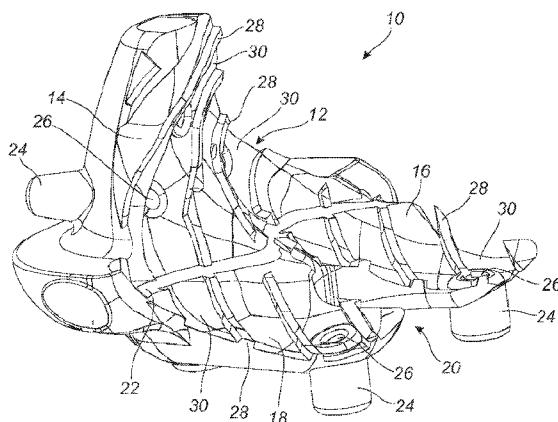

(57) Abstract: Patient-matched surgical instruments, and methods for making patient-matched surgical instruments, may include patient-matched surgical instruments having an anatomy facing side with several discrete, physically separate anatomy contacting portions configured to match the anatomy of a particular patient. The anatomy contacting portions may be one or more of non-uniform in distribution, non-uniform in shape or non uniform in surface area.

FIG. 1



- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MF, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

- (88) **Date of publication of the international search report:**

12 April 2012

2011265254 21 Apr 2016

PATIENT-MATCHED INSTRUMENTS

This application claims the benefit of U.S. Provisional Application Serial No. 61/393,643 filed October 15, 2010 for "Patient-Matched Instruments Having Non-Continuous Contact Surfaces," U.S. Provisional Application Serial No. 61/402,095 filed August 23, 2010 5 for "Patient-Matched Instrumentation," and U.S. Provisional Application Serial No. 61/353,838 filed June 11, 2010 for "Patient-Matched Instruments Having Textured Contact Surfaces, Methods for Using the Same, and Methods for Making the Same," the entire contents of each of which are incorporated by reference into this application.

Surgical instruments and methods for the treatment of bones or joints, in some 10 instances surgical instruments which are matched to a particular patient's anatomy, are described herein. Also described are methods of designing and using such surgical instruments.

Conventional patient-matched instruments are provided with large surfaces that are configured to conform to a patient's unique anatomy. Successful surgical outcomes depend 15 on the ability of patient-matched instruments to provide a reproducible, "confident" 3D-fit between the patient-matched instrument and the anatomy that they are designed to rest against. If there is any doubt by an end user that a patient-matched instrument fits well upon repeated engagement with a patient's unique anatomy, or if the instrument appears to fit 20 well with the patient's anatomy in multiple spatial orientations with respect to the anatomy, the instrument is typically discarded, and the surgery is carried out with the use of conventional, non-patient specific instruments.

To date, at least some patient-matched surgical instruments for use in total knee arthroplasty have employed anatomy-contacting surfaces that are substantially "negatives" of distal femoral and proximal tibial articular joint surfaces. The anatomy-contacting surfaces are generally 5 large surface areas that conform in a continuous manner to substantial areas of a patient's anatomy. In some instances, the custom surgical instruments are provided by obtaining 3D image data of the patient's anatomy (e.g., via an MRI scan), segmenting the 3D image data to clearly delineate surfaces of the bony and/or cartilaginous anatomy 10 from surrounding tissues, converting the segmented data to a computer model via CAD or other software, performing one or more optional secondary processes (e.g., smoothing functions), using a computer model to customize one or more surfaces of an instrument to the patient's anatomy, and manufacturing the custom instrument such that it is 15 adapted to conform to the patient's anatomy in a single spatial orientation.

In at least some current practices, substantially all portions of the joint anatomy shown in each 3D image data slice are segmented and conventional patient-matched instruments are provided with anatomy- 20 contacting portions that contact substantially continuous areas of the patient's anatomy. Such anatomy-contacting portions have large continuous surface areas of contact with the patient's bone and cartilage, and therefore, it is critical that the engineers or automated programs creating the patient-matched instruments maintain a high level 25 of accuracy and precision throughout each step of the entire segmentation process. Even if only one or two points on anatomy-contacting surfaces of a patient-matched instrument are inaccurate, misaligned, or otherwise misrepresent the true unique anatomy of the patient, the patient-matched instrument may not fit well, sit proud, teeter, 30 wobble, or may not fit at all. In such instances, an end user is less likely to

use the instrument. In many cases, poor patient-matched instrument fit may be attributed to even a few minor errors in the segmentation process.

Another drawback to using at least some conventional patient-matched instruments is that smooth anatomy-contacting surfaces potentially allow the instruments to slide or slip when engaged with the patient's unique anatomy. For example, in some instances, body fluids in combination with slippery bone and cartilage may work against frictional forces between the instruments and anatomical portions. Moreover, due to the highly-conforming nature of conventional patient-matched instruments, improper seating may be exhibited when used with anatomy having an abundance of osteophytes, legions, or tumors. Lastly, soft tissue (e.g., fatty tissues) may gather between patient-matched blocks and bone or cartilage and create a false impression to a user that the instrument is seated properly, when it is in fact, the contrary.

The invention provides a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:

- 15 a) an anatomy facing side;
- b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;
- 20 c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- d) wherein the plurality of anatomy contacting portions are at least one of:
 - 25 i) non-uniform in distribution;
 - ii) non-uniform in shape; or
 - iii) non-uniform in surface area.
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour,

wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a femoral cutting guide, wherein the anatomy-facing side includes a patella-femoral groove portion, an
5 intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and wherein the plurality of anatomy-contacting portions comprise at least one anatomy-contacting portion proximate the patella-femoral groove portion, at least one anatomy-contacting portion proximate the intercondylar notch portion, at least one anatomy-contacting portion proximate the medial condyle portion, and at least one anatomy-
10 contacting portion proximate the lateral condyle portion.

The invention also provides a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:

- a) an anatomy-facing side;
- b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;
- c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- d) wherein the plurality of anatomy-contacting portions define a first total area of the anatomy-facing side and wherein the plurality of recessed portions define a second total area of the anatomy facing side, wherein the second total area is greater than the first total area; and
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour;

21 Apr 2016
2011265254

wherein the patient-matched surgical instrument is a femoral cutting guide;
wherein the anatomy-facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and
wherein the plurality of anatomy-contacting portions comprise at least one anatomy-contacting portion proximate the patella-femoral groove portion, at least one anatomy-contacting portion proximate the intercondylar notch portion, at least one anatomy-contacting portion proximate the medical condyle portion, and at least one anatomy-contacting portion proximate the lateral condyle portion.

The invention also provides a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:

- a) an anatomy-facing side;
 - b) wherein the anatomy facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;
 - c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions; and
 - d) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a femoral cutting guide;
- wherein the anatomy-facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and
wherein the plurality of anatomy-contacting portions comprise at least one anatomy-contacting portion proximate the patella-femoral groove portion, at least one anatomy-contacting portion proximate the intercondylar notch portion, at least one

2011265254 21 Apr 2016

anatomy-contacting portion proximate the medial condyle portion, and at least one anatomy-contacting portion proximate the lateral condyle portion.

The invention also provides a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising;

- 5 a) an anatomy-facing side;
- b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions;
- c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- 10 d) wherein the plurality of anatomy-contacting portions are at least one of:
 - i) non-uniform in distribution;
 - ii) non-uniform in shape; or
 - 15 iii) non-uniform in surface area;
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour;
- 20 and
- f) wherein the instrument further comprises a pliant material located in at least one of the plurality of recessed portions.

The invention also provides a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising;

- 25 a) an anatomy-facing side;
- b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;

- c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- 5 d) wherein the plurality of anatomy-contacting portions are at least one of:
 - i) non-uniform in distribution;
 - ii) non-uniform in shape; or
 - iii) non-uniform in surface area; and
- e) wherein the anatomy-facing side of the patient-matched surgical instrument
- 10 includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a tibial cutting guide comprising:
 - a medial paddle including at least one of the anatomy-contacting portions; and
- 15
 - a lateral paddle including at least one of the anatomy-contacting portions.

Embodiments of the present invention include patient-matched instruments, such as cutting guides used in knee arthroplasty procedures, which include one or more anatomy contacting portions that are customized from patient-specific imaging or other types of patient specific data to match the anatomy of the particular patient, and thus facilitate proper position and orientation of the patient-matched instrument relative to the patient's specific anatomy during a surgical procedure.

In some embodiments, there is provided a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising: an anatomy facing side; wherein the anatomy facing side includes a plurality of discrete, physically separate anatomy contacting portions, the plurality of anatomy contacting portions configured to match the anatomy of the particular patient; wherein the anatomy facing side includes a plurality of discrete, physically separate recessed portions,

wherein the plurality of recessed portions are recessed relative to parts of the anatomy contacting portions proximate the plurality of recessed portions; wherein the plurality of anatomy contacting portions are at least one of: non-uniform in distribution; non-uniform in shape; or non-uniform in surface area.

In some embodiments, there is further provided a pliant material located in at least one of the plurality of recessed portions.

In some embodiments, the plurality of anatomy contacting portions defines a first total area of the anatomy facing side and wherein the at least one recessed portion defines a second total area of the anatomy facing side; wherein the second total area is greater than the first total area.

In some embodiments, the patient-matched surgical instrument is a femoral cutting guide, wherein the anatomy facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; wherein the plurality of anatomy contacting portions comprise at least one anatomy contacting portion proximate the patella-femoral groove portion, at least one anatomy contacting portion proximate the intercondylar notch portion, at least one anatomy contacting portion proximate the medial condyle portion, and at least one anatomy contacting portion proximate the lateral condyle portion.

In some embodiments, a total area of the anatomy contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is greater than a total area of the anatomy contacting portions proximate the medial condyle portion and the lateral condyle portion.

In some embodiments, a total area of the anatomy contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is less than a total area of the anatomy

contacting portions proximate the medial condyle portion and the lateral condyle portion.

In some embodiments, a density of anatomy contacting portions proximate the patella-femoral groove portion and the intercondylar notch 5 portion is greater than a density of anatomy contacting portions proximate the medial condyle portion and the lateral condyle portion.

In some embodiments, the plurality of anatomy contacting portions comprise at least one anatomy contacting portion defining an area contact.

10 In some embodiments, the plurality of anatomy contacting portions further comprise at least one anatomy contacting portion defining a substantially linear contact.

15 In some embodiments, the plurality of anatomy contacting portions further comprise at least one anatomy contacting portion defining a substantially point contact.

20 In some embodiments, the anatomy facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy contacting portions is higher in the areas of relatively greater contour than in the areas of relatively lower contour.

25 In some embodiments, the anatomy facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour.

In some embodiments, at least one of the plurality of anatomy contacting portions extends along a periphery of the anatomy facing side.

30 In some embodiments, the patient-matched surgical instrument is a tibial cutting guide comprising a medial paddle including at least one of

the anatomy contacting portions and a lateral paddle including at least one of the anatomy contacting portions.

In some embodiments, there is further provided a guide extending through the patient-matched surgical instrument.

5 In some embodiments, the guide is a through slot including at least one planar surface.

In some embodiments, there is provided a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:
an anatomy facing side; wherein the anatomy facing side includes a
10 plurality of discrete, physically separate anatomy contacting portions, the plurality of anatomy contacting portions configured to match anatomy of the particular patient; wherein the anatomy facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy
15 contacting portions proximate the plurality of recessed portions; and wherein the plurality of anatomy contacting portions define a first total area of the anatomy facing side and wherein the plurality of recessed portions define a second total area of the anatomy facing side; wherein the second total area is greater than the first total area.

20 In some embodiments, the patient-matched surgical instrument is a femoral cutting guide, wherein the anatomy facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; wherein the plurality of anatomy contacting portions comprise at least one anatomy contacting portion proximate the patella-femoral groove portion, at least one anatomy contacting portion proximate the intercondylar notch portion, at least one anatomy contacting portion proximate the medial condyle portion, and at least one anatomy contacting portion proximate the lateral condyle portion.

In some embodiments, a total area of the anatomy contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is greater than a total area of the anatomy contacting portions proximate the medial condyle portion and the lateral condyle portion.

5 In some embodiments, the anatomy facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour.

10 In some embodiments, the anatomy facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy contacting portions is higher in the areas of relatively greater contour than in the areas of relatively lower contour.

15 In some embodiments, there is provided a patient-matched surgical instrument matched to the anatomy of a particular patient, comprising: an anatomy facing side; wherein the anatomy facing side includes a plurality of discrete, physically separate anatomy contacting portions, the plurality of anatomy contacting portions configured to match the anatomy of the particular patient; wherein the anatomy facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy contacting portions proximate the plurality of recessed portions; wherein the plurality of anatomy contacting portions are at least one of: non-uniform in distribution; non-uniform in shape; or non-uniform in surface area; and wherein the plurality of anatomy contacting portions define a first total area of the anatomy facing side and wherein the plurality of recessed portions defines a second total area of the anatomy

facing side; wherein the second total area is greater than the first total area.

In some embodiments, there is provided a method for making a patient-matched surgical guide matched to the anatomy of a particular patient, comprising: receiving data concerning the anatomy of a particular patient; designing a three-dimensional computer model of the anatomy of the particular patient from the received data; wherein the three-dimensional computer model includes at least one contact portion; positioning a mesh relative to the three-dimensional computer model to define at least one non-anatomy contacting portion; designing the patient-matched surgical guide to match the at least one contact portion and to include a recess avoiding the at least one non-anatomy contacting portion; and manufacturing the designed patient-matched surgical guide.

15 In some embodiments, positioning the mesh relative to the three-dimensional computer model comprises positioning the mesh on the three-dimensional computer model.

20 In some embodiments, designing the patient-matched surgical guide comprises intersecting a blank of a surgical guide onto the three-dimensional computer model and the mesh.

In some embodiments, the method for making the patient-matched surgical guide further comprises creating an expanded mesh structure from the mesh positioned relative to the three-dimensional computer model.

25 In some embodiments, positioning the mesh relative to the three-dimensional computer model comprises positioning a first mesh relative to an anterior portion of a three-dimensional computer model of a distal femur and positioning a second mesh relative to a distal portion of the three-dimensional computer model of the distal femur.

In some embodiments, there is provided a method of designing a surgical instrument matched to a particular anatomic structure, wherein the surgical instrument comprises an anatomy facing side including at least one anatomy contacting portion and at least one recessed portion

5 that is recessed relative to parts of the at least one anatomy contacting portion proximate the at least one recessed portion, the method comprising: accessing a three-dimensional computer model of the anatomic structure, the three-dimensional computer model of the anatomic structure including at least one portion corresponding to the at

10 least one anatomy contacting portion of the surgical instrument; using a computer comprising a processor, modifying the three-dimensional computer model of the anatomic structure to create a modified three-dimensional computer model including at least one portion corresponding to the at least one recessed portion of the surgical instrument; and

15 using the modified three-dimensional computer model of the anatomic structure to modify a computer model of an instrument blank to correspond to the surgical instrument.

In some embodiments, modifying the three-dimensional computer model of the anatomic structure comprises creating a raised portion on

20 the three-dimensional computer model of the anatomic structure.

In some embodiments, modifying the three-dimensional computer model of the anatomic structure comprises positioning a mesh relative to the three dimensional computer model of the anatomic structure.

In some embodiments, there is further provided the step of creating

25 an expanded mesh from the mesh.

In some embodiments, positioning the mesh comprises positioning a first mesh relative to an anterior portion of the three-dimensional computer model of the anatomic structure and positioning a second mesh relative to a distal portion of the three-dimensional computer model of the

anatomic structure, wherein the three dimensional computer model is a model of a distal femur.

In some embodiments, positioning the mesh comprises wrapping the mesh around a portion of the three dimensional computer model of the
5 anatomic structure.

In some embodiments, positioning the mesh comprises positioning a mesh having a uniform grid pattern.

In some embodiments, accessing the three-dimensional computer model of the anatomic structure comprises accessing a three-dimensional
10 computer model of an anatomic structure of a particular patient.

In some embodiments, using the modified three-dimensional computer model of the anatomic structure to modify the computer model of the instrument blank comprises merging the computer model of the instrument blank with the modified three-dimensional computer model of
15 the anatomic structure.

In some embodiments, using the modified three-dimensional computer model of the anatomic structure to modify the computer model of the instrument blank further comprises subtracting an intersecting volume of the modified three-dimensional computer model of the
20 anatomic structure from a volume of the computer model of the instrument blank.

In some embodiments, there is further provided the step of manufacturing the surgical instrument.

In some embodiments, there is further provided the step of
25 outputting the modified computer model of the instrument blank to a device configured to manufacture the surgical instrument.

In some embodiments, modifying the computer model of the instrument blank comprises removing portions from a computer model of an oversized instrument blank.

In some embodiments, modifying the computer model of the instrument blank to correspond to the surgical instrument comprises modifying the computer model of the instrument blank to correspond to a surgical instrument comprising a plurality of discrete, physically separate 5 anatomy contacting portions, wherein the plurality of anatomy contacting portions are at least one of: (i) non-uniform in distribution; (ii) non-uniform in shape; or (iii) non-uniform in surface area.

In some embodiments, modifying the computer model of the instrument blank to correspond to the surgical instrument comprises 10 modifying the computer model of the instrument blank to correspond to a surgical instrument wherein the at least one anatomy contacting portion defines a first total area of the anatomy facing side and wherein the at least one recessed portion defines a second total area of the anatomy facing side; wherein the second total area is greater than the first total 15 area.

In some embodiments, there is provided a method of designing a surgical instrument matched to a particular anatomic structure, wherein the surgical instrument comprises an anatomy facing side including at least one anatomy contacting portion and at least one recessed portion 20 that is recessed relative to parts of the at least one anatomy contacting portion proximate the at least one recessed portion, the method comprising: accessing a three-dimensional computer model of the anatomic structure, the three-dimensional computer model of the anatomic structure including at least one portion corresponding to the at least one anatomy contacting portion of the surgical instrument; using a computer comprising a processor, modifying the three-dimensional computer model of the anatomic structure to create a modified three-dimensional computer model including at least one portion corresponding 25 to the at least one recessed portion of the surgical instrument, wherein modifying the three-dimensional computer model of the anatomic 30

structure comprises positioning a mesh relative to the three dimensional computer model of the anatomic structure; and using the modified three-dimensional computer model of the anatomic structure to modify a computer model of an instrument blank to correspond to the surgical
5 instrument.

In some embodiments, positioning the mesh comprises positioning a first mesh relative to an anterior portion of the three-dimensional computer model of the anatomic structure and positioning a second mesh relative to a distal portion of the three-dimensional computer model of the
10 anatomic structure, wherein the three dimensional computer model is a model of a distal femur.

In some embodiments, positioning the mesh comprises wrapping the mesh around a portion of the three dimensional computer model of the anatomic structure.
15

In some embodiments, positioning the mesh comprises positioning a mesh having a uniform grid pattern.

In some embodiments, there is provided a method of designing a surgical instrument matched to a particular anatomic structure, wherein the surgical instrument comprises an anatomy facing side including at
20 least one anatomy contacting portion and at least one recessed portion that is recessed relative to parts of the at least one anatomy contacting portion proximate the at least one recessed portion, the method comprising: accessing a three-dimensional computer model of the anatomic structure, the three-dimensional computer model of the anatomic structure including at least one portion corresponding to the at least one anatomy contacting portion of the surgical instrument; using a computer comprising a processor, modifying the three-dimensional computer model of the anatomic structure to create a modified three-dimensional computer model including at least one portion corresponding
25 to the at least one recessed portion of the surgical instrument, wherein
30

2011265254 21 Apr 2016

modifying the three-dimensional computer model of the anatomic structure comprises positioning a mesh relative to the three dimensional computer model of the anatomic structure; using the modified three-dimensional computer model of the anatomic structure to modify a computer model of an instrument blank to correspond to the surgical instrument
5 by: merging the computer model of the instrument blank with the modified three-dimensional computer model of the anatomic structure; and subtracting an intersecting volume of the modified three-dimensional computer model of the anatomic structure from a volume of the computer model of the instrument blank; and outputting the modified computer model of the instrument blank to a device configured to manufacture the surgical
10 instrument.

Further areas of applicability of the inventions and their embodiments described herein will become apparent from the detailed description provided hereinafter. It should be understood that the written description and accompanying drawings in this document, while illustrating particular embodiments of the invention, are intended for purposes of illustration
15 only and are not intended to limit the scope of the inventions.

FIGS. 1-8 illustrate an embodiment of a patient-matched surgical instrument in the form of a femoral cutting guide.

FIGS. 9-14 illustrate an embodiment of a patient-matched surgical instrument in the form of a tibial cutting guide.

20 FIGS. 15-16 illustrate an embodiment of a patient-matched surgical instrument in the form of a tibial cutting guide.

FIGS. 17A-1 7C illustrate additional embodiments of patient-matched surgical instruments.

25 FIGS. 18A-B and 19 illustrate embodiments of a patient-matched surgical instrument in the form of femoral cutting guides, each having

anatomy-contacting portions that vary in contact area, shape, and/or distribution.

FIG. 20 illustrates potential points of contact between a femur bone and a patient-matched surgical instrument (not shown) according to 5 another embodiment.

FIGS. 21 and 22 illustrate two embodiments of patient-matched surgical instruments in the form of femoral cutting guides, each having anatomy-contacting portions in the shape of substantial line segments.

FIGS. 23 and 24 illustrate two embodiments of patient-matched 10 surgical instruments in the form of femoral cutting guides, each having anatomy-contacting portions located generally around the peripheral areas of the instrument and/or guide structures of the instrument.

FIG. 25 illustrates a patient-matched surgical instrument including a pliant material.

15 FIG. 26 illustrates a method step of creating a three-dimensional patient-specific anatomic model according to one embodiment.

FIG. 27A illustrates an embodiment of a method step of creating and applying a first mesh structure to a first portion of a first anatomic model; FIG. 27B illustrates an embodiment of a method step of creating 20 and applying a second mesh structure to a second portion of the first anatomic model; FIG. 27C illustrates an embodiment of a method step of creating a first mesh structure and a second mesh structure, and applying the first and second mesh structures to first and second portions of a first anatomic model, respectively; and FIG. 27D illustrates the method step of 25 FIG. 27C further including the method step of determining an intersection of a surgical instrument blank with respect to a first anatomic model.

FIGS. 28-31 illustrate an embodiment of a method step of performing one or more sweep functions to a mesh structure, after said mesh structure is applied to an outer portion of a first anatomic model, to create a 30 modified first anatomic model.

FIGS. 32A and 33A illustrate a surgical instrument blank for use with a modified first anatomic model according to some embodiments, having superimposed thereon a virtual intersection with the first modified anatomic model.

5 FIGS. 32B and 33B illustrate the surgical instrument blank of FIG. 32A, having superimposed thereon a first mesh structure applied to a first portion of a first anatomic model.

10 FIGS. 32C and 33C illustrate the surgical instrument blank of FIG. 32A, having superimposed thereon a second mesh structure applied to a second portion of a first anatomic model.

15 FIGS. 34 and 35 illustrate an embodiment of a method step of merging a surgical instrument blank with a modified first anatomic model, which may, in some embodiments, be followed by subtracting the modified first anatomic model from the surgical instrument blank to define a patient-matched surgical instrument.

FIGS. 36-38 show another embodiment of a modified first anatomic model.

20 FIG. 39 illustrates an embodiment of a method step of merging a surgical instrument blank with the modified first anatomic model shown in FIGS. 36-38, and then subtracting the intersecting portions of the modified first anatomic model from the surgical instrument blank.

FIG. 40 illustrates an embodiment of a method step of merging first and second surgical instrument blanks with modified first and second anatomic models, respectively.

25 FIG. 41 illustrates an embodiment of modified first and second anatomic models, wherein one or more sweep functions are executed for mesh structures applied to first and second anatomic models.

30 FIG. 42A illustrates a second mesh structure created and applied to a second portion of a first anatomic model according to some embodiments; FIG. 42B illustrates a first mesh structure created and

2011265254 21 Apr 2016

applied to a first portion of a first anatomic model according to some embodiments.

FIG. 43A illustrates a second mesh structure created and applied to a first portion of a second anatomic model according to some embodiments; FIG. 43B illustrates a first mesh structure created and applied to a second portion of a second anatomic model according to some embodiments.

FIGS. 44 and 45 illustrate a method step of merging a second surgical instrument blank with a modified second anatomic model.

FIGS. 46 and 47 illustrate additional embodiments of patient-matched surgical instruments.

FIG. 48 schematically illustrates one embodiment of a method of designing and manufacturing a surgical instrument.

The following description of the drawings is merely exemplary in nature and is in no way intended to limit the invention, its application, or uses.

FIGS. 1-8 illustrate a first embodiment of a patient-matched surgical instrument, which, in this embodiment, is a femoral cutting guide 10. The femoral cutting guide 10 has an anatomy facing side 12 including an anterior portion 14 that is configured to face a patello-femoral groove and anterior cortex region of a distal femur. The instrument further comprises two condylar portions (a medial condyle portion 16 and a lateral condyle portion 18) separated by an intercondylar notch 20, in which the condylar portions are configured to face distal condylar portions of a patient's femur. The patient-matched femoral cutting guide 10 of FIGS. 1-8 also includes a through slot 22 for guiding a cutting instrument such as a saw blade. The cutting guide 10 additionally includes a plurality of bosses 24 having apertures 26 extending therethrough to guide one or more stabilizing fasteners or locating pins, which may or may

not be pre-drilled using the apertures. For instance, apertures 26 may be located on the condylar portions and determine a rotation or peg hole location of an implanted femoral prosthetic component. The through slot 22 and apertures 26 are occasionally referred to herein as "guide structures," although that term may also encompass structures other than just apertures and slots. In some embodiments, the guide structures are optional and are not necessarily integrally incorporated into the patient-matched instrument. In some embodiments, guides, bosses, and other structure may be included in non-patient-matched, standardized modular components that are later connected to or otherwise associated with the patient-matched instrument.

The femoral cutting guide of Figures 1-8 includes a plurality of discrete, physically separate anatomy contacting portions 28 on the anatomy facing side 12. The anatomy contacting portions 28 are configured to match the anatomy of a particular patient, and, in some embodiments, may be customized to a particular patient based on pre-operatively obtained imaging data of that patient.

In other embodiments, the patient-matched surgical instrument and its anatomy contacting portions are matched to a particular patient by using the pre-operatively obtained imaging data of that patient to select a patient-matched surgical instrument from a set of pre-determined instruments. For instance, in one embodiment, the set of pre-determined instruments includes hundreds (e.g. 1200) of pre-determined instruments, such as CAD computer models of instruments, among which automated software or other automated or non-automated functionality may be used to select one instrument from the set that best fits the particular patient, thereby matching the selected surgical instrument to the anatomy of the particular patient.

In the embodiment of Figures 1-8, the anatomy contacting portions 28 define substantially linear contacts (in this particular embodiment,

splines). Other substantially linear contacts may be utilized additionally or alternatively, including, but not limited to straight line segments, arcuate line segments, or curvilinear segments such as shown in some of the later described embodiments. Other types of anatomy contacting portions are substantial point contacts and area contacts. Non-limiting examples of anatomy contacting portions include teeth, ridges, undulations, serrations, spines, platforms, posts, nodules, tubes, pads, shapes specific to corresponding anatomical features or portions of such anatomical features, and/or various combinations thereof. The anatomy contacting portions may be spaced homogenously and evenly across an anatomy-facing side, or the anatomy contacting portions may be selected and distributed in random, non-random, pre-determined, optimized, or other fashion across the anatomy facing side. In some embodiments, the anatomy-contacting portions may create substantial line contacts with areas of bone and/or cartilage, but, in other embodiments, may contact bone, cartilage, and/or other anatomy in other manners (including point and area contacts). In some embodiments, the locations of the anatomy contacting portions may be determined using a random number generator or similar functionality.

The geometry of portions of the anatomy facing side of the instrument that do not contact bone or cartilage (the "recessed portions") may vary. In the example of FIG. 1, the recessed portions 30 are a series of flutes or channels extending between the anatomy contacting portions 28. These flutes or channels are shown to be generally rectangular or trapezoidal in cross-section, but any cross-section may be used in various embodiments. For example, as shown in FIGS. 9-14, rounded or partially cylindrically shaped flutes or channels 32 may alternatively provide clearance regions where the instrument is not designed to contact the patient's anatomy. In some instances, the recessed portions may be

partially or wholly made up of apertures extending through the surgical instrument.

In some embodiments, such as the embodiment shown in FIG. 1, the total area of the recessed portions 30 of the anatomy facing side 12 of the instrument is greater than the total surface area of the anatomy contacting portions 28 of the anatomy facing side 12. In other words, in at least this particular embodiment, the anatomy contacting portions 28 make up only a small portion of the anatomy facing side 12 of the femoral cutting guide 10.

As shown in FIG. 25, in some embodiments, at least some of the recessed portions 34 may be provided with a pliant material 26 that partially or completely fills one or more of the "gaps" between the anatomy contacting portions and the recessed portions.

Returning to the embodiment of FIGS. 1-8, the anatomy contacting portions 28 may extend generally parallel across the anatomy facing side 12 of the femoral cutting guide 10. In other embodiments, however, the anatomy contacting portions are non-parallel and/or are provided at an angle with respect to one another (perpendicular, acute, or obtuse angles). Additionally, the anatomy contacting portions may be discontinuous so as to create dotted line or partial line or curve segment contacts between the instrument and the patient's unique anatomy.

In some embodiments, the anatomy contacting portions may be non-uniform in distribution, non-uniform in shape, and/or non-uniform in contact area. In some embodiments, such non-uniformities may relate to the degree of contour in the particular region of the patient-matched instrument.

For example, FIG. 18A illustrates a femoral cutting guide 38 that includes anatomy contacting portions that define area contacts 40 (here, substantially rectangular shaped contacts) as well as anatomy contacting portions that define substantially linear contacts 42. In this particular

embodiment, in less contoured areas of the anatomy facing side 44, the anatomy contacting portions have a larger contact area than anatomy contacting portions in areas having a greater contour. For example, the area proximate the femoral condyles is generally less contoured than the 5 areas proximate the patella-femoral groove and intercondylar notch. Thus, area contacts 40 generally have a larger area than substantially linear contacts 42, which, in some embodiments, may not be "area" contacts at all and be splines, ridges or other structures that contact the anatomy along a discrete line. In some embodiments, the anatomy 10 contacting portions may also vary in height depending on the contour of the surgical instrument. For example, the femoral condyles stand proud whereas the intercondylar notch is more recessed. Thus, anatomy contacting portions proximate the femoral condyles may be generally shorter than anatomy contacting portions proximate the intercondylar 15 notch. In such embodiments, the substantially linear contact portions are narrow and tall, and thus approximate a discontinuous ridge that is dimensioned to contact a patient's anatomy along the deepest portion of the trochlear groove to provide internal / external rotational stability as well as stabilize the instrument with respect to the patient's femur in a 20 varus / valgus aspect. (In other embodiments, an anatomy contacting portion shaped like a continuous ridge or line segment may be provided in this area.)

While contrary to the above teachings, it is also envisioned that 25 larger contacting portions may be provided in areas with greater contouring (such as the intercondylar notch or trochlear groove), and smaller contacting portions may be provided in areas with less contouring (such as the femoral condyles). As one example, the embodiment shown in FIG. 18B includes a horseshoe-shaped contacting portion 46 proximate the intercondylar notch, and a large contacting portion 48 proximate the

trochlear groove. In contrast, smaller contacting portions 50 are provided proximate the condyles where there is less contouring.

FIG. 19 illustrates another embodiment of a patient-matched surgical instrument that includes anatomy contacting portions that vary in shape depending upon the contour of the instrument. In this embodiment, contacting portions 52 and 54 are generally rectangular (but may vary in size and/or height), whereas contacting portions 56 are generally cone-shaped. The different shaped contacting portions provide for different types of contact between the surgical instrument and a patient's anatomy. For example, rectangular contacting portions 52 provide for increased area contact with the patient's anatomy, narrow contacting portions 54 provide line contact (or substantial line contact) to nest within the trochlear groove, and cone-shaped contacting portions 56 provide for point contact (or substantially point contact) with the patient's anatomy. The shapes of the anatomy contacting portions may be selected to provide for a particular type of contact with particular portions of the patient's anatomy. For example, narrow rectangular and/or wedge-shaped contacting portions (such as contacting portions 54) may be selected for mating with the trochlear groove of the patient's distal femur. In contrast, wider rectangular contacting portions 52 may be selected to provide maximum area contact against the femoral condyles, albeit in a discrete region or regions of the femoral condyles. Cone-shaped contacting portions 56 may be selected when it is desired to reduce the amount of segmentation of image data required by the CAD modeling functionality.

Additionally, FIG. 19 illustrates that the distribution (or density) of the anatomy contacting portions may vary depending on the contour of the instrument. In FIG. 19, a larger number of anatomy contacting portions are concentrated in areas of the instrument having greater contour. Thus, contacting portions 54 and 56 are positioned proximate to the patello-

femoral groove and intercondylar notch portions of the instrument (areas having greater contour), whereas contacting portions 52 are provided proximate to the femoral condyle portions (an area having relatively less contour). There are only two contacting portions 52, whereas there are
5 more than two contacting portions 54 and 56.

FIG. 20 shows several arrows conceptually illustrating substantially point contacts between a patient's anatomy and contacting portions of another embodiment of a surgical instrument. In the embodiment of FIG. 20, the arrows indicate that there are generally more points of contact
10 proximate to areas of the patient's anatomy having more contour.

While contrary to the above teachings, it is also envisioned that a larger number of anatomy contacting portions may be concentrated in areas of the instrument having less contour. Thus, areas proximate to the femoral condyle portions of the instrument may be provided with more
15 anatomy contacting portions than in areas proximate to the intercondylar notch portion of the instrument. In this way, the anatomy contacting portions are concentrated in areas where segmentation error may be less likely to exist (at least in some embodiments) - the larger, less contoured areas - rather than areas with a greater amount of contour. Since
20 conventional patient scans (e.g., MRI) comprise a compilation of 2D image slices that are spaced by intervals of approximately 2-4 mm, interpolation algorithms or other methods are used to approximate anatomical geometries between the image data slices. By focusing contact portions in areas where there is less change in geometry between
25 2D image slices, instrument fit may be improved.

FIGS. 21 and 22 illustrate embodiments where the anatomy contacting portions are substantially linear contacts. The substantially linear contacts may be relatively straight (at least in two dimensions), or may have at least one curved segment. Thus, in the embodiment shown
30 in FIG. 21, there is provided one "S-shaped" contacting portion 58 that

provides greater contact with the patient's anatomy and may also increase internal and external rotational stability. As shown, there may also be other contacting portions 60 that are more linear than the S-shaped portion 58, contacting portions 60 being located proximate the 5 condylar portions of the instrument. If desired, these two contacting portions 60 may be shaped to generally follow the apex contour of the condyles.

The anatomy contacting portions 58 and 60 shown in FIG. 21 are discreet in that they have a first end and a second end that are not 10 connected to each other. In the embodiment shown in FIG. 22, the anatomy contacting portions connect with each other. Thus, there is provided a "waffle-shaped" contacting portion 62 including multiple line segments 64 connected to one another, and "ring-shaped" contacting portions 66 comprising a single curvilinear line segment connected at its 15 ends. If desired, the ring-shaped contacting portions 66 may be located proximate the condylar portions of the instrument, such that the patient's condyles "nest" within the ring-shaped contacting portions 66. Any other type of hatch or grid pattern comprising multiple line segments, and/or 20 oval or annulus-shaped line segments are also within the scope of this invention.

The anatomy contacting portions shown and described in FIGS. 21 and 22 may match to recessed portions of the patient's anatomy (such as the trochlear groove or intercondylar notch), but may also match portions of the anatomy that sit proud in relation to other anatomy (such 25 as the medial and lateral distal condyles). The anatomy contacting portions may match either articulating or non-articulating portions of the patient's anatomy. If desired, one or more discrete substantially point contact portions (such as contacting portions 56 in FIG. 19) may be provided along with the line-segment contacting portions shown in FIGS. 30 21 and 22.

FIGS. 23 and 24 illustrate embodiments where the anatomy contacting portions 68 are more heavily concentrated in peripheral areas 70 of the instrument and/or guide structures (such as but not limited to apertures 72 to receive fixation pins, or through slots 74 to receive cutting instruments). It is not necessary in all embodiments for the anatomy contacting portions to extend completely around the perimeter of the surgical instrument. Rather, the contacting portions may only extend around a portion of the perimeter. Additionally, it is not necessary for the anatomy contacting portions to extend completely around the guide structures (the contacting portions may only be located on the top of the through-slot, for example), or for the contacting portions to extend around each of the guide structures (only some guide structures may be provided with contacting portions).

Locating the anatomy contacting portions in such peripheral areas 15 may increase stability of the instrument when the instrument is placed on the patient's anatomy, or when the surgeon uses the guide structures (for example, when the through-slot receives a cutting instrument for cutting bone). In the embodiment shown in FIG. 23, the anatomy contacting portions 68 are discontinuous ridges that are shaped like rectangles or 20 wedges. (Of course, other shapes may be provided, such as cylinders, cones, spheres, pyramids, or any other shape described herein.) In FIG. 24, there is provided a single almost entirely continuous anatomy contacting portion 68 that extends around the perimeter 70 of the instrument. If desired, additional anatomy contacting portions may be 25 placed in central regions of the patient-matched instrument.

Additionally, FIG. 24 shows that in certain embodiments, portions (e.g. portion 76) of the surgical instrument may be "hollow" such that they are defined by a sidewall 78, the top edges of which define the contacting portions 68 of the instrument. In FIG. 24 the bottom half of the 30 surgical instrument is hollow, whereas the top half is non-hollow. In the

bottom half, the anatomy contacting portions 68 extend into the surgical instrument and define the sidewalls 78 of the hollow bottom half. Thus, the bottom half of the instrument resembles a cup, where the lip of the cup comprises the anatomy contacting portions 68. In other embodiments, 5 the entire surgical instrument may be hollow.

Any or all of the anatomy contacting portions described herein may be textured to improve the overall stability of the patient-matched instrument. For example, the texturing may include serration, points, cross-hatch, grooves, ridges, bumps, or barbs that increase the friction between 10 the patient's anatomy and the patient-matched instrument. In certain embodiments the texturing at least slightly penetrates the patient's soft tissue or other anatomy, which may, in some embodiments, compensate for segmentation errors that may occur in regions having greater amounts of soft tissue. In some embodiments, it may be desirable to locate the 15 textured portions proximate the perimeter of the instrument and/or guide structures. If desired, central regions of the condylar portions and anterior portion (where more hard tissue such as bone is located) may remain smooth for best fit.

FIG. 25 illustrates an embodiment of a patient matched surgical 20 instrument including pliant material 36 located in a recessed (or non-contacting) portion 34 of the instrument. With at least some of the embodiments described herein, when surgical instruments having anatomy contacting portions are placed against the patient's anatomy a gap or space may be left between the anatomy and the recessed portions (e.g. 34 in FIG. 25) of the instrument that do not contact the 25 anatomy. The gaps may give the perception of a non-conforming fit, and moreover, the gaps might contribute to instability of the instrument. Thus, at least one pliant portion may be provided within a recessed portion of the surgical instrument. In some embodiments, the pliant portion 30 completely fills the respective recessed area, but in other embodiments,

the pliant portion only fills a portion of the recessed area (e.g. as shown in FIG. 25). The pliant portion may comprise a silicone material, polymer film, gauze, putty, or dough that presses against and at least partially takes on the shape of the patient's anatomy, filling any gaps that might otherwise 5 be present between the discrete anatomy contacting portions. The pliant portions, together with the anatomy contacting portions, may in some embodiments approximate a continuous mirror-image surface of the patient's anatomy. Thus, the pliant portions provide the benefits of a continuous mirror-image surface (such as stability) to surgical instruments 10 that only have discontinuous anatomy contacting portions. The pliant portions may be coupled to the surgical instrument either before or during surgery, using adhesive, mechanical fasteners, welding, or the like. Alternatively, the pliant portions may simply be placed within the recessed 15 portions without any structure or substance to couple the pliant portion to the instrument. In some embodiments, a pliant material such as a polymer may be injected into the recesses of the instrument after manufacture.

Various embodiments of patient-matched surgical instruments may feature different fill depths of a pliant material in the recessed portions. For instance, in one embodiment, the pliant material may fill the recessed 20 portions up to the level of the surrounding anatomy contacting portions; however, in other embodiments, the pliant material may be below the level of the surrounding anatomy contacting portions or above the level of the surrounding anatomy contacting portions. In embodiments where the fill level of the pliant material is below the level of the surrounding 25 anatomy contacting portions, it may facilitate visualizing the fit of the instrument on the anatomy. In some embodiments where the pliant material is level with surrounding anatomy contacting portions, the pliant material may also contact the anatomy and add at least some degree of stability to the instrument / anatomy interaction. In some embodiments 30 where the fill level of the pliant material is above the level of the

surrounding anatomy contacting portions, pressing the instrument onto the anatomy may cause the pliant material to expand, filling in the recessed portions. In at least some of these embodiments, such as the embodiment where the pliant material is above the level of the surrounding anatomy contacting portions, the pliant material may be held in place by pinning the instrument to the anatomy. In this and other embodiments, the pliant material may provide increased friction between the instrument and anatomy, such that the position and orientation of the instrument on the anatomy is further maintained during the pinning process.

In some embodiments, the pliant material may be more localized (partially or entirely) in areas configured for contact with bony anatomy (e.g. relatively superior, anterior portions of the anatomy facing side of a femoral cutting guide) and the anatomy contacting portions may be more localized (partially or entirely) in areas configured for contact with cartilagenous anatomy (e.g. condylar and other areas of a femoral cutting guide). In other embodiments, other distributions (either regular or irregular) of pliant material and anatomy contacting portions are possible.

FIGS. 9-14 illustrate an embodiment of a patient-matched surgical instrument, in this instance a tibial cutting guide 80. The tibial guide 80 shown includes a guide 82 for directing a saw blade (or, in other embodiments, for directing other types of surgical tools such as a milling bit, osteotome, drill, wire, or pin). Although not shown, in some embodiments, the surgical instrument may have features for attaching modules for directing surgical tools rather than incorporating a surgical guide directly into the tool. The tibial cutting guide 80 shown in FIGS. 9-14 also includes several apertures 84 for receiving pins or other fasteners for securing the instrument to the patient.

The guide portion 82 of the tibial cutting guide 80 shown in FIGS. 9-14 is partially cantilevered off of other portions, and may be configured to

contact a patient's anatomy to some degree or may be configured to clear the patient's anatomy relative to anatomy contacting portions of the instrument. In the particular embodiment shown, as best seen in FIG. 11, the cantilevered portion of guide 82 is not configured to directly contact the patient's anatomy, whereas central portions of the guide 82 do include anatomy contacting portions 86 on the anatomy facing side of the tibial cutting guide 80.

In the embodiment of FIGS. 9-14, the tibial cutting guide 80 also includes two paddles 88, portions of which are for contacting superior portions of a proximal tibia. In the particular embodiment shown, the two paddles 88 are provided for contacting points on medial and lateral articular zones of a proximal tibial plateau, adjacent the tibial eminence, although, in other embodiments, the paddles may be designed to contact other portions of the anatomy. As shown in FIG. 9, indicia 90 may be provided on the instrument for indicating relative mechanical axis alignment, size, patient data, data relative to the surgery to be performed, data regarding an orientation of the instrument, or surgeon data, without limitation.

The tibial cutting guide 80 of FIGS. 9-14 is similar to the femoral cutting guide of FIGS. 1-8 in that it employs anatomy contacting portions (here ridges 86) on the anatomy facing side of the instrument. The anatomy contacting portions 86 shown are configured to create spline contacts between the instrument and the patient's tibial bone and/or cartilage, although many other types, arrangements and distributions of anatomy contacting portions are also possible. An anterior portion 92 of the instrument is configured to partially engage cortical bone adjacent the anterior cortex and medial 1/3 of the tibial tubercle. The spline contacts shown are generally evenly distributed about the anterior portion 92 and distal paddle portions 88 of the instrument; however, as described above, the anatomy contacting portions may be randomized, or

distributed in some other predetermined non-homogeneous fashion. Moreover, as previously stated, the number, location, orientation, size, width, profile, continuity, and shape of each anatomy contacting portion may be varied as needed to optimize interaction with a particular 5 patient's unique anatomy or for other purposes.

FIGS. 15-16 illustrate another embodiment of a patient matched tibial cutting guide 94 in which the anatomy contacting portions are several substantially point contacts 96. As shown, each point contact 96 includes a pad at its peak for contact with a point on the patient's 10 anatomy. In some embodiments, the pad may be substantially square, and may range in size from .1 to 10 mm square (measured along a side of the square) in some embodiments, from .5 to 5 mm square in some embodiments, and from 1 to 3 mm square in some embodiments. FIGS. 46 and 47 schematically show other patient-matched instruments (femoral 15 cutting guides 98 and 100 respectively) having different sized pads (102 and 104 respectively). In some embodiments, the pads are not square shaped, and may take on other shapes such as circles, triangles, rectangles, other polygons, or other shapes. In some embodiments, the substantially point contacts are not pads, but contact the anatomy at 20 only one or a very limited number of points. For instance, in some embodiments, each substantially point contact may have a rounded apex or sharp apex (as opposed to the flat apexes shown) that only contacts the anatomy at a single point or very small number of points. In some embodiments, each substantially point contact may define multiple 25 peaks that each contacts the anatomy in a limited number or only a single point.

FIGS. 17A-17C illustrate additional embodiments of patient matched surgical instruments. FIG. 17A illustrates a tibial cutting guide 106 similar to that shown in FIGS. 15-16 in that anatomy contacting portions 108 are 30 provided on both the paddles 110 and the anterior portion 112 as a

plurality of substantial point contacts (which, as mentioned earlier, make take on a variety of forms, including, but not limited to, a series of bumps, domes, spikes, cones, cylinders, polyhedrons (e.g., triangles, diamonds, pyramids), or other geometries or structures which would create

5 substantially point contacts between the instrument and a patient's anatomy). As shown in FIG. 17A, however, central areas 114 of the anterior portion 112 are devoid of / have a lower concentration of anatomy contacting portions 108, whereas a larger concentration of anatomy contacting portions 108 is provided on a periphery or perimeter

10 of the anterior portion 112 and areas of the instrument adjacent a guide structure 116. FIGS. 17B and 17C illustrate other embodiments of a customized surgical instrument for a tibia – each comprising a first region having one type of anatomy contacting portions, and a second region comprising another type of anatomy contacting portions. In particular,

15 FIG. 17B shows an embodiment in which paddles of the instrument include dimples 118 configured for substantially point contact with a patient's unique anatomy, and the anterior portion of the customized surgical instrument includes raised splines 120 configured to present spline / substantial line contacts with respect to the patient's anatomy. FIG. 17C

20 shows an embodiment in which the anterior portion of the patient-matched surgical instrument includes dimples 122 configured for providing a series of substantially point contacts with a patient's unique anatomy, and the paddles of the customized surgical instrument include raised splines 124 configured to present spline / substantially line contacts with

25 respect to a patient's anatomy.

FIGS. 26-35 illustrate various method steps associated with the creation of some of the patient-matched surgical instruments shown and described herein, according to some embodiments. While the method steps are shown and described in conjunction with a patient's distal femur, it should be noted that the various method steps may be applied

to any portion of a patient's anatomy, without limitation. In addition, the embodiments of the patient-matched surgical instruments discussed above for FIGS. 1-25, and other embodiments of patient-matched surgical instruments within the scope of the present disclosure, do not necessarily 5 have to be created using the embodiments of methods illustrated in FIGS. 26-35 and can be created in a variety of other ways. Moreover, the methods shown and described below may be used to create patient-matched surgical instruments other than those shown in FIGS. 1-25.

In general, the non-limiting embodiment illustrated in FIGS. 26-35 10 involves: (1) creating, obtaining or otherwise accessing a digital or other form of a three dimensional model of the patient's anatomy of interest; (2) applying one or more mesh or grid overlays onto portions of the bone model; (3) performing a sweep function that modifies the mesh or grid overlay(s) to create a geometric construct that defines areas where the 15 anatomy contacting portions are and areas where the anatomy contacting portions are not on the anatomy facing side of the patient specific instrument; (4) merging the modified overlay(s) with the bone model; and (5) applying an oversized blank of the instrument to the modified bone model to identify portions of the blank for removal (in some 20 embodiments, portions of a virtual blank for removal) such that patient-matched anatomy contacting portions are formed or otherwise present or created to define a patient-matched instrument. FIG. 48 schematically 25 illustrates one embodiment of a method involving accessing a three dimensional anatomic model (1002), modifying the anatomic model (1004), using the modified anatomic model to modify an instrument blank (1006), outputting the modified instrument blank to a manufacturing device (1008), and manufacturing the surgical instrument (1010).

FIG. 26 illustrates a method step of creating a first anatomic model 126 utilizing 3D imaging data obtained from a patient as conventionally 30 done, such as by, but not limited to, magnetic resonance imaging, x-ray

(including digital x-rays), ultrasound, or other techniques. In some embodiments, non-image based technologies may be used to obtain sufficient data about the 3D structure of the anatomy of interest to allow a patient-matched instrument in accordance with this disclosure to be created. In some embodiments, the first anatomic model is not a complete model of the particular portion of the anatomy of interest, but is only a model of certain key or desired anatomical points or portions of the anatomy of interest. The first anatomic model 126 may be electronically stored in a computer storage memory and imported into a computer assisted design (CAD) software package or other types of design software packages.

FIG. 27A illustrates a method step of creating and applying a first mesh structure 128 to a first portion of a first anatomic model 126. In some embodiments, the first mesh structure 128 (either by itself or in conjunction with other mesh structures) defines or at least roughly corresponds to at least some aspects of the number, position, and/or orientation of the anatomy contacting portions of the patient-matched instrument as well as the recessed portions interspersed among those anatomy contacting portions. Although the mesh structure 128 shown in FIG. 27A may be characterized as being defined by a square, uniform grid pattern, the mesh structure may have any geometric shape, size, porosity, or density, including a gradient density or porosity. The mesh structure may be evenly distributed, or may be random in nature, or otherwise have a predetermined pattern. Shown in FIG. 27A is one embodiment of an anterior mesh structure 128 for application to, or projection onto or "wrapping around" an anterior outer surface of the first model 126 shown in FIG. 26 (which here is a distal femur, the "anterior outer surface" being adjacent the trochlear groove, anterior cortex, and surrounding articular surfaces).

FIG. 27B illustrates a method step of creating and applying a second mesh structure 130 to a second portion of the first anatomic model 126 of FIG. 26. As previously mentioned, the mesh structure may have any geometric shape, size, porosity, or density, including a gradient density or 5 porosity. The mesh structure may be evenly distributed, or may be random in nature, or otherwise have a predetermined pattern. Shown in FIG. 27B is an embodiment of a distal mesh 130 to be applied to or otherwise projected onto or "wrapped around" one or more inferior surfaces of the first model 126 (here, adjacent the condyles and 10 intercondylar notch of the first bone model 126 shown in FIG. 26).

FIG. 27C illustrates a method step of creating a first mesh structure 128 and a second mesh structure 130, and applying both the first and second mesh structures to first and second portions of the first anatomic model 126 (e.g. of FIG. 26), respectively. The first and second mesh 15 structures 128 and 130 may be united as one homogenous mesh structure, or the mesh structures may be kept independent and distinct so that different sweep functions may be applied to each mesh structure to form different anatomy-contacting portion profiles on the different portions of the first anatomic model 126. As shown in FIG. 27C, the mesh structures 20 128 and 130 may overlap one another, although, in other embodiments, they may be designed not to overlap when applied to the first anatomic model 126.

FIG. 27D illustrates an embodiment of a method step of determining 25 an intersection of a surgical instrument blank 132 with respect to the first anatomic model 126. As shown in FIG. 27D, and will be described in more detail hereinafter, the surgical instrument blank 132 (which may be sized according to an individual patient or "universal" for all patient sizes) is virtually merged with the first anatomic model 126 which includes the first and/or second mesh structures 128 and 130 (or other numbers and 30 combinations of mesh structures in other embodiments). The intersection

between the blank 132 and the first anatomic model 126 defines an intersection perimeter 134 (i.e., the border of the interface between the virtually merged blank and first anatomic model). The intersection perimeter 134 is shown to be superimposed over the first and second mesh structures 128 and 130 in FIG. 27D. In some embodiments, the mesh structures is designed in such a manner (or the method is otherwise altered) to avoid a separate step of determining intersections between the blank and the first anatomic model 126.

FIGS. 28-31 illustrate a method step of performing one or more sweep functions to the mesh structure(s) to create an expanded mesh structure 136. The one or more sweep functions may be executed before or after the mesh structures 128 and 130 are applied to the first anatomic model 126. In other embodiments, performing a sweep function is unnecessary and the geometry of the mesh structure may already include geometries other than simple lines or grids such that “expanding” on a line grid is not necessary. In the embodiment illustrated in FIGS. 28-31, after the one or more sweep functions are executed, the resulting volume of the expanded mesh structure 136 and the first anatomic model 126 are united to create a modified first anatomic model 138. Shown in FIG. 28 is a portion of a modified first anatomic model 138 incorporating the first anterior mesh structure 128 shown in FIG. 27A and the second distal mesh structure 130 shown in FIG. 27B, after the mesh structures have been expanded by one or more sweep functions in CAD software. The resulting volumes of the first and second expanded mesh structures are shown to be united with the volume of the first anatomic model 126 shown in FIG. 26. In the embodiment shown in FIG. 28, the indentations left in the modified first anatomic model 138 after the expanded mesh structure has been united with the anatomic model 126 may correspond (at least partially) to the locations, sizes, geometries and other aspects of the anatomy contacting portions of the patient-matched surgical instrument.

In some embodiments, the sweep function may be applied to a first mesh structure that is united with the bone model prior to applying the same or a different sweep function to a second mesh structure for uniting with the bone model. In other embodiments, the first and second mesh structures may both have the same or different sweep functions applied and then both be united with the bone model at the same time. It will be apparent to one of skill in the art that other combinations and different orderings of these method steps are possible and within the scope of possible embodiments discussed herein.

It should be noted that while the sweep function applied to the first and second mesh structures 128 and 130 shown in FIG. 28 include a flattened rectangular cross-section, any cross-sectional geometry may be applied to mesh structures described herein. For example, a triangular, polygonal, circular, oval, irregular, or other cross-sectional shape or profile may be applied to the mesh structures to obtain a different modified first anatomic model. Moreover, a different sweep function may be applied to each line, area, region, strut or segment of a mesh structure to obtain an irregular or asymmetric modified first anatomic model. Therefore, the drawings merely illustrate one particular embodiment of many possible permutations of a modified first bone model.

FIG. 29 illustrates the second (distal) mesh structure 130 of FIG. 27B superimposed on the modified first anatomic model 138 of FIG. 28. FIG. 30 illustrates the first (anterior) mesh structure 128 of FIG. 27A superimposed on the modified first anatomic model of FIG. 28. FIG. 31 further depicts the modified first anatomic model 138 of FIG. 28 according to some embodiments.

In some embodiments, the steps of applying one or more mesh structures and/or performing one or more sweep functions are unnecessary and a “modified” anatomic model may be created directly as a result of imaging of the patient’s anatomy. For instance, in some

embodiments, the software or other mechanisms obtaining, controlling and/or processing data related to the patient's anatomy may be programmed or operate such that only certain, limited portions of the anatomy of interest are imaged, such portions corresponding to areas
5 where anatomy contacting portions of the patient-matched instrument are located.

FIGS. 32A and 33A illustrate a surgical instrument blank 140 according to some embodiments. In the particular instance shown, the blank 140 is configured for use with a distal femur. The blank is generally
10 oversized in volume so that it may be merged with a modified first anatomic model, such as the modified first anatomic model 138 shown in FIGS. 26-31. Subsequently, the volume of the modified first anatomic model 138 may be subtracted from the volume of the blank 140 to produce a patient-matched surgical instrument according to
15 embodiments of the invention. In other embodiments, however, such as but not limited to the alternative embodiment discussed in the previous paragraph, the blank may be generally undersized such that material (or "virtual" material) is not taken away from it to create a patient-matched instrument but that material is added to it to define patient specific
20 anatomy contacting portions on the anatomy facing face or faces of the instrument.

FIG. 32A shows a superior view of a patient-matched surgical instrument blank 140, and FIG. 33A shows a posterior isometric view of the blank 140. In both figures, a virtual intersection boundary 142 is superimposed, which represents an outer boundary of the volumetric intersection between the blank 140 and the modified first anatomic model 138 of FIG. 28.
25

FIGS. 32B and 33B illustrate the surgical instrument blank 140 of FIG. 32A, but instead of a virtual intersection boundary being superimposed
30 thereon, a first mesh structure 128 is shown to be superimposed in relation

to the blank 140 as it is applied to a first portion of the first anatomic model 126. In the particular instance shown, the first mesh structure 128 is an anterior mesh structure (as shown in FIG. 27A) that is applied to a portion of the first anatomic model 126 representing an anterior portion of a distal femur.

FIGS. 32C and 33C illustrate the surgical instrument blank 140 of FIG. 32A with a second mesh structure 130 superimposed in relation to the blank 140 as it is applied to a second portion of a first anatomic model 126. In the particular instance shown, the second mesh structure 130 is a distal mesh structure (as shown in FIG. 27B) that is applied to a portion of the first anatomic model 126 representing distal condylar and intercondylar portions of a distal femur.

FIGS. 34 and 35 illustrate a method step of merging a surgical instrument blank 140 with a modified first anatomic model 138, and then subtracting the volume of said modified first anatomic model 138 from a volume of the surgical instrument blank 140. During the subtraction function in a CAD software package, the surgical instrument blank 140 is essentially transformed into a patient-matched surgical instrument having one or more anatomy-contacting portions as shown and described for instance in FIGS. 1-25.

FIGS. 36-38 show an alternative embodiment of a modified first anatomic model 144, similar to that which is used to create a patient-matched surgical instrument 10 having the anatomy contacting portions 28 shown in FIGS. 1-8.

FIG. 39 illustrates a method step of merging a surgical instrument blank 146 with the modified first anatomic model 144 shown in FIGS. 36-38, before subtracting the volume of said modified first anatomic model 144 from the surgical instrument blank 146. After the subtraction function is executed within the CAD software package, the blank 146 is transformed

into a patient-matched surgical instrument similar to the one shown in FIGS. 1-8.

FIG. 40 illustrates a method step of simultaneously merging first and second surgical instrument blanks 148 and 150 with modified first and 5 second anatomic models 152 and 154, respectively. In the particular embodiment shown, the first modified anatomic model 152 is a distal femur model integrated with a plurality of expanded mesh structures of closely interwoven cylindrical struts or tubes, the negatives of which define the geometries and locations of patient specific pads on the surgical 10 instrument. The second modified anatomic model 154 is a proximal tibia model integrated with a plurality of expanded mesh structures of closely interwoven cylindrical struts.

FIG. 41 illustrates modified first and second anatomic models 152 and 154 according to the embodiment shown in FIG. 40. One or more 15 sweep functions are executed for a plurality of mesh structures which have been applied to, projected onto, or “wrapped” over first and second anatomic models. In the particular embodiment shown, a small-radius cylinder is chosen as the cross-sectional profile to be applied to each strut within the mesh structures, a distal femur has been chosen as 20 the first anatomic model, and a proximal tibia has been chosen as the second anatomic model. As shown in the figure, the sweep function need not be applied to an entire mesh structure and/or overlapping sections of mesh structures. Rather, it may be desirable in some instances to perform sweep functions in only select areas of the mesh structures. In 25 some cases, such as for the embodiment shown in FIG. 17A, it may be desirable to increase the size or cross-sectional geometries of portions of the mesh structures (e.g., central areas of the mesh structures) in order to stagger, displace, or effectively remove some anatomy contacting portions 108 from desired regions of the patient-matched surgical 30 instrument.

FIG. 42A illustrates a second mesh structure 156 (in bold) used to create the modified first anatomic model 152 shown in FIGS. 40 and 41. In the particular embodiment shown, the second mesh structure 156 is a distal femoral mesh structure which is applied to a distal femoral anatomic model proximate condylar and intercondylar regions.

FIG. 42B illustrates a first mesh structure 158 (in bold) used to create the modified first anatomic model 152 shown in FIGS. 40 and 41. In the particular embodiment shown, the first mesh structure 158 is an anterior femoral mesh structure which is applied to an anterior portion of a distal femoral anatomic model adjacent the anterior femoral cortex and trochlear groove.

FIG. 43A illustrates a second mesh structure 160 (in bold) used to create the modified second anatomic model 154 shown in FIGS. 40 and 41. In the particular embodiment shown, the second mesh structure 160 is a proximal tibial mesh structure which is applied to a proximal tibial anatomic model proximate the medial and lateral sulcus portions of the tibial plateau.

FIG. 43B illustrates a first mesh structure 162 (in bold) used to create the modified first anatomic model 154 shown in FIGS. 40 and 41. In the particular embodiment shown, the first mesh structure 162 is an anterior tibial mesh structure that is applied to an anterior cortex portion of a proximal tibial model adjacent the tibial tubercle.

FIGS. 44 and 45 further illustrate a method step of merging a second surgical instrument blank 150 with a modified second anatomic model 154, and then subtracting a volume of said modified second anatomic model 154 from the volume of the second surgical instrument blank 150 to create a model of a patient-matched surgical instrument. In the particular embodiment shown, the patient-matched surgical instrument is a custom tibial cutting jig similar to the one shown in FIGS. 15-16. FIGS. 44 and 45 are derived from FIG. 40, showing only the modified second

anatomic model 154 with the second surgical instrument blank 150 for clarity.

In some embodiments, one or more of the above described steps may be performed using computer equipment, whether stand alone or networked. Such computer equipment, in some embodiments, may include memory, a processor, and input / output features, which may facilitate performing at least some of the above identified steps, including creating one or more bone models, applying a mesh or meshes to such bone models, performing a sweep function on the mesh as applied to the bone model, merging a blank to the modified bone model, performing a subtraction function to define a patient specific instrument, and other functions. In some embodiments, the computer equipment may include or may be associated with a database in which is stored data about one or more mesh constructs, blanks, or other data. Some embodiments may include communication functionality to allow surgeons to remotely upload information about a patients' anatomy, and/or to participate or be able to provide feedback on a patient specific instrument.

While the instruments and methods shown and described are generally shown as configured for use in knee arthroplasty procedures, it is anticipated that the various anatomy-contacting portions and patterns thereof described herein may be applied to surgical instruments configured for use in other procedures. For instance, features of the described instruments and manufacturing methods thereof may be utilized with surgical instruments configured for contacting portions of a femoral head, acetabulum, glenoid, humerus, radius, ulna, fibula, tibia, proximal femur, foot, ankle, wrist, extremity, or other bony or cartilaginous regions.

As various modifications could be made to the exemplary embodiments, as described above with reference to the corresponding illustrations, without departing from the scope of the inventions described

2011265254 21 Apr 2016

herein, it is intended that all matter contained in the foregoing description and shown in the accompanying drawings shall be interpreted as illustrative rather than limiting. Thus, the breadth and scope of the invention should not be limited by any of the above-described exemplary embodiments.

5 While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not by way of limitation. It will be apparent to a person skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus, the present invention should not be limited by any of the above
10 described exemplary embodiments.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

15 The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

20

2011265254 21 Apr 2016

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:

- a) an anatomy facing side;
- 5 b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;
- c) wherein the anatomy-facing side includes a plurality of discrete, physically 10 separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- d) wherein the plurality of anatomy contacting portions are at least one of:
 - i) non-uniform in distribution;
 - 15 ii) non-uniform in shape; or
 - iii) non-uniform in surface area.
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in 20 the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a femoral cutting guide, wherein the anatomy-facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and wherein the plurality of anatomy-contacting portions comprise at least one anatomy- 25 contacting portion proximate the patella-femoral groove portion, at least one anatomy-contacting portion proximate the intercondylar notch portion, at least one anatomy-contacting portion proximate the medial condyle portion, and at least one anatomy-contacting portion proximate the lateral condyle portion.

2. The patient-matched surgical instrument of claim 1, further comprising a pliant

material located in at least one of the plurality of recessed portions.

3. The patient-matched surgical instrument of claim 1, wherein the plurality of anatomy-contacting portions defines a first total area of the anatomy-facing side and wherein the at least one recessed portion defines a second total area of the anatomy-facing side; and

wherein the second total area is greater than the first total area.

4. The patient-matched surgical instrument of claim 1, wherein a total area of the anatomy-contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is greater than a total area of the anatomy-contacting portions proximate the medial condyle portion and the lateral condyle portion.

5. The patient-matched surgical instrument of claim 1, wherein a total area of the anatomy-contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is less than a total area of the anatomy-contacting portions proximate the medial condyle portion and the lateral condyle portion.

15 6. The patient-matched surgical instrument of claim 1, wherein a density of anatomy-contacting portions proximate the patella-femoral groove portion and the intercondylar notch portion is greater than a density of anatomy-contacting portions proximate the medial condyle portion and the lateral condyle portion.

7. The patient-matched surgical instrument of claim 1, wherein the plurality of 20 anatomy-contacting portions comprise at least one anatomy-contacting portion defining an area contact.

8. The patient-matched surgical instrument of claim 7, wherein the plurality of anatomy-contacting portions further comprise at least one anatomy-contacting portion defining a substantially linear contact.

25 9. The patient-matched surgical instrument of claim 7, wherein the plurality of anatomy-contacting portions further comprise at least one anatomy-contacting portion

21 Apr 2016
2011265254

defining a substantially point contact.

10. The patient-matched surgical instrument of claim 1, wherein at least one of the plurality of anatomy-contacting portions extends along a periphery of the anatomy-facing side.

5 11. The patient-matched surgical instrument of claim 1, further comprising a guide extending through the patient-matched surgical instrument.

12. The patient-matched surgical instrument of claim 11, wherein the guide is a through slot including at least one planar surface.

13. A patient-matched surgical instrument matched to the anatomy of a particular 10 patient, comprising:

a) an anatomy-facing side;

b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;

c) wherein the anatomy-facing side includes a plurality of discrete, physically separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;

20 d) wherein the plurality of anatomy-contacting portions define a first total area of the anatomy-facing side and wherein the plurality of recessed portions define a second total area of the anatomy facing side, wherein the second total area is greater than the first total area; and

25 e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a femoral cutting guide;

2011265254
21 Apr 2016

wherein the anatomy-facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and

wherein the plurality of anatomy-contacting portions comprise at least one anatomy-contacting portion proximate the patella-femoral groove portion, at least one anatomy-

5 contacting portion proximate the intercondylar notch portion, at least one anatomy-contacting portion proximate the medical condyle portion, and at least one anatomy-contacting portion proximate the lateral condyle portion.

14. The patient-matched surgical instrument of claim 13, wherein a total area of the anatomy-contacting portions proximate the patella femoral groove portion and the

10 intercondylar notch portion is greater than a total area of the anatomy-contacting portions proximate the medial condyle portion and the lateral condyle portion.

15. A patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:

a) an anatomy-facing side;

15 b) wherein the anatomy facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;

c) wherein the anatomy-facing side includes a plurality of discrete, physically 20 separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions; and

d) wherein the anatomy-facing side of the patient-matched surgical instrument 25 includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a femoral cutting guide;

wherein the anatomy-facing side includes a patella-femoral groove portion, an intercondylar notch portion, a medial condyle portion, and a lateral condyle portion; and

wherein the plurality of anatomy-contacting portions comprise at least one anatomy-contacting portion proximate the patella-femoral groove portion, at least one anatomy-contacting portion proximate the intercondylar notch portion, at least one anatomy-contacting portion proximate the medial condyle portion, and at least one anatomy-contacting portion proximate the lateral condyle portion.

16. The patient-matched surgical instrument of claim 1, wherein the anatomy-contacting portions have a patient-specific shape derived from the anatomy of the particular patient and the anatomy-contacting portions conform to the anatomy of the particular patient.

17. The patient-matched surgical instrument of claim 16, wherein the patient-specific shape of the anatomy-contacting portions is derived from pre-operative imaging data for the particular patient.

18. The patient-matched surgical instrument of claim 1, wherein the instrument defines a notch at an outer edge and the anatomy-facing side comprises portions that extend along opposite sides of the notch, wherein each of the portions that extends along the opposite sides of the notch comprises one or more of the anatomy-contacting portions.

19. The patient-matched surgical instrument of claim 1, wherein the anatomy-facing side comprises a concave region, and wherein at least some of the anatomy-contacting portions are located on the concave region.

20. The patient-matched surgical instrument of claim 1, wherein the anatomy-facing side comprise two concave regions each configured to receive a femoral condyle, and wherein at least some of the anatomy-contacting portions are located on each of the concave regions.

21. A patient-matched surgical instrument matched to the anatomy of a particular patient, comprising;

- a) an anatomy-facing side;
- 25 b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions;
- c) wherein the anatomy-facing side includes a plurality of discrete, physically

- separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- d) wherein the plurality of anatomy-contacting portions are at least one of:
- 5 i) non-uniform in distribution;
ii) non-uniform in shape; or
iii) non-uniform in surface area;
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour,
10 wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour;
and
f) wherein the instrument further comprises a pliant material located in at least one of the plurality of recessed portions.
- 15 22. The patient-matched surgical instrument of claim 1, wherein the anatomy-contacting portions have contour that is a substantial negative of corresponding portions of the anatomy of the patient.
23. The patient-matched surgical instrument of claim 15, wherein the anatomy-contacting portions have contour that is a substantial negative of corresponding portions of
20 the anatomy of the patient.
24. A patient-matched surgical instrument matched to the anatomy of a particular patient, comprising:
- 25 a) an anatomy-facing side;
b) wherein the anatomy-facing side includes a plurality of discrete, physically separate anatomy-contacting portions shaped such that engagement with the anatomy of the particular patient orients the instrument in a predetermined orientation;
c) wherein the anatomy-facing side includes a plurality of discrete, physically

- separate recessed portions, wherein the plurality of recessed portions are recessed relative to parts of the anatomy-contacting portions proximate the plurality of recessed portions;
- d) wherein the plurality of anatomy-contacting portions are at least one of:
- 5 i) non-uniform in distribution
 - ii) non-uniform in shape; or
 - iii) non-uniform in surface area; and
- e) wherein the anatomy-facing side of the patient-matched surgical instrument includes areas of relatively greater contour and areas of relatively lower contour, wherein a concentration of the plurality of anatomy-contacting portions is lower in the areas of relatively greater contour than in the areas of relatively lower contour; wherein the patient-matched surgical instrument is a tibial cutting guide comprising:
10 a medial paddle including at least one of the anatomy-contacting portions; and
a lateral paddle including at least one of the anatomy-contacting portions.
- 15 25. The patient-matched surgical instrument of claim 24, further comprising a guide portion that is partially cantilevered off of other portions of the patient-matched surgical instrument, wherein the guide portion has a surface configured to guide a tibial resection, and wherein the guide portion is configured to not contact the anatomy of the patient when engagement of the anatomy-contacting portions with the anatomy of the particular patient
20 orients the instrument in the predetermined orientation.

1/45

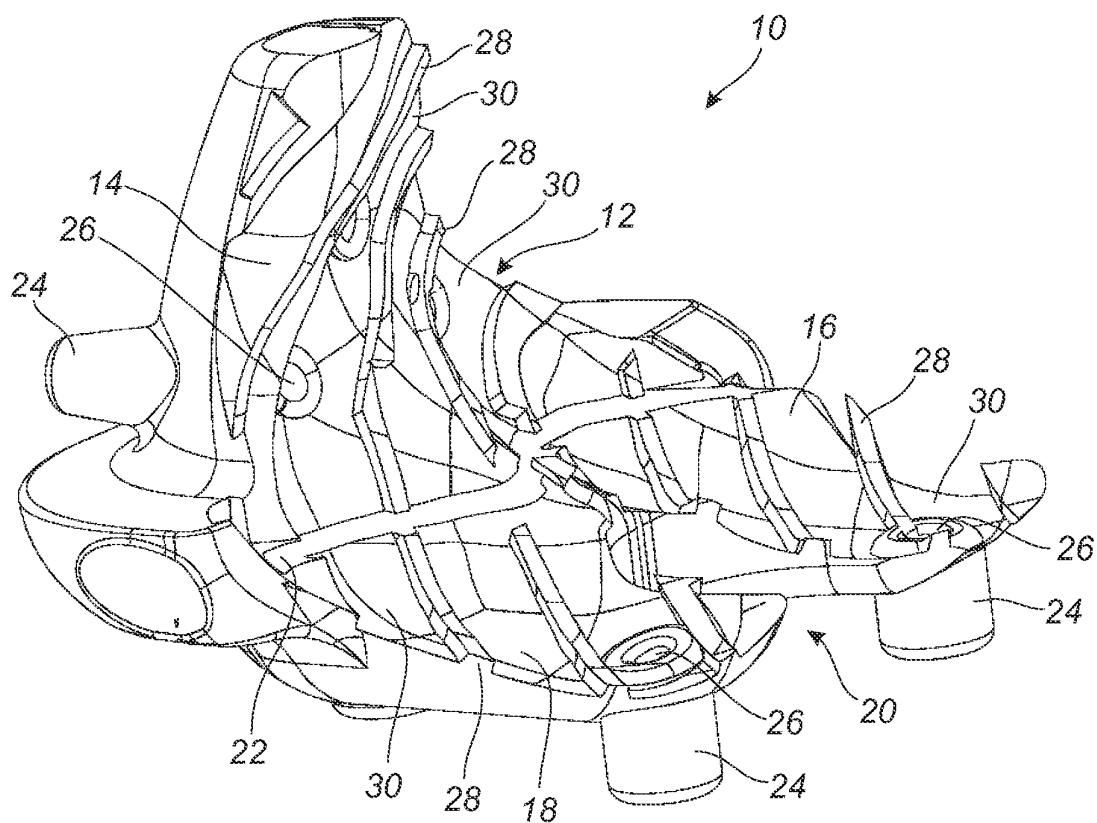


FIG. 1

2/45

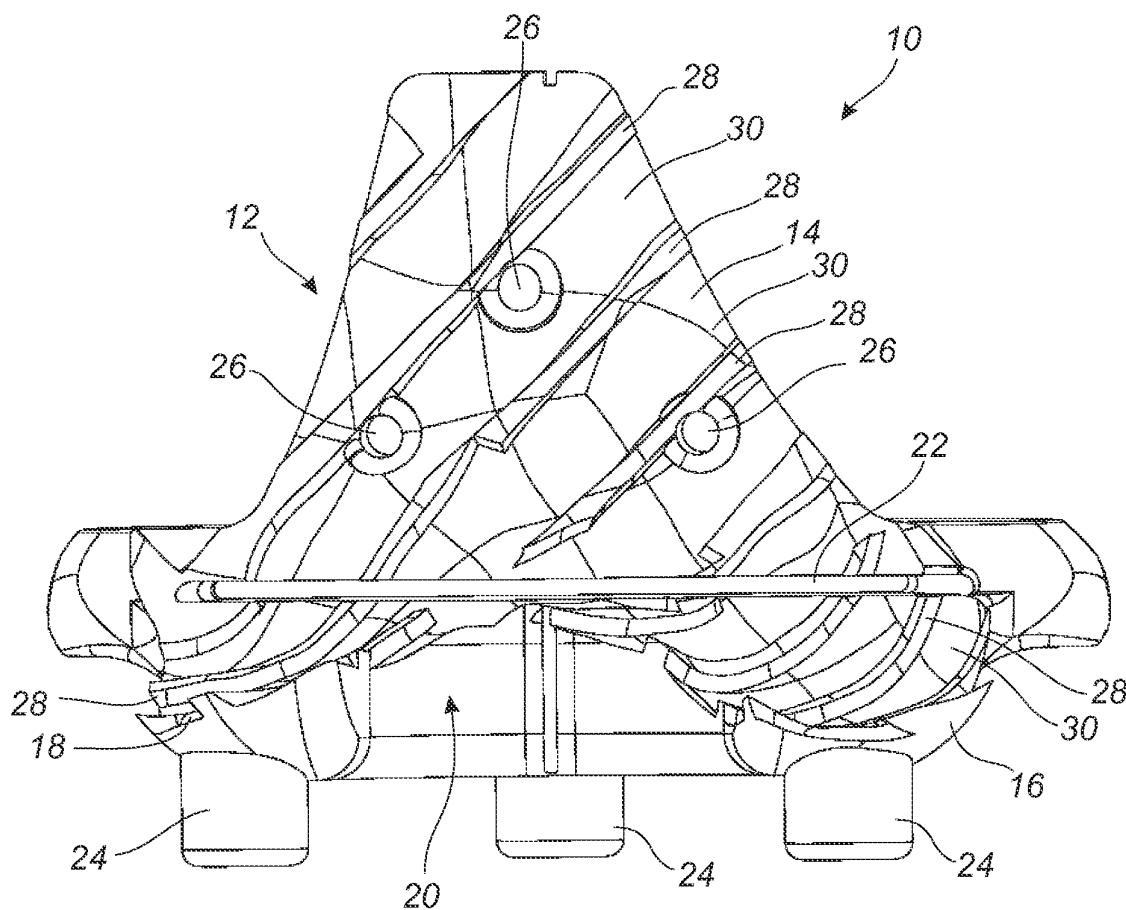


FIG. 2

3/45

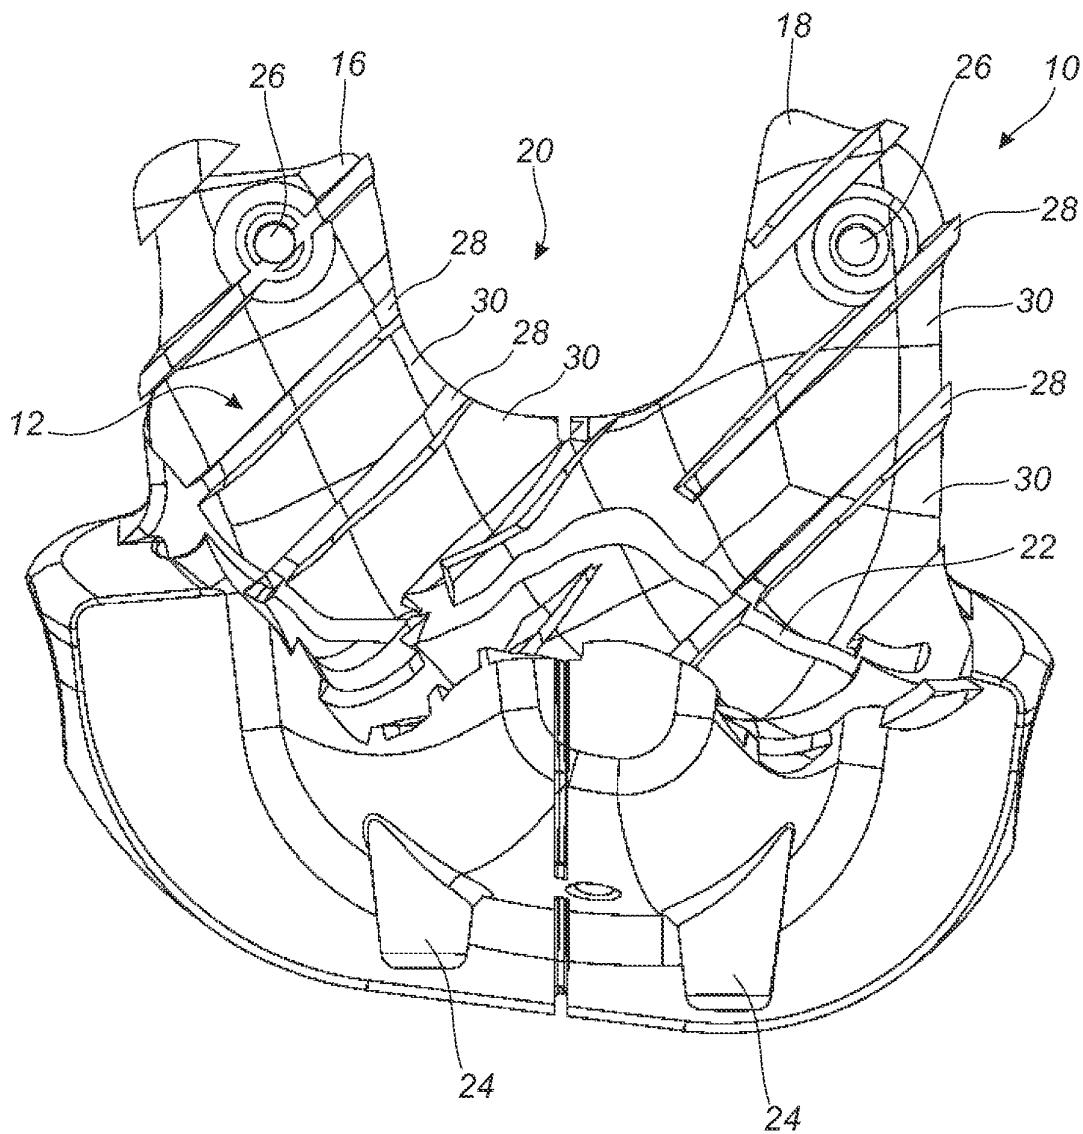


FIG. 3

4/45

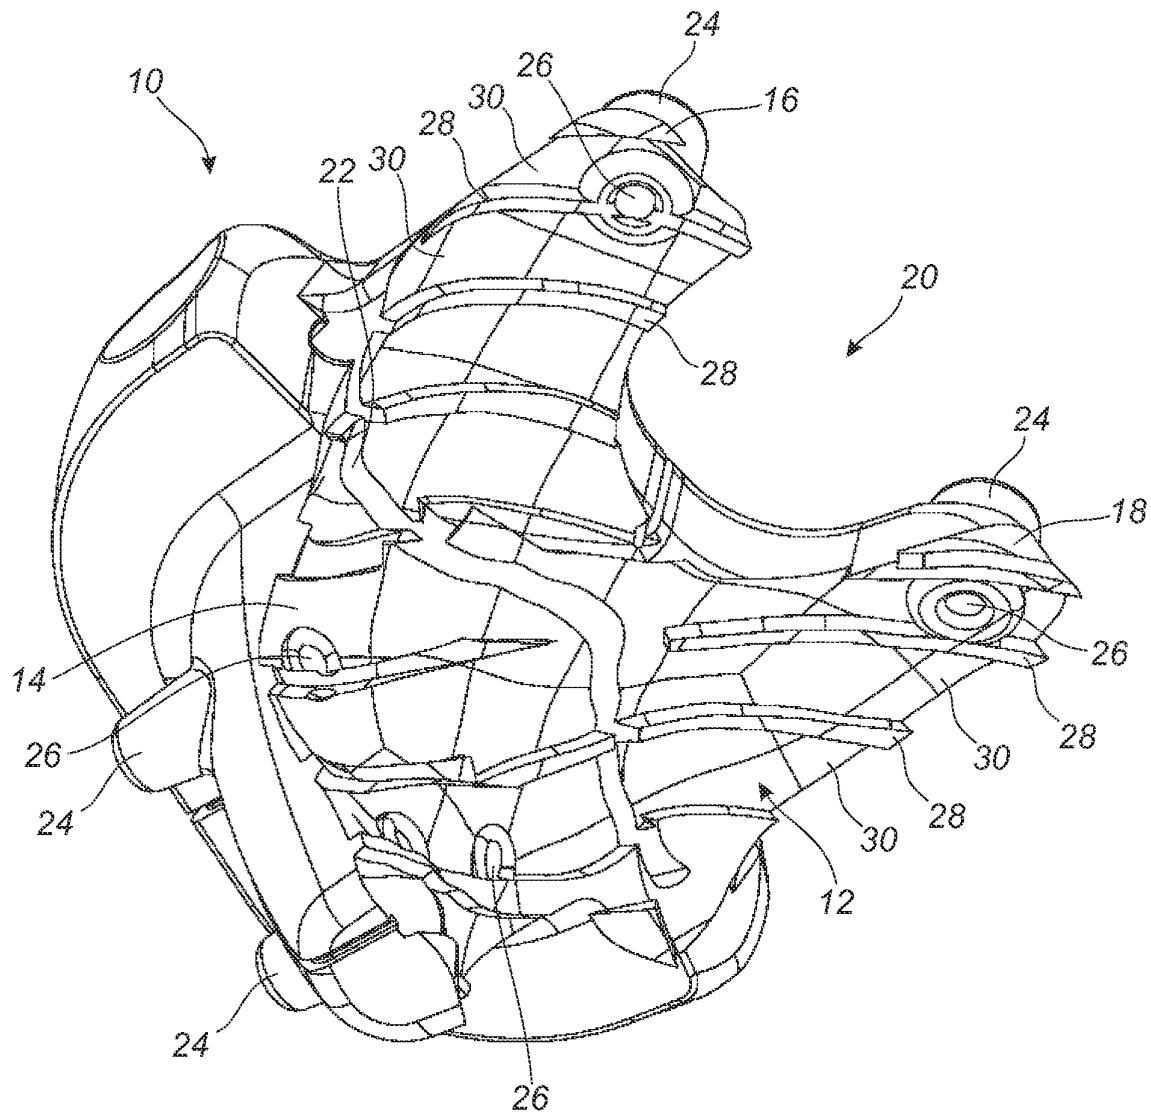


FIG. 4

5/45

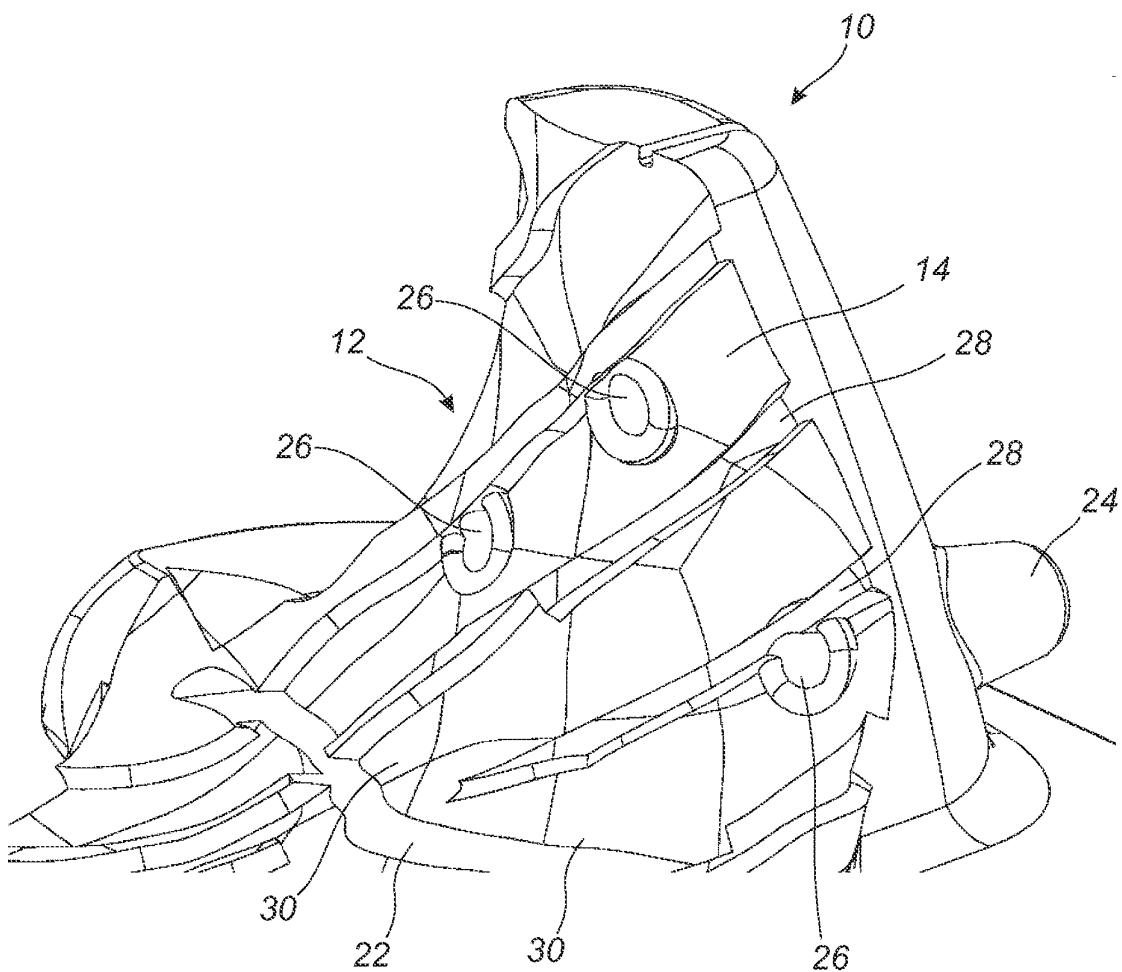


FIG. 5

6/45

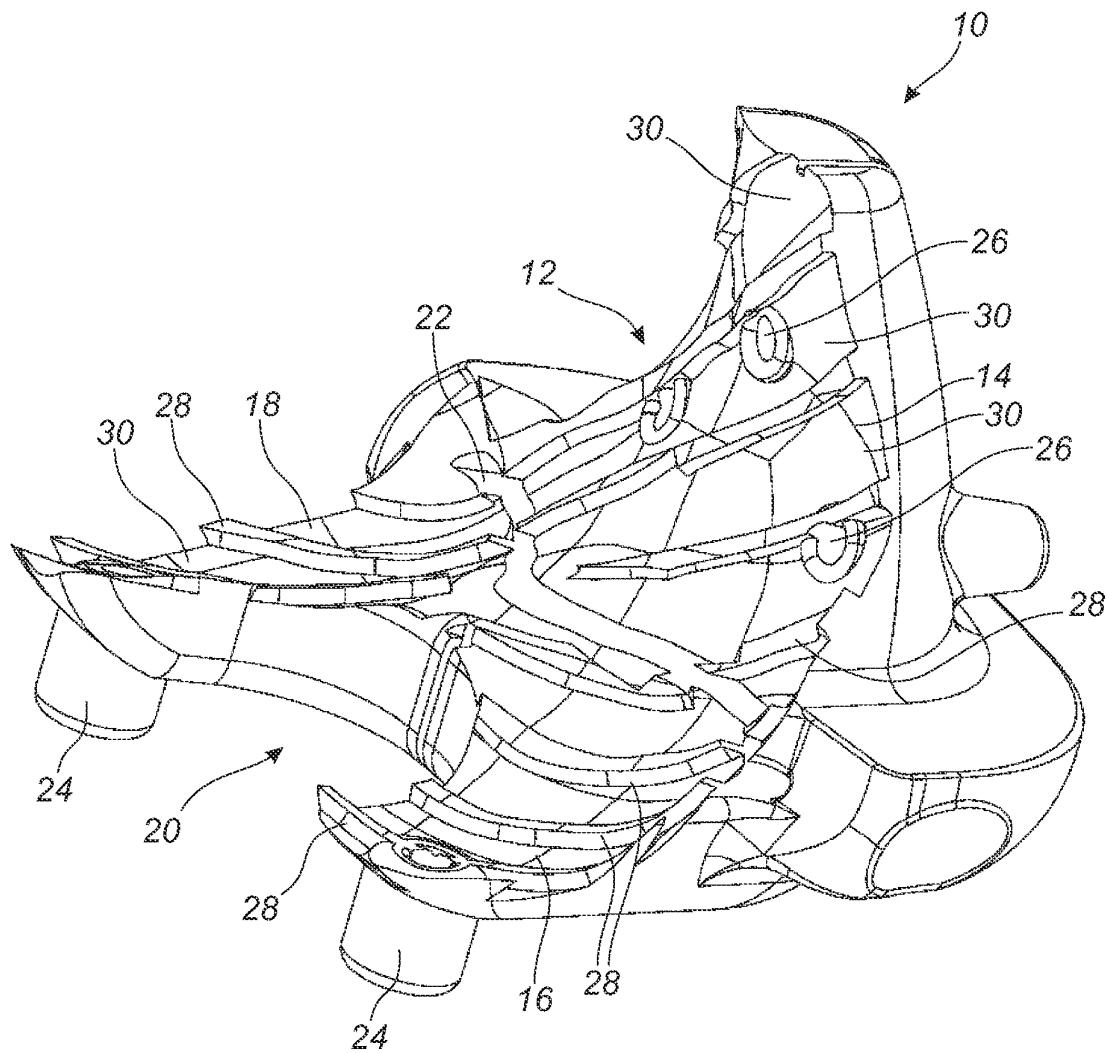


FIG. 6

7/45

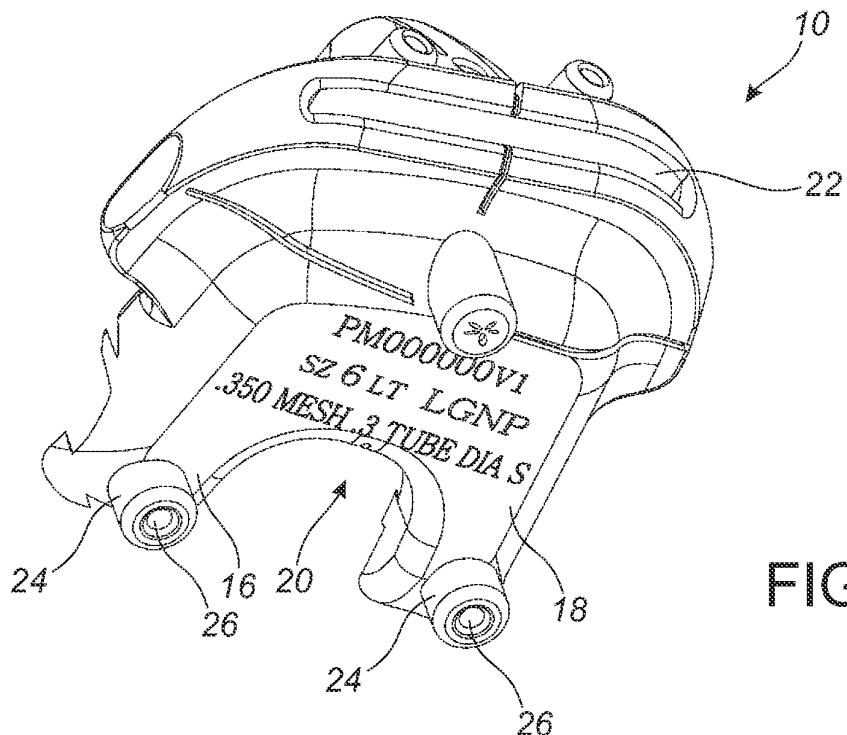


FIG. 7

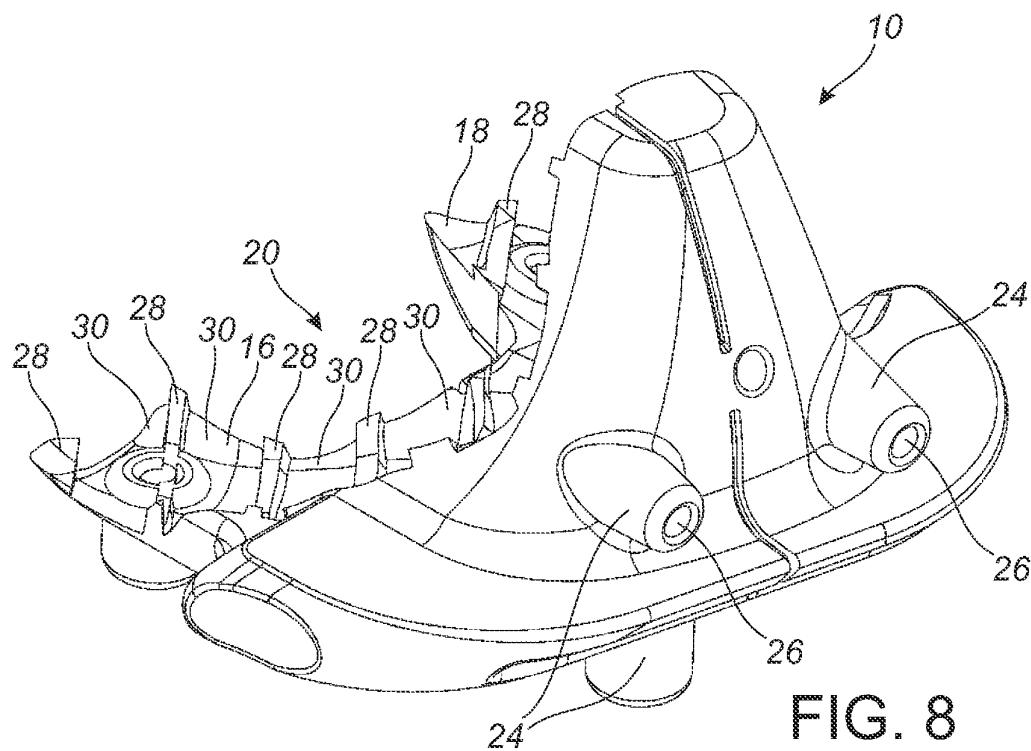


FIG. 8

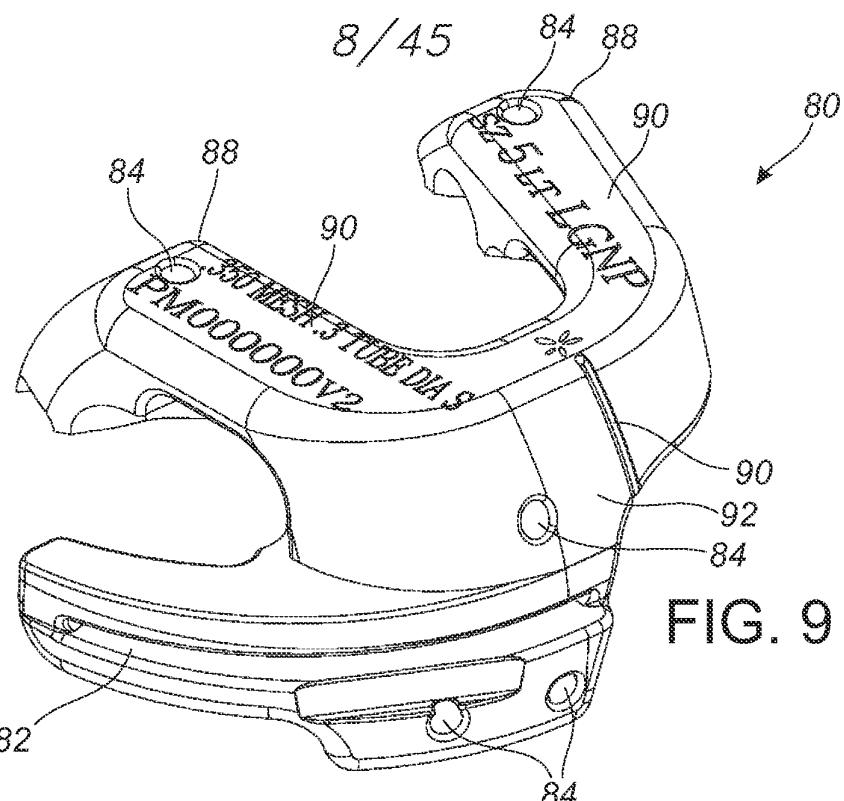


FIG. 9

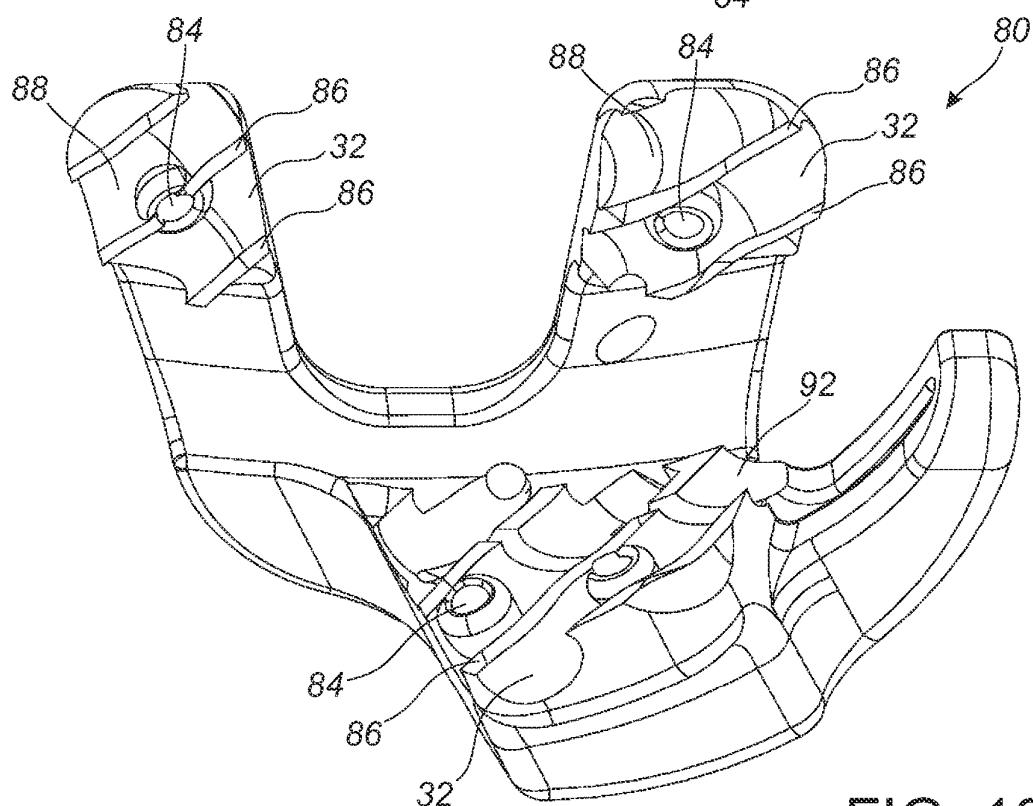


FIG. 10

9/45

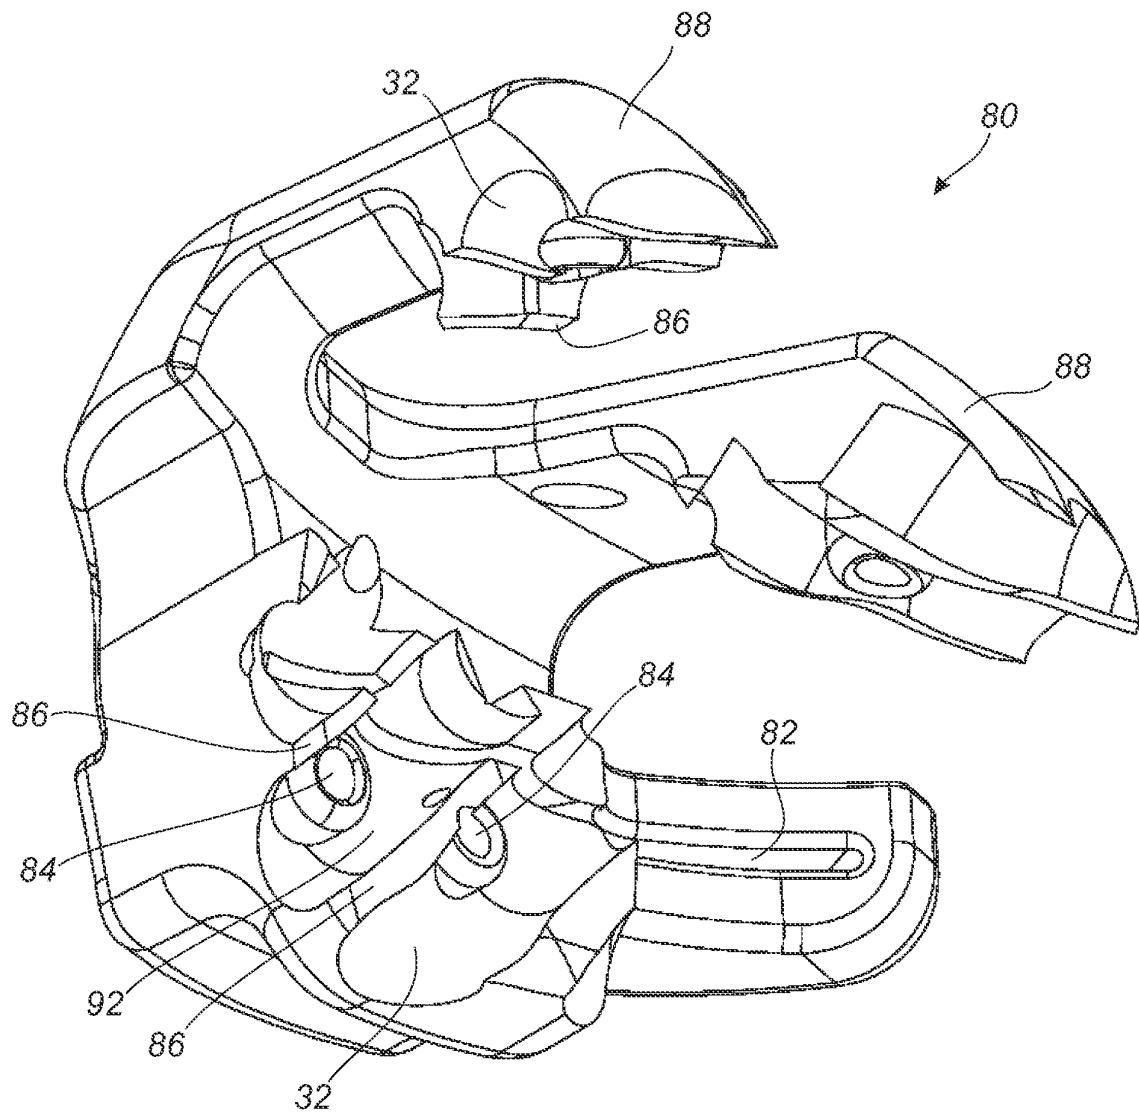


FIG. 11

10/45

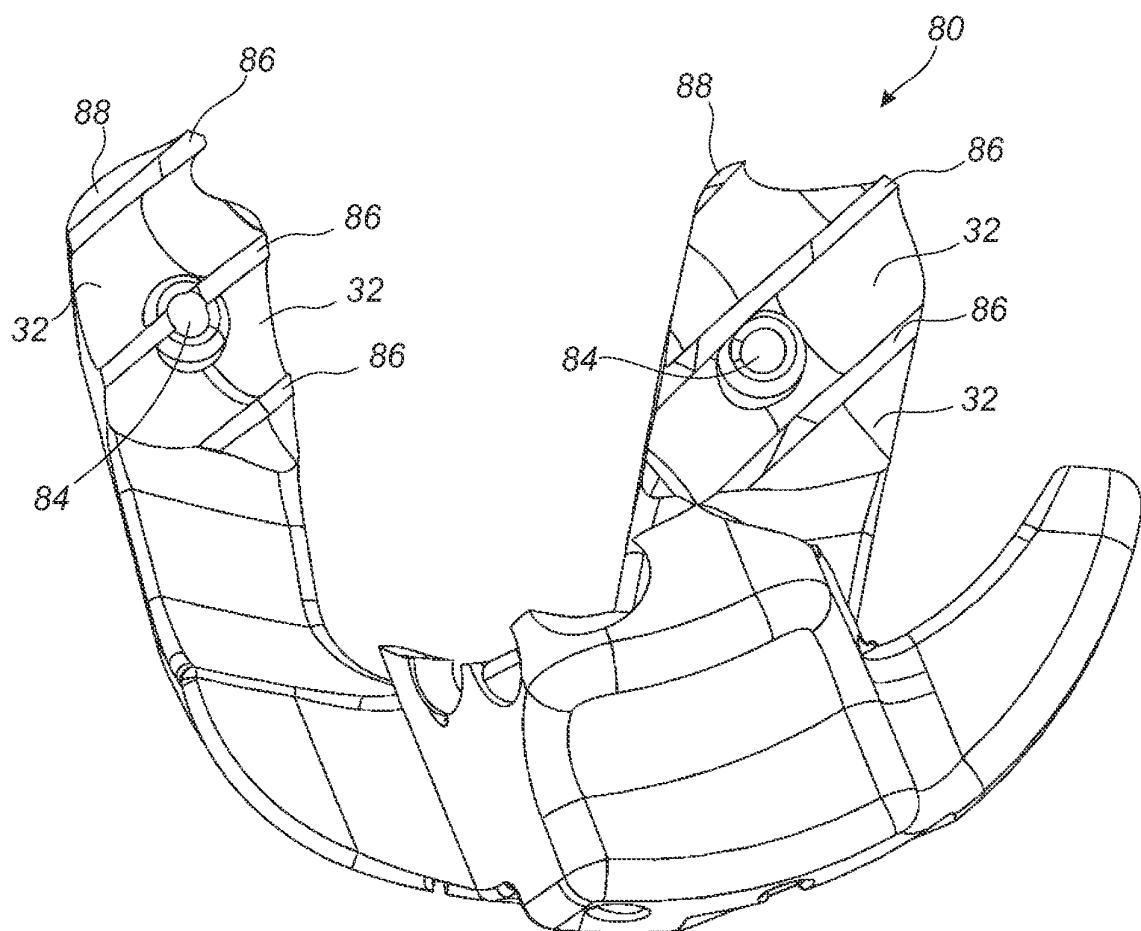


FIG. 12

11/45

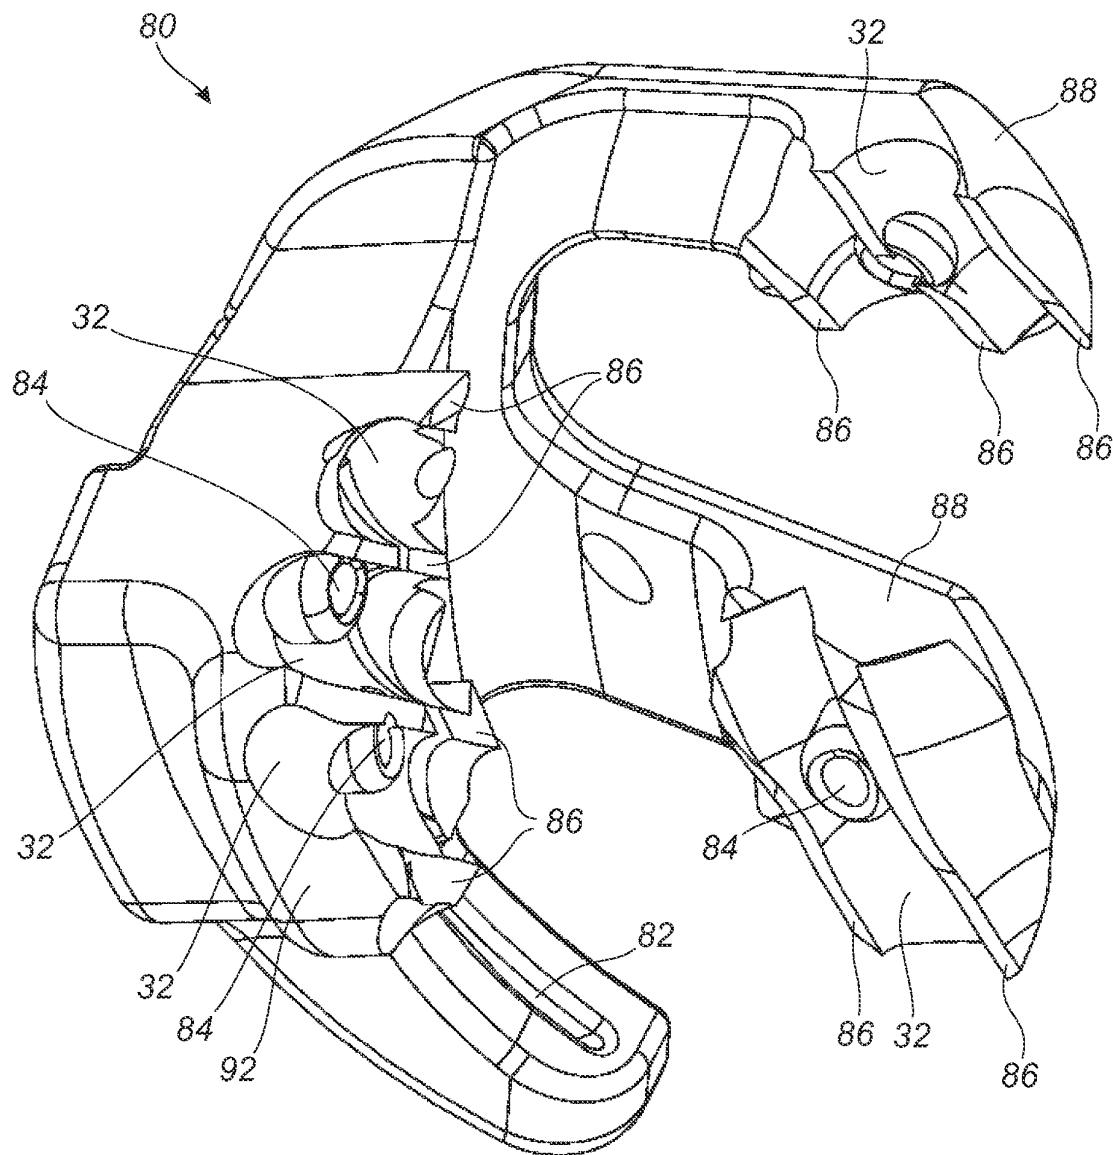


FIG. 13

12/45

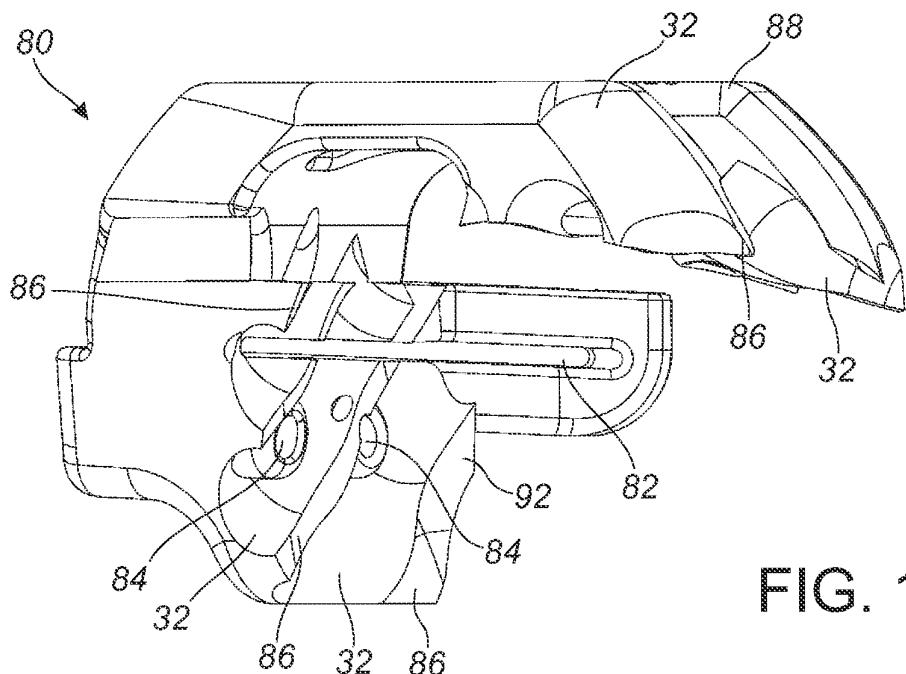


FIG. 14

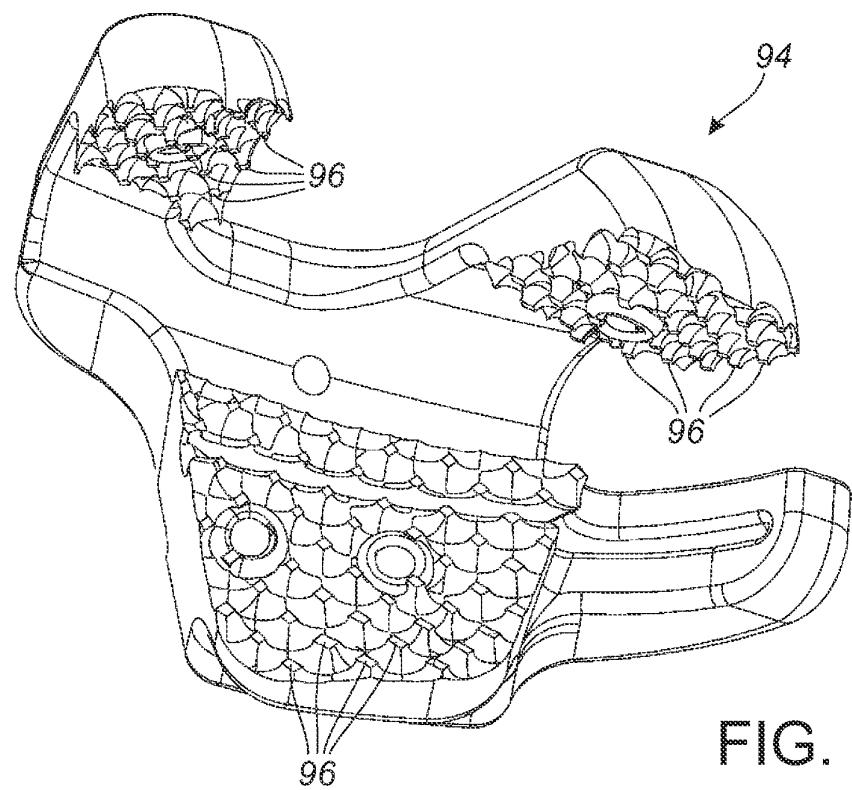


FIG. 15

13/45

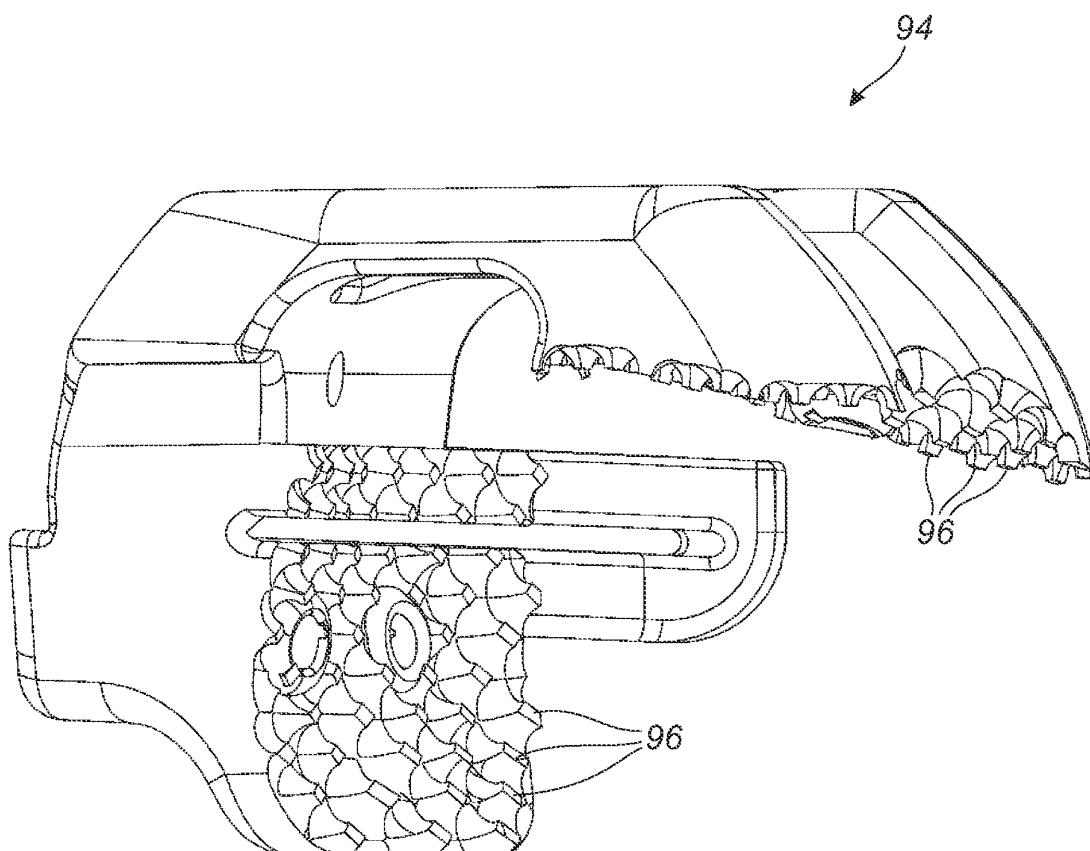


FIG. 16

14/45

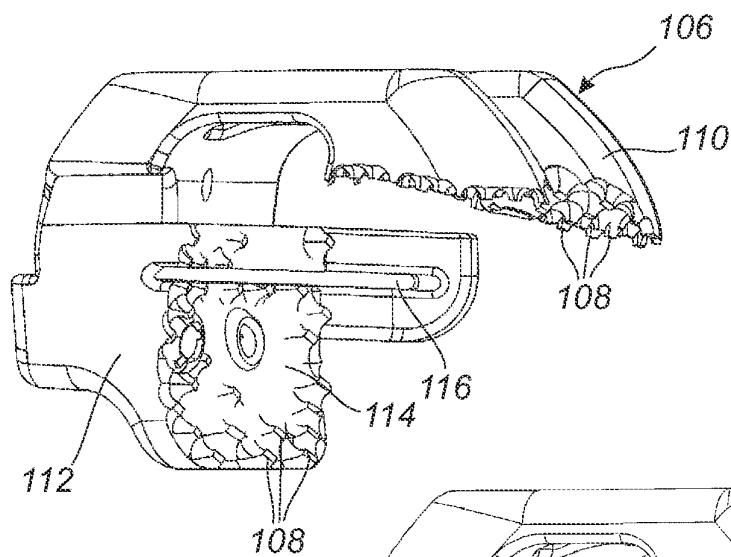


FIG. 17A

FIG. 17B

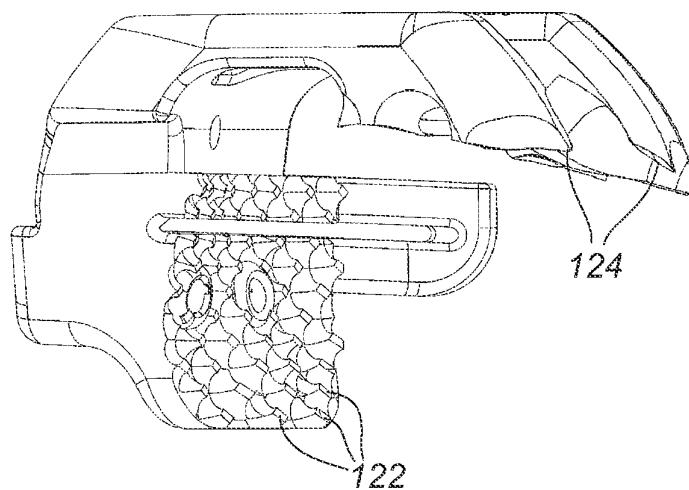
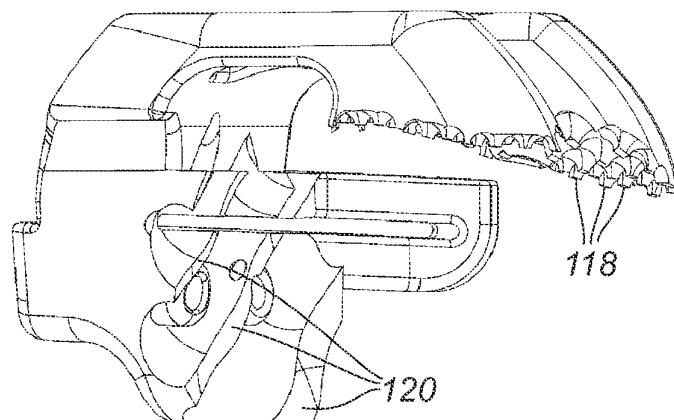


FIG. 17C

15/45

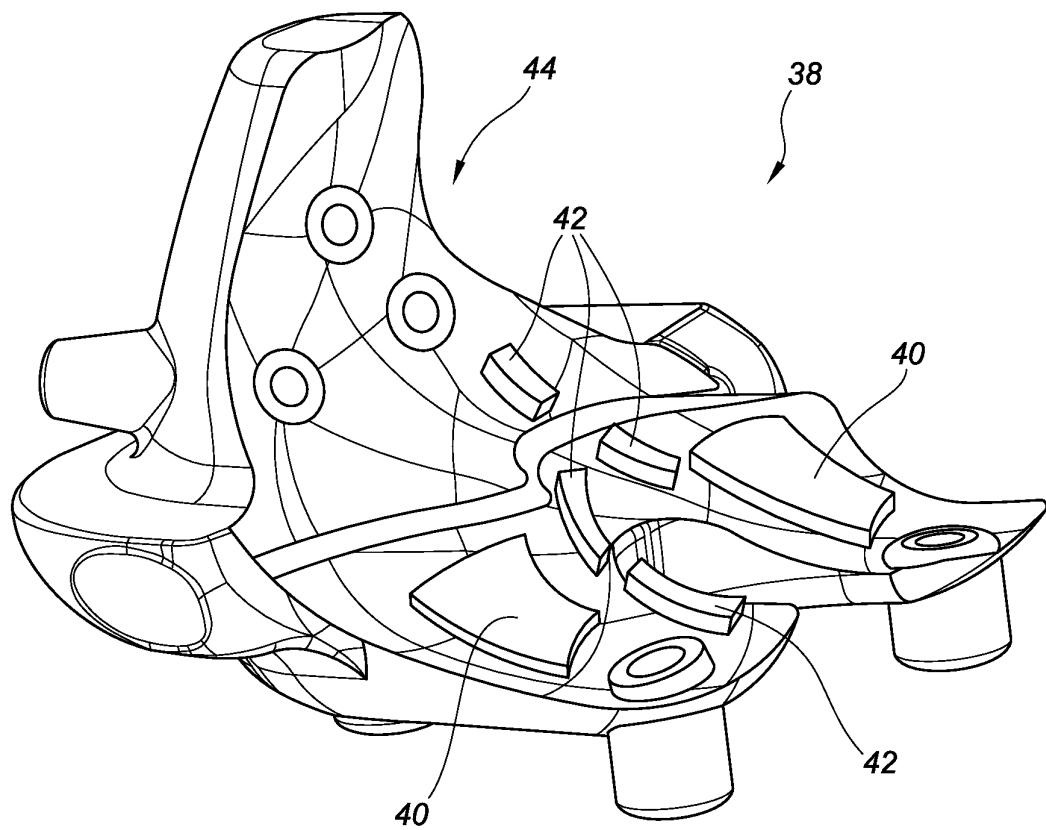


FIG. 18A

16/45

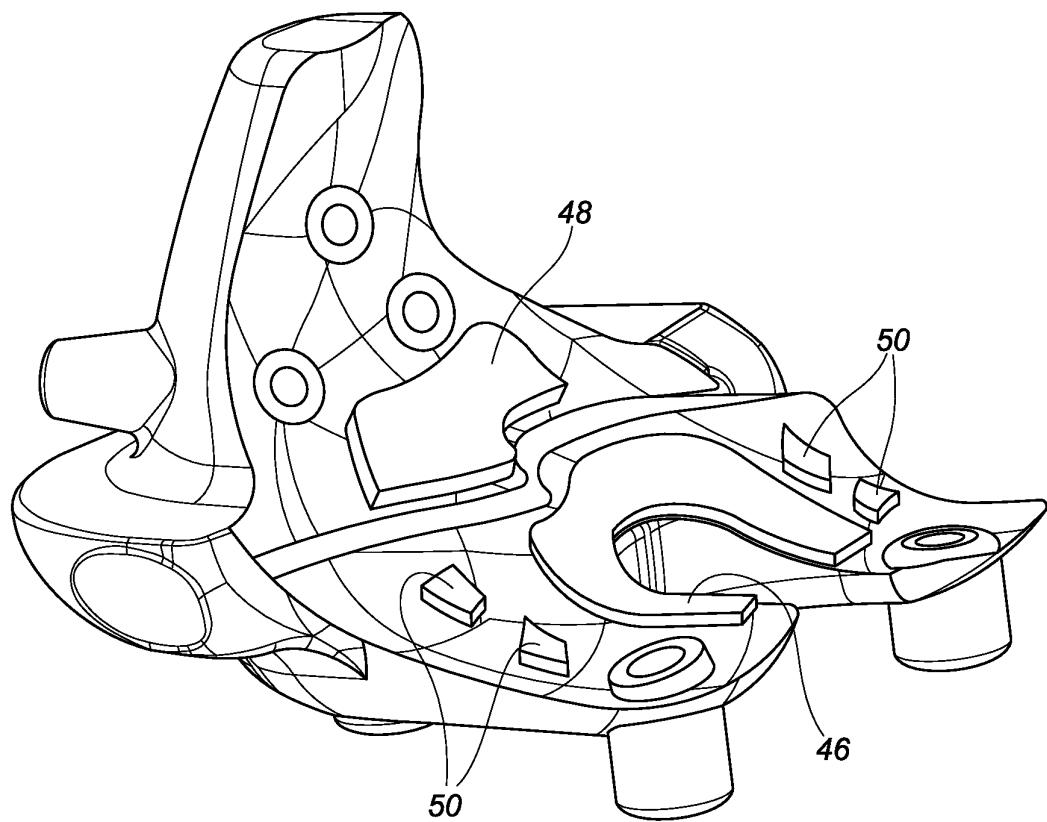


FIG. 18B

17/45

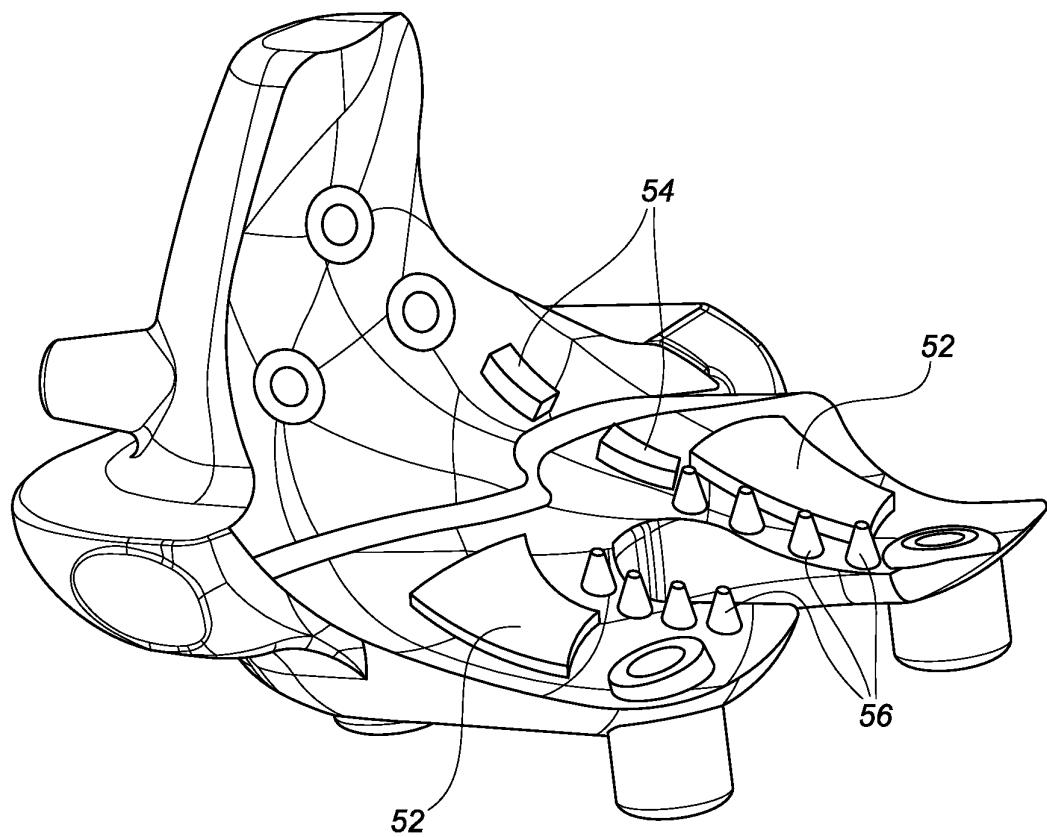


FIG. 19

18/45

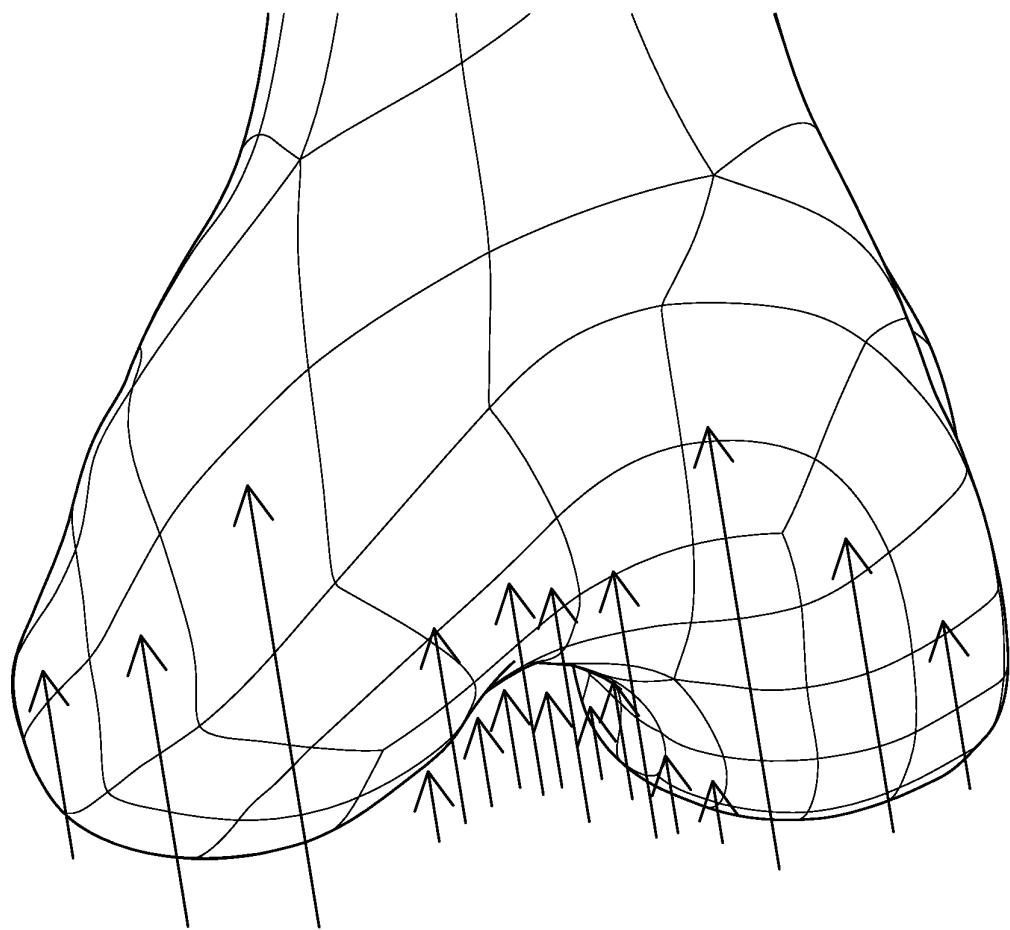


FIG. 20

19/45

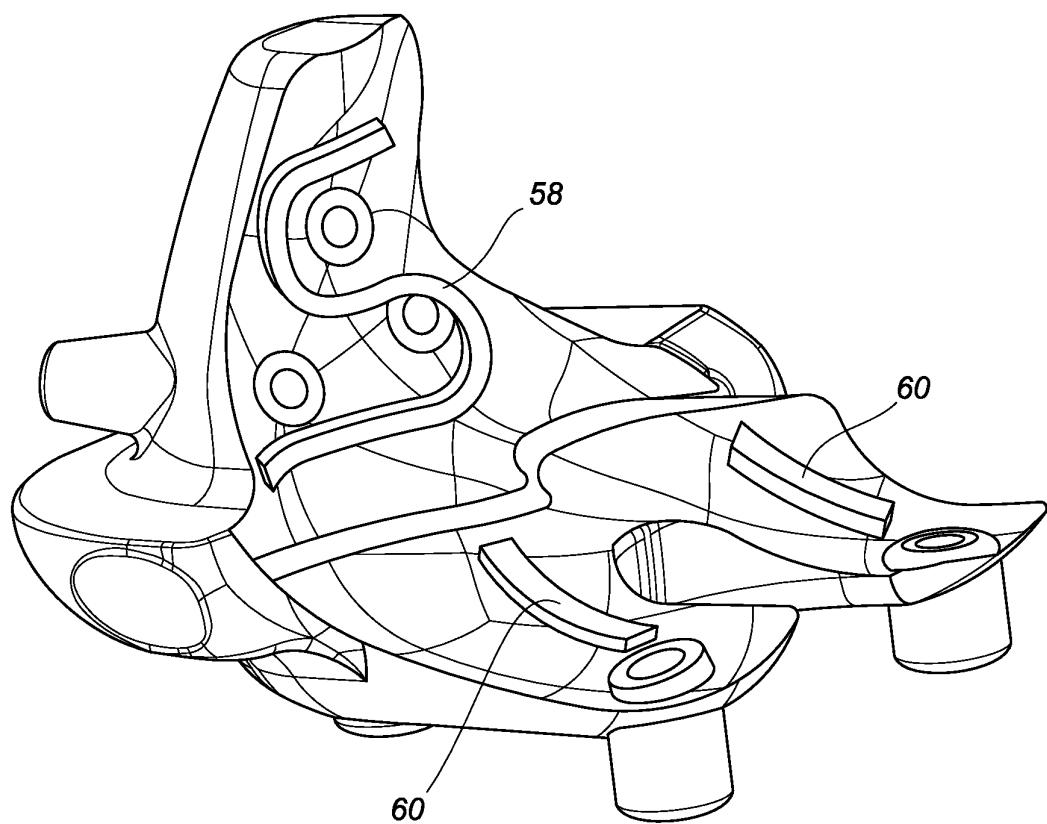


FIG. 21

20/45

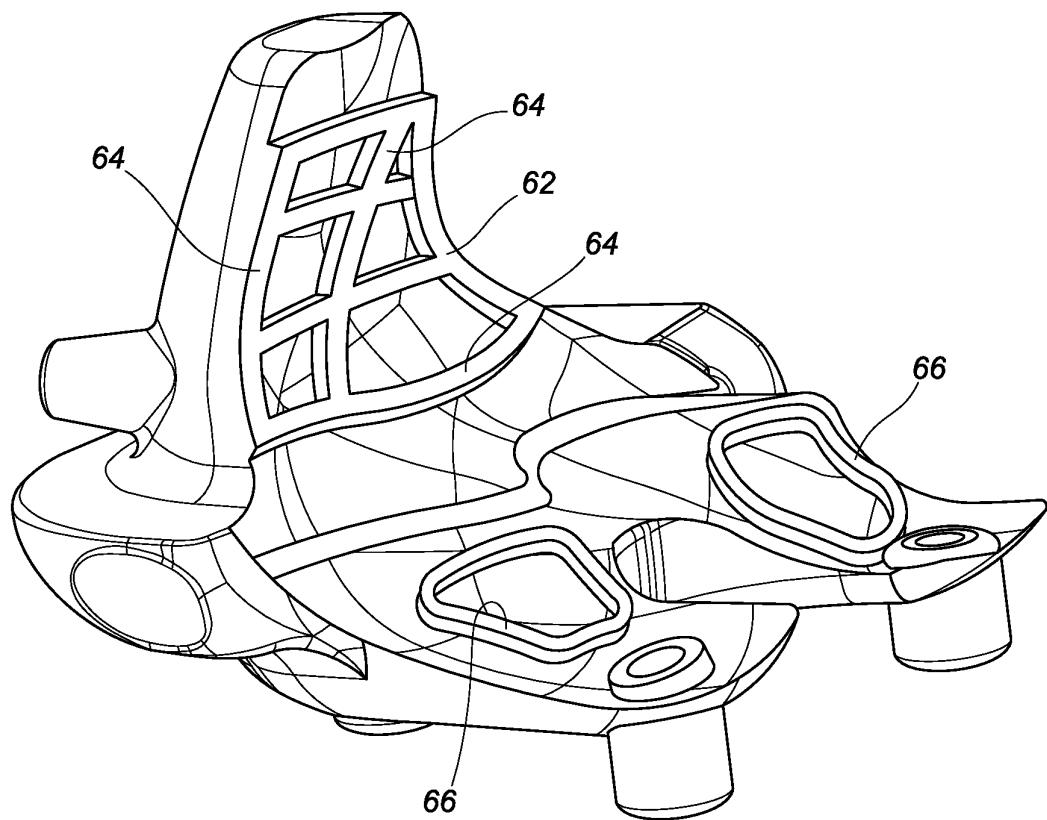


FIG. 22

21/45

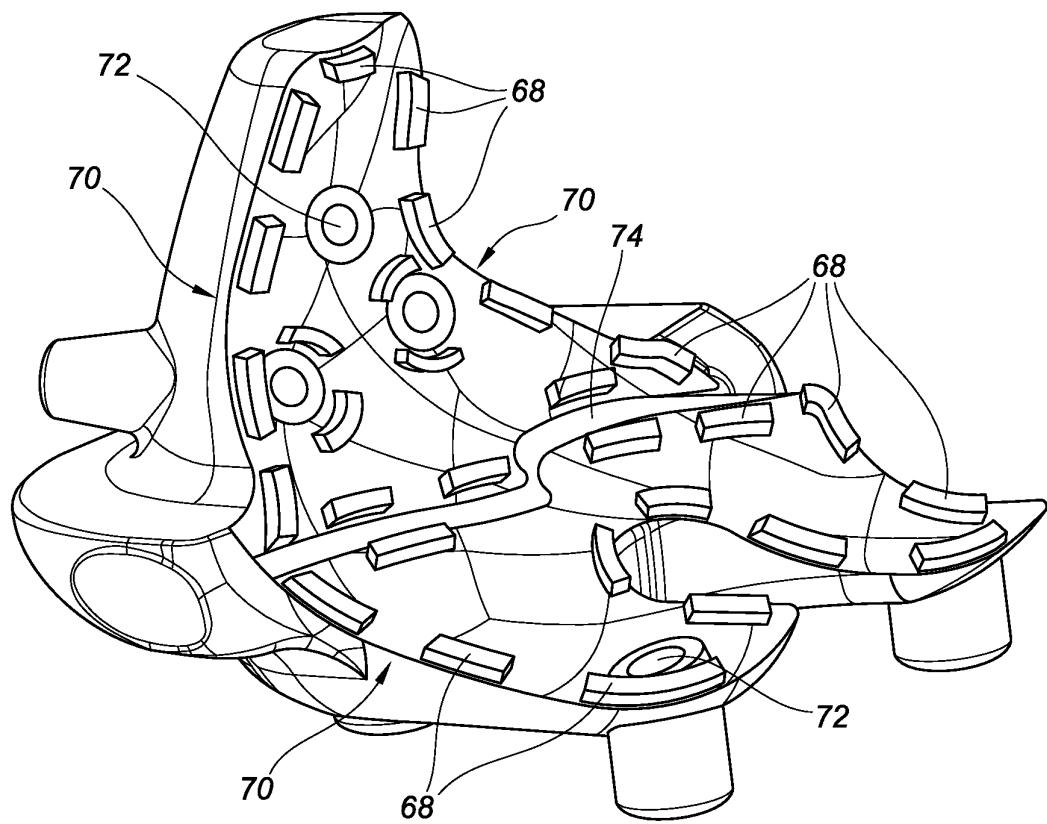


FIG. 23

22/45

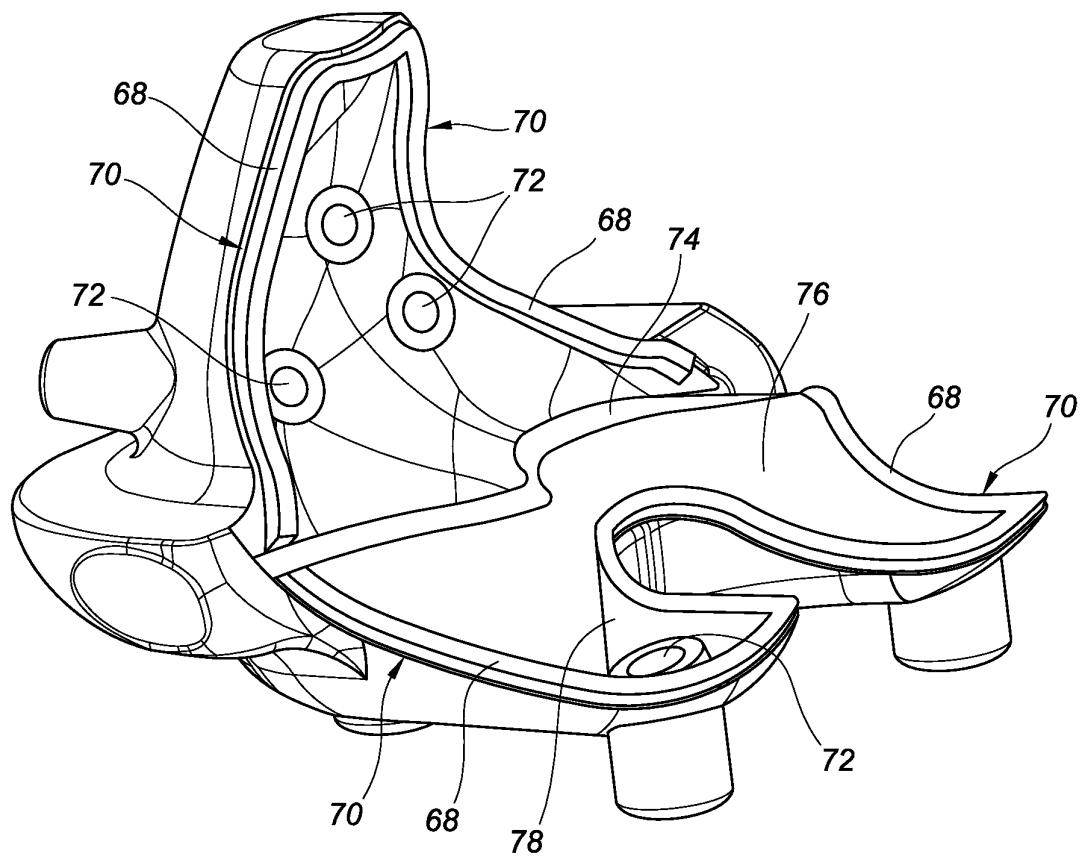


FIG. 24

23/45

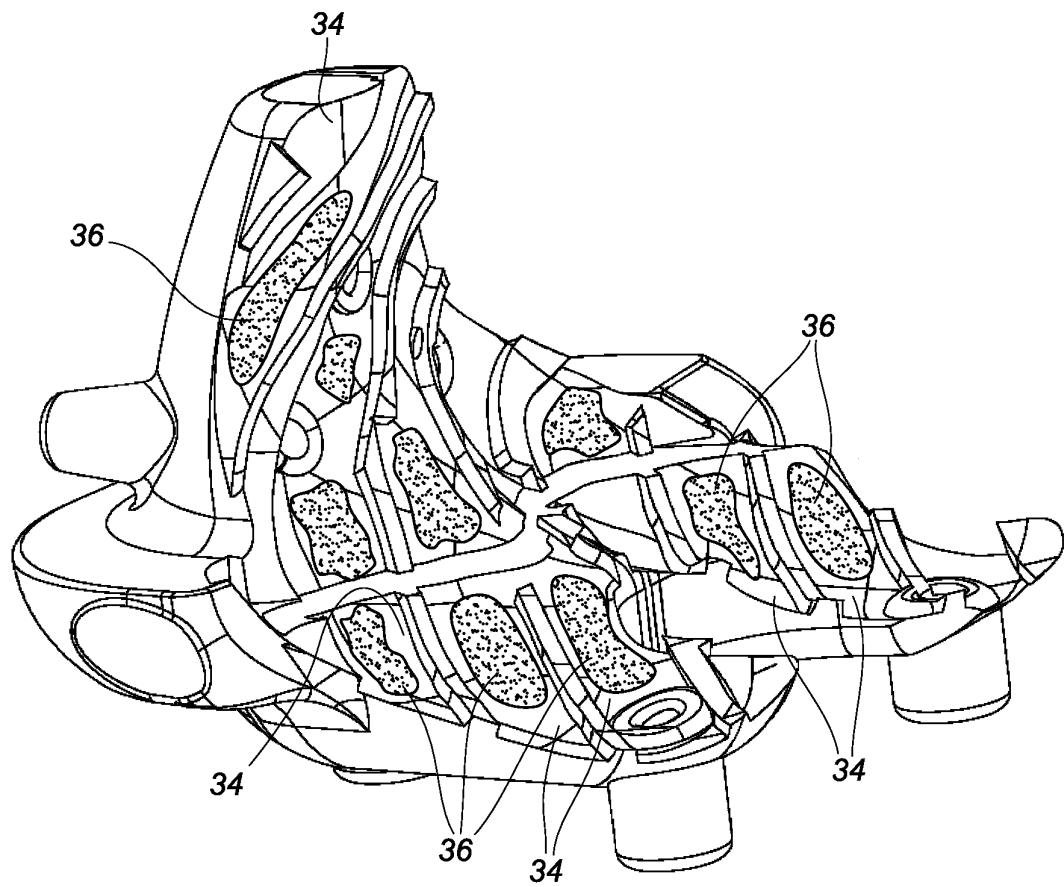


FIG. 25

24/45

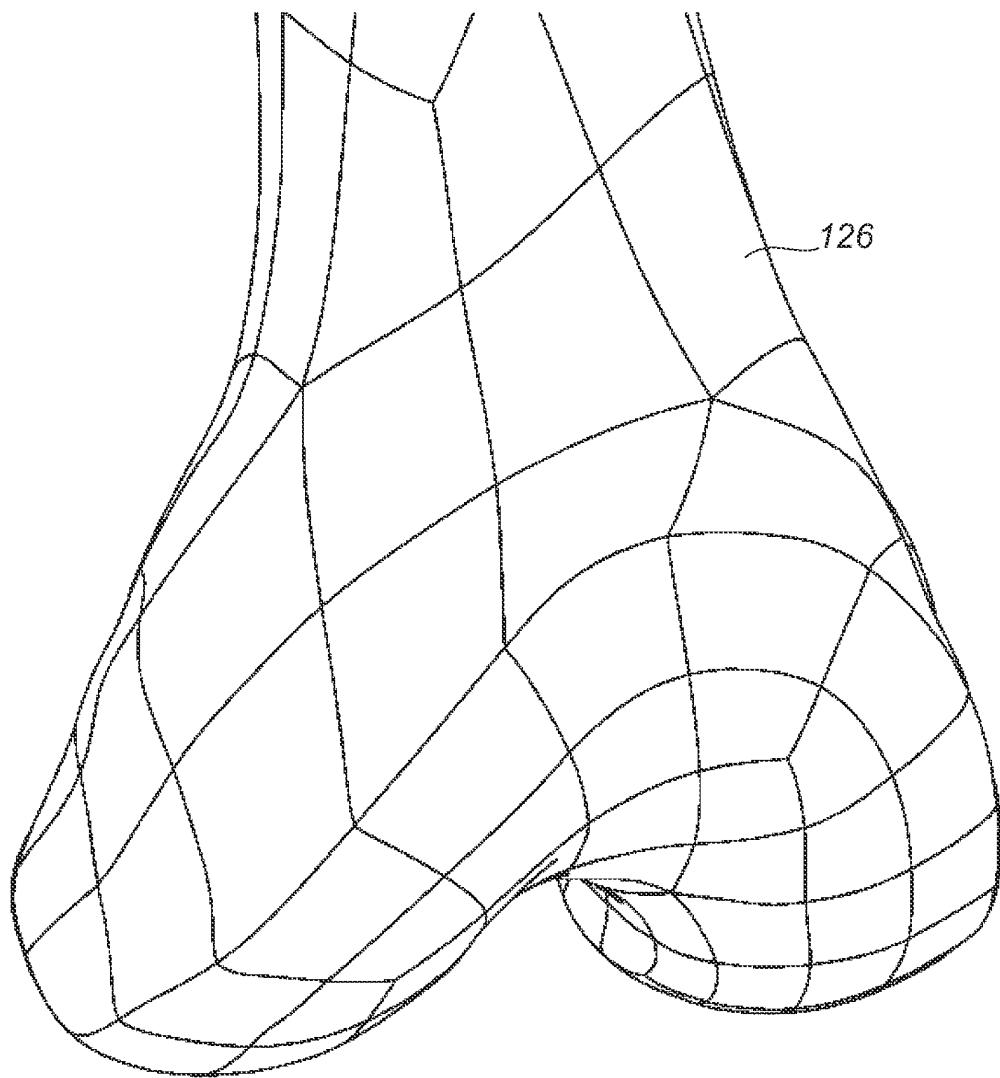
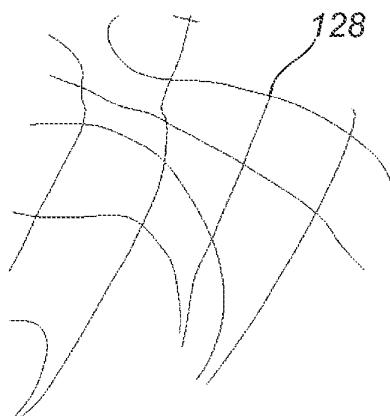
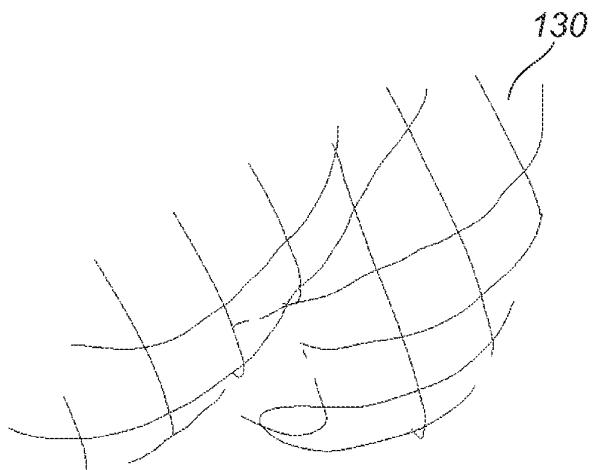
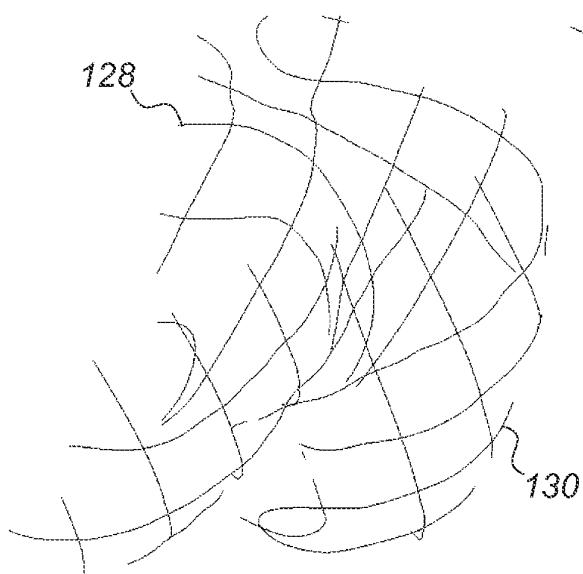
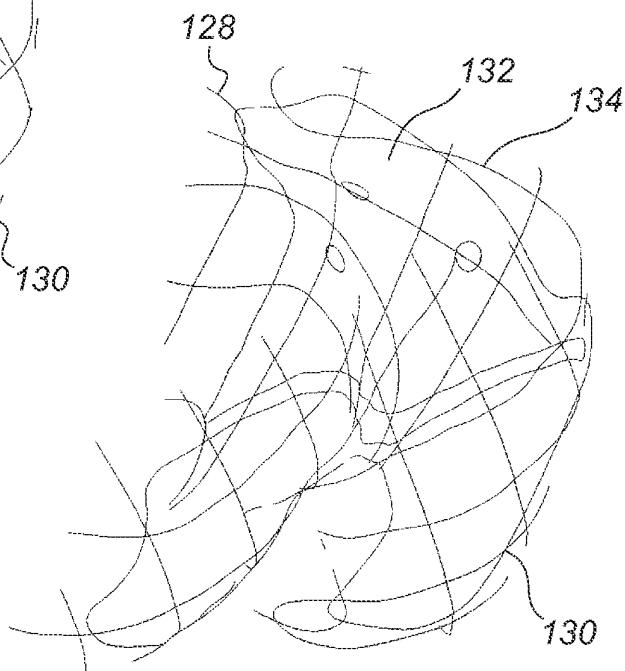


FIG. 26

25/45

**FIG. 27A****FIG. 27B****FIG. 27C****FIG. 27D**

26/45

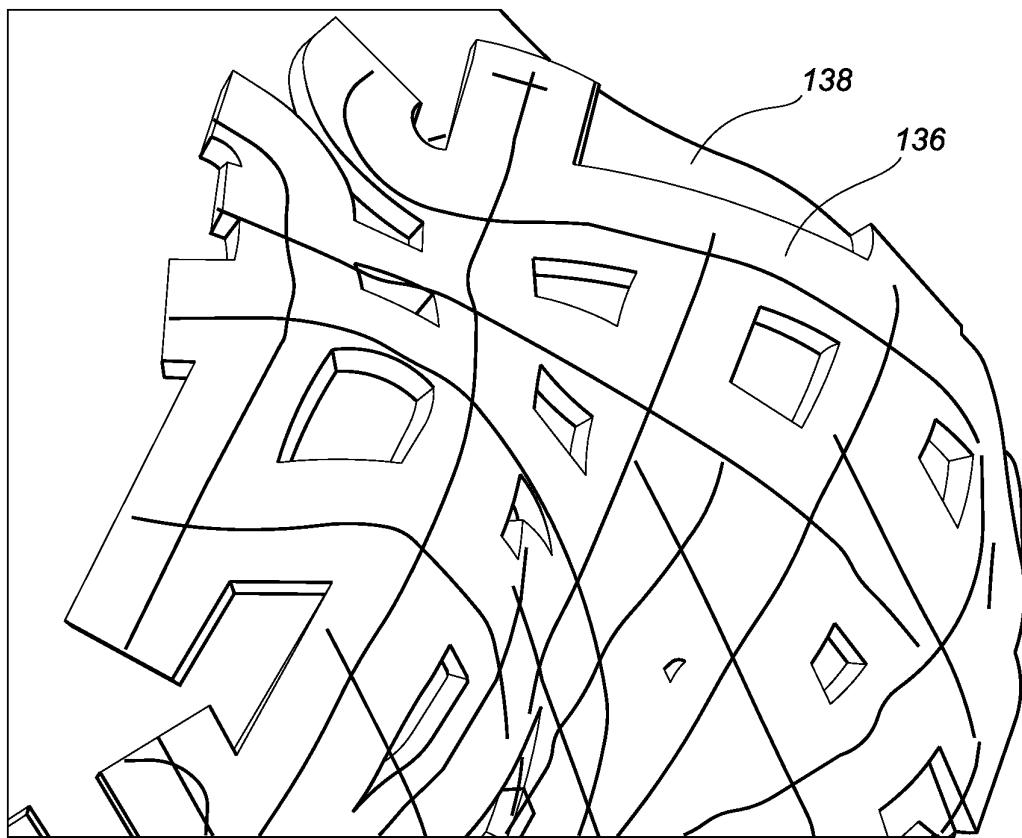


FIG. 28

27/45

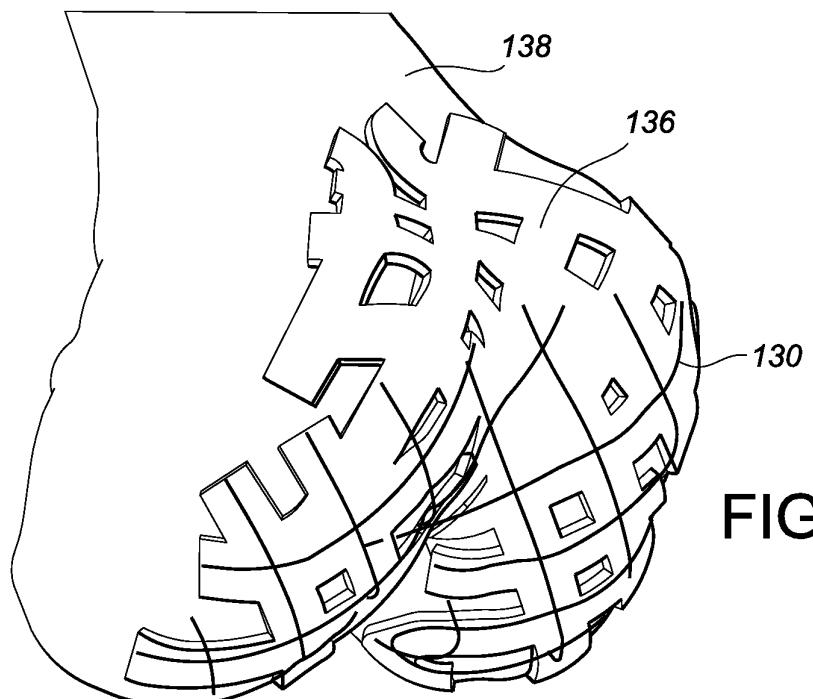


FIG. 29

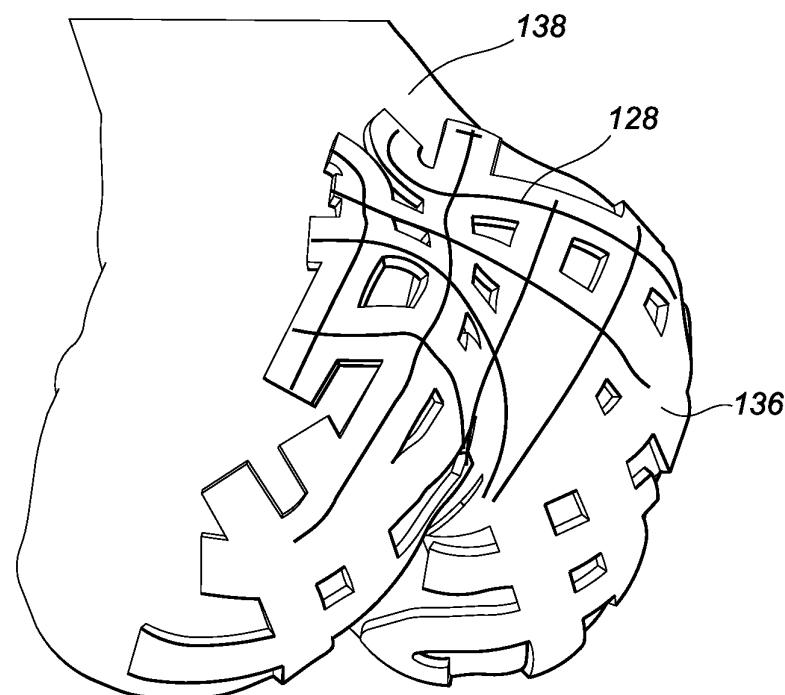


FIG. 30

28/45

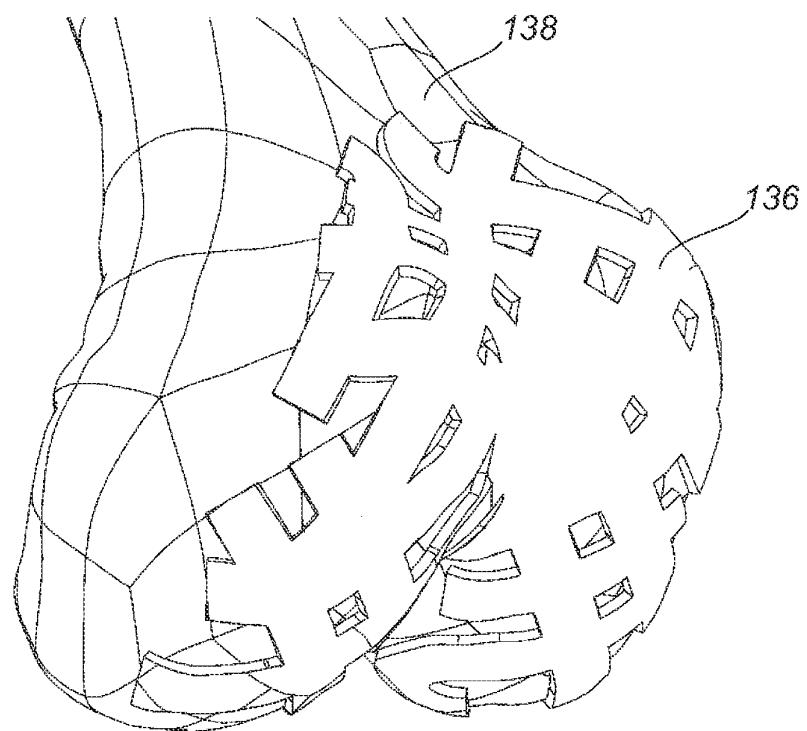
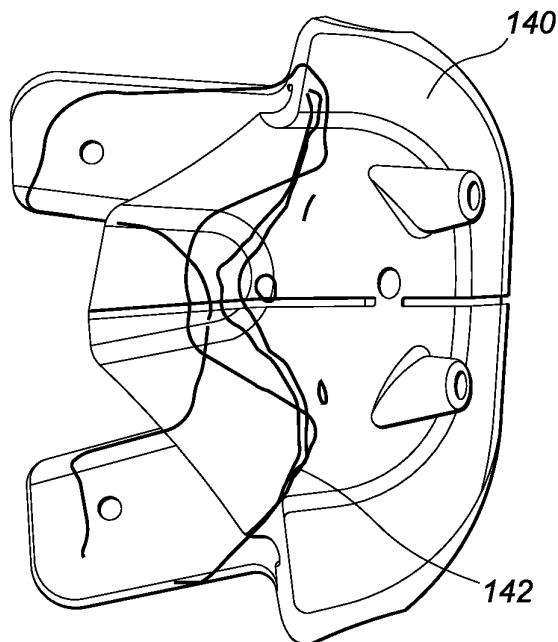
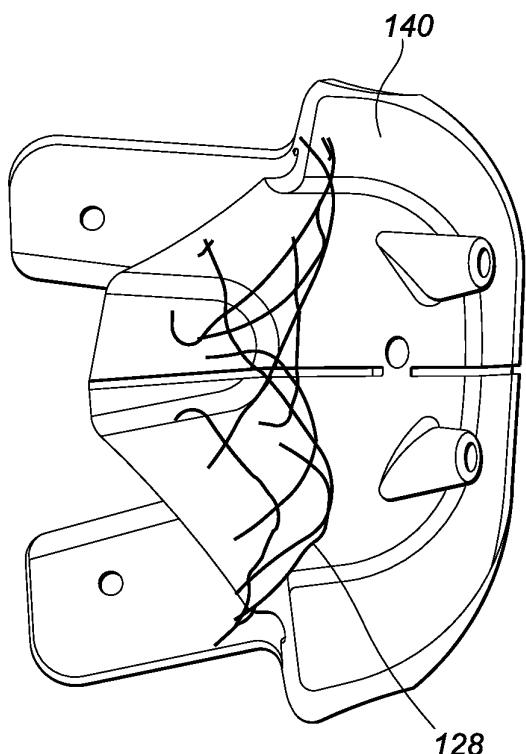
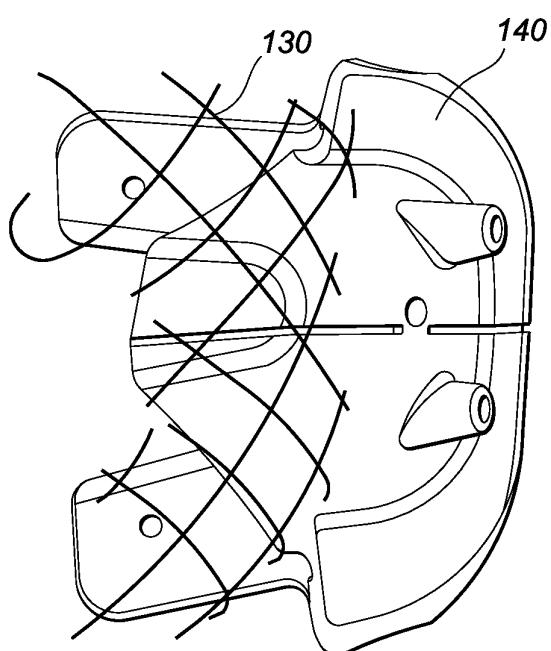


FIG. 31

29/45

**FIG. 32A****FIG. 32B****FIG. 32C**

30/45

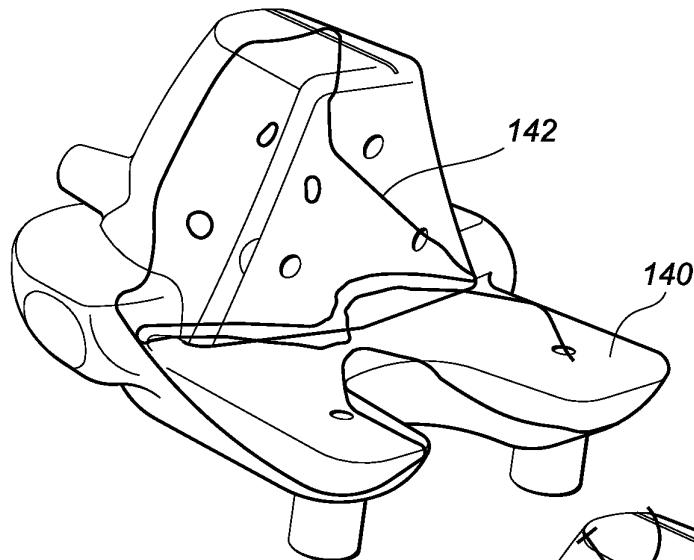


FIG. 33A

FIG. 33B

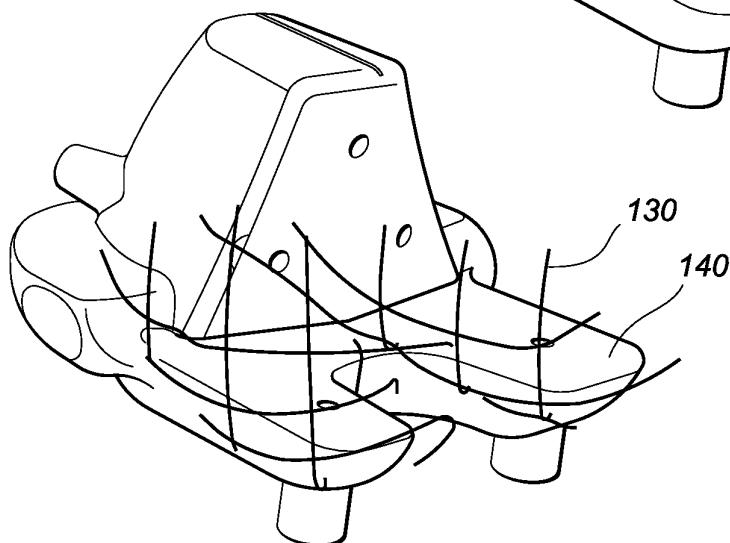
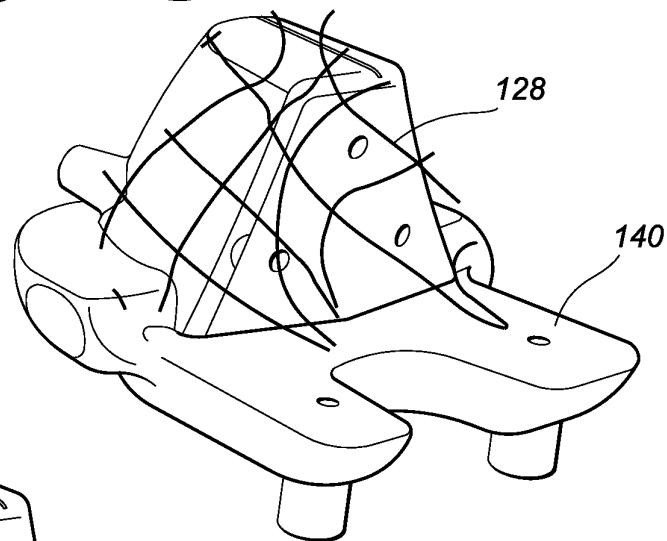


FIG. 33C

31/45

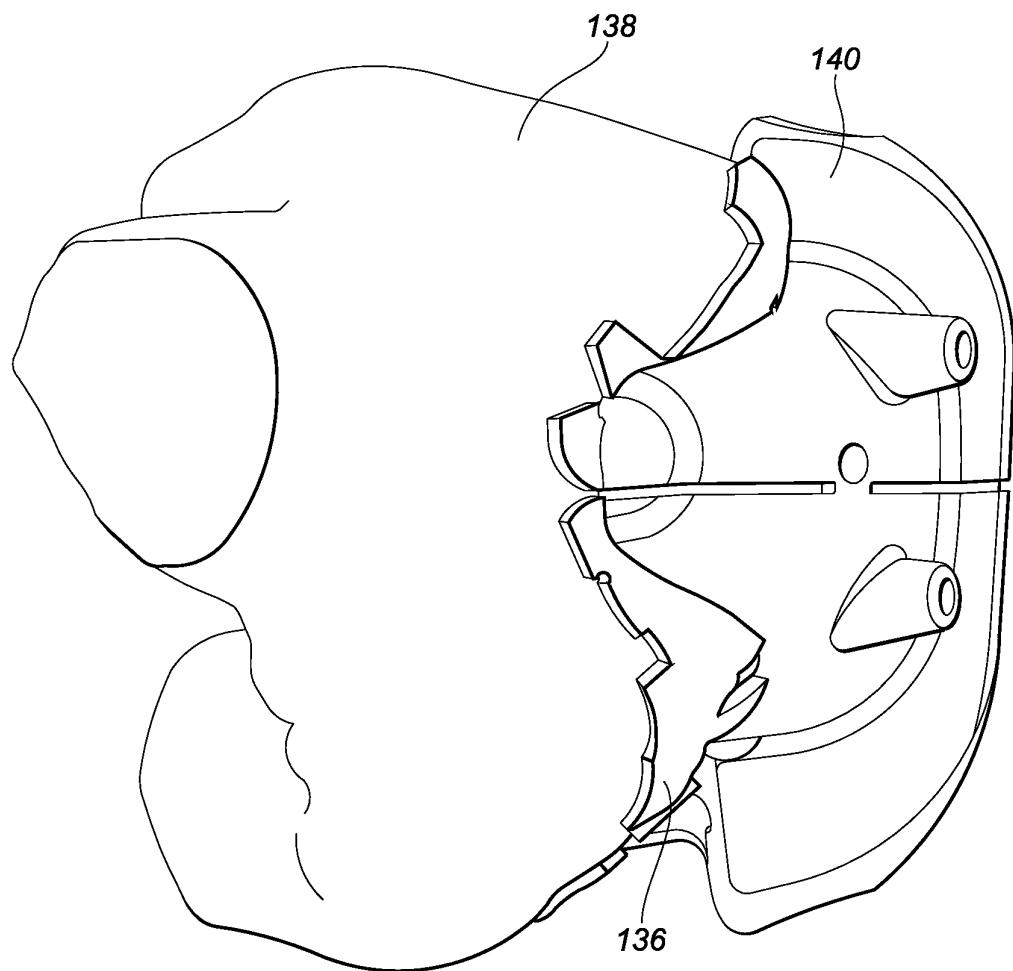


FIG. 34

32/45

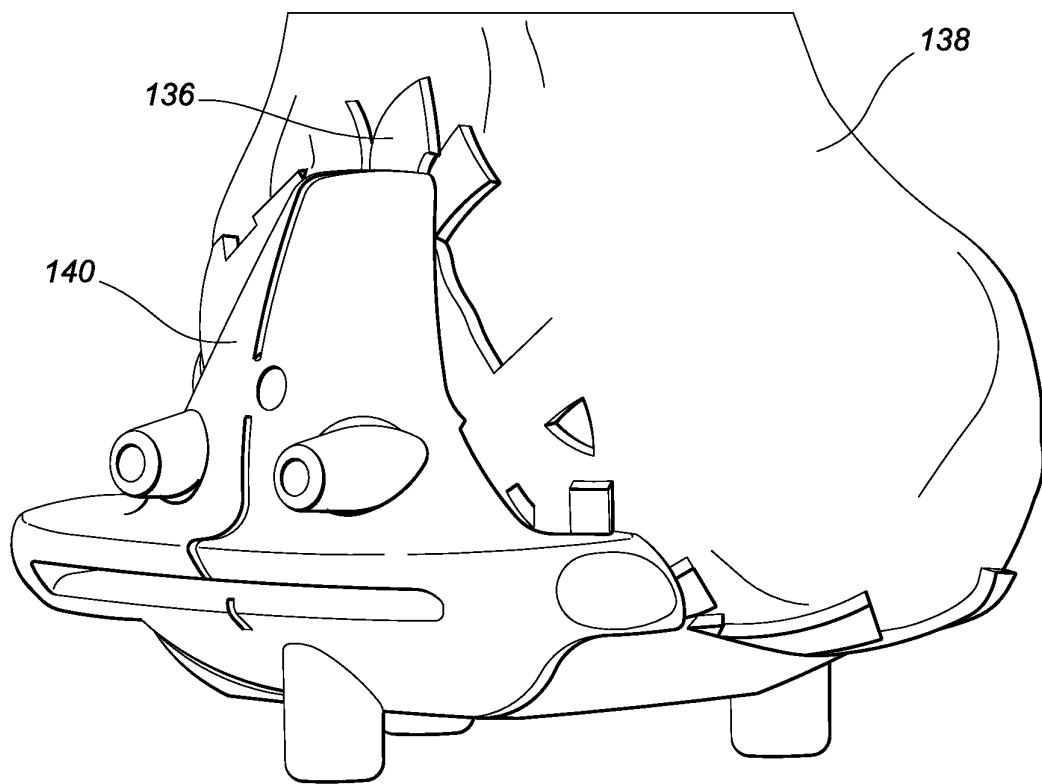


FIG. 35

33/45

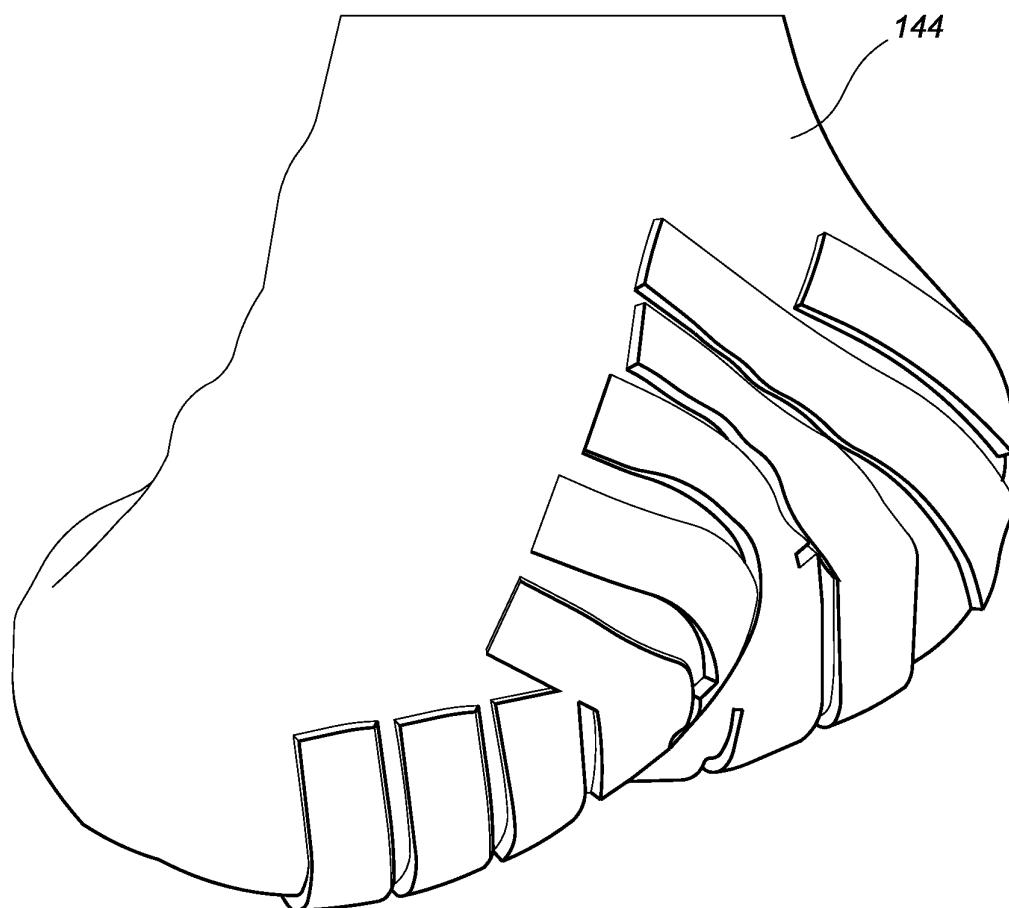


FIG. 36

34/45

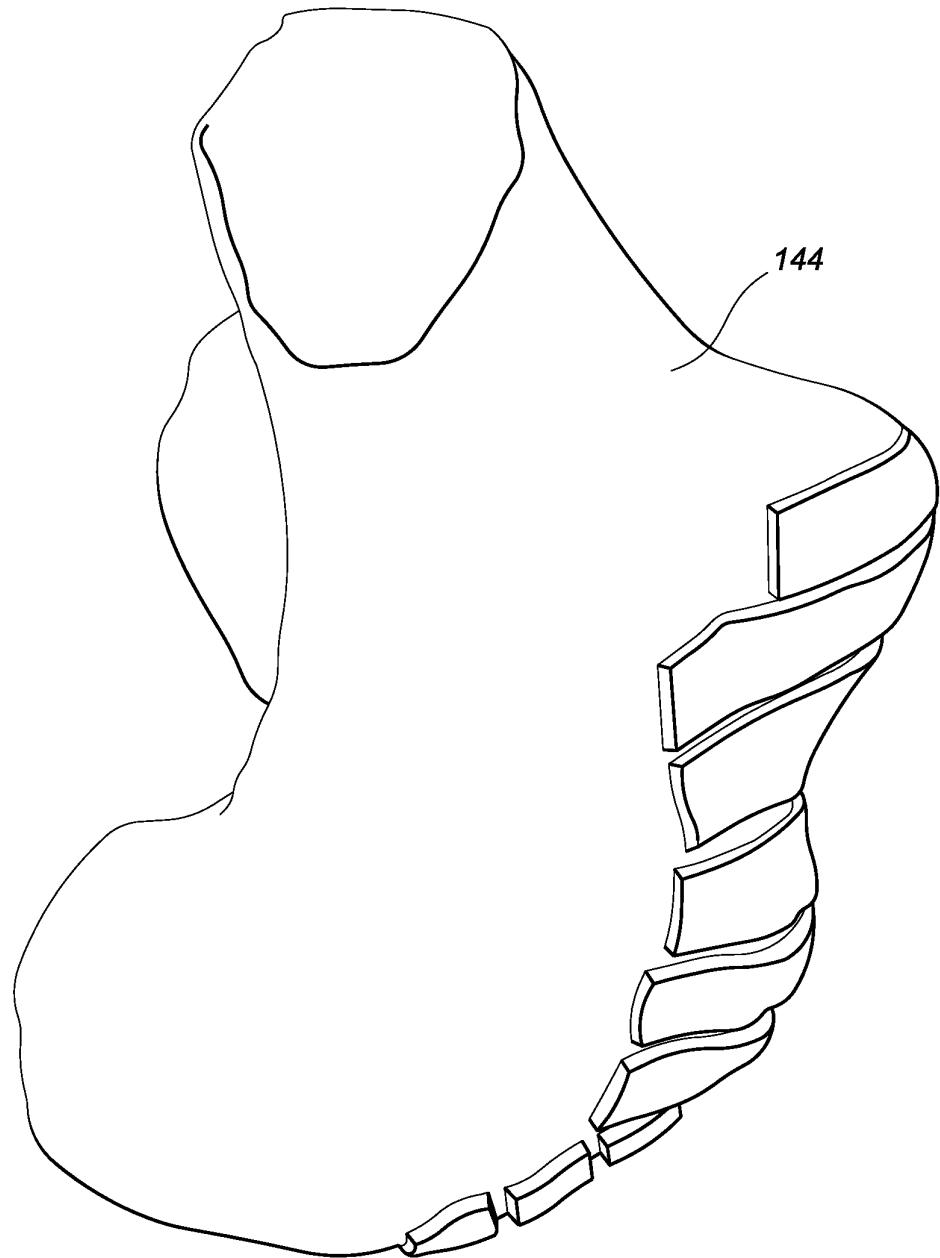


FIG. 37

35/45

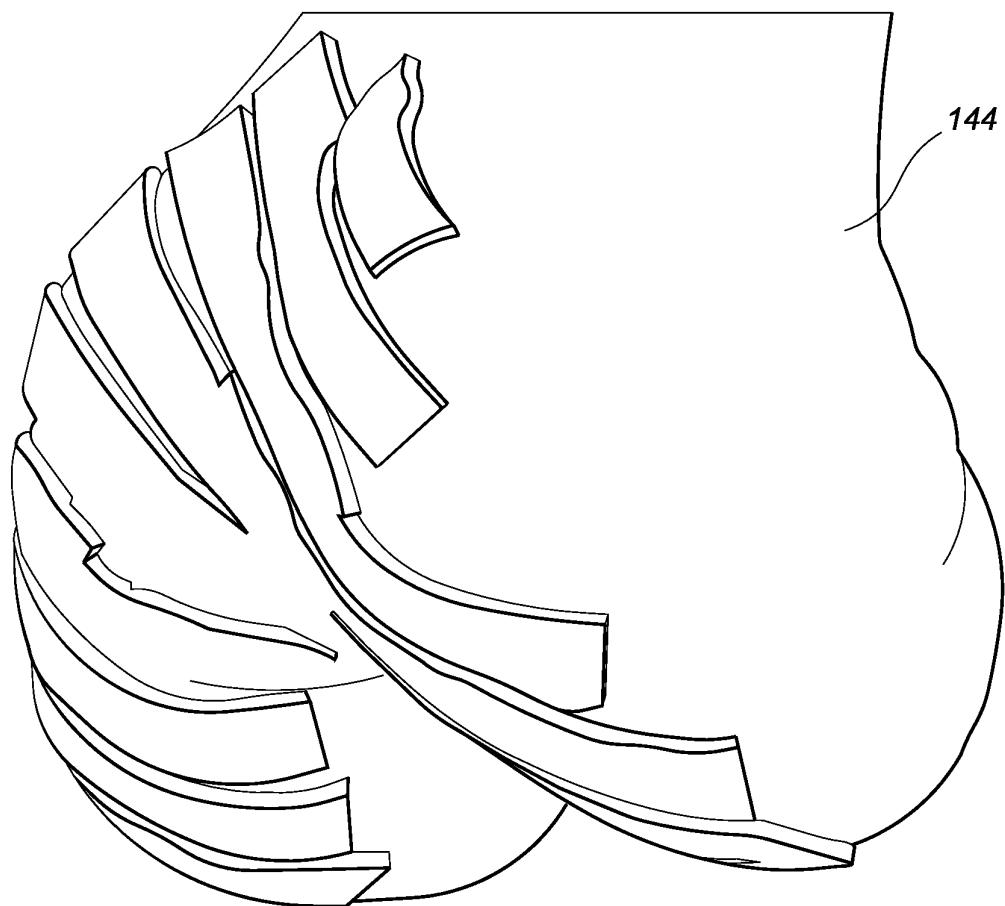


FIG. 38

36/45

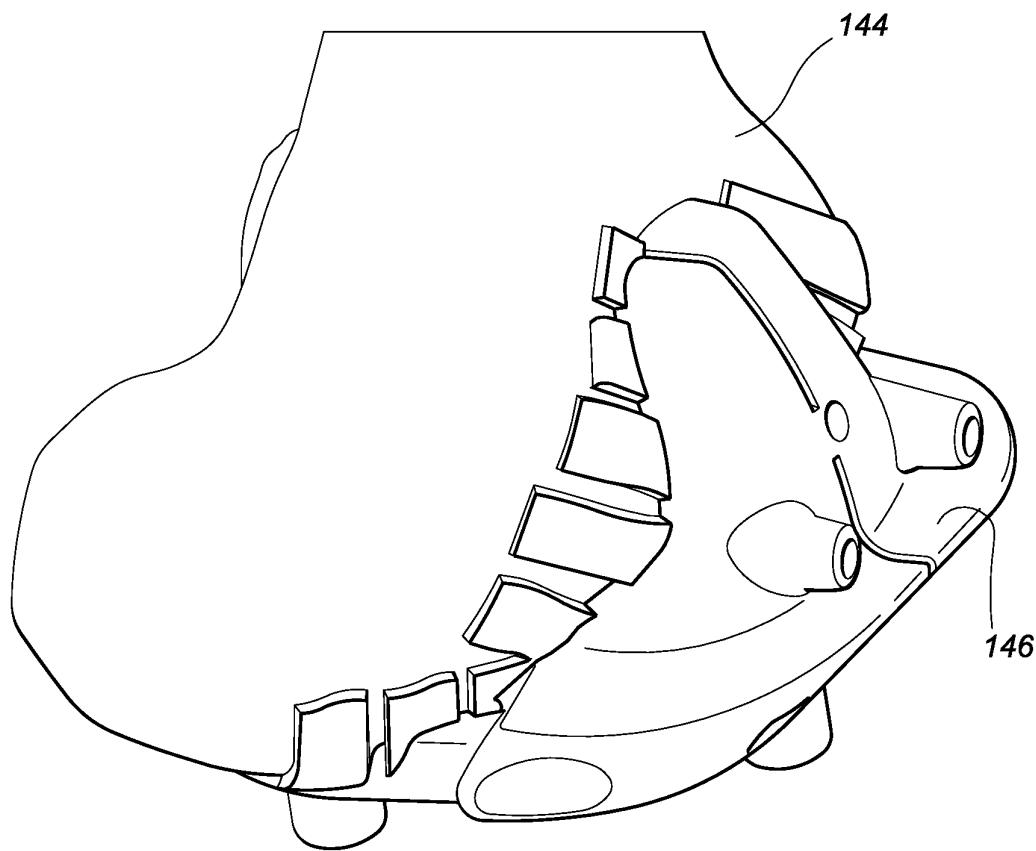


FIG. 39

37/45

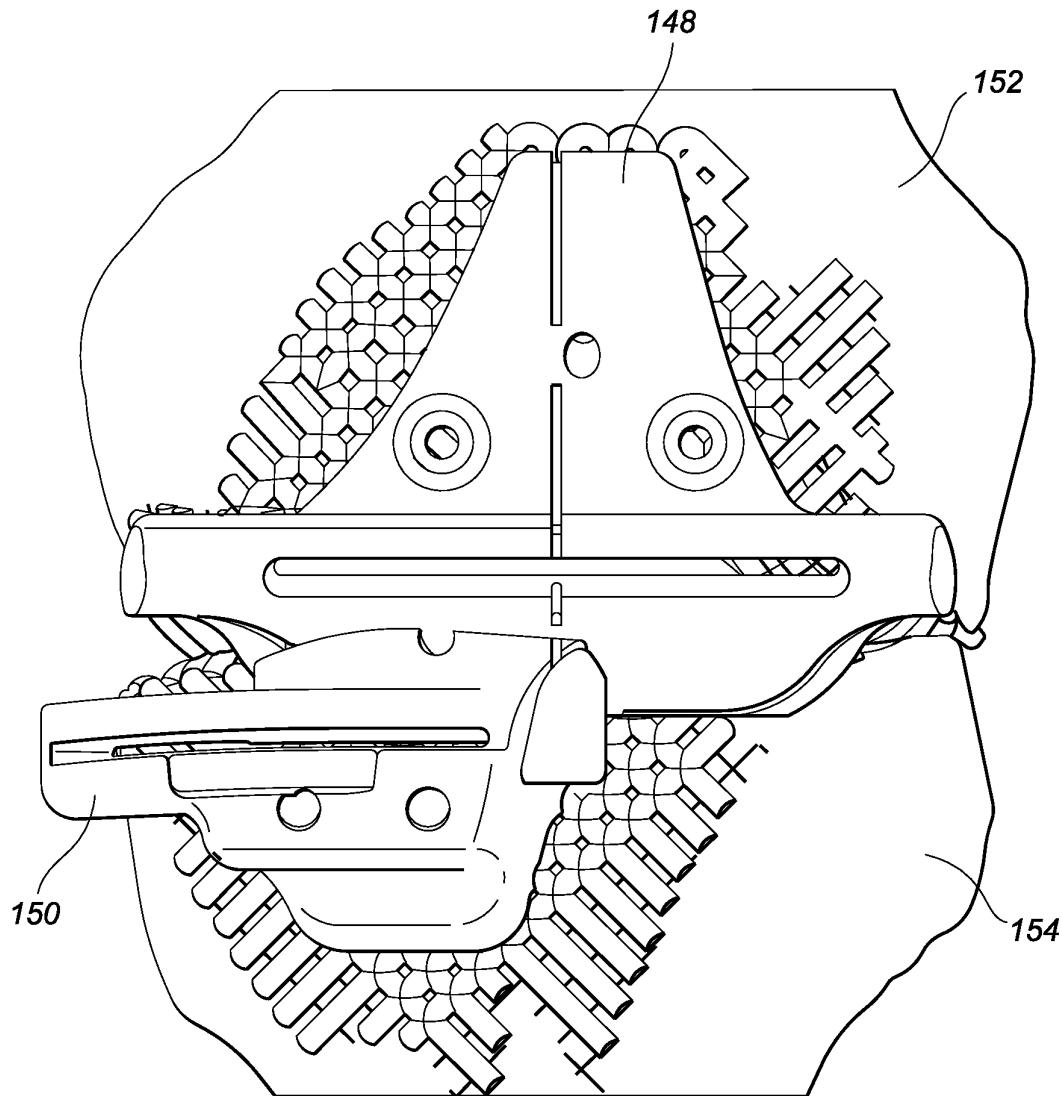


FIG. 40

38/45

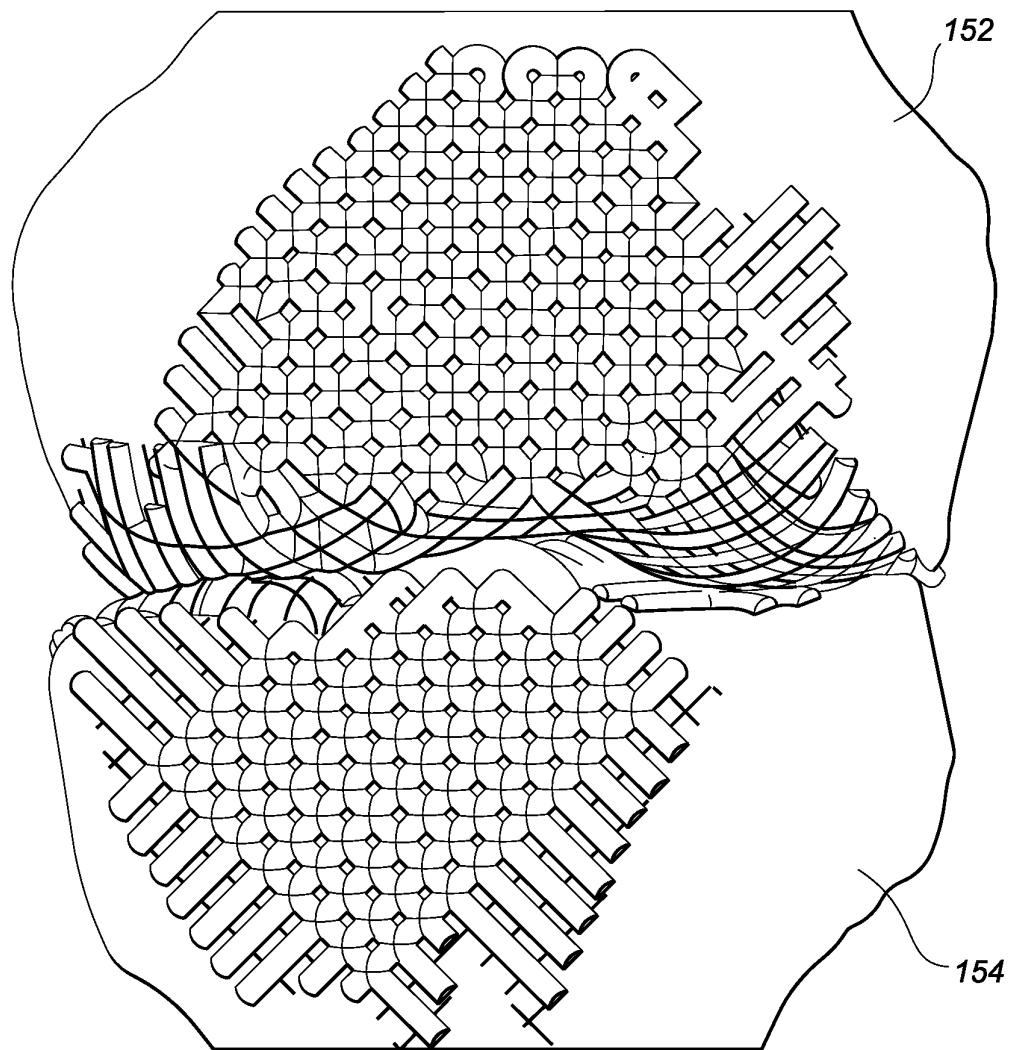


FIG. 41

39/45

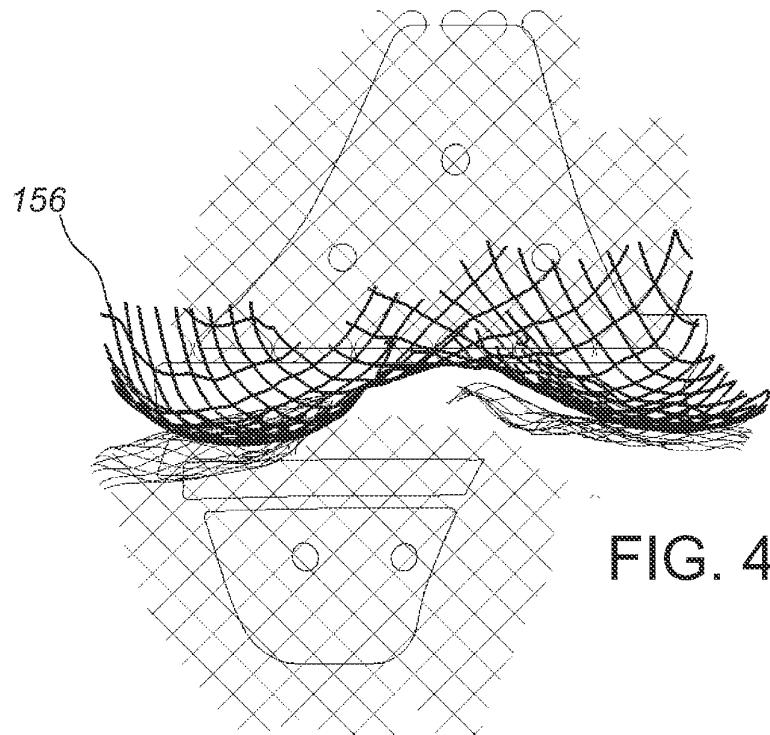


FIG. 42A

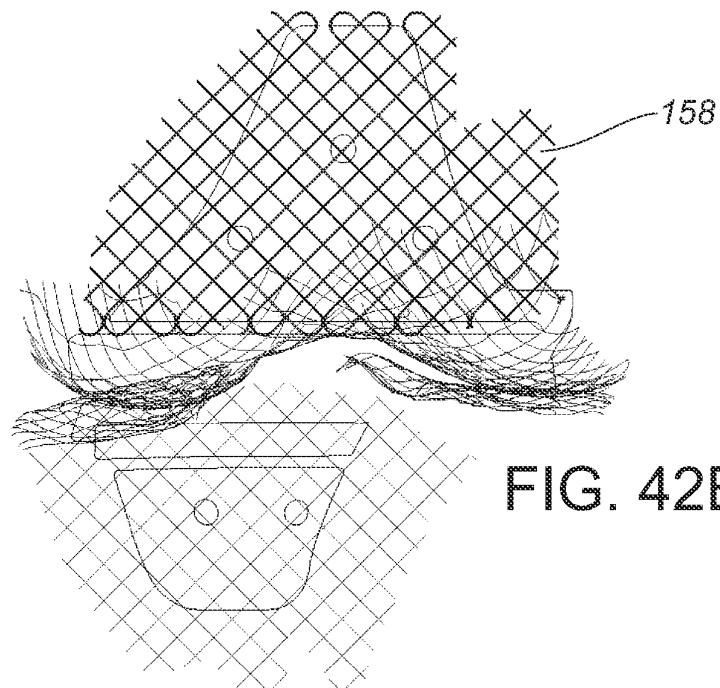


FIG. 42B

40/45

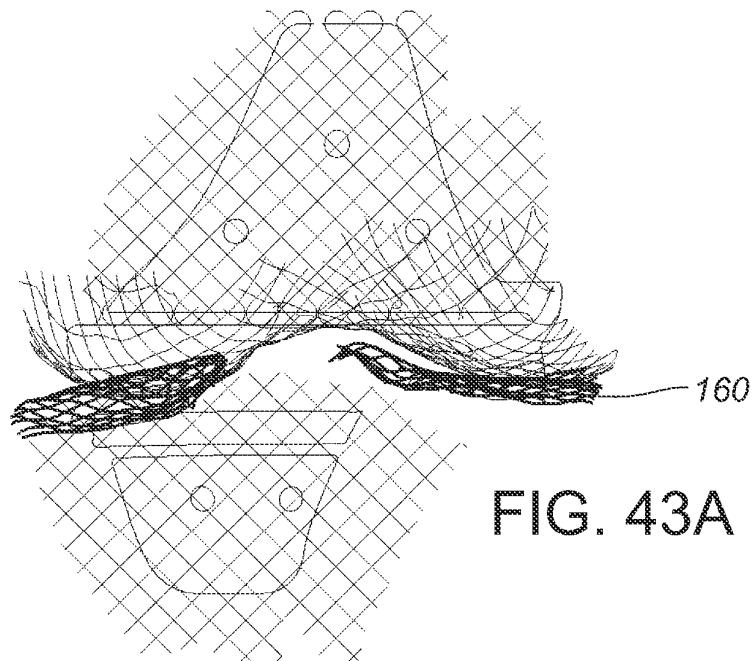


FIG. 43A

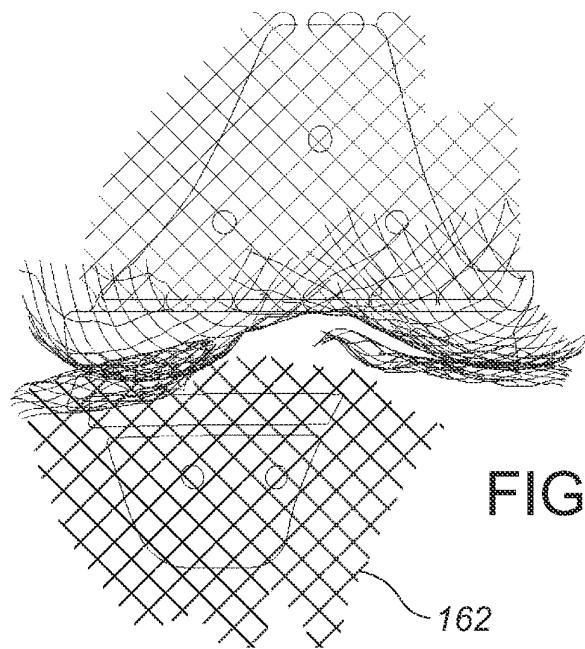


FIG. 43B

41/45

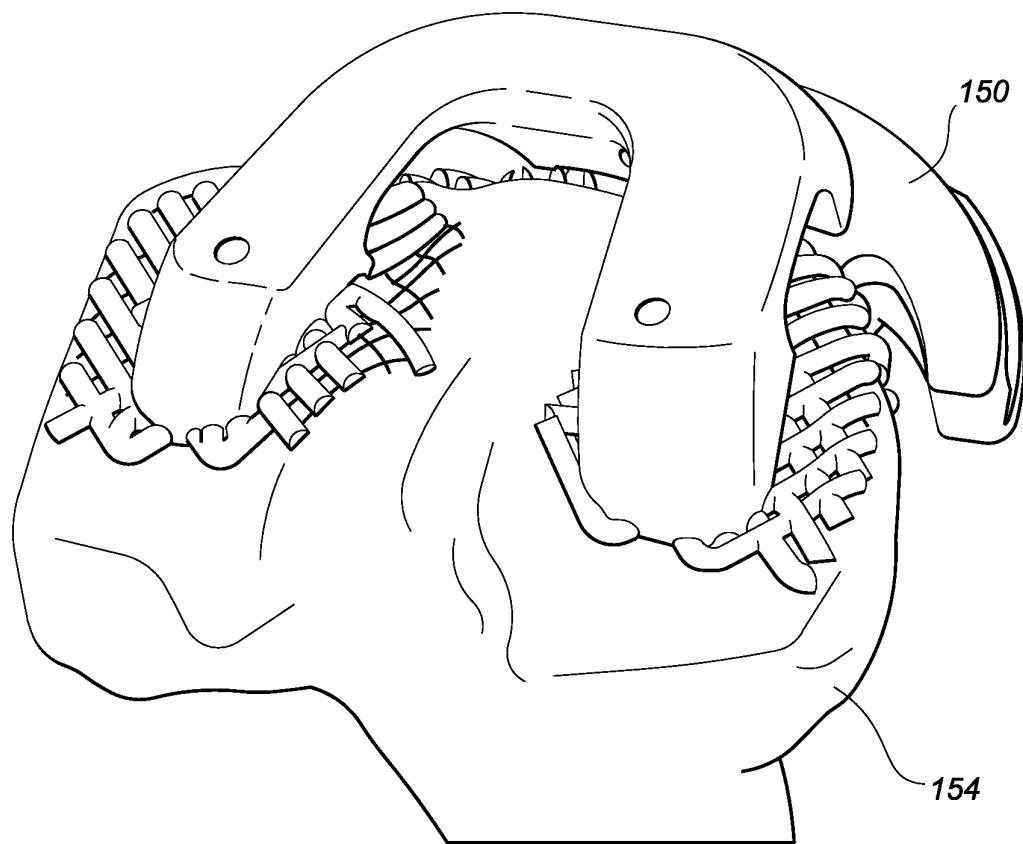


FIG. 44

42/45

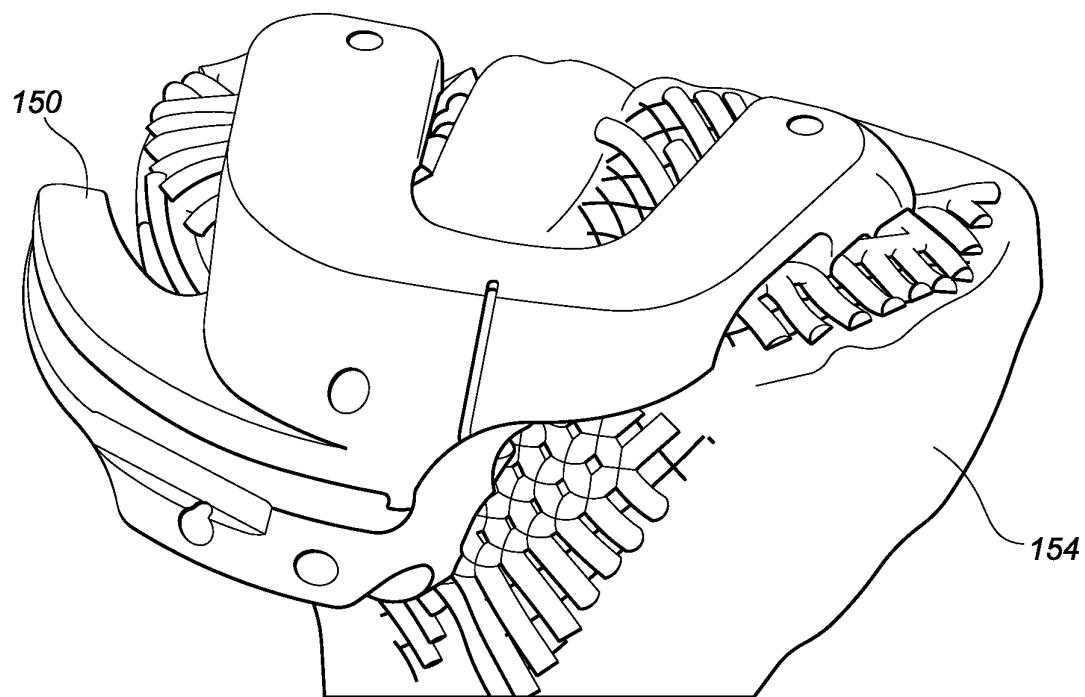


FIG. 45

43/45

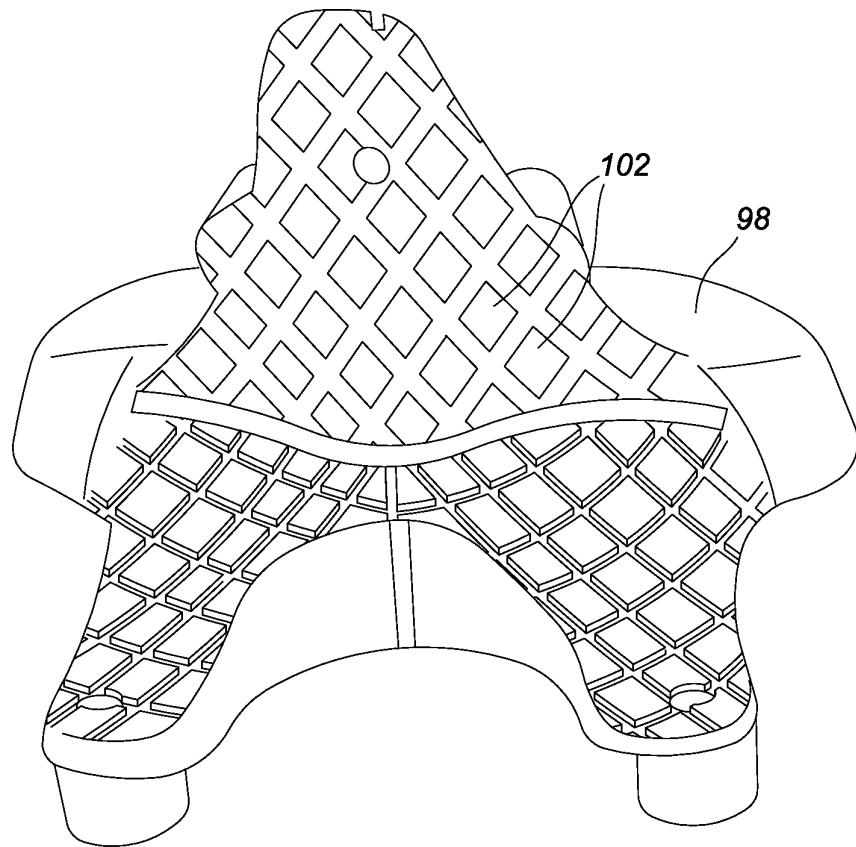


FIG. 46

44/45

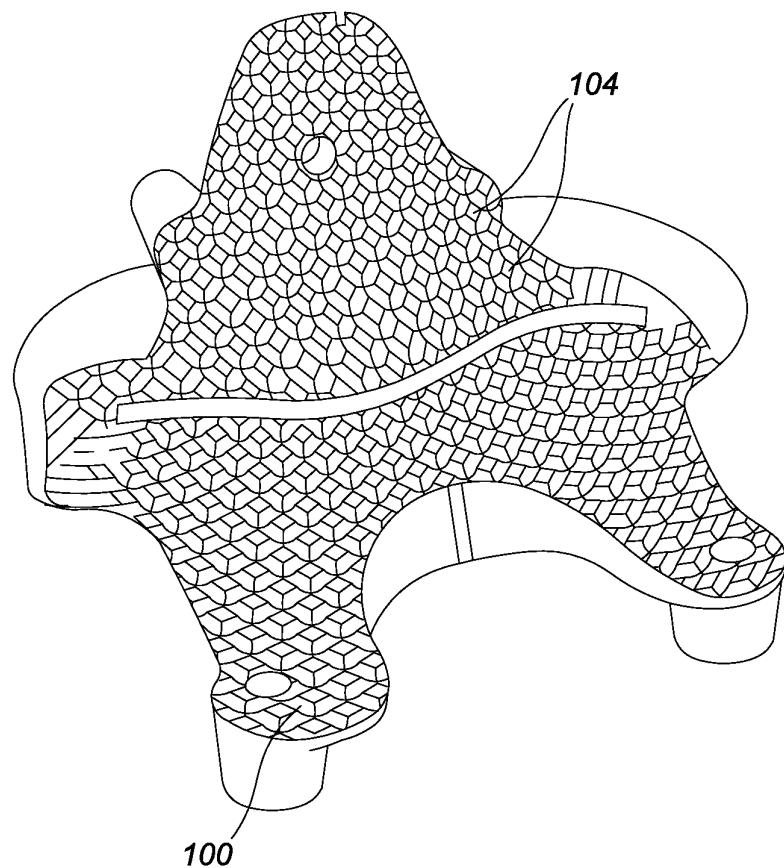


FIG. 47

45/45

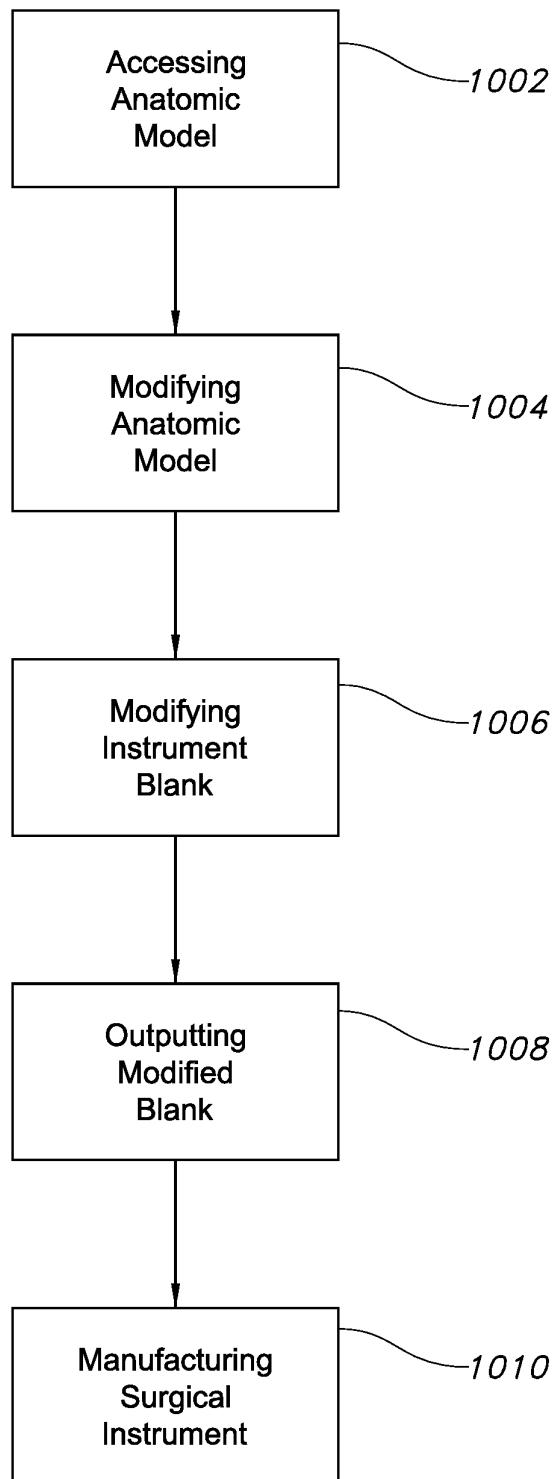


FIG. 48